# OCD Artesia

ATS-09-406 RM

| Form 3160-3<br>(February 2005)  | •   |                     |  |                           |  |
|---|---|---------------------|--|---------------------------|--|
| UNITED STATE<br>DEPARTMENT OF THE<br>BUREAU OF LAND MA  | INTERIOR  |                     | 5 Lease Serial No.<br>LC055374(SHL); LC060904(BHL) |                           |  |
| APPLICATION FOR PERMIT TO   |   |                     | 6 If Indian, Allote                                | e or Tribe Name           |  |
| la. Type of work: DRILL · REEN  | TER   |                     | 7 If Unit or CA Agreement, Name and No.            |                           |  |
| lb. Type of Well  | Single Zone M   | fultiple Zone       | 8 Lease Name and<br>BAILOUT B                      | Well No. OA FED COM 1H    |  |
| 2. Name of Operator EOG Resources, Inc.   |   |                     | 9 API Well No.<br>30-015-                          |                           |  |
| 3a Address P.O. Box 2267 Midland, TX 79702  | 3b Phone No. (include area code 432-686-3642                            | 2)                  | 10 Field and Pool, or<br>Sand Tank; I              | • •                       |  |
| 4. Location of Well (Report location clearly and in accordance with a   | arry State requirements.*)  | <del>-</del>        | 11. Sec., T. R M. or                               | Blk and Survey or Area    |  |
| At surface 1770' FSL & 410' FEL (U/L I)  At proposed prod. zone 1980' FSL & 330' FWL (U/L L)  | Split Est   | tate                | Section 12, T                                      | 118S-R29E, N.M.P.M.       |  |
| 14 Distance in miles and direction from nearest town or post office*  Approx 5 miles SW from Loco Hills, NM   | <u> </u>  |                     | 12 County or Parish<br>Eddy                        | 13 State NM               |  |
| 15 Distance from proposed* location to nearest property or lease line, ft (Also to nearest drig. unit line, if any)   | 16 No. of acres in lease  | 17 Spaci            | ng Unit dedicated to this                          | s well                    |  |
| 18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft.  | 19. Proposed Depth 7780' TVD; 12113' TMD                                |                     | /BIA Bond No. on file                              |                           |  |
| 21 Elevations (Show whether DF, KDB, RT, GL, etc.) GL 3522.0  | 22. Approximate date work will 06/15/2009                               | ll start*           | 23. Estimated durati 30 days                       | ion                       |  |
|   | 24. Attachments   |                     |  |                           |  |
| The following, completed in accordance with the requirements of Onst  1 Well plat certified by a registered surveyor  2 A Drilling Plan.  3. A Surface Use Plan (if the location is on National Forest System SUPO must be filed with the appropriate Forest Service Office). | 4 Bond to construct 20 about Lands, the 5 Operator ce                   | ver the operatione) | ons unless covered by a                            | as may be required by the |  |
| 25. Signature L. Mut  | Name (Printed/Typed)  Donny G. Gland                                    | ton                 |  | Date 05/01/2009           |  |
| Title Sr. Lease Operations ROW Representative   |   |                     |  |                           |  |
| Approved by (Signates SI DAVID D. EVANS   |   | vin n. I            |  | Date JUL 1 5 2009         |  |
| Title FIELD MANAGER   | Office CARLSBAD   |                     |  |                           |  |
| Application approval does not warrant or certify that the applicant he conduct operations thereon.  Conditions of approval, if any, are attached.   | olds legal or equitable title to those                                  |                     |  | PR TWO YEARS              |  |
| Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a States any false, fictitious or fraudulent statements or representations a   | crime for any person knowingly as to any matter within its jurisdiction | and willfully to    | make to any department                             | or agency of the United   |  |

**Roswell Controlled Water Basin** 

\*(Instructions on page 2)

SEE ATTACHED FOR CONDITIONS OF APPROVAL Approval Subject to General Requirements & Special Stipulations Attached

District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Avenue, Artesia, NM 88210 District III

1000 Rio Brazos Rd., Aztec, NM 87410 District IV

Dedicated Acres

160

1220 S. St. Francis Dr., Santa Fe, NM 87505

Joint or Infill

Consolidation Code

Order No.

State of New Mexico

Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION 1220 South St. Francis Dr.

Santa Fe, NM 87505

Form C-102

Revised October 12, 2005

AMENDED REPORT

Submit to Appropriate District Office

State Lease- 4 Copies

Fee Lease-3 Copies


WELL LOCATION AND ACREAGE DEDICATION PLAT

| 30-015-               | Number   | Pool Code<br>96836 | 3       | Sa            | d Tank:          | Pool Name<br>Bone S | er, no         |                |
|-----------------------|--|--------------------|---------|---------------|------------------|---------------------|----------------|----------------|
| Property Co           | Property Code 37754  BAILOUT BOA FED. COM      |                    |         |               |                  |                     |                | Well Number 1H |
| OGRID No              | OCRID No. Operator Name                        |                    |         |               |                  |                     |                | Elevation      |
| 7377                  | EOG RESOURCES, INC.                            |                    |         |               |                  |                     | 3522.0'        |                |
|                       |  | Su                 |         | Location      |                  |                     |                |                |
| UL or lot no. Section | Township                                       | Range              | Lot Idn | Feet from the | North/South line | Feet from the       | East/West line | County         |
| I 12                  | 18 SOUTH                                       | 29 EAST, N.M.P.M.  |         | 1770'         | SOUTH            | 410'                | EAST           | EDDY           |
|                       | Bottom Hole Location If Different From Surface |                    |         |               |                  |                     |                |                |
| UL or lot no. Section | Township                                       | Range              | Lot Idn | Feet from the | North/South line | Feet from the       | East/West line | County         |
| L 12                  | 18 SOUTH                                       | 29 EAST, N.M.P.M.  |         | 1980'         | SOUTH            | 330'                | WEST           | EDDY           |

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

|  |  |                             |  | OPERATOR CERTIFICATION   |
|--|--|-----------------------------|--|--|
| NEW ME<br>NAD<br>Y=64<br>X=59<br>LAT.: N 3<br>LONG.: W 1 | DLE LOCATION XICO EAST 1927 101631.7 12.7600857 104.0352578 40 & C   | NEW<br>Y<br>LAT.:<br>LONG.: | ACE LOCATION MEXICO EAST 4AD 1927 =640176.3 =596167.4 N 32.7595473 W 104.0205049 | I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.  Donny G. Glatm  Printed Name  |
| 7330//////   | ylunun yanun y | <u> </u>                    | X/////////   | SURVEYOR CERTIFICATION   |
| ,0861  | CRID AZ = 272°18'  GRID AZ = 272°18'  330'  LC - 050429 - b  E/2 Sw/4 - 80 AC  Sw/4 Sw/4 - 40 AC               | PRODUCING AREA              | 330<br>410<br>410<br>410<br>410<br>410<br>410<br>410<br>410<br>410<br>41         | I hereby certify that the well location shown on this pilet was plotted from field notes of actual sunds and by me or funder my supervision and that the same is the and correct to the best of the be |

# LOCATION VERIFICATION MAP

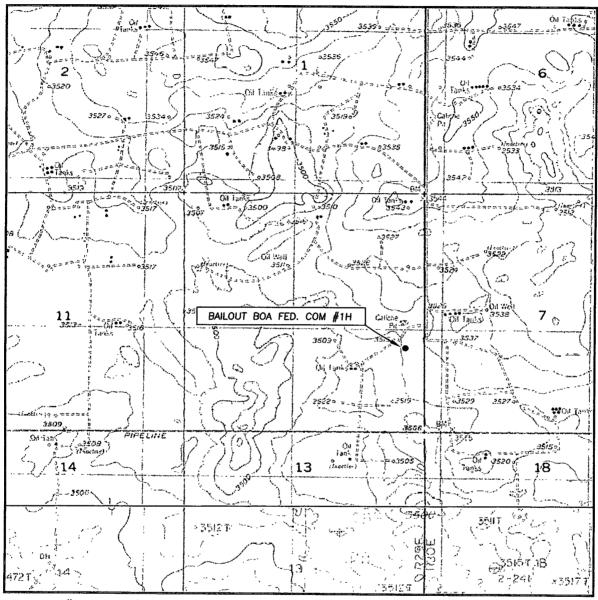

SCALE: 1" = 2000'

CONTOUR INTERVAL: 10'

SEC. 12 TWP. 18—S RGE. 29—E

SURVEY N.M.P.M.

COUNTY EDDY

DESCRIPTION 1770' FSL & 410' FEL

ELEVATION 3522.0'

OPERATOR EOG RESOURCES INC.

LEASE BAILOUT BOA FED. COM #1H

U.S.G.S. TOPOGRAPHIC MAP


RED LAKE SE, N.M.

Asel Surveying

P.O. BOX 393 - 310 W. TAYLOR HOBBS, NEW MEXICO - 575-393-9146



# VICINITY MAP

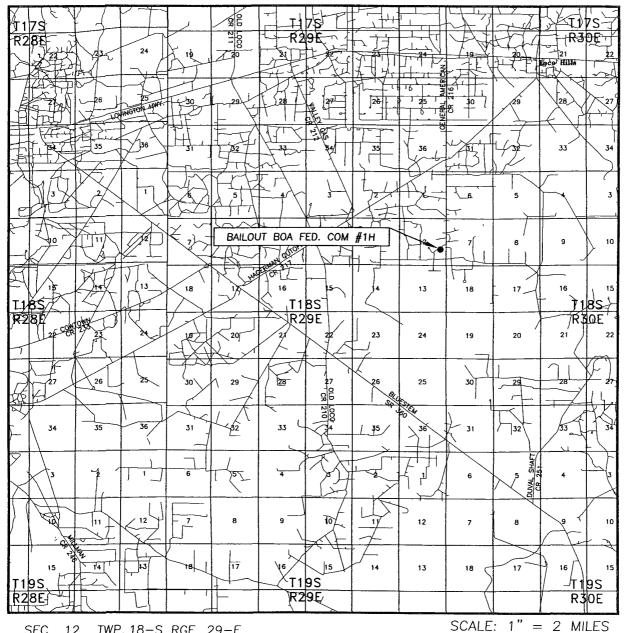

SEC. 12 TWP. 18-S RGE. 29-E

SURVEY N.M.P.M.

COUNTY EDDY

DESCRIPTION 1770' FSL & 410' FEL

ELEVATION 3522.0'

OPERATOR EOG RESOURCES INC.


LEASE BAILOUT BOA FED. COM #1H


Asel Surveying

P.O. BOX 393 - 310 W. TAYLOR HOBBS, NEW MEXICO - 575-393-9146



DIRECTIONS BEGINNING AT THE INTERSECTION OF U.S. HWY. #82 AND EDDY CO. ROAD #217 IN LOCO HILLS, GO SOUTHWEST ON COUNTY ROAD #217 (HAGERMAN CUTOFF ROAD) FOR 3.0 MILES, GO SOUTH ON COUNTY ROAD #216 (GENERAL AMERICAN ROAD) FOR 1.8 MILES, TURN RIGHT ON TRAIL ROAD AND GO WEST FOR 0.1 MILES, TURN LEFT ON PROPOSED ROAD AND GO SOUTH FOR 0.1 MILES TO LOCATION.

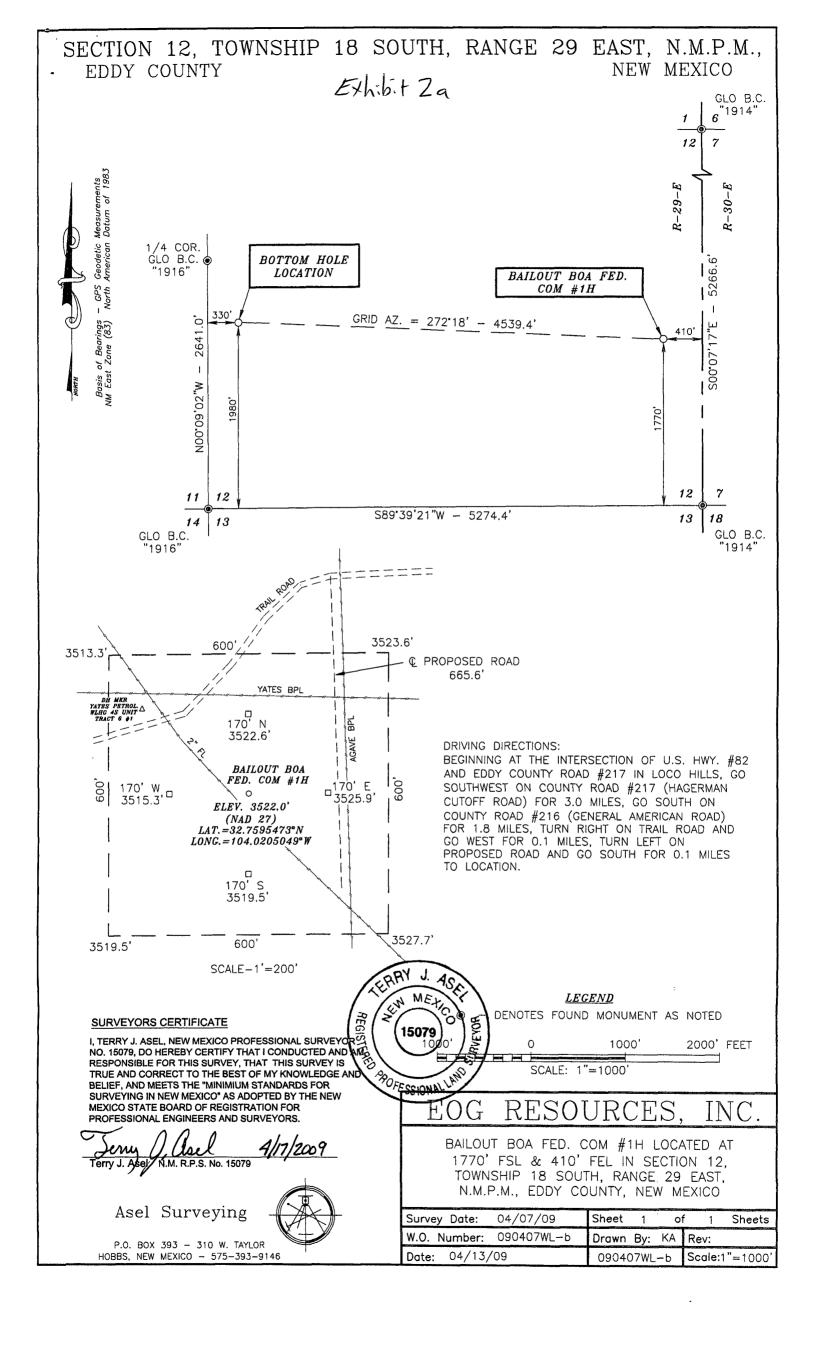

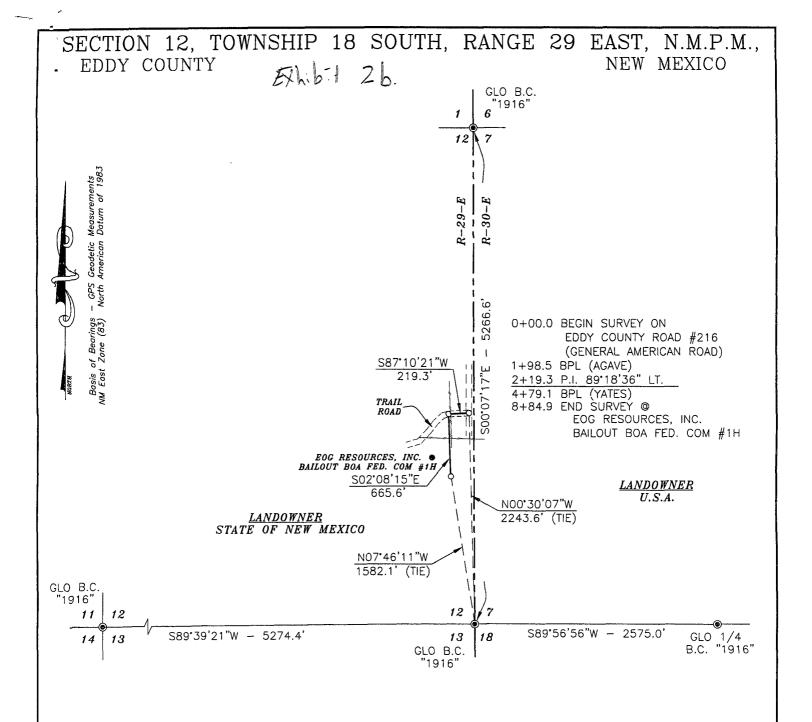

# **DESCRIPTION**

A STRIP OF LAND 20.0 FEET WIDE CROSSING STATE OF NEW MEXICO LAND IN SECTION 12, TOWNSHIP 18 SOUTH, RANGE 29 EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO AND BEING 10.0 FEET LEFT AND 10.0 FEET RIGHT OF THE FOLLOWING DESCRIBED CENTERLINE SURVEY:

BEGINNING AT A POINT WHICH LIES NO0'30'07"W - 2243.6 FEET FROM THE SOUTHEAST CORNER OF SAID SECTION 12; THEN S87'10'21"W - 219.3 FEET; THEN S02'08'15"E - 665.6 FEET TO A POINT WHICH LIES N07'46'11"W - 1582.1 FEET FROM THE SOUTHEAST CORNER OF SAID SECTION 12.

SAID STRIP OF LAND BEING 884.9 FEET OR 53.63 RODS IN LENGTH, CONTAINING 0.406 ACRES MORE OR LESS AND BEING ALLOCATED BY FORTIES AS FOLLOWS.

NE/4 SE/4 53.63 RODS OR 0.406 ACRES



# <u>LEGEND</u>

DENOTES FOUND MONUMENT AS NOTED

# SURVEYORS CERTIFICATE

I, TERRY J. ASEL, NEW MEXICO PROFESSIONAL SURVEYOR
NO. 15079, DO HEREBY CERTIFY THAT I CONDUCTED AND AM
RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY IS
TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND
BELIEF, AND MEETS THE "MINIMIUM STANDARDS FOR
SURVEYING IN NEW MEXICO" AS ADOPTED BY THE NEW
MEXICO STATE BOARD OF REGISTRATION FOR
PROFESSIONAL ENGINEERS AND SURVEYORS.

Terry J. Asel N.M. R.P.S. No. 15079

Asel Surveying

P.O. BOX 393 - 310 W. TAYLOR HOBBS, NEW MEXICO - 575-393-9146

# 1000' 0 1000' 2000' FEET SCALE: 1"=1000'

# EOG RESOURCES, INC.

SURVEY FOR A ROAD EASEMENT CROSSING STATE OF NEW MEXICO LAND IN SECTION 12, TOWNSHIP 18 SOUTH, RANGE 29 EAST, N.M.P.M., EDDY COUNTY, NEW MEXICO

| Survey Date: 04/07/09   | Sheet 1 of 1 Sheets           |
|-------------------------|-------------------------------|
| W.O. Number: 090407RD-b | Drawn By: KA                  |
| Date: 04/14/09          | 090407RD-b.DWG Scale:1"=1000' |

| SO   | (84 736 "Keelyfester (00) 30 "6" (00) 40 (00) 106 (00) 106 (00) 106 (10) 10 | 245, 94 mg 95 98 9 6 98 9 6 98 9 6 98 9 6 98 9 6 98 9 6 98 9 6 98 9 6 98 9 6 98 9 6 98 9 6 98 9 6 98 9 6 98 9 6 98 9 6 98 9 6 98 9 8 9   | TERRY 919467982 13ERCC 6171 11 A A A   | Towns of County of the County  |
|--|--|--|--|--|
| Bailout BOA Fed Com 1H   | 112 201 028784 (000) 103 318 00 007<br>0110 219 8 00 007<br>340 3 344 00 345 9207 141  | 12 % 376 Marbob 250,779 or8792 % 6 (105 M) 100 M   | 6 1 - 10 0 pm 300 pm 30   | ( ) Anodorio estado ( ) Anodorio estado ( ) Anodorio estado ( ) Anodorio estado ( ) Anodorio ( ) |
| SHL: 1770'FSL & 410' FEL   | 199 0736 01350 224 0140 326<br>+ 0 734 W1 12704 1351 (261 An)<br>10 136 1370 1370 1370 1370 1370 1370 1370 1370  | 1924 47 67 24 67 65 122 7 P26 148 3 152 145 P 8 16 147 16  | COGOEG 4º Geren Terceo<br>1028936 Frantactor Besson Wooley<br>1028936 Frantactor Besson Wooley<br>1028936 Frantactor Besson Wooley   | A Philips<br>(Anadorket Phon) So Bdy 5 A   |
| BAL: 1980 ' FSL: 330 ' FWL   | 161 299 159 055 156 156<br>161 299 159 055 156<br>161 291 166 155  | 159 150 149  | 1026936 Franklin etgi Oper 18.28. Hud<br>1026936 Franklin etgi Oper 18.28. Julia<br>103425 Franklin et | Hanson Ener Court 2 Ma-WI  |
|  | 80 182 20 184 20 185 185 185 185 185 185 185 185 185 185   | Grand  | BITZ 9 MM ANY LOCO HINIS - DESIGNAL PROPERTY   | TD33 3 MA 10 MA AROCO PNY Phillips AROCO SPS 3 AA Bressor  |
| Section 12, T185 - R29E  | 197 196 (197 196 W) Keely Wi   | (Pra) (Gen Amer) 26 75. 191<br>(Grbs Deep) Morhobokedy<br>(Grbs Deep) 193 193 192<br>(Grbs Deep) 193 193 192   | 50. Bay 28 28 10 P29 P36 23 Bbm. h.  | Woolley C250.Bdy Dir56 21 F  |
| N.M.P.M., Eddy County, NM  | Gen Amer Birra Gen Am  | 131 67 CBS Oper S/R (Peccs Pred) So. Edy   | Caza En Gen Amer Newmonitchevron   | Wooley etcl 42 1/4383 0467534  |
| ver<br>vere<br>e 53  | 23 Costilla COG Strang Conk Pet OEG CA 3 209 6   | 7 15 2 4 1033 N 732 1  | 7-A rates B 0 Moone" (Street Moone" (Street Moone") To 15 B 0 Moone" (Street Moone") To 15 B 15  | (Percos Prod.) (Percos Prod.) (Permise Prod.)  |
| 15 / 15 / 15 / 15 / 15 / 15 / 15 / 15 /  | I I I B 2023   | Prillips wolces, s/R Yotes e   | Asion Family Ltd . "3160 Agron by Tranklinetal Language Tranklinet   | Armer 01   |
| Exhibit 3  | Henry Rodelsy Trees of the Control o | 30.807 32 18 500 300 3 3 5 3 3 10 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3  | Schedisch" 12:354 As 1. tom.   | 0 \$68379   50 west? Ener Prod<br>Big Tomik Fed.<br>170 1719<br>  Woolley<br>  Beason   X  |
| Sacramento Partine S S-WI Contilla Fair 01 Tares Petr 4 Mayor 5 CC 6 SI  | 24 Si BI-SINH 3 Single Provide Single | (EOG Res DIR)  | State of Sta   | 14038 14035 14039 Franklin Asten, Four   |
| Tr 10-A Tr 10-But 10-Bu | T. 16 160103 Per 1970  | Total State Pet 5.44 Sand Tank-Fed   | to Uel base +01908  of EGG Res. Franklin (Enrop) Coppedge Sand lank 103503 Fed   | to: T02935<br>Ne'son L L L<br>102953 L EOG Res.<br>3 EOG Res.  |
| 3   5/4/2   17.36   5/4/2   17.36   5/4/2   17.36   5/4/2   17.36   5/4/2   17.36   5/4/2   17.36   5/4/2   17.36   5/4/2   17.36   5/4/2   17.36   5/4/2   17.36   5/4/2   17.36   5/4/2   17.36   5/4/2   17.36   17 | CECHIASTER DEILOZ JAN TONK WHOTH RE ROY 5518 Tr. 77 05102 270 Tr 25 "A" 455  | 1-AON-12MI Cates Pet. 1-AON-12MI G (Newmont) 13774 G 4 0 21095 41 Orros-locos  | 103505 Fed 14nk 1 105 P20  | Mendonoil 4<br>i (Franklin,<br>Aston E. Fairl EDG Res.   |
| Tr. 43 Sections of the Section of th | Pont Welcr Votes Pet 14  | (Newmont)<br>049947<br>3279 71 77  | 046256<br>(Capedae' ( (Sa Roy )  | (OIA 6 30 75) Kalley Fed (OIA 6 30 75) Kalley Fed (MAC 30 75) Kalley Fed (MAC 30 75) Kalley Fed (MAC 30 75) Kalley Fed   |
| Tra South Control (Service) (Foir Oil et al.)  South Found Control (Service) (Foir Oil et al.)  South Control (Service) (Foir Oil et al.)   | (2° el e (Newmont))  | 15 Instant U.S. Mosteller T02872  3784 2 H O EOG Res EOG 3 Varies Per etait U.S. Tom Boud etail. S. R.   | "Coppedge" (So Rou) 2H 5 US STORE OF ST   | Franklin, stal Owol S. "Alelson", ed", TO 3787 T/A Nelson  |
| Tr. 20 Tr. 5 Tr. 17-A South First State Seet et al. 1/2) Tr mompsood Tr. 5 Tr. 17-A South First State Seet et al. 1/2 Tr. 17-A South First State Seet et a | 95 Tr. 354 060904 77A 55AX 4 102717 74 13 A A A A A A A A A A A A A A A A A A  | Tonk Bar T.   2H EOG Res SH  | (Burlington)   | 3-1-2008 189<br>100557 01159 SHL   |
| #Fed 085014   F GR BG   INN  | Bill Saunders BSDisc pig (2) Tr. 4-Bl (2) 1055374  | OWI OF THE STREET  | (P/B) (Morr piec)  | 691. 9 234<br>Yates  |
| Tread of the second of the sec | O Dixon (Tx. Reexp)  | 10/65 Per 5 048620 Aston 97 98 4 Tr. 1981 (Newmont)  | Fromkline to 1 10 7941   | Barrey ieEOG Res. 26985  Horvey etal H.E.Yates   |
| Il s 1068 90 State 12 8 8 19 19 19 19 19 19 19 19 19 19 19 19 19   | Newmont US Tr.6  | BHL U.S. BHL 4 BHL 38.02 I'Tr. 21A 3 2H 1 1 2 2H   | BHL Strong Breccom   | A stree Lace Send   Hills Feed   1   Property   Propert |
| To Send (Tx Reex)  | 0437523 055830<br>Tr. 7-A  | O437525 Mostellar South on the Control of the Contr   | A.J Smith  | HBP   1   2008   |
| loco-buy B 6058  | Yates Petr etal  | Tr. 218.65 034 0431521<br>Newmont 048628 BHR<br>36 II 31 173160 Tr. 2-8  | BHL Fronting tol Masteller 17 Person 1999  | Southwest'n Humble   |
| HBP OR 654 ON THE PROPERTY OF STATE OF  | HBP<br>0437522<br>EOG Res. EOG   | EOG BHL O 4HAJ Smith   | Samson Res 10 214  BHL Foreign Holies  TAM TO 2244  BHL Foreign Holies  Free To 2245  U.S. Free To 2245  U.   | EOG Res<br>HE 9262 POG Res.  |
|  |  | 0.437523 EOG Res. 9<br>Songl<br>Tork Fed OG3621<br>38 19   | U.S Fed Com!   | 11-1208<br>V 5940<br>942 95<br>State 7 Texaco"   |
| on the Jrt 7 39 Oct 6 (Martin Yates III Washed Vates Retail Yates Per 8 6 7 1973) Oct 6 (Martin Yates III Washed Vates Retail Yates Per 9 1973) Oct 132 (Martin Yates III Washed Vates Retail Yates Per 9 1973) Oct 132 (Martin Yates III Washed Vates Retail Yates Per 9 1973) Oct 132 (Martin Yates III Washed Vates Retail Yates Per 9 1973) Oct 132 (Martin Yates III Washed Vates Retail Yates Per 9 1973) Oct 132 (Martin Yates III Washed Vates Retail Yates III Washed Vates III Washed Vates Retail Yates III Washed Vates II | TD 2774 HBP 0427523 HBP 0427523 HBP 0427523  | Machaba  | HBP Redfernt<br>046256   etcl) Elliott<br>19440   Oil  | 9 i ex a c o , et al McCoye<br>9 i ex a c o , et al Emphers<br>10 3350   |
| Moser 22 Meshed 9 Premier 0 437524 10 10 10 10 10 10 10 10 10 10 10 10 10  | 1 4 7 1 1  | Choc 1 Let 2 / Choc 1   |  | (Flog-Redfern, etal):9440 HBP Artiona Cherron 2)   |
| 22 Mosting  | TO 3774  HAP 0 0427523  TO 3774  Marbob C 152000  TO 15 | Yotes Chocolofe 020186 Bros.Mi Lohn   sirehem/   | F0 3400  | ÎĀRĒNA ?   |
| 51 Penton Red Spenton Penton Red Spenton R | ** Const.    | 94.2004  | 91 2004 Pet Res, et al<br>93 2004 Eligit Oil<br>934 18 HBP<br>630 20 U.S. 27279  | ! RES ! I  |
| mond   12 (1) (1) (1) (1) (1) (1) (1) (1) (1) (1)  | FC   ES   EOG  | Chesapeake Chesapeake Administration TO 585 Fed Conj Mewipourne Santo Namo   | z (Elliott Oil) Smith Elliottoil   | Webb of Manning  |
| TO 2015 Triggs MALH Tring tetal 14 (1975)  Own from Settline 1, 030152 (1976)  Own from Settline 1, 030152 (1976)  Trill 1976 1976 1976 1976 1976 1976 1976 1976   | 5.072 C437523  | FedCam Fed Manzand F245 Open   | FEED (Summer) BANGS (   | 27279 (Apache) (1/A3270) "Elliott Wis C33775 Fed of NCT-108 87   |
| 30752 (40 Mile 24 bots) (1723 Premier 4 Mile 24 375 22 Premier 4 Mile 2 | HØP  | 1936 1 30 (Pel Res Carp<br>1936 1 90 (Manzano) 6 (Manzano) 6 (Pel Res Carp<br>10 (Manzano) 7 (Pel Res Carp<br>10 (Pel Res Carp | 27290 Senting No. 20 Cm   2 Cm   | Pet Resized) 20 Arena Kes.  ### 0'5 (Chevron) - 49Mill  NO BENSON 5 8 6 9 7 7  |
| 30752   40   Milli Lithers   180   1723   1723   1724   17 | 33Mil. (8(EOG.D/R)<br>33Mil. (8urlingfon, 5/R)<br>6(com 8.27 62(2) 047311<br>6(com 8.27 62(2) 047311<br>6(com 8.27 62(2) 047311  | "Ellioff-Fed" Silenogen  | Membourne on the control of the cont   | ON, UNIT TIA   |
| House Plans Prod (Micon)  Act of the Plans Prod (Micon)  Act o | srbob (Find Of,C) rybung Hock Yesu Ener sprom the Find Of, C)  | Morexco   Dose402<br>(Sunshine Roy) 30,  | GIL 03 (19 03 03) (19 03 03) (19 03 03) (19 03 03) (19 03 03) (19 03 03) (19 03 03)  | R.W. Webb (Coperation of the control of the coperation of the cope |
| 1 Feature 382 19 Mucos W.Z. Delh.  | GIA MEC S Startand P   | 8 30 Telior Off Tenaco  Frag Nacetyon Octo   | 2 043-CV Punk ( ) Cibolo   | 27276 File 10 Celluster 4 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1  |
| Protest (Cit. Serva to So Roy Professor Sobre So | Tex) Pura Feet   SFina   1930   500   1930   | 18 2d 3 Snow 4   | Market 32 ent Ener  Style  Market G (Yoles)  Mar   | 3 garcies 8 3300 000 000 000 000 000 000 000 000   |
| 08 1636 3666 45  | 55 41 19 04 15 29 42 KI 30 40 1 1 1  | Be Grant Rocch erol  | Texaco Texaco  | HESO, Hebra (Neberra)  |

# 1. GEOLOGIC NAME OF SURFACE FORMATION:

Permian

# 2. ESTIMATED TOPS OF IMPORTANT GEOLOGICAL MARKERS:

| Rustler                            | 260'   |
|------------------------------------|--------|
| Grayburg                           | 2,650  |
| 1 <sup>st</sup> Bone Spring Sand   | 6,700' |
| 2 <sup>nd</sup> Bone Spring F Sand | 7,760' |

# 3. ESTIMATED DEPTHS OF ANTICIPATED FRESH WATER, OIL OR GAS:

| Upper Permian Sands                | 0- 250' | Fresh Water      |
|------------------------------------|---------|------------------|
| Grayburg/ San Andres               | 2,650'  | Oil Premier Sand |
| 1 <sup>st</sup> Bone Spring Sand   | 6,700'  | Oil              |
| 2 <sup>nd</sup> Bone Spring F Sand | 7,760'  | Oil              |

No other Formations are expected to give up oil, gas or fresh water in measurable quantities. Surface fresh water sands will be protected by setting 11.75" casing at 350° and circulating cement back to surface.

# 4. CASING PROGRAM

|  |         |                    |         |      |       |      | Collapse      | <u>Burst</u> | <u>Tension</u> |
|--|---------|--------------------|---------|------|-------|------|---------------|--------------|----------------|
|  |         |                    |         |      |       |      | <u>Design</u> | Design       | <u>Design</u>  |
|  |         | <u>Interval</u>    |         |      |       |      |               |              |                |
| see COA  | 14.750" | 0=350,             | 11.75"  | 42#  | H-40  | ST&C | 6.56          | 1.25         | 3.28           |
|  | 11.00"  | £0 <b>.</b> 3,300? | 8.625:" | -32# | -J-55 | LT&C | 1:73          | 1-90-        | _4.24          |
| and the second s | 7.875"  | 0-12,113           | 5.5"    | 17#  | N-80  | LT&C | 1.85          | 1.26         | 2.25           |
|  |         |                    |         |      |       |      | *             | •            |                |

# **Cementing Program:**

11.75" Surface Casing: Cement to surface, 500 sx Premium Plus C + 0.005 pps

Static Free + 2% CaCl2 + 0.25 pps CelloFlake + 0.005

gps FP-6L, 14.8 ppg, 1.35 yield

8.625" Intermediate Casing: Cement to surface, Lead: 650 sx 60:40 Poz: C + 0.005

pps Static Free + 5% NaCl + 0.125 pps CelloFlake + 5 pps LCM-1 + 0.005 gps FP-6L + 1% SMS, 13.0 ppg,

1.571 yield

Tail: 200 sx Prem Plus C + 0.25 pps CelloFlake + 0.005 FP-6L + 1% CaCl<sub>2</sub>, 14.8 ppg, 1.34 yield

5.50" Production Casing: Cement to 2,700', Lead: 750 sx 50:50 Poz C + 0.005

pps Static Free + 5% NaCl + 0.25 pps CelloFlake + 5 pps LCM-1 + 0.005 gps FP-6L + 10% Bentonite, 11.8

ppg, 2.29 yield

Tail: 600 sx 50:50 Poz H + 2% Bentonite + 0.005 gps FP-6L + 0.005 pps Static Free + 5% NaCl + 0.1% R-3 + 0.2% CD-32 + 0.3% FL-52A, 14.2 ppg, 1.30 yield

# 5. MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL:

(SEE EXHIBIT #1)

The blowout preventer equipment (BOP) shown in Exhibit #1 will consist of a double ram-type (5000 psi WP) preventer and an annular preventer (5000-psi WP). Units will be hydraulically operated and the ram-type will be equipped with blind rams on bottom and drill pipe rams on top. All BOP's and accessory equipment will be tested in accordance with Onshore Oil & Gas order No. 2. for a 2M system prior to drilling out of the surface casing shoe and while drilling the intermediate section. Before drilling out of the intermediate casing, the ram- type BOP and accessory equipment will be tested to 5000/ 250 psig and the annular preventer to 2500/ 250 psig.

Pipe rams will be operationally checked each 24-hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets.

Hydraulically operated choke will not be installed prior to the setting and cementing of the intermediate casing string, but will be installed prior to drilling out of the intermediate casing shoe.

# ·6.-TYPES-AND-CHARACTERISTICS-OF-THE-PROPOSED MUD-SYSTEM:

The well will be drilled to TD with a combination of brine, cut brine, and polymer mud system. The applicable depths and properties of this system are as follows:

|   |              |                 |                   | Wt           | Viscosity | Waterloss   |
|---|--------------|-----------------|-------------------|--------------|-----------|-------------|
|   |              | <u>Depth</u>    | Type              | <u>(PPG)</u> | (sec)     | <u>(cc)</u> |
|   | /            | 0-3 <i>5</i> 0° | Fresh – Gel       | 8.6-8.8      | 28-34     | N/c         |
|   | bee L        | ,350°-3,300°    | Brine             | 10.0-10.2    | 28-34     | N/c         |
| • | COA          | 3,300'-7,000'   | Fresh water       | 8.4-8.6      | 28-34     | N/c         |
|   | <b>O</b> 1,7 | 7,000'-7,400'   | Cut Brine         | 8.8-9.6      | 28-34     | N/c         |
|   |              | 7,400'-8,000'   | Cut Brine         | 8.8-9.6      | 28-34     | 10-15       |
|   |              | 7,298'-12,113'  | Polymer (Lateral) | 8.8-9.6      | 35-45     | 10-25       |
|   |              |                 |                   |              |           |             |

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept at the wellsite at all times.

# 7. AUXILIARY WELL CONTROL AND MONITORING EQUIPMENT:

- (A) A kelly cock will be kept in the drill string at all times.
- (B) A full opening drill pipe-stabbing valve (inside BOP) with proper drill pipe connections will be on the rig floor at all times.

# 8. LOGGING, TESTING AND CORING PROGRAM:

Open-hole logging is anticipated in the 7-7/8" production hole. The logging suites for this hole section are listed below:

NGT-CNL-LDT w/ Pe

From TD to previous casing shoe. At casing pull GR -

Neutron to surface.

HR Laterolog Array

From TD to previous casing shoe.

**FMI** 

Possible in the production hole

# 9. ABNORMAL CONDITIONS, PRESSURES, TEMPERATURES AND POTENTIAL HAZARDS:

The estimated bottom hole temperature (BHT) at TD is 165 degrees F with an estimated maximum bottom-hole pressure (BHP) at TD of 3500 psig. No hydrogen sulfide or other hazardous gases or fluids have been encountered, reported or are known to exist at this depth in this area. No major loss circulation zones have been reported in offsetting wells.

# 10. ANTICIPATED STARTING DATE AND DURATION OF OPERATIONS:

The drilling operation should be finished in approximately one month. If the well is productive, an additional 30-60 days will be required for completion and testing before a decision is made to install permanent facilities.

# **Permit Information:**

Well Name: Bailout BOA Fed Com #1H

Location:

SL 1770' FSL & 410' FEL, Section 12, T-18-S, R-29-E, Eddy Co., N.M.

BHL 1980' FSL & 330' FWL, Section 12, T-18-S, R-29-E, Eddy Co., N.M.

# **Casing Program:**

| Casing       | Setting | Hole    | Casing  | Casing | Casing | Desired |
|--------------|---------|---------|---------|--------|--------|---------|
|              | Depth   | Size    | Size    | Weight | Grade  | TOC     |
| Surface      | 350'    | 14-3/4" | 11-3/4" | 42#    | H-40   | Surface |
| Intermediate | 3,300'  | 11"     | 8-5/8"  | 32#    | J-55   | Surface |
| Production   | 12,113' | 7-7/8"  | 5 1/2"  | 17#    | N-80   | 2,700'  |

# **Cement Program:**

| Depth   | No.   | Slurries:   |
|---------|-------|---|
|         | Sacks |   |
| 350'    | 500   | Premium Plus C + 0.005 pps Static Free + 2% CaCl2 + 0.25 pps CelloFlake |
|         |       | + 0.005 gps FP-6L   |
| 3,300'  | 650   | Lead: 60:40 Poz: C + 0.005 pps Static Free + 5% NaCl + 0.125 pps        |
|         |       | CelloFlake + 5 pps LCM-1 + 0.005 gps FP-6L + 1% SMS                     |
|         | 200   | Tail: Premium Plus C + 0.005 pps Static Free + 1% CaCl2 + 0.125 pps     |
|         |       | CelloFlake + 0.005 gps FP-6L  |
| 12,113' | 750   | Lead: 50:50 Poz C + 0.005 pps Static Free + 5% NaCl + 0.25 pps          |
|         |       | CelloFlake + 5 pps LCM-1 + 0.005 gps FP-6L + 10% Bentonite              |
|         | 600   | Tail: 50:50 Poz H + 2% Bentonite + 0.005 gps FP-6L + 0.005 pps Static   |
|         |       | Free + 5% NaCl + 0.1% R-3 + 0.2% CD-32 + 0.3% FL-52A                    |

# **Mud Program**:

| Depth            | Type              | Weight (ppg) | Viscosity | Water Loss |
|------------------|-------------------|--------------|-----------|------------|
| 0 – 350'         | Fresh - Gel       | 8.6-8.8      | 28-34     | N/c        |
| 350' – 3,300'    | Brine             | 10.0-10.2    | 28-34     | N/c        |
| 3,300' – 7,000'  | Fresh Water       | 8.4 – 8.6    | 28-34     | N/c        |
| 7,000' – 7,400'  | Cut Brine         | 8.8-9.6      | 28-34     | N/c        |
| 7,400' - 8,000'  | Cut Brine         | 8.8-9.6      | 28-34     | 10-15      |
| 7,298' – 12,113' | Cut Brine/        | 8.8-9.6      | 40-45     | 10-25      |
|                  | Polymer (Lateral) |              |           |            |

# Planning Report

Database: FDM

Company: Midland - New Mexico Project: Sand Tank (Bone Spring)

Bailout BOA Fed Com #1H Site: Bailout BOA Fed Com #1H Well: Bailout BOA Fed Com #1H Wellbore:

Original Plan

Design:

Local Co-ordinate Reference:

TVD Reference:

MD Reference: North Reference:

Survey Calculation Method:

Well Bailout BOA Fed Com #1H

WELL @ 3541.00ft (Original Well Elev) WELL @ 3541.00ft (Original Well Elev)

Grid

Minimum Curvature

Project Sand Tank (Bone Spring), Eddy County, NM

Map System: Geo Datum:

US State Plane 1927 (Exact solution)

NAD 1927 (NADCON CONUS)

New Mexico East 3001 Map Zone:

System Datum:

Bailout BOA Fed Com #1H

640,176.30ft Northing: Site Position: Latitude: 32° 45' 34,370 N Easting: 596,167 40ft 104° 1' 13 818 W Map Longitude: From: 0.00 ft Slot Radius: **Grid Convergence:** 0 17 deg **Position Uncertainty:** 

Well Bailout BOA Fed Com #1H +N/-S 0.00 ft 32° 45' 34.370 N Well Position 640,176.30 ft Northina: Latitude: +E/-W 0.00 ft Easting: 596,167.40 ft Longitude: 104° 1' 13 818 W 0.00 ft Wellhead Elevation: **Position Uncertainty Ground Level:** 3,522.00 ft

Bailout BOA Fed Com #1H Magnetics Model Name Sample Date Declination Dip Angle (deg) (deg) **IGRF2000** 12/31/2004 8.81

Original Plan Design 🛴 **Audit Notes: PROTOTYPE** Version: Phase: 0.00 Tie On Depth: Vertical Section: Depth From (TVD) Direction (ft) (deg) 7.780.00 0.00 0.00 272.31

| Plan Sections Measured Depth |       | Azimuth | Vertical<br>Depth | +N/-S         | +E/-W     | Dogleg<br>Rate | Build<br>Rate | Turn<br>Rate | ΤΕΟ     |                   |
|------------------------------|-------|---------|-------------------|---------------|-----------|----------------|---------------|--------------|---------|-------------------|
| (ft)                         | (deg) | (deg)   | (ft)              | (ft)          | (ft)      | (?/100ft)      | (?/100ft) (   | ?/100ft)     | (deg)   | Target            |
| 0 00                         | 0.00  | 0 00    | 0.00              | 0.00          | 0.00      | 0.00           | 0.00          | 0 00         | 0.00    |                   |
| 7,298 00                     | 0 00  | 0.00    | 7,298 00          | 0.00          | 0.00      | 0.00           | 0.00          | 0.00         | 0.00    |                   |
| 8,055 12                     | 90.00 | 272.31  | 7,780.00          | 19.43         | -481.61   | 11.89          | 11 89         | 0 00         | 272.31  |                   |
| 8,055.20                     | 90.00 | 272.31  | 7,780.00          | 19 <b>4</b> 3 | -481.69   | 3.00           | 0 00          | -3.00        | -90.00  |                   |
| 12,112.44                    | 90 00 | 272 31  | 7,780.00          | 182.80        | -4,535 63 | 0.00           | 0.00          | 0.00         | 0.00    |                   |
| 12,112.52                    | 90 00 | 272 31  | 7,780.00          | 182.80        | -4,535 71 | 3.00           | 0.00          | 3.00         | 90 00 B | BHL (Bailout #1H) |

# Planning Report

Database: Company:

EDM Midland - New Mexico Project: Sand Tank (Bone Spring)
Site: Bailout BOA Fed Com #1H
Well: Bailout BOA Fed Com #1H
Bailout BOA Fed Com #1H

TVD Reference: MD Reference: MD Reference: North Reference:

A SANTE OF A SANTE OF A TO A SANTE OF A SANTE Local Co-ordinate Reference: Well Bailout BOA Fed Com #1H

WELL @ 3541.00ft (Original Well Elev) WELL @ 3541 00ft (Original Well Elev)

Grid

Survey Calculation Method: 7/4, Minimum Curvature

| Design: Ori                                  | ginal Plan                           |                                      |  |                                      |  |                                      |  | nal de Theologica e                  |  |
|--|--------------------------------------|--------------------------------------|--|--------------------------------------|--|--------------------------------------|--|--------------------------------------|--|
| Planned Survey                               |                                      |                                      |  | enegatekin<br>Karabanene             | e legen encueelse.<br>Priocity alfraga | isan magalakan<br>Pangalayan         | melikleputilist<br>Pogode puviti             |                                      |  |
| Measured<br>Depth<br>(ft)                    | 6. 7 W. 12 12                        | Azimuth<br>(deg)                     | Vertical<br>Depth<br>(ft)                    | +N/-S<br>-(ft)                       |  | Vertical<br>Section<br>(ft)          | Dogleg<br>Rate<br>(?/100ft)                  | Build<br>Rate<br>(?/100ft)           | Turn<br>Rate<br>(?/100ft)                    |
| 0.00<br>100.00<br>200.00<br>300.00<br>400.00 | 0.00<br>0.00<br>0 00<br>0 00<br>0 00 | 0.00<br>0.00<br>0.00<br>0.00<br>0.00 | 0.00<br>100.00<br>200.00<br>300.00<br>400.00 | 0.00<br>0.00<br>0.00<br>0.00<br>0.00 | 0 00<br>0 00<br>0.00<br>0.00<br>0.00   | 0.00<br>0.00<br>0.00<br>0.00<br>0.00 | 0.00<br>0.00<br>0.00<br>0.00<br>0.00<br>0.00 | 0.00<br>0 00<br>0 00<br>0.00<br>0.00 | 0.00<br>0.00<br>0.00<br>0.00<br>0.00<br>0.00 |
| 500.00                                       | 0.00                                 | 0 00                                 | 500.00                                       | 0 00                                 | 0.00                                   | 0.00                                 | 0.00   | 0.00                                 | 0.00   |
| 600.00                                       | 0 00                                 | 0.00                                 | 600.00                                       | 0.00                                 | 0 00                                   | 0.00                                 | 0.00   | 0.00                                 | 0.00   |
| 700.00                                       | 0.00                                 | 0.00                                 | 700.00                                       | 0 00                                 | 0.00                                   | 0.00                                 | 0.00   | 0.00                                 | 0.00   |
| 800.00                                       | 0.00                                 | 0.00                                 | 800.00                                       | 0.00                                 | 0.00                                   | 0.00                                 | 0.00   | 0.00                                 | 0.00   |
| 900.00                                       | 0.00                                 | 0.00                                 | 900.00                                       | 0.00                                 | 0.00                                   | 0.00                                 | 0.00   | 0.00                                 | 0.00   |
| 1,000.00                                     | 0.00                                 | 0.00                                 | 1,000.00                                     | 0.00                                 | 0 00                                   | 0 00                                 | 0.00   | 0.00                                 | 0.00   |
| 1,100.00                                     | 0.00                                 | 0.00                                 | 1,100.00                                     | 0.00                                 | 0.00                                   | 0 00                                 | 0 00   | 0.00                                 | 0.00   |
| 1,200.00                                     | 0.00                                 | 0.00                                 | 1,200.00                                     | 0.00                                 | 0 00                                   | 0 00                                 | 0.00   | 0 00                                 | 0.00   |
| 1,300.00                                     | 0.00                                 | 0.00                                 | 1,300.00                                     | 0.00                                 | 0.00                                   | 0.00                                 | 0 00   | 0.00                                 | 0.00   |
| 1,400.00                                     | 0.00                                 | 0.00                                 | 1,400.00                                     | 0.00                                 | 0.00                                   | 0.00                                 | 0.00   | 0.00                                 | 0.00   |
| 1,500.00                                     | 0.00                                 | 0.00                                 | 1,500 00                                     | 0.00                                 | 0.00                                   | 0.00                                 | 0.00   | 0.00                                 | 0.00   |
| 1,600.00                                     | 0.00                                 | 0.00                                 | 1,600.00                                     | 0.00                                 | 0 00                                   | 0.00                                 | 0.00   | 0.00                                 | 0.00   |
| 1,700.00                                     | 0.00                                 | 0.00                                 | 1,700 00                                     | 0.00                                 | 0.00                                   | 0.00                                 | 0.00   | 0 00                                 | 0.00   |
| 1,800.00                                     | 0.00                                 | 0.00                                 | 1,800.00                                     | 0.00                                 | 0.00                                   | 0.00                                 | 0.00   | 0.00                                 | 0.00   |
| 1,900.00                                     | 0.00                                 | 0.00                                 | 1,900.00                                     | 0.00                                 | 0 00                                   | 0.00                                 | 0.00   | 0 00                                 | 0.00   |
| 2,000 00                                     | 0.00                                 | 0.00                                 | 2,000 00                                     | 0.00                                 | 0.00                                   | 0.00                                 | 0 00   | 0.00                                 | 0.00   |
| 2,100 00                                     | 0.00                                 | 0 00                                 | 2,100.00                                     | 0.00                                 | 0.00                                   | 0.00                                 | 0 00   | 0.00                                 | 0 00   |
| 2,200.00                                     | 0 00                                 | 0.00                                 | 2,200.00                                     | 0.00                                 | 0.00                                   | 0.00                                 | 0.00   | 0.00                                 | 0.00   |
| 2,300.00                                     | 0 00                                 | 0 00                                 | 2,300.00                                     | 0.00                                 | 0.00                                   | 0.00                                 | 0 00   | 0.00                                 | 0.00   |
| 2,400 00                                     | 0.00                                 | 0 00                                 | 2,400 00                                     | 0.00                                 | 0.00                                   | 0.00                                 | 0.00   | 0.00                                 | 0.00   |
| 2,500.00                                     | 0.00                                 | 0 00                                 | 2,500.00                                     | 0.00                                 | 0.00                                   | 0.00                                 | 0.00   | 0.00                                 | 0 00   |
| 2,600.00                                     | 0.00                                 | 0.00                                 | 2,600.00                                     | 0.00                                 | 0 00                                   | 0.00                                 | 0.00   | 0 00                                 | 0.00   |
| 2,700.00                                     | 0.00                                 | 0 00                                 | 2,700.00                                     | 0.00                                 | 0.00                                   | 0.00                                 | 0.00   | 0.00                                 | 0 00   |
| 2,800.00                                     | 0.00                                 | 0 00                                 | 2,800.00                                     | 0.00                                 | 0.00                                   | 0.00                                 | 0.00   | 0.00                                 | 0 00   |
| 2,900.00                                     | 0.00                                 | 0 00                                 | 2,900.00                                     | 0.00                                 | 0.00                                   | 0.00                                 | 0.00   | 0.00                                 | 0 00   |
| 3,000.00                                     | 0 00                                 | 0.00                                 | 3,000 00                                     | 0.00                                 | 0.00                                   | 0.00                                 | 0 00   | 0.00                                 | 0.00   |
| 3,100.00                                     | 0 00                                 | 0 00                                 | 3,100 00                                     | 0.00                                 | 0.00                                   | 0.00                                 | 0 00   | 0.00                                 | 0.00   |
| 3,200.00                                     | 0 00                                 | 0.00                                 | 3,200 00                                     | 0.00                                 | 0.00                                   | 0.00                                 | 0.00   | 0.00                                 | 0.00   |
| 3,300.00                                     | 0.00                                 | 0 00                                 | 3,300 00                                     | 0.00                                 | 0 00                                   | 0.00                                 | 0.00   | 0 00                                 | 0.00   |
| 3,400.00                                     | 0.00                                 | 0 00                                 | 3,400 00                                     | 0.00                                 | 0.00                                   | 0.00                                 | 0.00   | 0 00                                 | 0.00   |
| 3,500.00                                     | 0.00                                 | 0.00                                 | 3,500.00                                     | 0.00                                 | 0 00                                   | 0.00                                 | 0.00   | 0 00                                 | 0.00   |
| 3,600 00                                     | 0.00                                 | 0 00                                 | 3,600.00                                     | 0.00                                 | 0 00                                   | 0 00                                 | 0.00   | 0 00                                 | 0 00   |
| 3,700.00                                     | 0.00                                 | 0 00                                 | 3,700.00                                     | 0.00                                 | 0 00                                   | 0.00                                 | 0.00   | 0 00                                 | 0.00   |
| 3,800 00                                     | 0.00                                 | 0.00                                 | 3,800.00                                     | 0.00                                 | 0.00                                   | 0 00                                 | 0.00   | 0 00                                 | 0.00   |
| 3,900.00                                     | 0.00                                 | 0 00                                 | 3,900.00                                     | 0.00                                 | 0.00                                   | 0.00                                 | 0.00   | 0.00                                 | 0.00   |
| 4,000.00                                     | 0 00                                 | 0 00                                 | 4,000 00                                     | 0.00                                 | 0.00                                   | 0 00                                 | 0.00   | 0.00                                 | 0.00   |
| 4,100.00                                     | 0.00                                 | 0.00                                 | 4,100.00                                     | 0.00                                 | 0.00                                   | 0.00                                 | 0.00   | 0.00                                 | 0.00   |
| 4,200.00                                     | 0 00                                 | 0 00                                 | 4,200 00                                     | 0.00                                 | 0 00                                   | 0.00                                 | 0.00   | 0.00                                 | 0.00   |
| 4,300.00                                     | 0 00                                 | 0 00                                 | 4,300 00                                     | 0.00                                 | 0 00                                   | 0.00                                 | 0.00   | 0.00                                 | 0.00   |
| 4,400.00                                     | 0 00                                 | 0 00                                 | 4,400 00                                     | 0.00                                 | 0 00                                   | 0.00                                 | 0.00   | 0.00                                 | 0.00   |
| 4,500.00                                     | 0.00                                 | 0.00                                 | 4,500 00                                     | 0.00                                 | 0.00                                   | 0.00                                 | 0.00   | 0 00                                 | 0.00   |
| 4,600.00                                     | 0.00                                 | 0.00                                 | 4,600.00                                     | 0.00                                 | 0 00                                   | 0.00                                 | 0.00   | 0.00                                 | 0.00   |
| 4,700.00                                     | 0.00                                 | 0.00                                 | 4,700.00                                     | 0.00                                 | 0.00                                   | 0.00                                 | 0.00   | 0 00                                 | 0.00   |
| 4,800.00                                     | 0.00                                 | 0.00                                 | 4,800 00                                     | 0.00                                 | 0.00                                   | 0.00                                 | 0.00   | 0 00                                 | 0.00   |
| 4,900.00                                     | 0.00                                 | 0.00                                 | 4,900.00                                     | 0.00                                 | 0.00                                   | 0.00                                 | 0.00   | 0.00                                 | 0.00   |
| 5,000 00                                     | 0.00                                 | 0.00                                 | 5,000.00                                     | 0.00                                 | 0.00                                   | 0.00                                 | 0 00   | 0.00                                 | 0 00   |
| 5,100 00                                     | 0 00                                 | 0.00                                 | 5,100.00                                     | 0.00                                 | 0 00                                   | 0 00                                 | 0 00   | 0.00                                 | 0.00   |
| 5,200.00                                     | 0 00                                 | 0.00                                 | 5,200.00                                     | 0.00                                 | 0.00                                   | 0 00                                 | 0.00   | 0.00                                 | 0.00   |
| 5,300.00                                     | 0 00                                 | 0.00                                 | 5,300.00                                     | 0.00                                 | 0.00                                   | 0.00                                 | 0.00   | 0.00                                 | 0.00   |

Planning Report

Database: EDM

Design:

Company: Midland - New Mexico
Project: Sand Tank (Bone Spring)
Site: Bailout BOA Fed Com #1H
Welli Bailout BOA Fed Com #1H
Wellbore: Bailout BOA Fed Com #1H

Original Plan

enel likingerikeringer langlikering berang perang perang perang berang perang berang perang berang berang perang berang perang p

Local Co-ordinate Reference: Well Bailout BOA Fed Com #1H

TVD Reference: MD Reference: North Reference: Survey Calculation Method: Well Bailout BOA Fed Com #1H WELL @ 3541.00ft (Original Well Elev) WELL @ 3541.00ft (Original Well Elev)

COM COM TO THE TO THE THE THE TOTAL TO THE TO

Grid

Minimum Curvature

| Planned Survey            | The second           |                  |                           |               |               |                             |                             | er mulian i un alta tal alta della ele<br>Le Par Gallonia di Ala Sala della della<br>Congressio della |                           |
|---------------------------|----------------------|------------------|---------------------------|---------------|---------------|-----------------------------|-----------------------------|---|---------------------------|
| Measured<br>Depth<br>(ft) | Inclination<br>(deg) | Azimuth<br>(deg) | Vertical<br>Depth<br>(ft) | +N/-S<br>(ft) | +E/-W<br>(ft) | Vertical<br>Section<br>(ft) | Dogleg<br>Rate<br>(?/100ft) | Build<br>Rate<br>(?/100ft)  | Furn<br>Rate<br>(7/100ft) |
| 5,400 00                  | 0.00                 | 0.00             | 5,400.00                  | 0.00          | 0.00          | 0.00                        | 0 00                        | 0 00  | 0 00                      |
| 5,500.00                  | 0.00                 | 0.00             | 5,500.00                  | 0 00          | 0.00          | 0.00                        | 0.00                        | 0.00  | 0.00                      |
| 5,600.00                  | 0 00                 | 0.00             | 5,600 00                  | 0.00          | 0 00          | 0.00                        | 0.00                        | 0.00  | 0.00                      |
| 5,700.00                  | 0 00                 | 0.00             | 5,700 00                  | 0 00          | 0.00          | 0.00                        | 0.00                        | 0.00  | 0.00                      |
| 5,800 00                  | 0.00                 | 0.00             | 5,800 00                  | 0.00          | 0.00          | 0.00                        | 0.00                        | 0.00  | 0.00                      |
| 5,900 00                  | 0 00                 | 0.00             | 5,900.00                  | 0.00          | 0.00          | 0.00                        | 0.00                        | 0.00  | 0.00                      |
| 6,000.00                  | 0 00                 | 0 00             | 6,000 00                  | 0.00          | 0.00          | 0 00                        | 0.00                        | 0 00  | 0 00                      |
| 6,100.00                  | 0.00                 | 0.00             | 6,100.00                  | 0.00          | 0.00          | 0.00                        | 0 00                        | 0.00  | 0 00                      |
| 6,200.00                  | 0.00                 | 0.00             | 6,200.00                  | 0.00          | 0.00          | 0.00                        | 0 00                        | 0.00  | 0.00                      |
| 6,300.00                  | 0 00                 | 0.00             | 6,300 00                  | 0.00          | 0.00          | 0.00                        | 0.00                        | 0.00  | 0.00                      |
| 6,400.00                  | 0.00                 | 0 00             | 6,400.00                  | 0.00          | 0.00          | 0.00                        | 0.00                        | 0.00  | 0.00                      |
| 6,500.00                  | 0 00                 | 0 00             | 6,500.00                  | 0.00          | 0.00          | 0 00                        | 0 00                        | 0.00  | 0 00                      |
| 6,600 00                  | 0.00                 | 0 00             | 6,600.00                  | 0.00          | 0.00          | 0.00                        | 0.00                        | 0 00  | 0 00                      |
| 6,700.00                  | 0.00                 | 0.00             | 6,700.00                  | 0.00          | 0.00          | 0.00                        | 0.00                        | 0.00  | 0.00                      |
| 6,800 00                  | 0.00                 | 0 00             | 6,800.00                  | 0.00          | 0.00          | 0 00                        | 0 00                        | 0.00  | 0.00                      |
| 6,900.00                  | 0.00                 | 0.00             | 6,900.00                  | 0.00          | 0.00          | 0.00                        | 0.00                        | 0.00  | 0.00                      |
| 7,000.00                  | 0 00                 | 0.00             | 7,000 00                  | 0.00          | 0.00          | 0.00                        | 0 00                        | 0.00  | 0.00                      |
| 7,100.00                  | 0 00                 | 0.00             | 7,100 00                  | 0.00          | 0.00          | 0.00                        | 0.00                        | 0.00  | 0.00                      |
| 7,200.00                  | 0 00                 | 0 00             | 7,200.00                  | 0.00          | 0.00          | 0.00                        | 0.00                        | 0.00  | 0.00                      |
| 7,298 00                  | 0.00                 | 0.00             | 7,298.00                  | 0.00          | 0.00          | 0.00                        | 0.00                        | 0.00  | 0.00                      |
| 7,300 00                  | 0.24                 | 272.31           | 7,300 00                  | 0.00          | 0.00          | 0.00                        | 11.89                       | 11 89   | 0.00                      |
| 7,400 00                  | 12 12                | 272.31           | 7,399 24                  | 0.43          | -10.74        | 10 75                       | 11 89                       | 11.89   | 0.00                      |
| 7,500 00                  | 24.01                | 272.31           | 7,494 14                  | 1 68          | -41.68        | 41.71                       | 11.89                       | 11.89   | 0.00                      |
| 7,600.00                  | 35 90                | 272.31           | 7,580.62                  | 3.69          | -91.48        | 91.56                       | 11.89                       | 11.89   | 0.00                      |
| 7,700 00                  | 47 79                | 272.31           | 7,654.99                  | 6.37          | -158.02       | 158 14                      | 11.89                       | 11.89   | 0.00                      |
| 7,800.00                  | 59 67                | 272.31           | 7,714 04                  | 9.62          | -238.43       | 238.62                      | 11.89                       | 11.89   | 0.00                      |
| 7,900.00                  | 71.56                | 272.31           | 7,755.25                  | 13.28         | -329.27       | 329.54                      | 11 89                       | 11.89   | 0.00                      |
| 8,000 00                  | 83.45                | 272.31           | 7,776.85                  | 17 21         | -426 65       | 427.00                      | 11.89                       | 11.89   | 0.00                      |
| 8,055 12                  | 90.00                | 272.31           | 7,780.00                  | 19.43         | -481.61       | 482.00                      | 11.89                       | 11.89   | 0.00                      |
| 8,055.20                  | 90.00                | 272.31           | 7,780.00                  | 19.43         | -481.69       | 482.08                      | 3 00                        | 0.00  | -3.00                     |
| 8,100.00                  | 90.00                | 272.31           | 7,780.00                  | 21.23         | -526.45       | 526.88                      | 0 00                        | 0.00  | 0.00                      |
| 8,200 00                  | 90 00                | 272.31           | 7,780.00                  | 25 26         | -626.37       | 626.88                      | 0.00                        | 0 00  | 0.00                      |
| 8,300.00                  | 90.00                | 272.31           | 7,780.00                  | 29.29         | -726.29       | 726.88                      | 0.00                        | 0 00  | 0.00                      |
| 8,400 00                  | 90.00                | 272.31           | 7,780.00                  | 33.31         | -826.20       | 826 88                      | 0.00                        | 0.00  | 0.00                      |
| 8,500 00                  | 90.00                | 272.31           | 7,780.00                  | 37.34         | -926.12       | 926 88                      | 0.00                        | 0.00  | 0.00                      |
| 8,600 00                  | 90 00                | 272.31           | 7,780.00                  | 41.37         | -1,026.04     | 1,026.88                    | 0.00                        | 0.00  | 0.00                      |
| 8,700.00                  | 90.00                | 272.31           | 7,780.00                  | 45.39         | -1,125.96     | 1,126.88                    | 0.00                        | 0.00  | 0.00                      |
| 8,800.00                  | 90.00                | 272.31           | 7,780.00                  | 49 42         | -1,225 88     | 1,226.88                    | 0.00                        | 0.00  | 0.00                      |
| 8,900 00                  | 90.00                | 272.31           | 7,780.00                  | 53 45         | -1,325.80     | 1,326.88                    | 0.00                        | 0.00  | 0.00                      |
| 9,000.00                  | 90.00                | 272.31           | 7,780.00                  | 57.47         | -1,425 72     | 1,426.88                    | 0.00                        | 0.00  | 0.00                      |
| 9,100.00                  | 90.00                | 272.31           | 7,780.00                  | 61.50         | -1,525 64     | 1,526.88                    | 0.00                        | 0.00  | 0.00                      |
| 9,200 00                  | 90.00                | 272.31           | 7,780.00                  | 65.53         | -1,625.56     | 1,626 88                    | 0.00                        | 0.00  | 0.00                      |
| 9,300.00                  | 90.00                | 272.31           | 7,780.00                  | 69.55         | -1,725.47     | 1,726 88                    | 0 00                        | 0.00  | 0.00                      |
| 9,400.00                  | 90.00                | 272.31           | 7,780.00                  | 73.58         | -1,825.39     | 1,826.88                    | 0.00                        | 0.00  | 0.00                      |
| 9,500.00                  | 90.00                | 272.31           | 7,780.00                  | 77.61         | -1,925.31     | 1,926.88                    | 0.00                        | 0.00  | 0.00                      |
| 9,600.00                  | 90.00                | 272.31           | 7,780.00                  | 81 63         | -2,025.23     | 2,026.88                    | 0.00                        | 0.00  | 0.00                      |
| 9,700 00                  | 90 00                | 272.31           | 7,780.00                  | 85.66         | -2,125 15     | 2,126 88                    | 0 00                        | 0.00  | 0.00                      |
| 9,800.00                  | 90.00                | 272.31           | 7,780.00                  | 89.69         | -2,225 07     | 2,226.88                    | 0.00                        | 0.00  | 0.00                      |
| 9,900.00                  | 90.00                | 272.31           | 7,780.00                  | 93.71         | -2,324.99     | 2,326 88                    | 0.00                        | 0.00  | 0.00                      |
| 10,000 00                 | 90 00                | 272.31           | 7,780.00                  | 97.74         | -2,424 91     | 2,426.88                    | 0 00                        | 0.00  | 0.00                      |
| 10,100.00                 | 90.00                | 272.31           | 7,780.00                  | 101.77        | -2,524.83     | 2,526.88                    | 0.00                        | 0.00  | 0.00                      |
| 10,200 00                 | 90 00                | 272.31           | 7,780.00                  | 105 79        | -2,624.75     | 2,626.88                    | 0 00                        | 0.00  | 0.00                      |
| 10,300.00                 | 90.00                | 272.31           | 7,780.00                  | 109.82        | -2,724.66     | 2,726.88                    | 0 00                        | 0.00  | 0.00                      |

Planning Report

Database: EDM Company: Midlar Project: Sand

Midland - New Mexico
Sand Tank (Bone Spring) Project: Sand Tank (Bone Spring)
Site: Bailout BOA Fed Com #1H
Well: Bailout BOA Fed Com #1H

Local Co-ordinate Reference: TVD Reference: MD Reference: North Reference: Survey Calculation Method:

∰ Well Bailout BOA Fed.Com #1H WELL @ 3541.00ft (Original Well Elev) WELL @ 3541 00ft (Original Well Elev)

enderstrand out to be the control of the control of

Grid


Minimum Curvature


Wellbore: Design: Original Plan

Bailout BOA Fed Com #1H

| lanned Survey          | The second     | a character es es . | TOTAL PROGRAMME & RES ARE | THE PERSON AND THE PE | TENER OF FRENCH SE     | T. T. T. WARRING CO  | DET LINE HATTOVET.         | i wana                  | CUT, TO VALUETY PROGRA |
|------------------------|----------------|---------------------|---------------------------|--|------------------------|----------------------|----------------------------|-------------------------|------------------------|
|                        |                |                     |                           |  |                        |                      |                            |                         |                        |
| Measured<br>Depth Ir   | clination      | Azimuth             | Vertical * Depth          | +N/-S  | +E/-W                  | Vertical<br>Section  | Dogleg<br>Rate             | Build<br>Rate           | Turn<br>Rate           |
| (ft)                   | (deg)          | (deg)               | (ft)                      | (ft)   | (ft)                   | ニューカー なっかつが、ませきようできた | 大きなないない アンファスト かんとうかい かんかん | "工作为不一知"的"公务"的"多"的"会经验" | ?/100ft)               |
| 10,400.00              | 90 00          | 272.31              | 7,780.00                  | 113.85   | -2,824.58              | 2,826 88             | 0.00                       | 0.00                    | 0.00                   |
| 10,500.00              | 90.00          | 272 31              | 7,780.00                  | 117.87   | -2,924.50              | 2,926.88             | 0.00                       | 0.00                    | 0.00                   |
| 10,600.00              | 90 00          | 272.31              | 7,780.00                  | 121.90   | -3,024.42              | 3,026 88             | 0 00                       | 0.00                    | 0.00                   |
| 10,700 00              | 90.00          | 272 31              | 7,780 00                  | 125 92   | -3,124.34              | 3,126.88             | 0 00                       | 0.00                    | 0.00                   |
| 10,800 00<br>10,900,00 | 90 00<br>90 00 | 272.31<br>272.31    | 7,780 00<br>7,780.00      | 129 95<br>133.98   | -3,224 26<br>-3,324 18 | 3,226.88<br>3,326.88 | 0.00<br>0.00               | 0.00<br>0.00            | 0.00<br>0.00           |
| 11.000.00              | 90.00          | 272 31              | 7,780.00                  | 138.00   | -3,424 10              | 3,426.88             | 0.00                       | 0.00                    | 0.00                   |
| 11,100.00              | 90.00          | 272.31              | 7,780.00                  | 142.03   | -3,524.02              | 3,526.88             | 0 00                       | 0 00                    | 0.00                   |
| 11,200.00              | 90 00          | 272.31              | 7,780 00                  | 146.06   | -3,623 93              | 3,626.88             | 0.00                       | 0 00                    | 0.00                   |
| 11,300.00              | 90.00          | 272.31              | 7,780.00                  | 150.08   | -3,723.85              | 3,726.88             | 0.00                       | 0 00                    | 0.00                   |
| 11,400.00              | 90.00          | 272.31              | 7,780.00                  | 154.11   | -3,823.77              | 3,826.88             | 0.00                       | 0.00                    | 0.00                   |
| 11,500.00<br>11,600.00 | 90.00<br>90.00 | 272.31<br>272.31    | 7,780.00<br>7.780.00      | 158.14<br>162.16   | -3,923.69<br>-4,023.61 | 3,926 88<br>4,026 88 | 0 00<br>0.00               | 0 00<br>0 00            | 0.00                   |
| •                      |                |                     | ,                         |  |                        |                      |                            |                         | 0.00                   |
| 11,700.00              | 90.00          | 272.31              | 7,780.00                  | 166 19   | -4,123.53              | 4,126 88             | 0.00                       | 0 00                    | 0 00                   |
| 11,800 00<br>11,900.00 | 90 00<br>90.00 | 272 31<br>272 31    | 7,780.00<br>7.780.00      | 170 22<br>174.24   | -4,223.45<br>-4,323 37 | 4,226.88<br>4,326.88 | 0.00<br>0.00               | 0.00<br>0.00            | 0.00<br>0.00           |
| 12,000.00              | 90.00          | 272.31              | 7,780.00                  | 178.27   | -4,323.37<br>-4,423.29 | 4,426 88             | 0.00                       | 0.00                    | 0.00                   |
| 12,100.00              | 90 00          | 272.31              | 7,780.00                  | 182.30   | -4,523 20              | 4,526.88             | 0.00                       | 0 00                    | 0.00                   |
| 12,112.44              | 90.00          | 272 31              | 7,780 00                  | 182.80   | -4,535 63              | 4,539.31             | 0 00                       | 0.00                    | 0 00                   |
| 12,112.52              | 90.00          | 272.31              | 7,780 00                  | 182.80   | -4,535 71              | 4,539.39             | 3.00                       | 0.00                    | 3.00                   |

| Targets  Target Name  - hit/miss target Dip - Shape (d | Angle Dip<br>eg) (de |      | TVD      | +N/-S<br>-(ft) | +E/-W<br>(ft) | Northing:<br>(ft) | Easting (ft) | Latitude         | Longitude         |
|--|----------------------|------|----------|----------------|---------------|-------------------|--------------|------------------|-------------------|
| BHL (Bailout #1H) - plan hits target center - Point    |                      | 0 00 | 7,780.00 | 182.80         | -4,535.71     | 640,359 10        | 591,631 70   | 32° 45' 36.309 N | I 104° 2' 6 928 W |

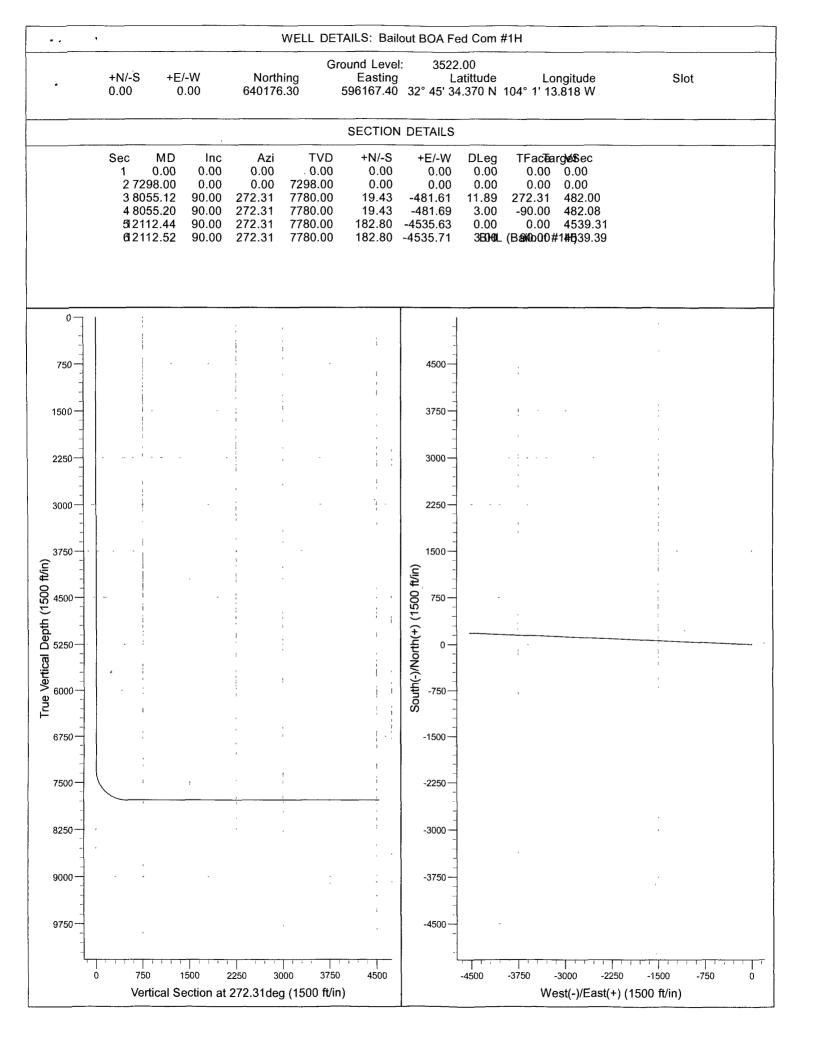

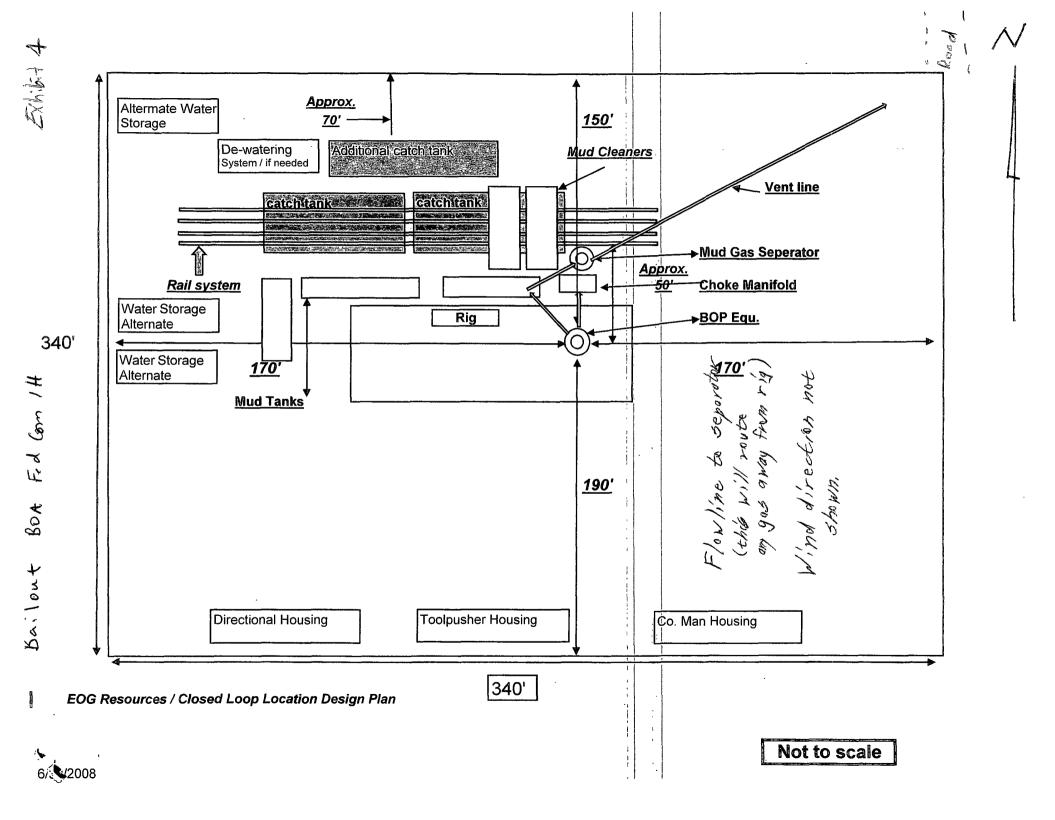


Builout Boa Fed form 14

Saidut BOA Ed Con 14

WELL NAME: Bailout BOA Ed Com 2H

CLOSED LOOP EQUIPMENT

Closed Loop EQUIPMENT

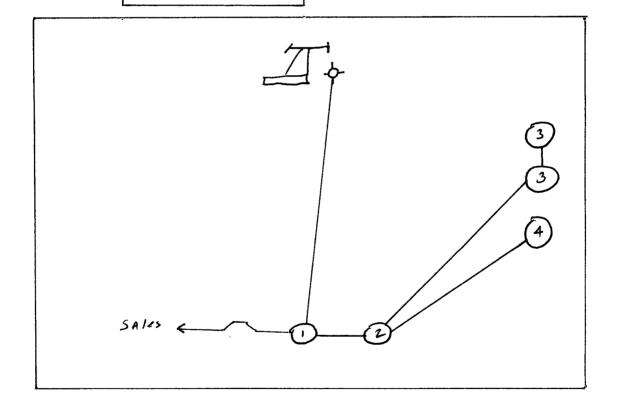

- 1- Separator 3. Oil Tank


"NOT TO SCALE"


- 2. Heater 4. Water TANK

#### ATTACHMENT TO EXHIBIT #1

- 1. Wear ring to be properly installed in head.
- 2. Blow out preventer and all fittings must be in good condition, 5000 psi W.P. minimum. Exhibit #1.
- 3. All fittings to be flanged
- 4. Safety valve must be available on rig floor at all times with proper connections, valve to be full bore 5000 psi W.P. minimum.
- 5. All choke and fill lines to be securely anchored especially ends of choke lines.
- 6. Equipment through which bit must pass shall be at least as large as the diameter of the casing being drilled through.
- 7. Kelly cock on kelly.
- 8. Extension wrenches and hand wheels to be properly installed.
- 9. Blow out preventer control to be located as close to driller's position as feasible.
- 10. Blow out preventer closing equipment to include minimum 40-gallon accumulator, two independent sources of pump power on each closing unit installation, and meet all API specifications.

# Bailout BOA Fed Com 1H

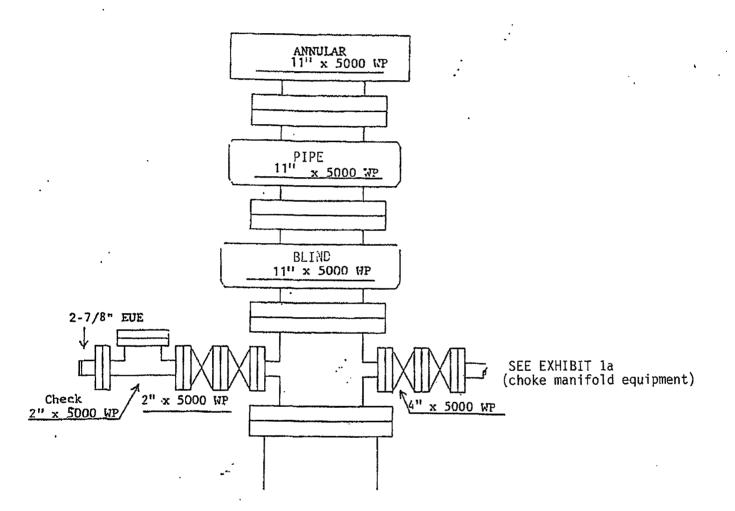

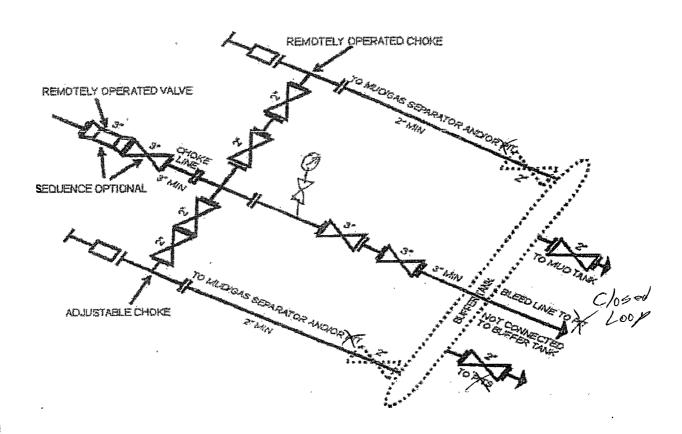

# 5M CHOKE MANIFOLD EQUIPMENT - CONFIGURATION OF CHOKES MAY VARY

Although not required for any of the choke manifold systems, buffer tanks are sometimes installed downstream of the choke assemblies for the purpose of manifolding the bleed lines together. When buffer tanks are employed, valves shall be installed upstream to isolate a failure or maifunction without interrupting flow control. Though not shown on 2M, 3M, 10M, OR 15M drawings, it would also be applicable to those situations.

[54 FR 39528, Sept. 27, 1989]

# Legals:

# Bailout BOA Fed. COM #1H

Eddy Co. New Mexico

1770' FSL & 410' FEL Surface Location

Section 12 T-18-S, R-29-E

Lat: N 32.7595473

Long: W 104.0205049

1980' FSL & 330' FEL Bottom of Hole Location


Section 12

T-18-S, R-29-E

Lat: N 32.7600857

Long: W 104.0352578

# H<sub>2</sub>S "Contingency Plan"





Safety Solutions, LLC 3222 Commercial Dr.

(432) 686-8555 Midland, TX 79701

#### **Table of Contents**

# 1. H<sub>2</sub>S Contingency Plan

- a. Scope
- b. Objective
- c. Discussion of Plan

# **II.** Emergency Procedures

- a. Emergency Procedures
- b. Emergency Reaction Steps
- c. Simulated Blowout Control Drills

# **III.** Ignition Procedures

- a. Responsibility
- b. Instructions

# **IV. Training Requirements**

# V. Emergency Equipment

#### VI. Check Lists

- a. Status Check List
- b. Procedural Check List

# **VII. Briefing Procedures**

# VIII. Evacuation Plan

- a. General Plan
- b. Emergency Phone Lists

# IX. Maps and Plats

- a. Location Plat
- b. Map to Location
- c. Radius of Exposure

# X. General Information

- a. Drilling/Re-entry Permits
- b. H-9 Permit
- c. H<sub>2</sub>S Permissible Limits
- d. Toxicity Table
- e. Physical Properties
- f. Respirator Use

g. Emergency Rescue

#### H<sub>2</sub>S CONTINGENCY PLAN SECTION

#### Scope:

This contingency plan provides an organized plan of action for alerting and protecting the public within an area of exposure prior to an intentional release, or following the accidental release of a potentially hazardous volume of hydrogen sulfide. The plan establishes guidelines for all personnel whose work activity may involve exposure to Hydrogen Sulfide Gas (H<sub>2</sub>S).

# Objective:

Prevent any and all accidents, and prevent the uncontrolled release of H<sub>2</sub>S into the atmosphere.

Provide proper evacuation procedures to cope with emergencies.

Provide immediate and adequate medical attention should an injury occur.

#### Discussion of Plan:

#### **Suspected Problem Zones:**

*Implementation:* This plan, with all details, is to be fully implemented 1000' before drilling into the first sour zone.

**Emergency Response Procedure:** This section outlines the conditions and denotes steps to be taken in the event of an emergency.

**Emergency Equipment and Procedure:** This section outlines the safety and emergency equipment that will be required for the drilling of this well.

**Training Provisions:** This section outlines the training provisions that must be adhered to 1000' before drilling into the first sour zone.

**Emergency call list:** Included are the telephone numbers of all persons that would need to be contacted, should an H<sub>2</sub>S emergency occur.

Briefing: This section deals with the briefing of all persons involved with the drilling of this well.

Public Safety: Public Safety Personnel will be made aware of the drilling of this well.

**Check Lists:** Status check lists and procedural check lists have been included to ensure adherence to the plan.

General Information: A general information section has been included to supply support information.

#### **EMERGENCY PROCEDURES SECTION**

- I. In the event of any evidence of H<sub>2</sub>S level above 10ppm, take the following steps immediately:
  - a. Secure breathing apparatus.
  - b. Order non-essential personnel out of the danger zone.
  - c. Take steps to determine if the H<sub>2</sub>S level can be corrected or suppressed, and if so, proceed with normal operations.
- II. If uncontrollable conditions occur, proceed with the following:
  - Take steps to protect and/or remove any public downwind of the rig, including partial evacuation or isolation. Notify necessary public safety personnel and the New Mexico Oil Conservation Division of the situation.
  - b. Remove all personnel to the Safe Briefing Area.
  - c. Notify public safety personnel for help with maintaining roadblocks and implementing evacuation.
  - Determine and proceed with the best possible plan to regain control of the well.
     Maintain tight security and safety measures.

# III. Responsibility:

- a. The Company Approved Supervisor shall be responsible for the total implementation of the plan.
- b. The Company Approved Supervisor shall be in complete command during any emergency.
- c. The Company Approved Supervisor shall designate a back up Supervisor in the event that he/she is not available.

#### **EMERGENCY PROCEDURE IMPLEMENTATION**

# I. Drilling or Tripping

#### a. All Personnel

- i. When alarm sounds, don escape unit and report to upwind Safe Briefing Area.
- ii. Check status of other personnel (buddy system).
- iii. Secure breathing apparatus.
- iv. Wait for orders from supervisor.

#### **b.** Drilling Foreman

- i. Report to the upwind Safe Briefing Area.
- ii. Don Breathing Apparatus and return to the point of release with the Tool Pusher or Driller (buddy system).
- iii. Determine the concentration of H<sub>2</sub>S.
- iv. Assess the situation and take appropriate control measures.

#### c. Tool Pusher

- i. Report to the upwind Safe Briefing Area.
- ii. Don Breathing Apparatus and return to the point of release with the Drilling Foreman or the Driller (buddy system).
- iii. Determine the concentration of H<sub>2</sub>S.
- iv. Assess the situation and take appropriate control measures.

#### d. Driller

- i. Check the status of other personnel (in a rescue attempt, always use the buddy system).
- **ii.** Assign the least essential person to notify the Drilling Foreman and Tool Pusher, in the event of their absence.
- **iii.** Assume the responsibility of the Drilling Foreman and the Tool Pusher until they arrive, in the event of their absence.

### e. Derrick Man and Floor Hands

i. Remain in the upwind Safe Briefing Area until otherwise instructed by a supervisor.

# f. Mud Engineer

- i. Report to the upwind Safe Briefing Area.
- ii. When instructed, begin check of mud for pH level and H<sub>2</sub>S level.

# g. Safety Personnel

- i. Don Breathing Apparatus.
- ii. Check status of personnel.
- iii. Wait for instructions from Drilling Foreman or Tool Pusher.

# II. Taking a Kick

- a. All Personnel report to the upwind Safe Briefing Area.
- b. Follow standard BOP procedures.

# III. Open Hole Logging

- a. All unnecessary personnel should leave the rig floor.
- **b.** Drilling Foreman and Safety Personnel should monitor the conditions and make necessary safety equipment recommendations.

# IV. Running Casing or Plugging

- **a.** Follow "Drilling or Tripping" procedures.
- **b.** Assure that all personnel have access to protective equipment.

#### SIMULATED BLOWOUT CONTROL DRILLS

All drills will be initiated by activating alarm devices (air horn). One long blast, on the air horn, for ACTUAL and SIMULATED Blowout Control Drills. This operation will be performed by the Drilling Foreman or Tool Pusher at least one time per week for each of the following conditions, with each crew:

Drill #1 Bottom Drilling

Drill #2 Tripping Drill Pipe

In each of these drills, the initial reaction time to shutting in the well shall be timed as well as the total time for the crew to complete its entire pit drill assignment. The times must be recorded on the IADC Driller's Log as "Blowout Control Drill".

Drill No .:

Reaction Time to Shut-In: minutes, seconds.

Total Time to Complete Assignment: minutes, seconds.

#### I. Drill Overviews

- a. Drill No. 1 Bottom Drilling
  - i. Sound the alarm immediately.
  - ii. Stop the rotary and hoist Kelly joint above the rotary table.
  - iii. Stop the circulatory pump.
  - iv. Close the drill pipe rams.
  - v. Record casing and drill pipe shut-in pressures and pit volume increases.
- b. Drill No. 2 Tripping Drill Pipe
  - i. Sound the alarm immediately.
  - ii. Position the upper tool joint just above the rotary table and set the slips.
  - iii. Install a full opening valve or inside blowout preventer tool in order to close the drill pipe.
  - iv. Close the drill pipe rams.
  - v. Record the shut-in annular pressure.

#### II. Crew Assignments

#### a. Drill No. 1 - Bottom Drilling

#### i. Driller

- 1. Stop the rotary and hoist Kelly joint above the rotary table.
- 2. Stop the circulatory pump.
- 3. Check Flow.
- 4. If flowing, sound the alarm immediately
- 5. Record the shit-in drill pipe pressure
- 6. Determine the mud weight increase needed or other courses of action.

#### ii. Derrickman

- 1. Open choke line valve at BOP.
- 2. Signal Floor Man #1 at accumulator that choke line is open.
- 3. Close choke and upstream valve after pipe tam have been closed.
- 4. Read the shut-in annular pressure and report readings to Driller.

# iii. Floor Man #1

- 1. Close the pipe rams after receiving the signal from the Derrickman.
- 2. Report to Driller for further instructions.

#### iv. Floor Man #2

- 1. Notify the Tool Pusher and Operator representative of the H<sub>2</sub>S alarms.
- 2. Check for open fires and, if safe to do so, extinguish them.
- 3. Stop all welding operations.
- 4. Turn-off all non-explosions proof lights and instruments.
- 5. Report to Driller for further instructions.

#### v. Tool Pusher

- 1. Report to the rig floor.
- 2. Have a meeting with all crews.

- 3. Compile and summarize all information.
- 4. Calculate the proper kill weight.
- 5. Ensure that proper well procedures are put into action.

# vi. Operator Representative

- 1. Notify the Drilling Superintendent.
- 2. Determine if an emergency exists and if so, activate the contingency plan.

#### b. Drill No. 2 - Tripping Pipe

#### i. Driller

į

- 1. Sound the alarm immediately when mud volume increase has been detected.
- 2. Position the upper tool joint just above the rotary table and set slips.
- 3. Install a full opening valve or inside blowout preventer tool to close the drill pipe.
- 4. Check flow.
- 5. Record all data reported by the crew.
- 6. Determine the course of action.

#### ii. Derrickman

- 1. Come down out of derrick.
- 2. Notify Tool Pusher and Operator Representative.
- 3. Check for open fires and, if safe to do so, extinguish them.
- 4. Stop all welding operations.
- 5. Report to Driller for further instructions.

#### iii. Floor Man #1

- 1. Pick up full opening valve or inside blowout preventer tool and stab into tool joint above rotary table (with Floor Man #2).
- 2. Tighten valve with back-up tongs.

- 3. Close pipe rams after signal from Floor Man #2.
- 4. Read accumulator pressure and check for possible high pressure fluid leaks in valves or piping.
- 5. Report to Driller for further instructions.

#### iv. Floor Man #2

- 1. Pick-up full opening valve or inside blowout preventer tool and stab into tool joint above rotary table (with Floor Man #1).
- 2. Position back-up tongs on drill pipe.
- 3. Open choke line valve at BOP.
- 4. Signal Floor Man #1 at accumulator that choke line is open.
- 5. Close choke and upstream valve after pipe rams have been closed.
- 6. Check for leaks on BOP stack and choke manifold.
- 7. Read annular pressure.
- 8. Report readings to the Driller.

#### v. Tool Pusher

- 1. Report to the rig floor.
- 2. Have a meeting with all of the crews.
- 3. Compile and summarize all information.
- 4. See that proper well kill procedures are put into action.

# vi. Operator Representative

- 1. Notify Drilling Superintendent
- 2. Determine if an emergency exists, and if so, activate the contingency plan.

#### **IGNITION PROCEDURES**

### Responsibility:

The decision to ignite the well is the responsibility of the DRILLING FOREMAN in concurrence with the STATE POLICE. In the event the Drilling Foreman is incapacitated, it becomes the responsibility of the RIG TOOL PUSHER. This decision should be made only as a last resort and in a situation where it is clear that:

- 1. Human life and property are endangered.
- 2. There is no hope of controlling the blowout under the prevailing conditions.

If time permits, notify the main office, but do not delay if human life is in danger. Initiate the first phase of the evacuation plan.

Instructions for Igniting the Well:

- 1. Two people are required for the actual igniting operation. Both men must wear self-contained breathing apparatus and must use a full body harness and attach a retrievable safety line to the D-Ring in the back. One man must monitor the atmosphere for explosive gases with the LEL monitor, while the Drilling Foreman is responsible for igniting the well.
- 2. The primary method to ignite is a 25mm flare gun with a range of approximately 500 feet.
- 3. Ignite from upwind and do not approach any closer than is warranted.
- 4. Select the ignition site best suited for protection and which offers an easy escape route.
- 5. Before igniting, check for the presence of combustible gases.
- 6. After igniting, continue emergency actions and procedures as before.
- 7. All unassigned personnel will limit their actions to those directed by the Drilling Foreman.

Note: After the well is ignited, burning Hydrogen Sulfide will convert to Sulfur Dioxide, which is also highly toxic. Do not assume the area is safe after the well is ignited.

#### TRAINING PROGRAM

When working in an area where Hydrogen Sulfide ( $H_2S$ ) might be encountered, definite training requirements must be carried out. The Company Supervisor will ensure that all personnel, at the well site, have had adequate training in the following:

- 1. Hazards and characteristics of Hydrogen Sulfide.
- 2. Physicals effects of Hydrogen Sulfide on the human body.
- 3. Toxicity of Hydrogen Sulfide and Sulfur Dioxide.
- 4. H<sub>2</sub>S detection, Emergency alarm and sensor location.
- 5. Emergency rescue.
- 6. Resuscitators.
- 7. First aid and artificial resuscitation.
- 8. The effects of Hydrogen Sulfide on metals.
- 9. Location safety.

Service company personnel and visiting personnel must be notified if the zone contains  $H_2S$ , and each service company must provide adequate training and equipment for their employees before they arrive at the well site.

# **EMERGENCY EQUIPMENT REQUIREMENTS**

#### Lease Entrance Sign:

Should be located at the lease entrance with the following information:

# CAUTION – POTENTIAL POISON GAS HYDROGEN SULFIDE NO ADMITTANCE WITHOUT AUTHORIZATION

## **Respiratory Equipment:**

- Fresh air breathing equipment should be placed at the safe briefing areas and should include the following:
- Two SCBA's at each briefing area.
- Enough air line units to operate safely, anytime the H<sub>2</sub>S concentration reaches the IDLH level (100 ppm).
- Cascade system with enough breathing air hose and manifolds to reach the rig floor, the derrickman and the other operation areas.

#### Windsocks or Wind Streamers:

- A minimum of two 10" windsocks located at strategic locations so that they may be seen from any point on location.
- Wind streamers (if preferred) should be placed at various locations on the well site to ensure wind consciousness at all times. (Corners of location).

# **Hydrogen Sulfide Detector and Alarms:**

- 1 Four channel H₂S monitor with alarms.
- Four (4) sensors located as follows: #1 Rig Floor, #2 Bell Nipple, #3 Shale Shaker, #4 Mud
- Gastec or Draeger pump with tubes.
- Sensor test gas.

## Well Condition Sign and Flags:

The Well Condition Sign w/flags should be placed a minimum of 150' before you enter the location. It should have three (3) color coded flags (green, yellow and red) that will be used to denote the following location conditions:

GREEN – Normal Operating Conditions YELLOW – Potential Danger RED – Danger, H₂S Gas Present

#### **Auxiliary Rescue Equipment:**

- Stretcher
- 2 100' Rescue lines.
- First Aid Kit properly stocked.

#### **Mud Inspection Equipment:**

Garret Gas Train or Hach Tester for inspection of Hydrogen Sulfide in the drilling mud system.

#### Fire Extinguishers:

Adequate fire extinguishers shall be located at strategic locations.

#### **Blowout Preventer:**

- The well shall have hydraulic BOP equipment for the anticipated BHP.
- The BOP should be tested upon installation.
- BOP, Choke Line and Kill Line will be tested as specified by Operator.

## **Confined Space Monitor:**

There should be a portable multi-gas monitor with at least 3 sensors ( $O_2$ , LEL  $H_2S$ ). This instrument should be used to test the atmosphere of any confined space before entering. It should also be used for atmospheric testing for LEL gas before beginning any type of Hot Work. Proper calibration documentation will need to be provided.

## **Communication Equipment:**

- Proper communication equipment such as cell phones or 2-way radios should be available at the rig.
- Radio communication shall be available for communication between the company man's trailer,
   rig floor and the tool pusher's trailer.

• Communication equipment shall be available on the vehicles.

# **Special Control Equipment:**

- Hydraulic BOP equipment with remote control on the ground.
- Rotating head at the surface casing point.

#### **Evacuation Plan:**

- Evacuation routes should be established prior to spudding the well.
- Should be discussed with all rig personnel.

#### **Designated Areas:**

## Parking and Visitor area:

- All vehicles are to be parked at a pre-determined safe distance from the wellhead.
- Designated smoking area.

#### Safe Briefing Areas:

- Two Safe Briefing Areas shall be designated on either side of the location at the maximum allowable distance from the well bore so they offset prevailing winds or they are at a 180 degree angle if wind directions tend to shift in the area.
- Personal protective equipment should be stored at both briefing areas or if a moveable cascade trailer is used, it should be kept upwind of existing winds. When wind is from the prevailing direction, both briefing areas should be accessible.

#### Note:

- Additional equipment will be available at the Safety Solutions, LLC office.
- Additional personal H<sub>2</sub>S monitors are available for all employees on location.
- Automatic Flare Igniters are recommended for installation on the rig.

# **CHECK LISTS**

# **Status Check List**

Note: Date each item as they are implemented.

| 1.  | Sign at location entrance.  |
|-----|---|
| 2.  | Two (2) wind socks (in required locations).   |
| 3.  | Wind Streamers (if required).   |
| 4.  | SCBA's on location for all rig personnel and mud loggers.                               |
| 5.  | Air packs, inspected and ready for use.   |
| 6.  | Spare bottles for each air pack (if required).  |
| 7.  | Cascade system for refilling air bottles.   |
| 8.  | Cascade system and hose line hook up.   |
| 9.  | Choke manifold hooked-up and tested. (before drilling out surface casing.)              |
| 10. | Remote Hydraulic BOP control (hooked-up and tested before drilling out surface casing). |
| 11. | BOP tested (before drilling out surface casing).  |
| 12. | Mud engineer on location with equipment to test mud for H <sub>2</sub> S.               |
| 13. | Safe Briefing Areas set-up  |
| 14. | Well Condition sign and flags on location and ready.                                    |
| 15. | Hydrogen Sulfide detection system hooked -up & tested.                                  |
| 16. | Hydrogen Sulfide alarm system hooked-up & tested.                                       |
| 17. | Stretcher on location at Safe Briefing Area.  |
| 18. | 2 – 100' Life Lines on location.  |
| 19. | 1 – 20# Fire Extinguisher in safety trailer.  |
| 20. | Confined Space Monitor on location and tested.  |
| 21. | All rig crews and supervisor trained (as required).                                     |

| 22. Access restricted for unauthorized personnel.                                      |  |
|--|--|
| 23. Drills on H₂S and well control procedures.   |  |
| 24. All outside service contractors advised of potential H <sub>2</sub> S on the well. |  |
| 25. NO SMOKNG sign posted.   |  |
| 26. H <sub>2</sub> S Detector Pump w/tubes on location.                                |  |
| 27. 25mm Flare Gun on location w/flares.   |  |
| 28. Automatic Flare Igniter installed on rig.  |  |

#### **Procedural Check List**

#### Perform the following on each tour:

F

- 1. Check fire extinguishers to see that they have the proper charge.
- 2. Check breathing equipment to insure that they have not been tampered with.
- 3. Check pressure on the supply air bottles to make sure they are capable of recharging.
- 4. Make sure all of the Hydrogen Sulfide detection systems are operative.

#### Perform the following each week:

- 1. Check each piece of breathing equipment to make sure that they are fully charged and operational. This requires that the air cylinder be opened and the mask assembly be put on and tested to make sure that the regulators and masks are properly working. Negative and Positive pressure should be conducted on all masks.
- 2. BOP skills.
- 3. Check supply pressure on BOP accumulator stand-by source.
- 4. Check all breathing air mask assemblies to see that straps are loosened and turned back, ready for use.
- 5. Check pressure on cascade air cylinders to make sure they are fully charged and ready to use for refill purposes if necessary.
- 6. Check all cascade system regulators to make sure they work properly.
- 7. Perform breathing drills with on-site personnel.
- 8. Check the following supplies for availability:
  - Stretcher
  - Safety Belts and Ropes
  - Spare air Bottles
  - Spare Oxygen Bottles (if resuscitator required)
  - Gas Detector Pump and Tubes
  - Emergency telephone lists
- 9. Test the Confined Space Monitor to verify the batteries are good

## **BRIEFING PROCEDURES**

The following scheduled briefings will be held to ensure the effective drilling and operation of this project:

# **Pre-Spud Meeting**

Date: Prior to spudding the well.

Attendance: Drilling Supervisor

Drilling Engineer
Drilling Foreman
Rig Tool Pushers
Rig Drillers
Mud Engineer
All Safety Personnel

**Key Service Company Personnel** 

Purpose: Review and discuss the well program, step-by-step, to insure complete understanding of

assignments and responsibilities.

## **EVACUATION PLAN**

#### **General Plan**

The direct lines of action prepared by SAFETY SOLUTIONS, LLC to protect the public from hazardous gas situations are as follows:

- 1. When the company approved supervisor (Drilling Foreman, Tool Pusher or Driller) determine that Hydrogen Sulfide gas cannot be limited to the well location, and the public will be involved, he will activate the evacuation plan. Escape routes are noted on the area map.
- 2. Company safety personnel or designee will notify the appropriate local government agency that a hazardous condition exists and evacuation needs to be implemented.
- 3. Company approved safety personnel that have been trained in the use of the proper emergency equipment will be utilized.
- 4. Law enforcement personnel (State Police, Local Police Department, Fire Department, and the Sheriff's Department) will be called to aid in setting up and maintaining road blocks. Also, they will aid in evacuation of the public if necessary.
- NOTE: Law enforcement personnel will not be asked to come into a contaminated area. Their assistance will be limited to uncontaminated areas. Constant radio contact will be maintained with them.
  - 5. After the discharge of gas has been controlled, "Company" safety personnel will determine when the area is safe for re-entry.

**See Emergency Action Plan** 

# **Emergency Assistance Telephone List**

| PUBLIC SAFETY:                   | 911 o  |                |  |  |
|----------------------------------|--------|----------------|--|--|
| Eddy County Sheriff's Department |        | (575) 887-7551 |  |  |
| Kent Waller                      |        | . ,            |  |  |
| Fire Department:                 |        |                |  |  |
| Carlsbad                         |        | (575) 885-3125 |  |  |
| Artesia                          |        | (575) 746-5050 |  |  |
| Hospitals:                       |        |                |  |  |
| Carlsbad                         |        | (575) 887-4121 |  |  |
| Artesia                          |        | (575) 748-3333 |  |  |
| Hobbs                            |        | (575) 392-1979 |  |  |
| Dept. of Public Safety/Carlsbad  |        | (575) 748-9718 |  |  |
| Highway Department               |        | (575) 885-3281 |  |  |
| New Mexico Oil Conservation      |        | (575) 476-3440 |  |  |
| U.S. Dept. of Labor              |        | (575) 887-1174 |  |  |
| EOG Resources, Inc.              |        |                |  |  |
| EOG / Midland                    |        |                |  |  |
| Company Drilling Consultants:    |        |                |  |  |
| Lynn Clayton                     | Cell   | (432) 553-4819 |  |  |
| Drilling Engineer                |        |                |  |  |
| Jason La Grega                   | Cell   | (432) 894-1217 |  |  |
| Drilling Manager                 |        |                |  |  |
| Manuel Leyva                     | Cell   | (432) 706-4821 |  |  |
| Johnny Lopez                     | Cell   | (432) 513-2181 |  |  |
| Drilling Superintendent          |        |                |  |  |
| Barney Thompson                  | Office | (432) 686-3678 |  |  |
|                                  | Cell   | (432) 254-9056 |  |  |
| McVay Drilling                   |        |                |  |  |
| McVay Drilling / Hobbs           |        | (575) 397-3311 |  |  |
| McVay Drilling Rig #4            | Rig    | (575) 370-5598 |  |  |
| Tool Pusher:                     |        |                |  |  |
| Terry Johnson                    | Cell   | (575) 370-5620 |  |  |
| Safety Consultants               |        | ····           |  |  |
| Safety Solutions, LLC            |        | (432) 686-8555 |  |  |
| Cliff Strasner                   | Cell   | (432) 894-9789 |  |  |
| Craig Strasner                   | Cell   | (432) 894-0341 |  |  |

# MAPS AND PLATS (Maps & Plats Attached)

#### **Affected Notification List**

(within a 65' radius of exposure @100ppm)

The geologic zones that will be encountered during drilling are known to contain hazardous quantities of  $H_2S$ . The accompanying map illustrates the affected areas of the community. The residents within this radius will be notified via a hand delivered written notice describing the activities, potential hazards, conditions of evacuation, evacuation drill siren alarms and other precautionary measures.

**Evacuee Description:** 

Residents: THERE ARE NO RESIDENTS WITHIN 3000' ROE.

**Notification Process:** 

A continuous siren audible to all residence will be activated, signaling evacuation of previously notified and informed residents.

**Evacuation Plan:** 

All evacuees will migrate lateral to the wind direction.

The Oil Company will identify all home bound or highly susceptible individuals and make special evacuation preparations, interfacing with the local and emergency medical service as necessary.

**GENERAL INFORMATION** 

## Toxic Effects of H<sub>2</sub>S Poisoning

Hydrogen Sulfide is extremely toxic. The acceptable ceiling concentration for eight-hour exposure is 10 PPM, which is .001% by volume. Hydrogen Sulfide is heavier than air (specific gravity – 1.192) and is colorless and transparent. Hydrogen Sulfide is almost as toxic as Hydrogen Cyanide and is 5-6 times more toxic than Carbon Monoxide. Occupational exposure limits for Hydrogen Sulfide and other gases are compared below in Table 1. Toxicity table for H<sub>2</sub>S and physical effects are shown in Table 2.

Table 1
Permissible Exposure Limits of Various Gases

| Common Name      | Symbol           | Sp. Gravity | TLV      | STEL       | IDLH    |
|------------------|------------------|-------------|----------|------------|---------|
| Hydrogen Cyanide | HCN              | .94         | 4.7 ppm  | С          |         |
| Hydrogen Sulfide | H <sub>2</sub> S | 1.192       | 10 ppm   | 15 ppm     | 100 ppm |
| Sulfide Dioxide  | SO <sub>2</sub>  | 2.21        | 2 ppm    | 5 ppm      |         |
| Chlorine         | CL               | 2.45        | .5 ppm   | 1 ppm      |         |
| Carbon Monoxide  | со               | .97         | 25 ppm   | 200 ppm    |         |
| Carbon Dioxide   | CO <sub>2</sub>  | 1.52        | 5000 ppm | 30,000 ppm |         |
| Methane          | CH <sub>4</sub>  | .55         | 4.7% LEL | 14% UEL    |         |

#### **Definitions**

- A. TLV Threshold Limit Value is the concentration employees may be exposed based on a TWA (time weighted average) for eight (8) hours in one day for 40 hours in one (1) week. This is set by ACGIH (American Conference of Governmental Hygienists) and regulated by OSHA.
- B. STEL Short Term Exposure Limit is the 15 minute average concentration an employee may be exposed to providing that the highest exposure never exceeds the OEL (Occupational Exposure Limit). The OEL for H<sub>2</sub>S is 19 PPM.
- C. IDLH Immediately Dangerous to Life and Health is the concentration that has been determined by the ACGIH to cause serious health problems or death if exposed to this level. The IDLH for H<sub>2</sub>S is 100 PPM.
- D. TWA Time Weighted Average is the average concentration of any chemical or gas for an eight (8) hour period. This is the concentration that any employee may be exposed based on an TWA.

# TABLE 2

|           |      | Toxicity Table of H₂S   |
|-----------|------|---|
| Percent % | PPM  | Physical Effects  |
| .0001     | 1    | Can smell less than 1 ppm.  |
| .001      | 10   | TLV for 8 hours of exposure.  |
| .0015     | 15   | STEL for 15 minutes of exposure.  |
| .01       | 100  | Immediately Dangerous to Life & Health. Kills sense of smell in 3 to 5 minutes.       |
| .02       | 200  | Kills sense of smell quickly, may burn eyes and throat.                               |
| .05       | 500  | Dizziness, cessation of breathing begins in a few minutes.                            |
| .07       | 700  | Unconscious quickly, death will result if not rescued promptly.                       |
| .10       | 1000 | Death will result unless rescued promptly. Artificial resuscitation may be necessary. |

#### PHYSICAL PROPERTIES OF H2S

The properties of all gases are usually described in the context of seven major categories:

COLOR
ODOR
VAPOR DENSITY
EXPLOSIVE LIMITS
FLAMMABILITY
SOLUBILITY (IN WATER)
BOILING POINT

Hydrogen Sulfide is no exception. Information from these categories should be considered in order to provide a fairly complete picture of the properties of the gas.

#### **COLOR - TRANSPARENT**

Hydrogen Sulfide is colorless so it is invisible. This fact simply means that you can't rely on your eyes to detect its presence. In fact that makes this gas extremely dangerous to be around.

#### **ODOR – ROTTEN EGGS**

Hydrogen Sulfide has a distinctive offensive smell, similar to "rotten eggs". For this reason it earned its common name "sour gas". However,  $H_2S$ , even in low concentrations, is so toxic that it attacks and quickly impairs a victim's sense of smell, so it could be fatal to rely on your nose as a detection device.

#### VAPOR DENSITY - SPECIFIC GRAVITY OF 1.192

Hydrogen Sulfide is heavier than air so it tends to settle in low-lying areas like pits, cellars or tanks. If you find yourself in a location where H<sub>2</sub>S is known to exist, protect yourself. Whenever possible, work in an area upwind and keep to higher ground.

#### **EXPLOSIVE LIMITS - 4.3% TO 46%**

Mixed with the right proportion of air or oxygen, H<sub>2</sub>S will ignite and burn or explode, producing another alarming element of danger besides poisoning.

#### **FLAMMABILITY**

Hydrogen Sulfide will burn readily with a distinctive clear blue flame, producing Sulfur Dioxide (SO<sub>2</sub>), another hazardous gas that irritates the eyes and lungs.

#### SOLUBILITY - 4 TO 1 RATIO WITH WATER

Hydrogen Sulfide can be dissolved in liquids, which means that it can be present in any container or vessel used to carry or hold well fluids including oil, water, emulsion and sludge. The solubility of  $H_2S$  is dependent on temperature and pressure, but if conditions are right, simply agitating a fluid containing  $H_2S$  may release the gas into the air.

# **BOILING POINT – (-76 degrees Fahrenheit)**

Liquefied Hydrogen Sulfide boils at a very low temperature, so it is usually found as a gas.

#### RESPIRATOR USE

The Occupational Safety and Health Administration (OSHA) regulate the use of respiratory protection to protect the health of employees. OSHA's requirements are written in the Code of Federal Regulations, Title 29, Part 1910, Section 134, Respiratory Protection. This regulation requires that all employees who might be required to wear respirators, shall complete a OSHA mandated medical evaluation questionnaire. The employee then should be fit tested prior to wearing any respirator while being exposed to hazardous gases.

Written procedures shall be prepared covering safe use of respirators in dangerous atmospheric situations, which might be encountered in normal operations or in emergencies. Personnel shall be familiar with these procedures and the available respirators.

Respirators shall be inspected prior to and after each use to make sure that the respirator has been properly cleaned, disinfected and that the respirator works properly. The unit should be fully charged prior to being used.

Anyone who may use respirators shall be properly trained in how to properly seal the face piece. They shall wear respirators in normal air and then in a test atmosphere. (Note: Such items as facial hair (beard or sideburns) and eyeglass temple pieces will not allow a proper seal.) Anyone that may be expected to wear respirators should have these items removed before entering a toxic atmosphere. A special mask must be obtained for anyone who must wear eyeglasses. Contact lenses should not be allowed.

Respirators shall be worn during the following conditions:

- A. Any employee who works near the top or on the top of any tank unless tests reveal less than 20 ppm of  $H_2S$ .
- B. When breaking out any line where H<sub>2</sub>S can reasonably be expected.
- C. When sampling air in areas where H<sub>2</sub>S may be present.
- D. When working in areas where the concentration of  $H_2S$  exceeds the Threshold Limit Value for  $H_2S$  (10 ppm).
- E. At any time where there is a doubt as to the  $H_2S$  level in the area to be entered.

## **EMERGENCY RESCUE PROCEDURES**

#### DO NOT PANIC!!!

#### Remain Calm - Think

- 1. Before attempting any rescue you must first get out of the hazardous area yourself. Go to a safe briefing area.
- 2. Sound alarm and activate the 911 system.
- 3. Put on breathing apparatus. At least two persons should do this, when available use the buddy system.
- 4. Rescue the victim and return them to a safe briefing area.
- 5. Perform an initial assessment and begin proper First Aid/CPR procedures.
- 6. Keep victim lying down with a blanket or coat, etc.., under the shoulders to keep airway open. Conserve body heat and do not leave unattended.
- 7. If the eyes are affected by H<sub>2</sub>S, wash them thoroughly with potable water. For slight irritation, cold compresses are helpful.
- 8. In case a person has only minor exposure and does not lose consciousness totally, it's best if he doesn't return to work until the following day.
- 9. Any personnel overcome by H<sub>2</sub>S should always be examined by medical personnel. They should always be transported to a hospital or doctor.

# SURFACE USE PLAN OF OPERATION

SHL: 1770' FSL & 410' FEL, Unit I, Section 12, T18S-R29E, N.M.P.M., Eddy, NM BHL: 1980' FSL & 330' FWL, Unit L, Section 12, T18S-R29E, N.M.P.M., Eddy, NM

#### 1. EXISTING ROADS:

- a. The well site and elevation plat for the proposed well are reflected on the well site layout; Form C-102. The well was staked by Terry Asel, RPL 15079.
- b. All roads into the location are depicted on Exhibit 2, 2a & 2b.
- c. <u>Directions to Locations:</u> Beginning in Loco Hills, NM, From Jct. of Hwy 82 & Co. Road 217, Go Southwest on CR 217 for 3 miles, turn left on CR 216 and go south for 1.8 miles, turn right on trail road and go west for 0.1 miles, turn left on proposed road and go south for 0.1 miles to location.

#### 2. NEW OR RECONSTRUCTED ACCESS ROAD:

- a. The well site layout, Exhibit 2a shows the layout. The trail road will be upgraded and the 665.6' of new road will be constructed alongside the east side of the well pad (Exhibit 2b).
- b. The maximum width of the road will be 15'. It will be crowned and made of 6" of rolled and compacted caliche. Water will be deflected, as necessary, to avoid accumulation and prevent soil erosion.
- c. Surface material will be native caliche. This material will be obtained from a BLM approved pit nearest in proximity to the location. The average grade will be approximately 1%.
- d. No cattleguards, gates or fence cuts will be required. No turnouts are planned.

#### 3. LOCATION OF EXISTING WELLS:

Exhibit #3 shows all existing wells within a one-mile radius of this well.

## 4. LOCATION OF EXISTING AND/OR PROPOSED PRODUCTION FACILITIES:

- a. In the event the well is found to be productive, the Bailout BOA Fed Com 1H tank battery would be utilized and the necessary production equipment will be installed at the well site. See Production Facilities Layout diagram.
- b. As a proposed oil well, operator will contact Central Valley Electric Coop to provide electrical service to the well.
- c. All flow lines will adhere to API standards.
- d. Refer to b above.
- e. If the well is productive, rehabilitation plans are as follows:

- i. Within 120 days subsequent to the first date of sales, the location shall be reduced as determined by operator to the minimum area necessary to safely and effectively operate the well.
- ii. The original topsoil from the well site will be returned to the location. The location will be contoured as close as possible to match the original topography.

#### 5. LOCATION AND TYPE OF WATER SUPPLY:

This location will be drilled using a combination of water mud systems (outlined in the drilling program). The water will be obtained from commercial water stations in the area and hauled to location by transport truck using existing and proposed roads shown in Exhibit 2, 2a & 2b. On occasion, water will be obtained from existing water wells. In these cases where a poly pipeline is used to transport water for drilling purposes, proper authorizations will be secured. If poly pipeline is used to transport fresh water to the location, proper authorization will be secured by the contractor.

#### 6. CONSTRUCTION MATERIALS

All caliche utilized for the drilling pad and proposed access road will be obtained from an existing BLM approved pit or from prevailing deposits found under the location. All roads will be constructed of rolled and compacted caliche. Will use BLM recommended use of extra caliche from other locations close by roads, if available.

# 7. METHODS OF HANDLING WASTE MATERIALS

- a. Drill cuttings shall be disposed of in a steel cuttings bin (catch tanks) on the drilling pad (behind the steel mud tanks). The bin and cuttings shall be hauled to an approved cuttings dumpsite.
  - At the site, the cuttings shall be removed from the bin & the bin shall be returned to the drilling site for reuse.
- b. All trash, junk, and other waste material shall be contained in trash cages or trash bins to prevent scattering. When a job is completed, all contents shall be removed and disposed of in an approved landfill.
- c. The supplier, including broken sacks, shall pick up salts remaining after completion of well.
- d. If necessary, a porto-john shall be provided for the rig crews. This equipment shall be properly maintained during the drilling and completion operations and shall be removed when all operations are complete.
- e. Remaining drilling fluids shall be hauled off by transports to a state approved disposal site. Water produced during completion shall be put in storage tanks and disposed of in a state approved disposal. Oil and condensate produced shall be put in a storage tank and sold.

- f. Disposal of fluids to be transported by the following companies:
  - i. RGB TRUCKING
  - ii. LOBO TRUCKING
  - iii. I & W TRUCKING
  - iv. CRANE HOT OIL & TRANSPORT
  - v. JWS
  - vi. QUALITY TRUCKING

#### 8. ANCILLARY FACILITIES:

a. No airstrip, campsite, or other facilities will be built.

#### 9. WELL SITE LAYOUT:

- a. Exhibit 4 shows the proposed location of reserve and sump pits, living facilities and well site layout with dimensions of the pad layout.
- b. Mud pits in the active circulating system shall be steel pits and the catch tanks shall be steel tanks set in shallow sumps behind the steel circulating tanks and sumps.
- c. The area where the catch tanks are placed shall be reclaimed and the surface vegetation restored to as or near the same condition that existed prior to operations.

## 10. PLANS FOR SURFACE RECLAMATION:

- a. After concluding the drilling and/or completion operations, if the well is found non-commercial, the caliche shall be removed from the pad and transported to the original caliche pit or used for other drilling locations and roads. The road shall be reclaimed and the surface vegetation restored to as or near the same condition that existed prior to operations. The catch tank area shall be broken out and leveled after drying to a condition where these are feasible. The original topsoil shall again be returned to the pad and contoured, as close as possible, to the original topography.
- b. After the well is plugged and abandoned, the location and road shall be reclaimed and the surface vegetation restored to as or near the same condition that existed prior to operations.
- c. If the well is deemed commercially productive, the catch tank area shall be restored as described in 10(a) within 120 days subsequent to the first date of sales. Caliche from areas of the pad site not required for operations shall be reclaimed. The original top soil shall be returned to the area of the drill pad not

necessary to operate the well. These unused areas of the drill pad shall be contoured, as close as possible, to match the original topography.

# 11. SURFACE OWNERSHIP

The surface is owned by the State of New Mexico. The surface is multiple use with the primary uses of the region for the grazing of livestock and the production of oil and gas.

## 12. OTHER INFORMATION:

- a. The area surrounding the well is grassland. The topsoil is sandy in nature. The vegetation is moderately sparse with native prairie grass, cactus and shinnery oak. No wildlife was observed but it is likely that deer, rabbits, coyotes, birds and rodents transverse the area.
- b. There are not dwellings within 2 miles of location.
- c. There is no permanent or live water within 2 miles of the location.
- d. A Cutural Resources Examination will be completed by 5/1/2009 and forwarded to the BLM office in Carlsbad, New Mexico.

#### 13. BOND COVERAGE:

a. Bond Coverage is Nationwide; Bond No. NM 2308

# **COMPANY REPRESENTATIVES:**

Representatives responsible for ensuring compliance of the surface use plan are listed below:

# Permitting & Land

Mr. Donny G. Glanton Senior Lease Operations ROW Representative EOG Resources, Inc. P.O. Box 2267 Midland, TX 79702 (432) 686-3642 Office (432) 770-0602 Cell

# **Drilling**

# **Operations**

| Mr. Jason LaGrega          | Mr. Howard Kemp       |
|----------------------------|-----------------------|
| Division Drilling Engineer | Production Manager    |
| EOG Resources, Inc.        | EOG Resources, Inc    |
| P.O. Box 2267              | P.O. Box 2267         |
| Midland, TX 79702          | Midland, TX 79702     |
| (432) 686-3633 Office      | (432) 686-3704 Office |
| (432) 894-1217 Cell        | (432) 634-1001 Cell   |

# **OPERATOR CERTIFICATION**

I certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions that presently exist; that I have full knowledge of State and Federal Laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true, and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements. Executed this 20th day of April 2009.

Name: Donny G. Glanton

Position: Sr. Lease Operations ROW Representative

Address: P.O. Box 2267 Midland, TX 79705

Telephone: 432-686-3642

Email: donny\_glanton@eogresources.com

|  | Signed: | J. 1114 |
|--|---------|---------|
|--|---------|---------|

 $\mathcal{M}$ .

# PECOS DISTRICT CONDITIONS OF APPROVAL

OPERATOR'S NAME: LEASE NO.: LC060904

WELL NAME & NO.: Bailout BOA Fed Com - 1H

SURFACE HOLE FOOTAGE: 1770' FSL & 410' FEL

BOTTOM HOLE FOOTAGE 1980' FSL & 330' FWL

LOCATION: Section 12, T. 18 S., R 29 E., NMPM

COUNTY: Eddy County, New Mexico

# TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

| General Provisions                              |
|---|
| Permit Expiration                               |
| Archaeology, Paleontology, and Historical Sites |
| Noxious Weeds                                   |
| Special Requirements                            |
| Lesser Prairie Chicken                          |
| Communitization Agreement                       |
| <b>⊠</b> Construction                           |
| Notification                                    |
| Topsoil   |
| Closed loop system                              |
| Federal Mineral Material Pits                   |
| Well Pads                                       |
| Roads   |
| <b>⊠</b> Road Section Diagram                   |
| <b>☐</b> Drilling                               |
| ☐ Production (Post Drilling)                    |
| Well Structures & Facilities                    |
| Pipelines                                       |
| Electric Lines                                  |
| <b>◯</b> Closed loop system/Interim Reclamation |
| Final Abandonment/Reclamation                   |

# I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

## II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

# III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

# IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

# V. SPECIAL REQUIREMENT(S)

Timing Limitation Stipulation/Condition of Approval for Lesser Prairie-Chicken: Oil and gas activities including 3-D geophysical exploration, and drilling will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, geophysical exploration other than 3-D operations, and pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Additionally, no new drilling will be allowed within up to 200 meters of leks known at the time of permitting. Normal vehicle use on existing roads will not be restricted. Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 ft. from the source of the noise.

# Ground-level Abandoned Well Marker to avoid raptor perching:

Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well. For more installation details, contact the Carlsbad Field Office at 575-234-5972

# **Communitization Agreement**

A Communitization Agreement covering the acreage dedicated to this well must be filed for approval with the BLM. The effective date of the agreement shall be prior to any sales. Operator to supply NMOCD order or description of pool which details the vertical and horizontal extent of pool to verify that requested communitization is within an approved and established pool.

## VI. CONSTRUCTION

#### A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5972 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

## B. TOPSOIL

The operator shall stockpile the topsoil of the well pad. The topsoil shall not be used to backfill the reserve pit and will be used for interim and final reclamation.

## C. CLOSED LOOP SYSTEM

Closed loop system- V door east

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

## D. FEDERAL MINERAL MATERIALS PIT

--- If the operator elects to surface the access-road-and/or well pad, mineral materials extracted during construction of the reserve pit may be used for surfacing the well pad and-access road-and-other-facilities on the lease.

Payment shall be made to the BLM prior to removal of any additional federal mineral materials from any site other than the reserve pit. Call the Carlsbad Field Office at (575) 234-5972.

#### E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation.

The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

## F. ON LEASE ACCESS ROADS

#### Road Width

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed thirty (30) feet.

#### Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

#### Crowning

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.


#### Ditching

Ditching shall be required on both sides of the road.

#### **Turnouts**

Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall be constructed on all blind curves. Turnouts shall conform to the following diagram:

# Standard Turnout - Plan View




Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outsloping and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

# Cross Section of a Typical Lead-off Ditch



All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

## Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

400 foot road with 4% road slope: 
$$\frac{400'}{4\%}$$
 + 100' = 200' lead-off ditch interval

#### **Culvert Installations**

Appropriately sized culvert(s) shall be installed at the deep waterway channel flow crossing.

## Cattleguards

An appropriately sized cattleguard(s) sufficient to carry out the project shall be installed and maintained at fence crossing(s).

Any existing cattleguard(s) on the access road shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattleguard(s) that are in place and are utilized during lease operations.

A gate shall be constructed and fastened securely to H-braces.

# **Fence Requirement**


Where entry is required across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting.

The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fence(s).

# **Public Access**

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

Figure 1 - Cross Sections and Plans For Typical Road Sections

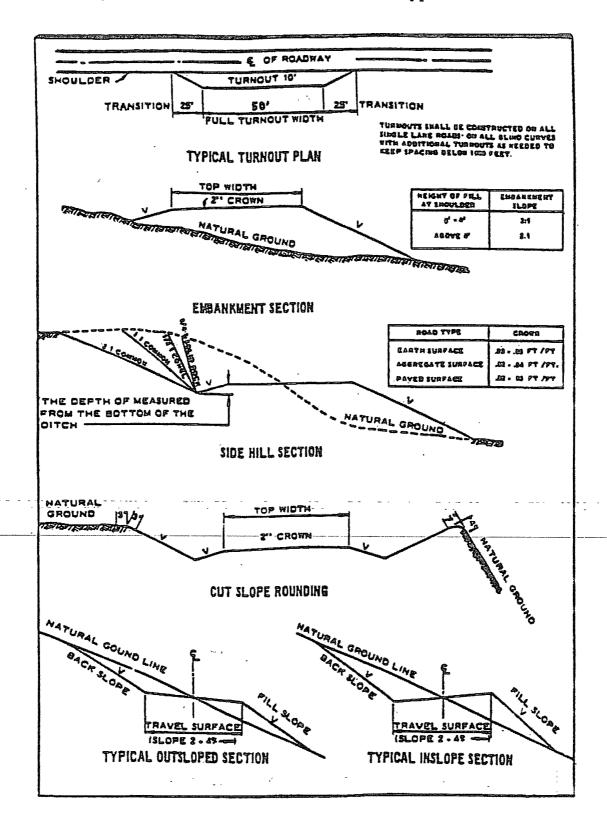

#### VII. DRILLING

# A. DRILLING OPERATIONS REQUIREMENTS

The BLM is to be notified a minimum of 4 hours in advance for a representative to witness:

- a. Spudding well
- b. Setting and/or Cementing of all casing strings
- c. BOPE tests

# **Eddy County**

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220, (575) 361-2822

- 1. Although Hydrogen Sulfide has not been reported in this section, it is always a possible hazard. It has been reported in the section to the southeast. If Hydrogen Sulfide is encountered, please report measured amounts and formations to the BLM.
- 2. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
- 3. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw\_works is located, this does not include the dog house or stairway area.

#### B. CASING

Changes to the approved APD casing and cement program require submitting a sundry and receiving approval prior to work. Failure to obtain approval prior to work will result in an Incident of Non-Compliance being issued.

Centralizers required on surface casing per Onshore Order 2.III.B.1.f.

Wait on cement (WOC) time for a primary cement job will be a minimum 18 hours for a water basin, 24 hours in the potash area, or 500 pounds compressive strength, whichever is greater for all casing strings. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. See individual casing strings for details regarding lead cement slurry requirements.

No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.

Possible brine/water flows in the Salado Group and Artesia Group. Possible lost circulation in the Grayburg and San Andres formations.

- 1. The 11-3/4 inch surface casing shall be set at approximately 240 feet (a minimum of 25 feet into the Rustler Anhydrite and above the salt) and cemented to the surface. Rustler top in the Duggan 12, which is in Unit letter H, is approximately 220' per the log. Fresh water to setting depth, brine water below.
  - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement.
  - b. Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry.
  - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
  - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
- The minimum required fill of cement behind the 8-5/8 inch intermediate casing is:

   \overline
   \o

to be set in the upper portion of the San Andres.

Formation below the 8-5/8" shoe to be tested according to Onshore Order 2.III.B.1.i. Test to be done as a mud equivalency test using the mud weight necessary for the pore pressure of the formation below the shoe (not the mud weight required to prevent dissolving the salt formation) and the mud weight for the bottom of the

prevent dissolving the salt formation) and the mud weight for the bottom of the hole.

| 3. | The minimum | required fill | of cement | behind | the <b>5</b> - | 1/2 | inch | production | casing is | s: |
|----|-------------|---------------|-----------|--------|----------------|-----|------|------------|-----------|----|
|----|-------------|---------------|-----------|--------|----------------|-----|------|------------|-----------|----|

- Cement should tie-back at least 600 feet into previous casing string. Operator shall provide method of verification.
- 4. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

# C. PRESSURE CONTROL

- 1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
- 2. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **2000 (2M)** psi.
- 3. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the 8-5/8" intermediate casing shoe shall be 5000 (5M) psi.
- 4. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
  - a. The tests shall be done by an independent service company.
  - b. The results of the test shall be reported to the appropriate BLM office.
  - c. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
  - d. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug.

# D. DRILL STEM TEST

If drill stem tests are performed, Onshore Order 2.III.D shall be followed.

WWI 062609

# VIII. PRODUCTION (POST DRILLING)

## A. WELL STRUCTURES & FACILITIES

## **Placement of Production Facilities**

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

## **Containment Structures**

The containment structure shall be constructed to hold the capacity of the entire contents of the largest tank, plus 24 hour production, unless more stringent protective requirements are deemed necessary by the Authorized Officer.

# **Painting Requirement**

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color Shale Green, Munsell Soil Color Chart # 5Y 4/2

- B. PIPELINES
- C. ELECTRIC LINES

# IX. INTERIM RECLAMATION A. INTERIM RECLAMATION

If the well is a producer, interim reclamation shall be conducted on the well site in accordance with the orders of the Authorized Officer. The operator shall submit a Sundry Notices and Reports on Wells (Notice of Intent), Form 3160-5, prior to conducting interim reclamation.

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

The operators should work with BLM surface management specialists to devise the best strategies to reduce the size of the location. Any reductions should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

# BLM SERIAL #: COMPANY REFERENCE: WELL # & NAME:

# Seed Mixture for LPC Sand/Shinnery Sites

The holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)\* per acre. There shall be <u>no</u> primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed will be done in accordance with State law(s) and within nine (9) months prior to purchase. Commercial seed will be either certified or registered seed. The seed container will be tagged in accordance with State law(s) and available for inspection by the authorized officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). The holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. The seeding will be repeated until a satisfactory stand is established as determined by the authorized officer. Evaluation of growth will not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed\* per acre:

Species

| <u></u>                 |  |
|-------------------------|--|
| Plains Bristlegrass     | 5lbs/A   |
| Sand Bluestem           | 5lbs/A   |
| Little Bluestem         | 3lbs/A   |
| Big Bluestem            | 6lbs/A   |
| Plains Coreopsis        | 2lbs/A   |
| Sand Dropseed           | 1lbs/A   |
|                         |  |
| **Four-winged Saltbush  | 5lbs/A   |
| * This can be used arou | and well node and other areas where coliche conn |

lb/acre

Pounds of seed x percent purity x percent germination = pounds pure live seed

<sup>\*</sup> This can be used around well pads and other areas where caliche cannot be removed.

<sup>\*</sup>Pounds of pure live seed:

# X. FINAL ABANDONMENT & REHABILITATION REQUIREMENTS

Upon abandonment of the well and/or when the access road is no longer in service the Authorized Officer shall issue instructions and/or orders for surface reclamation and restoration of all disturbed areas.

Ground-level Abandoned Well Marker to avoid raptor perching: Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well.

On private surface/federal mineral estate land the reclamation procedures on the road and well pad shall be accomplished in accordance with the private surface land owner agreement.

Page 15 of 15