

**UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY**

**SUNDRY NOTICES AND REPORTS ON WELLS**

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well  gas well  other

2. NAME OF OPERATOR  
Amoco Production Company

3. ADDRESS OF OPERATOR  
501 Airport Dr., Farmington, NM 87401

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 1450' FNL x 410' FWL  
AT TOP PROD. INTERVAL: Same  
AT TOTAL DEPTH: Same

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

5. LEASE  
SF-078828-A

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME  
Gallegos Canyon Unit

8. FARM OR LEASE NAME

9. WELL NO.  
174E

10. FIELD OR WILDCAT NAME  
Basin Dakota

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
SW/NW, Section 28, T28N, R12W

12. COUNTY OR PARISH  
San Juan


13. STATE  
NM

14. API NO.  
30-045-25202

15. ELEVATIONS (SHOW DF, KDB, AND WD)  
5603' GL

- REQUEST FOR APPROVAL TO:
- TEST WATER SHUT-OFF
  - FRACTURE TREAT
  - SHOOT OR ACIDIZE
  - REPAIR WELL
  - PULL OR ALTER CASING
  - MULTIPLE COMPLETE
  - CHANGE ZONES
  - ABANDON\*
  - (other) Completion

SUBSEQUENT REPORT OF:

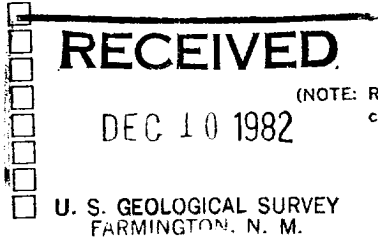

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Completion operations commenced 11-11-82. Total depth of the well is 6074' and plugback depth is 6032'. Perforated intervals 5870-5884' and 5898-5906' with 2 SPF, a total of 44 .38" holes. Fraced interval 5870-5906' with 117,000 gallons of 75 quality foam containing 20% gelled H<sub>2</sub>O, 2% KCL, 3489 SCF of nitrogen per barrel of frac fluid and 151,750# 20-40 sand. Landed 2-3/8" tubing at 5986'. Rig released 11-18-82.



Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED \_\_\_\_\_ TITLE Admin. Supvr. DATE 12-8-82

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY:

**ACCEPTED FOR RECORD**

DEC 17 1982

\*See Instructions on Reverse Side

FARMINGTON DISTRICT  
BY Smm