

STATE OF NEW MEXICO
OIL CONSERVATION
COMMISSION

DISTRICT NO. 3
Phone 99 P. O. Box 697
AZTEC, NEW MEXICO

(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR

GEOLOGICAL SURVEY UNIT: S.F. 078060, NE 1/4 - Phillip
Petr. Co., S.F. 078126, NE 1/4; SE of NE 1/4,
& SW 1/4 - W. C. Higgins, Jr.

Land Office Santa Fe

Lease No. 078426

Unit Sec. 17, T-29-N.,

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	<input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....		SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....		SUBSEQUENT REPORT OF REDRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....		SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....		SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

September 25, 1952, 19

Well No. 1 Victims is located 1150 ft. from S line and 1650 ft. from W line of sec. 17
SW 1/4 Section 17 29 North 6 East S. 29. N.
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)
Blanco Wildcat Pio Arriba County New Mexico
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is _____ ft. - to be furnished

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

The objective sands are the Cliff House and the Point Leckou, and their respective tops are expected at 5500' and 6000'. The casing program is as follows:

- 175' of 4-5/8" O. D. casing cemented to top
- 5500' of 5 1/2" O. D. casing cemented with 300 sacks

Well will be drilled with rotary tools to the top of the Cliff House at about 5500' and the pay sands will be drilled with rotary tools using natural gas method to a total depth of about 6300'.

Well will then be shot with about 1800 quarts of nitro from 5500' to total depth.


It is noted that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

SOUTHERN UNION GAS COMPANY

Address 1952 1304 Hurt Bldg., Dallas, Texas

By A. M. Winderkehr


Title Reservoir Engineer



Lease Well No.

Sec. 17 T. 29 N. R. 6 W. N.M.P.M.

Location 1150' from the South line and 1650' from the West line.

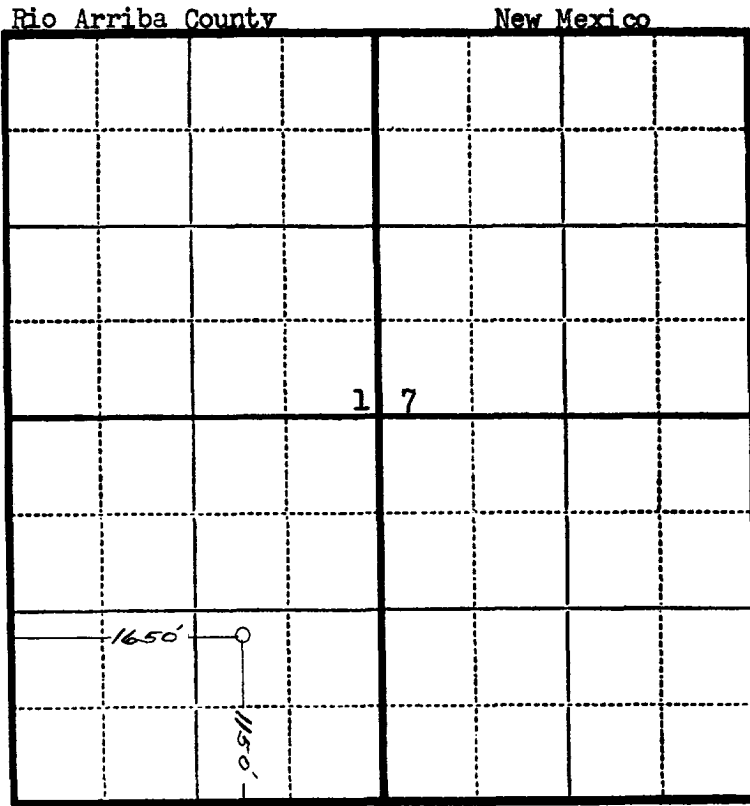

Scale—4 inches equals 1 mile.

This is to certify that the above plat was prepared from field notes of actual surveys made by me or under my supervision and that the same are true and correct to the best of my knowledge and belief.

Charles J. Finklea

Seal:

Registered Professional
Engineer and Land Surveyor.

Charles J. Finklea
N. Mex. Reg. No. 1302

Surveyed September 13, 1952

