Form 3160-5 (August 1999)

## **UNITED STATES** DEPARTMENT OF THE INTERIOR **BUREAU OF LAND MANAGEMENT**

## SUNDRY NOTICES AND REPORTS ON WELLS

FORM APPROVED OMB NO. 1004-0135 Expires: November 30, 2000

5. Lease Serial No.

|--|

Do not use this form fo abandoned well. Use Fo			6. If	Indian, Allottee or Tribe Name	
SUBMIT IN TRIPLICATE -	Other Instructions	on reverse side	26	Unit or CA/Agreement, Name and/or No.	
			C	Juan 20 6 Unit	
1. Type of Well  Oil Well  X Gas Well Other		San Juan 29-6 Unit  8. Well Name and No.			
2. Name of Operator			S.1.2	9-6 Unit #97	
Phillips Petroleum Company		····	9. A	PI Well No.	
3a. Address 5525 Highway 64, NBU 3004, Farming	con, NM 87401	3b. Phone No. (include a 505-599-3454		39-20241 Field and Pool, or Exploratory Area	
4. Location of Well (Footage, Sec., T., R., M., or Surve	ey Description)		Raci	n Dakota	
Unit M. 990' FSL & 1090' FWL Section 35, T29N, R6W			11. County or Parish, State		
Section 33, 1234, Nov			Rio	Arriba, NM	
12. CHECK APPROPR	ATE BOX(ES) TO	NDICATE NATURE OF NO	OTICE, REPORT, OR O	THER DATA	
TYPE OF SUBMISSION		TY	PE OF ACTION		
X Notice of Intent	Acidize	Deepen	Production (Start/I	Resume) Water Shut-Off	
	Alter Casing	Fracture Treat	Reclamation	Well Integrity	
Subsequent Report	Casing Repair	New Construction	Recomplete	X Other Add MV pay	
Final Abandonment Notice	Change Plans	Plug and Abandon	Temporarily Aban	don <u>to DK well</u>	
	Convert to Inject	tion Plug Back	Water Disposal		
This is a Dakota well that was conterval. We will then commingly commingled per Order R-11187 only commingling order has been receivoccurs.  See attached for the procedure well.	e the Mesaverde y after the com ved. We will s	and Dakota product mingling paperwork ubmit a sundry repo	tion downhole. I has been filed a orting the date a	This well will be and the individual well actual commingling	
14. I hereby certify that the foregoing is true and correct Name (Printed Nyped)  Pats	sy Clugston	Title Sr. Re	egulatory Prorat	ion Clerk	
THI	S SPACE FOR FE	DERAL OR STATE OF			
Approved by	~	Tiate 7	Engener	Date State 1 C CACO	
Conditions of approval, if any, are attached. Approval	of this notice does not	warrant or Office	rigener	- ANTE I CONTROL	
certify that the applicant holds legal or equitable title to		ubject lease			

1625 N. French Dr., Hobbs, NM 88240

State of New Mexico

Form C-10 Revised March 17, 199

District II

811 South First, Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

2040 South Pacheco, Santa Fe, NM 87505

Energy, Minerals & Natural Resources

OIL CONSERVATION DIVISION 2040 South Pacheco

2040 South Facilities Santa Fe, NM 87505

Submit to Appropriate District Offic

State Lease - 4 Copie

Fee Lease - 3 Copie

AMENDED REPOR

WELL LOCATION AND ACREAGE DEDICATION PLAT

<sup>1</sup> API Number	<sup>2</sup> Pool Code	<sup>2</sup> Pool Code <sup>3</sup> Pool Name			
30-039-20241	72319	Blanco Mesaverde			
<sup>4</sup> Property Code		<sup>5</sup> Property Name	6 Well Number		
009257	San Juan 29-6 Unit	#97			
OGRID No.		8 Operator Name	' Elevation		
017654	Phillips Pet	Phillips Petroleum Company			


<sup>10</sup> Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
М	35	29N	6W		990	South	1090	West	Rio Arriba

<sup>11</sup> Bottom Hole Location If Different From Surface

UL or lot no.	Section To	ownship	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
M									
12 Dedicated Acres	13 Joint or In	ıfill 14 Co	onsolidation	Code 15 Or	der No.		-		
320 W/2	J		U						

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A

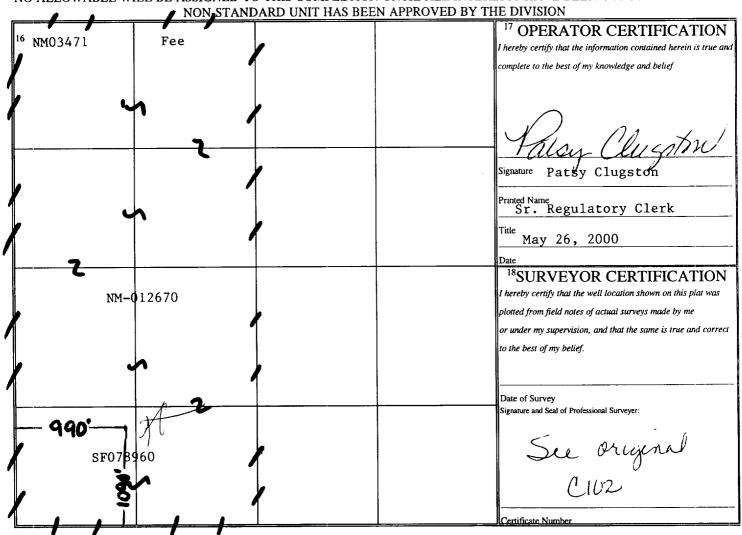

## Projected Recompletion Outline for the San Juan 29-6 Unit #97

- 1. RU completion rig. Pull production tubing.
- 2. Set RBP above Dakota interval and pressure test casing.
- 3. Perforate the Mesaverde intervals 1 spf .36" holes at depth to be determined from GR/CCL/CBL.
- 4. Breakdown Mesaverde perforations using 15% HCL.
- 5. Stimulate the entire Mesaverde with 150,000 gal slickwater and 75,000 # sand.
- 6. Isolate the Mesaverde perforations.
- 7. Perforate the Lewis Shale interval @ 1 spf .36" holes at depths to be determined from GR/CCL/CBL.
- 8. Breakdown Lewis Shale perforations with 15% HCL & ballsealers.
- 9. Stimulate the Lewis Shale with 200,000 # sand and 60 Quality N2 foam.
- 10. Flow back well on 1/4" & 1/2" chokes to cleanup.
- 11. Drill out plugs and clean out well and land tubing. Return well to production.