

DISTRICT I
1625 N. French Dr., Hobbs, NM 88240
Phone: (505) 393-6161 Fax: (505) 393-0720

DISTRICT II
811 S. First St., Artesia, NM 88210
Phone: (505) 748-1283 Fax: (505) 748-9720

DISTRICT III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170

DISTRICT IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, New Mexico 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-015-46291	Pool Code 96473 ✓	Pool Name Pierce Crossing Bone Springs, East ✓
Property Code 39046 ✓	Property Name CEDAR CANYON 15 ✓	Well Number 4H ✓
OGRID No. 16696 ✓	Operator Name OXY U.S.A. INC.	Elevation 2926'

Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
E	15	24-S	29-E		2310	NORTH	330	WEST	EDDY

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
H	15	24-S	29-E		2310	NORTH	330	EAST	EDDY

Dedicated Acres	Joint or Infill	Consolidation Code	Order No.
160	N		

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

CORNER COORDINATES TABLE A - Y=444340.2 N, X=609137.2 E B - Y=444334.6 N, X=614443.0 E C - Y=443007.9 N, X=614448.3 E D - Y=443013.2 N, X=609146.1 E		GEODETIC COORDINATES NAD 27 NME SURFACE LOCATION & PENETRATION POINT Y=443357.5 N X=609473.7 E LAT.=32.218411° N LONG.=103.979346° W BOTTOM HOLE LOCATION Y=443352.2 N X=614117.0 E LAT.=32.218354° N LONG.=103.964332° W		OPERATOR CERTIFICATION I hereby certify that the information herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. <i>David Stewart</i> 4/22/13 Signature Date David Stewart Sr. Pres. Ado. Printed Name david.stewart@oxy.com E-mail Address
				SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. MARCH 29, 2013 Date of Survey Signature & Seal of Professional Surveyor: Certificate Number Gary G. Eidson 12641 Ronald P. Eidson 3239 BKL PROFESSIONAL SURVEYOR W.O.: 13.11.0332

Operator Name/Number:	OXY USA Inc.	16696
Lease Name/Number:	Cedar Canyon 15 #4H	39046
Pool Name/Number:	Pierce Crossing Bone Spring, East	96473
Surface Location:	2310 FNL 330 FWL E Sec 15 T24S R29E	
Bottom Hole Location:	2310 FNL 330 FEL H Sec 15 T24S R29E	

C-102 Plats: 3/29/13 4/17/13 4/19/13 Elevation: 2926' GL

Proposed TD: 8795' TVD 13106' TMD
 SL - Lat: 32.218411 Long: 103.979346 X=609473.7 Y=443357.5 NAD - 1927
 BH - Lat: 32.218354 Long: 103.964332 X=614117.0 Y=443352.2 NAD - 1927

Casing Program:

Hole Size	Interval	OD Csg	Weight	Collar	Grade	Condition	Collapse Design Factor	Burst Design Factor	Tension Design Factor
14-3/4"	0-370'	11-3/4"	42	ST&C	H-40	New	6	1.52	2.2
				Hole filled with 8.6# Mud			1070#	1980#	
10-5/8"	0-3100'	8-5/8"	32	LT&C	J-55	New	1.62	1.86	2.29
				Hole filled with 10.0# Mud			2530#	3930#	
7-7/8"	0-13106'	5-1/2"	17	BT&C	L-80	New	1.41	1.3	1.71
				Hole filled with 9.2# Mud			6390#	7740#	

Collapse and burst loads calculated using Stress Check with anticipated loads

Cement Program:

- 11-3/4" Surface Circulate cement to surface w/ 240sx PP cmt w/ 2% CaCl₂, 14.8ppg 1.35 yield 1346# 24hr CS 150% Excess
- 8-5/8" Intermediate Circulate cement to surface w/ 620sx PP cmt w/ 5% salt, 16.2ppg 1.85 yield 853# 24hr CS 125% Excess followed by 230sx PPC, 14.8ppg 1.33 yield 1571# 24hr CS 125% Excess
- 5-1/2" Production Cement w/ 720sx PP cmt w/ 14.8#/sx Silicalite 50/50 Blend + 15#/sx Scotchlite HGS-6000 + 1#/sx Cal Seal 60 + .5#/sx CFR-3 + .15#/sx WG-17 + 1.5#/sx salt + 2% CaCl₂, 10.6ppg 2.69 yield 646# 24hr CS 80% Excess followed by 760sx Super H cmt w/ 3#/sx salt + .4% CFR-3 + .5% Halad-344 + .2% HR-800, 13.2ppg 1.64 yield 1447# 24hr CS 40% Excess Calc TOC-2500'

Description of Cement Additives: Calcium Chloride, Cal-Seal 60, Salt (Accelerator); Silicalite (Additive Material); CFR-3 (Dispersant); WG-17 (Gelling Agent); Scotchlite HGS-6000 (Light Weight Additive); Halad-344 (Low Fluid Loss Control); HR-800 (Retarder)

The above cement volumes could be revised pending the caliper measurement.

Proposed Mud Circulation System:

Depth	Mud Wt. ppg	Visc sec	Fluid Loss	Type System
0 - 370'	8.5-9.0	28-38	NC	Fresh Water/Spud Mud
370 - 3100'	9.8-10.2	28-32	NC	NaCl Brine
3100 - TD	8.8-9.6	28-34	NC	Cut Brine/Salt Gel-Starch

Pump high viscosity sweeps as needed for hole cleaning. The mud system will be monitored visually/manually as well as with an electronic PVT. The necessary mud products for additional weight and fluid loss control will be on location at all times.

BOP Program:

Surface None
 Intermediate/Production 13-5/8" 10M three ram stack w/ 5M annular preventer, 5M Choke Manifold

Estimated Tops of Geological Markers & Depths of Anticipated Fresh Water, Oil or Gas:

Geological Marker	Depth	Type
a. Rustler	340'	Formation
b. Top Salt	440'	Formation
c. Bottom Salt	1375'	Formation
d. Base Anhydrite	2955'	Formation
e. Delaware-Bell Canyon	3010'	Oil/Gas
f. Delaware-Brushy Canyon	5070'	Oil/Gas
g. 1st Bone Spring	6660'	Oil/Gas
h. 2nd Bone Spring	8015'	Oil/Gas

Fresh water may be present above the Rustler formation. Surface casing will be set below the top of the Rustler, which will cover potential fresh water sources.

Spacing Unit:

The following wells are in the Pierce Crossing Bone Spring, E.(96473) and completed in the 1st Bone Spring.
 1. Harroun 15 #15 - 30-015-33317 - TVD 7817' - Units E,F,G Sec 15

Architectural floor plan of a mobile unit, likely a mobile laboratory or industrial processing unit. The plan shows a long, narrow structure with various equipment and storage areas. Key components labeled include:

- SCOM OILTOOLS DEWATERING SYSTEM**: Located at the top center of the unit.
- POLYMER TANK**: A rectangular tank located below the dewatering system.
- ACID TANK**: A circular tank located below the polymer tank.
- SCOM OILTOOLS DE-1000**: Two units, one on the left and one on the right side of the unit.
- CR1 ROLLOFF BOX**: A large rectangular box on the right side of the unit.
- ROLLS STORAGE**: A storage area for rolls, located between the two SCOM OILTOOLS DE-1000 units.
- ROLLS - 1200-WIDE**: A storage area for rolls, located below the rolls storage area.

The plan also shows various structural elements, including walls, doors, and internal partitions. Dimensions are indicated: 40' on the left side and 75' at the top.

Scomi

Closed Loop System

Dewat

DE 1000

DE 1000

27'-0"x8'-0" LUBRICATOR PUMP PARTS HOUSE

VARIABLE FREQUENCY DRIVE HOUSE
30'-0"x11'-0" GENERATOR HOUSE
30'-0"x11'-0" GENERATOR HOUSE
30'-0"x11'-0" GENERATOR HOUSE

35'-0"x8'-1 1/4" DIESEL TANK

38'-7"x12'-0" WATER TANK

VOLUME TANKS

TRIP TANK

SHAKER SKID

CRI roll off box

Gas Separator

CHOKE MANIFOLD

UTILITY BOOM

DRILL FLOOR

DRILL FLOOR

MAST IN HORIZONTAL POSITION

END OF BOGEY GUIDE

DRILL LINE STORAGE SPOOL

DRINKS SKID

BOP TRANSPORT SKID

HPU/ACCUMULATOR SKID

BOOMER TRANSPORT SKID

TOOL BOX

PARTS HOUSE

DRILLERS CABIN


9 WELL

40'-0"x10'-0" RIG OFFICE TRAILER

40'-0"x10'-0" MEETING/CHANGE HOUSE

OXY FLEX III PAD (SCOMI Closed Loop System)

Level Area-No Caliche-For Offices and Living Quarters

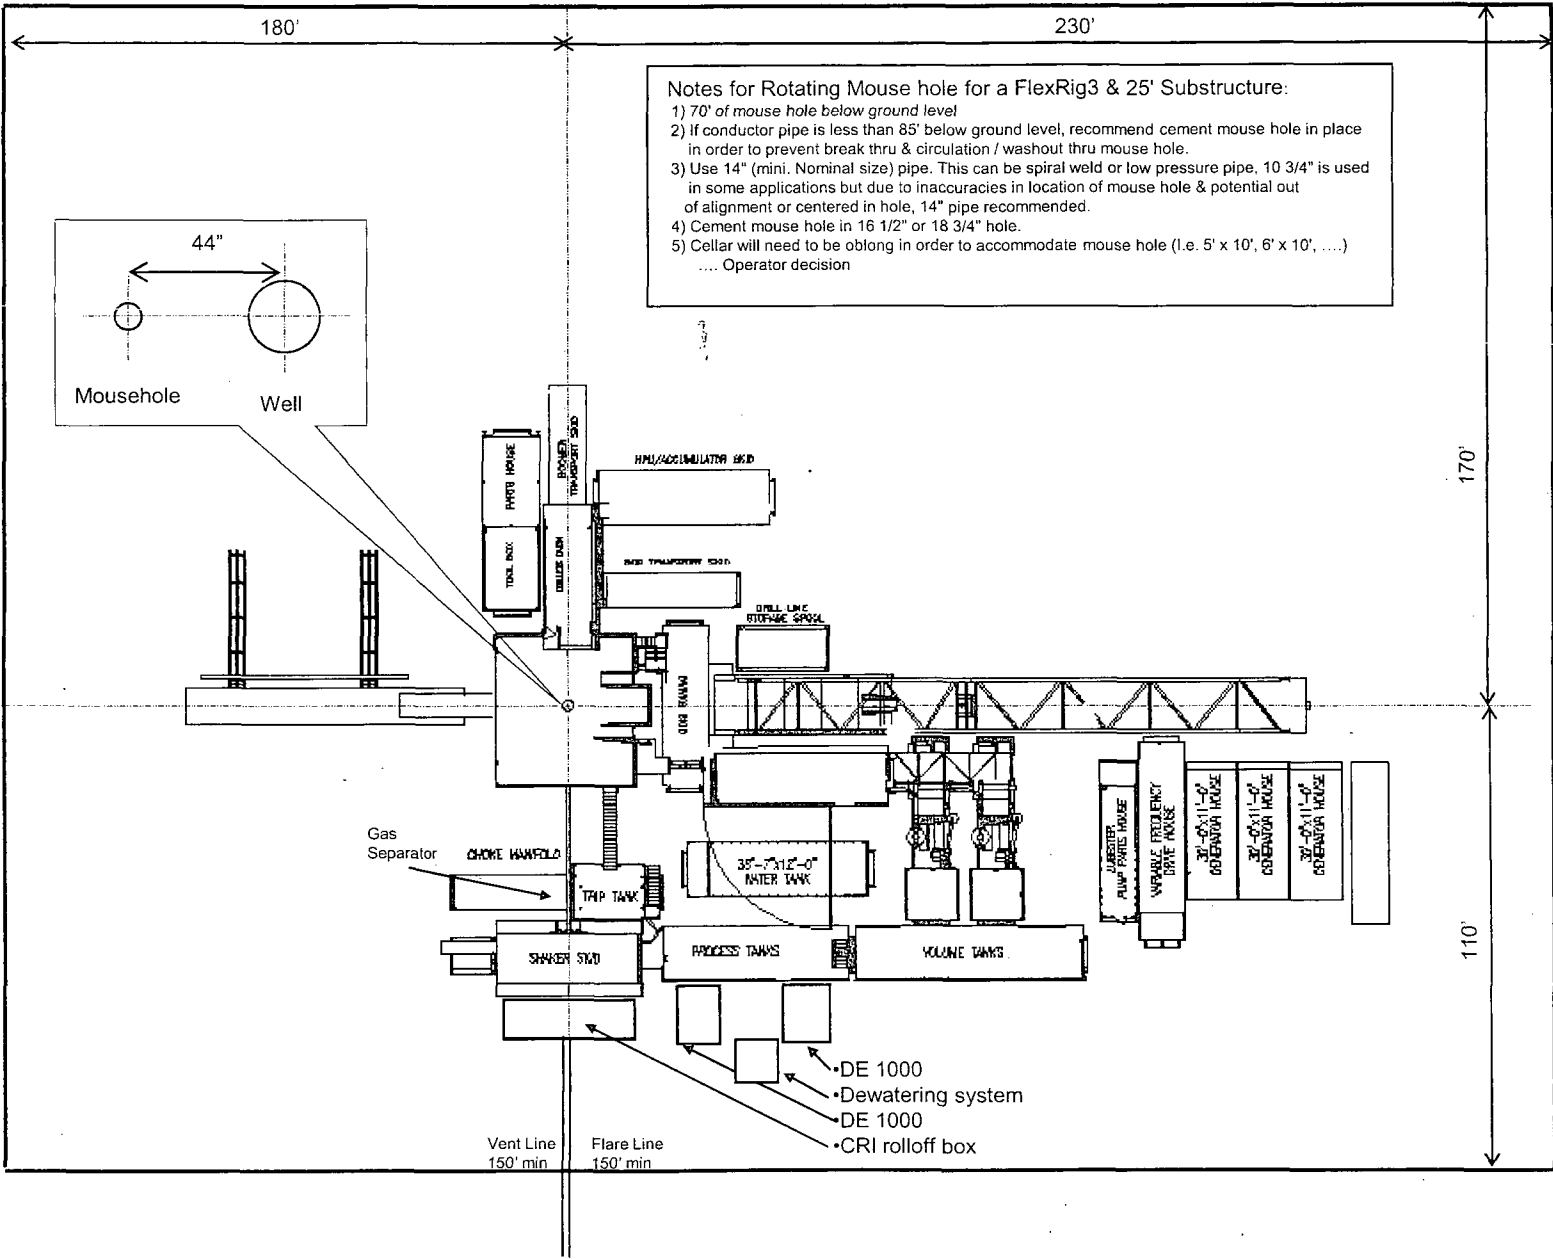

100 ft



Cedar Canyon 15 Fee #4H Eddy Co, NM

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.00	0.00	90.07	0.00	0.00	0.00	0.00	0.00	0.00	
2	8098.45	0.00	90.07	8098.45	0.00	0.00	0.00	0.00	0.00	
3	9088.94	89.14	90.07	8735.00	-0.72	627.11	9.00	90.07	627.11	
4	13105.58	89.14	90.07	8795.00	-5.30	4643.30	0.00	0.00	4643.30	PBHL

SITE DETAILS




Cedar Canyon 15 Fee #4H
Site Centre Northing: 443357.50
Easting: 609473.70
Ground Level: 2926.00
Positional Uncertainty: 0.00
Convergence: 0.19

WELL DETAILS

Name	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Slot
Cedar Canyon 15 Fee #4H	0.00	0.00	443357.50	609473.70	32°13'06.280N	103°58'45.644W	N/A

TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting	Shape
PBHL	8795.00	-5.30	4643.30	443352.20	614117.00	Point

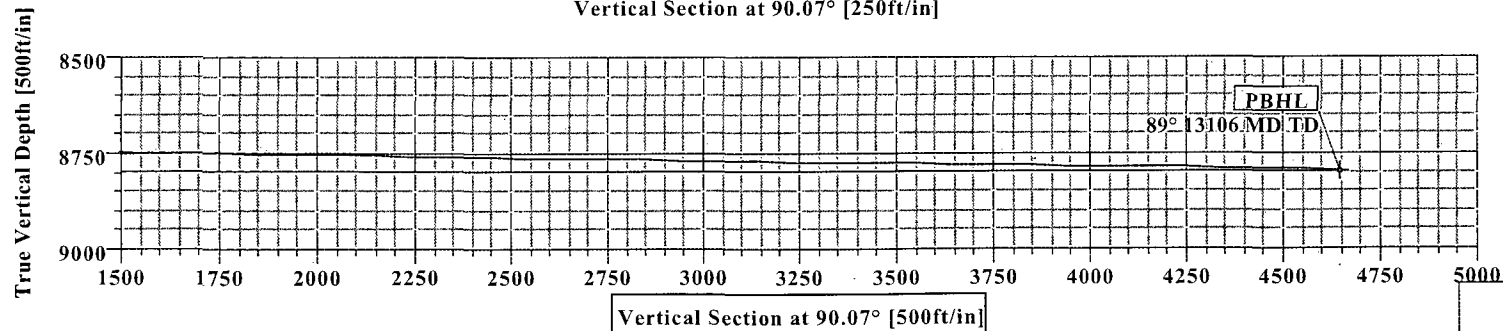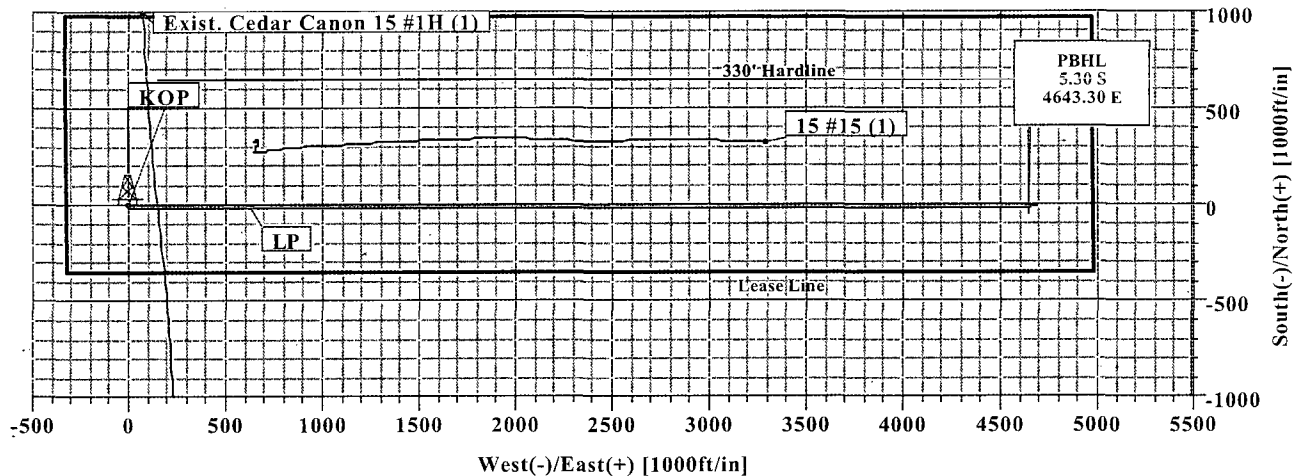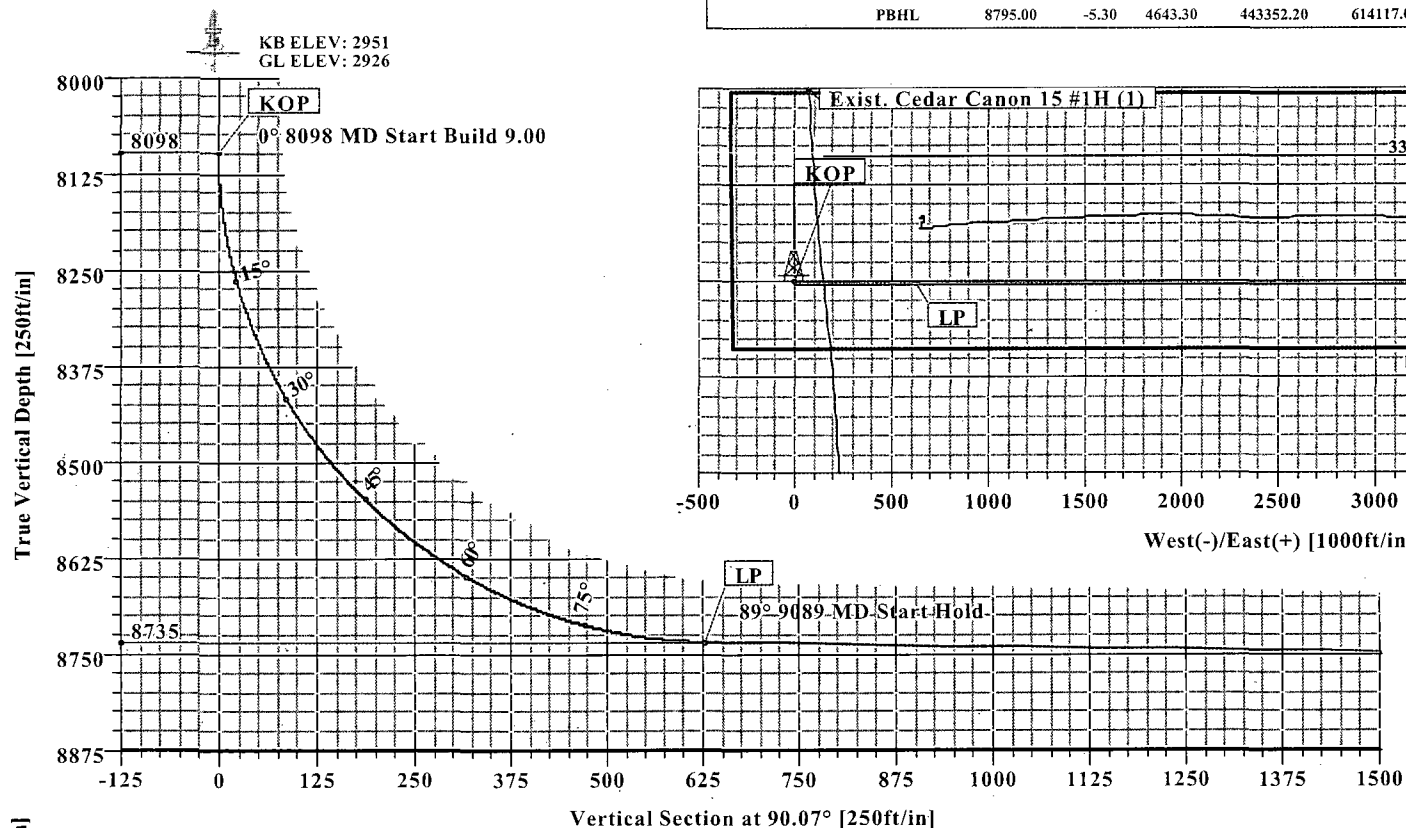

LEGEND	
Exist. Cedar Canon 15 #1H (1)	
15 #15 (1)	
1	
Plan #1	

Plan: Plan #1 (Cedar Canyon 15 Fee #4H/1)

Created By: Patrick Rudolph

Date: 4/18/2013



Weatherford International Ltd.

WFT Plan Report - X & Y's



Weatherford

Company: Occidental Permian Ltd.	Date: 4/18/2013	Time: 08:21:32	Page: 1
Field: Eddy Co. NM (Nad 27)	Co-ordinate (NE) Reference:	Well: Cedar Canyon 15 Fee #4H	Grid North
Site: Cedar Canyon 15 Fee #4H	Vertical (TVD) Reference:	SITE 2951.0	
Well: Cedar Canyon 15 Fee #4H	Section (VS) Reference:	Well (0.00N:0.00E:90.07Azi)	
Wellpath: 1	Survey Calculation Method:	Minimum Curvature	Db: Sybase

Plan: Plan #1	Date Composed: 4/18/2013
Principal: Yes	Version: 1
	Tied-to: From Surface

Site: Cedar Canyon 15 Fee #4H

Site Position:	Northing: 443357.50 ft	Latitude: 32 13 6.280 N
From: Map	Easting: 609473.70 ft	Longitude: 103 58 45.644 W
Position Uncertainty: 0.00 ft	North Reference: Grid	
Ground Level: 2926.00 ft	Grid Convergence: 0.19 deg	

Well: Cedar Canyon 15 Fee #4H Slot Name:

Well Position: +N/-S 0.00 ft	Northing: 443357.50 ft	Latitude: 32 13 6.280 N
+E/-W 0.00 ft	Easting: 609473.70 ft	Longitude: 103 58 45.644 W
Position Uncertainty: 0.00 ft		

Wellpath: 1

Current Datum: SITE	Height 2951.00 ft	Drilled From: Surface
Magnetic Data: 5/15/2013		Tie-on Depth: 0.00 ft
Field Strength: 48402 nT		Above System Datum: Mean Sea Level
Vertical Section: Depth From (TVD)	+N/-S	Declination: 7.54 deg
ft	ft	Mag Dip Angle: 60.06 deg
		+E/-W
		ft
		Direction
		deg
8795.00	0.00	0.00 90.07

Plan Section Information

MD ft	Incl deg	Azim deg	TVD ft	+N/-S ft	+E/-W ft	DLS deg/100ft	Build deg/100ft	Turn deg/100ft	TFO deg	Target
0.00	0.00	90.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
8098.45	0.00	90.07	8098.45	0.00	0.00	0.00	0.00	0.00	0.00	
9088.94	89.14	90.07	8735.00	-0.72	627.11	9.00	9.00	0.00	90.07	
13105.58	89.14	90.07	8795.00	-5.30	4643.30	0.00	0.00	0.00	0.00	PBHL

Survey

MD ft	Incl deg	Azim deg	TVD ft	N/S ft	E/W ft	VS ft	DLS deg/100ft	MapN ft	MapE ft	Comment
8000.00	0.00	90.07	8000.00	0.00	0.00	0.00	0.00	443357.50	609473.70	
8098.45	0.00	90.07	8098.45	0.00	0.00	0.00	0.00	443357.50	609473.70	KOP
8100.00	0.14	90.07	8100.00	0.00	0.00	0.00	9.00	443357.50	609473.70	
8150.00	4.64	90.07	8149.94	0.00	2.09	2.09	9.00	443357.50	609475.79	
8200.00	9.14	90.07	8199.57	-0.01	8.08	8.08	9.00	443357.49	609481.78	
8250.00	13.64	90.07	8248.57	-0.02	17.95	17.95	9.00	443357.48	609491.65	
8300.00	18.14	90.07	8296.65	-0.04	31.64	31.64	9.00	443357.46	609505.34	
8350.00	22.64	90.07	8343.51	-0.06	49.05	49.05	9.00	443357.44	609522.75	
8400.00	27.14	90.07	8388.85	-0.08	70.09	70.09	9.00	443357.42	609543.79	
8450.00	31.64	90.07	8432.40	-0.11	94.62	94.62	9.00	443357.39	609568.32	
8500.00	36.14	90.07	8473.90	-0.14	122.50	122.50	9.00	443357.36	609596.20	
8550.00	40.64	90.07	8513.08	-0.18	153.54	153.54	9.00	443357.32	609627.24	
8600.00	45.14	90.07	8549.70	-0.21	187.56	187.56	9.00	443357.29	609661.26	
8650.00	49.64	90.07	8583.55	-0.26	224.35	224.35	9.00	443357.24	609698.05	
8700.00	54.14	90.07	8614.40	-0.30	263.68	263.68	9.00	443357.20	609737.38	
8750.00	58.64	90.07	8642.07	-0.35	305.31	305.31	9.00	443357.15	609779.01	
8800.00	63.14	90.07	8666.39	-0.40	348.98	348.98	9.00	443357.10	609822.68	
8850.00	67.64	90.07	8687.20	-0.45	394.43	394.43	9.00	443357.05	609868.13	
8900.00	72.14	90.07	8704.39	-0.50	441.37	441.37	9.00	443357.00	609915.07	
8950.00	76.64	90.07	8717.84	-0.56	489.51	489.51	9.00	443356.94	609963.21	
9000.00	81.14	90.07	8727.47	-0.61	538.56	538.56	9.00	443356.89	610012.26	
9050.00	85.64	90.07	8733.23	-0.67	588.21	588.21	9.00	443356.83	610061.91	
9088.94	89.14	90.07	8735.00	-0.72	627.11	627.11	9.00	443356.78	610100.81	LP



Weatherford International Ltd.

WFT Plan Report - X & Y's



Weatherford

Company: Occidental Permian Ltd. Date: 4/18/2013 Time: 08:21:32 Page: 2
 Field: Eddy Co. NM (Nad 27) Co-ordinate(NE) Reference: Well: Cedar Canyon 15 Fee #4H Grid North
 Site: Cedar Canyon 15 Fee #4H Vertical (TVD) Reference: SITE 2951.0
 Well: Cedar Canyon 15 Fee #4H Section (VS) Reference: Well (0.00N 0.00E 90.07Azi)
 Wellpath: 1 Survey Calculation Method: Minimum Curvature Db: Sybase

Survey

MD ft	Incl deg	Azim deg	TVD ft	N/S ft	E/W ft	VS ft	DLS deg/100ft	MapN ft	MapE ft	Comment
9100.00	89.14	90.07	8735.17	-0.73	638.17	638.17	0.00	443356.77	610111.87	
9200.00	89.14	90.07	8736.66	-0.84	738.16	738.16	0.00	443356.66	610211.86	
9300.00	89.14	90.07	8738.15	-0.96	838.14	838.14	0.00	443356.54	610311.84	
9400.00	89.14	90.07	8739.65	-1.07	938.13	938.13	0.00	443356.43	610411.83	
9500.00	89.14	90.07	8741.14	-1.18	1038.12	1038.12	0.00	443356.32	610511.82	
9600.00	89.14	90.07	8742.63	-1.30	1138.11	1138.11	0.00	443356.20	610611.81	
9700.00	89.14	90.07	8744.13	-1.41	1238.10	1238.10	0.00	443356.09	610711.80	
9800.00	89.14	90.07	8745.62	-1.53	1338.09	1338.09	0.00	443355.97	610811.79	
9900.00	89.14	90.07	8747.12	-1.64	1438.08	1438.08	0.00	443355.86	610911.78	
10000.00	89.14	90.07	8748.61	-1.76	1538.07	1538.07	0.00	443355.74	611011.77	
10100.00	89.14	90.07	8750.10	-1.87	1638.05	1638.06	0.00	443355.63	611111.75	
10200.00	89.14	90.07	8751.60	-1.98	1738.04	1738.04	0.00	443355.52	611211.74	
10300.00	89.14	90.07	8753.09	-2.10	1838.03	1838.03	0.00	443355.40	611311.73	
10400.00	89.14	90.07	8754.58	-2.21	1938.02	1938.02	0.00	443355.29	611411.72	
10500.00	89.14	90.07	8756.08	-2.33	2038.01	2038.01	0.00	443355.17	611511.71	
10600.00	89.14	90.07	8757.57	-2.44	2138.00	2138.00	0.00	443355.06	611611.70	
10700.00	89.14	90.07	8759.07	-2.55	2237.99	2237.99	0.00	443354.95	611711.69	
10800.00	89.14	90.07	8760.56	-2.67	2337.98	2337.98	0.00	443354.83	611811.68	
10900.00	89.14	90.07	8762.05	-2.78	2437.96	2437.97	0.00	443354.72	611911.66	
11000.00	89.14	90.07	8763.55	-2.90	2537.95	2537.96	0.00	443354.60	612011.65	
11100.00	89.14	90.07	8765.04	-3.01	2637.94	2637.94	0.00	443354.49	612111.64	
11200.00	89.14	90.07	8766.53	-3.13	2737.93	2737.93	0.00	443354.37	612211.63	
11300.00	89.14	90.07	8768.03	-3.24	2837.92	2837.92	0.00	443354.26	612311.62	
11400.00	89.14	90.07	8769.52	-3.35	2937.91	2937.91	0.00	443354.15	612411.61	
11500.00	89.14	90.07	8771.02	-3.47	3037.90	3037.90	0.00	443354.03	612511.60	
11600.00	89.14	90.07	8772.51	-3.58	3137.89	3137.89	0.00	443353.92	612611.59	
11700.00	89.14	90.07	8774.00	-3.70	3237.87	3237.88	0.00	443353.80	612711.57	
11800.00	89.14	90.07	8775.50	-3.81	3337.86	3337.87	0.00	443353.69	612811.56	
11900.00	89.14	90.07	8776.99	-3.92	3437.85	3437.85	0.00	443353.58	612911.55	
12000.00	89.14	90.07	8778.49	-4.04	3537.84	3537.84	0.00	443353.46	613011.54	
12100.00	89.14	90.07	8779.98	-4.15	3637.83	3637.83	0.00	443353.35	613111.53	
12200.00	89.14	90.07	8781.47	-4.27	3737.82	3737.82	0.00	443353.23	613211.52	
12300.00	89.14	90.07	8782.97	-4.38	3837.81	3837.81	0.00	443353.12	613311.51	
12400.00	89.14	90.07	8784.46	-4.49	3937.80	3937.80	0.00	443353.01	613411.50	
12500.00	89.14	90.07	8785.95	-4.61	4037.79	4037.79	0.00	443352.89	613511.49	
12600.00	89.14	90.07	8787.45	-4.72	4137.77	4137.78	0.00	443352.78	613611.47	
12700.00	89.14	90.07	8788.94	-4.84	4237.76	4237.77	0.00	443352.66	613711.46	
12800.00	89.14	90.07	8790.44	-4.95	4337.75	4337.75	0.00	443352.55	613811.45	
12900.00	89.14	90.07	8791.93	-5.07	4437.74	4437.74	0.00	443352.43	613911.44	
13000.00	89.14	90.07	8793.42	-5.18	4537.73	4537.73	0.00	443352.32	614011.43	
13105.58	89.14	90.07	8795.00	-5.30	4643.30	4643.30	0.00	443352.20	614117.00	PBHL

Targets

Name	Description	Dir	TVD ft	+N/-S ft	+E/-W ft	Map Northing ft	Map Easting ft	Latitude Deg Min Sec	Longitude Deg Min Sec
PBHL			8795.00	-5.30	4643.30	443352.20	614117.00	32 13 6.073 N	103 57 51.594 W



Weatherford International Ltd.

WFT Plan Report - X & Y's

**Weatherford**

Company:	Occidental Permian Ltd.	Date:	4/18/2013	Time:	08:21:32	Page:	3
Field:	Eddy Co, NM (Nad 27)	Co-ordinate(NE) Reference:	Well: Cedar Canyon 15 Fee #4H Grid Nort				
Site:	Cedar Canyon 15 Fee #4H	Vertical (TVD) Reference:	SITE: 2951.0				
Well:	Cedar Canyon 15 Fee #4H	Section (VS) Reference:	Well: (0.00N:0.00E:90.07Azi)				
Wellpath:	1	Survey Calculation Method:	Minimum Curvature			Db:	Sybase

Casing Points

MD ft	TVD ft	Diameter in	Hole Size in	Name
380.00	380.00	0.000	0.000	Csg
3100.00	3100.00	0.000	0.000	Csg

Annotation

MD ft	TVD ft	
8098.45	8098.45	KOP
9088.94	8735.00	LP
13105.58	8795.00	PBHL

Formations

MD	TVD	Formations	Lithology	Dip Angle	Dip Direction

Field: Eddy Co, NM (Nad 27)

Map System: US State Plane Coordinate System 1927

Geo Datum: NAD27 (Clarke 1866)

Sys Datum: Mean Sea Level

Map Zone:

New Mexico, Eastern Zone

Coordinate System:

Well Centre

Geomagnetic Model:

IGRF2010



Weatherford International Ltd.

Anticollision Report



Weatherford®

Company: Occidental Permian Ltd. Date: 4/18/2013 Time: 09:02:26 Page: 1
 Field: Eddy Co, NM (Nad:27)
 Reference Site: Cedar Canyon 15 Fee #4H Co-ordinate(NF) Reference: Well: Cedar Canyon 15 Fee #4H Grid: Nort
 Reference Well: Cedar Canyon 15 Fee #4H Vertical (TVD) Reference: SITE 2951.0
 Reference Wellpath: 1 Db: Sybase

NO GLOBAL SCAN: Using user defined selection & scan criteria
 Interpolation Method: MD Interval: 100.00 ft
 Depth Range: 10.00 to 12368.84 ft
 Maximum Radius: 10000.00 ft

Reference: Plan: Plan #1
 Error Model: ISCWSA Ellipse
 Scan Method: Closest Approach 3D
 Error Surface: Ellipse

Plan: Plan #1 Date Composed: 4/18/2013
 Version: 1
 Principal: Yes Tied-to: From Surface

Summary

Site	Offset Wellpath	Wellpath	Reference MD ft	Offset MD ft	Ctr-Ctr Distance ft	Edge Distance ft	Separation Factor	Warning
Cedar Canyon 16 State #7H	Cedar Canyon 16 State #7H	V0 Plan: Plan #1 V1	8210.00	8226.33	159.51	122.92	4.36	
Exist. Cedar Canon 11 V0	Exist. Cedar Canon 11 V0		6410.00	8466.95	148.68	87.97	2.45	
Exist. Harroun 15 #1 15 #15	1 V0		11910.00	10192.00	1031.77	964.08	15.24	

Site: Cedar Canyon 16 State #7H
 Well: Cedar Canyon 16 State #7H
 Wellpath: 1 V0 Plan: Plan #1 V1

Inter-Site Error: 0.00 ft

Reference MD ft	TVD ft	Offset MD ft	TVD ft	Semi-Major Axis Ref ft	Offset ft	TFO-HS deg	Offset Location North ft	East ft	Ctr-Ctr Distance ft	Edge Distance ft	Separation Factor	Warning
10.00	10.00	10.00	10.00	0.00	0.01	179.61	-174.90	1.20	174.90	174.90	20750.96	
110.00	110.00	110.00	110.00	0.11	0.11	179.61	-174.90	1.20	174.90	174.69	819.12	
210.00	210.00	210.00	210.00	0.33	0.33	179.61	-174.90	1.20	174.90	174.24	263.78	
310.00	310.00	310.00	310.00	0.56	0.56	179.61	-174.90	1.20	174.90	173.79	157.20	
410.00	410.00	410.00	410.00	0.78	0.78	179.61	-174.90	1.20	174.90	173.34	111.97	
510.00	510.00	510.00	510.00	1.01	1.01	179.61	-174.90	1.20	174.90	172.89	86.95	
610.00	610.00	610.00	610.00	1.23	1.23	179.61	-174.90	1.20	174.90	172.44	71.06	
710.00	710.00	710.00	710.00	1.46	1.46	179.61	-174.90	1.20	174.90	171.99	60.09	
810.00	810.00	810.00	810.00	1.68	1.68	179.61	-174.90	1.20	174.90	171.54	52.05	
910.00	910.00	910.00	910.00	1.90	1.90	179.61	-174.90	1.20	174.90	171.09	45.91	
1010.00	1010.00	1010.00	1010.00	2.13	2.13	179.61	-174.90	1.20	174.90	170.64	41.06	
1110.00	1110.00	1110.00	1110.00	2.35	2.35	179.61	-174.90	1.20	174.90	170.20	37.14	
1210.00	1210.00	1210.00	1210.00	2.58	2.58	179.61	-174.90	1.20	174.90	169.75	33.91	
1310.00	1310.00	1310.00	1310.00	2.80	2.80	179.61	-174.90	1.20	174.90	169.30	31.19	
1410.00	1410.00	1410.00	1410.00	3.03	3.03	179.61	-174.90	1.20	174.90	168.85	28.87	
1510.00	1510.00	1510.00	1510.00	3.25	3.25	179.61	-174.90	1.20	174.90	168.40	26.88	
1610.00	1610.00	1610.00	1610.00	3.48	3.48	179.61	-174.90	1.20	174.90	167.95	25.14	
1710.00	1710.00	1710.00	1710.00	3.70	3.70	179.61	-174.90	1.20	174.90	167.50	23.62	
1810.00	1810.00	1810.00	1810.00	3.93	3.93	179.61	-174.90	1.20	174.90	167.05	22.26	
1910.00	1910.00	1910.00	1910.00	4.15	4.15	179.61	-174.90	1.20	174.90	166.60	21.06	
2010.00	2010.00	2010.00	2010.00	4.38	4.38	179.61	-174.90	1.20	174.90	166.15	19.98	
2110.00	2110.00	2110.00	2110.00	4.60	4.60	179.61	-174.90	1.20	174.90	165.70	19.00	
2210.00	2210.00	2210.00	2210.00	4.83	4.83	179.61	-174.90	1.20	174.90	165.25	18.12	
2310.00	2310.00	2310.00	2310.00	5.05	5.05	179.61	-174.90	1.20	174.90	164.80	17.31	
2410.00	2410.00	2410.00	2410.00	5.28	5.28	179.61	-174.90	1.20	174.90	164.35	16.57	
2510.00	2510.00	2510.00	2510.00	5.50	5.50	179.61	-174.90	1.20	174.90	163.90	15.90	
2610.00	2610.00	2610.00	2610.00	5.73	5.73	179.61	-174.90	1.20	174.90	163.45	15.27	
2710.00	2710.00	2710.00	2710.00	5.95	5.95	179.61	-174.90	1.20	174.90	163.00	14.70	
2810.00	2810.00	2810.00	2810.00	6.18	6.18	179.61	-174.90	1.20	174.90	162.55	14.16	
2910.00	2910.00	2910.00	2910.00	6.40	6.40	179.61	-174.90	1.20	174.90	162.10	13.66	
3010.00	3010.00	3010.00	3010.00	6.62	6.62	179.61	-174.90	1.20	174.90	161.65	13.20	
3110.00	3110.00	3110.00	3110.00	6.85	6.85	179.61	-174.90	1.20	174.90	161.20	12.77	
3210.00	3210.00	3210.00	3210.00	7.07	7.07	179.61	-174.90	1.20	174.90	160.76	12.36	
3310.00	3310.00	3310.00	3310.00	7.30	7.30	179.61	-174.90	1.20	174.90	160.31	11.98	
3410.00	3410.00	3410.00	3410.00	7.52	7.52	179.61	-174.90	1.20	174.90	159.86	11.62	
3510.00	3510.00	3510.00	3510.00	7.75	7.75	179.61	-174.90	1.20	174.90	159.41	11.29	



Weatherford International Ltd.

Anticollision Report



Weatherford

Company: Occidental Permian Ltd. Date: 4/18/2013 Time: 09:02:26 Page: 2
 Field: Eddy Co. NM (Nad.27)
 Reference Site: Cedar Canyon 15 Fee #4H Co-ordinate(NE) Reference: Well: Cedar Canyon 15 Fee #4H, Grid North
 Reference Well: Cedar Canyon 15 Fee #4H Vertical (TVD) Reference: SITE 2951.0
 Reference Wellpath: 1 Db: Sybase

Site: Cedar Canyon 16 State #7H
 Well: Cedar Canyon 16 State #7H
 Wellpath: 1 V0 Plan: Plan #1 V1

Inter-Site Error: 0.00 ft

Reference		Offset		Semi-Major Axis		Offset Location		Ctr-Ctr Distance	Edge Distance	Separation Factor	Warning
MD	TVD	MD	TVD	Ref	Offset	TFO-HS	North				
ft	ft	ft	ft	ft	ft	deg	ft	ft	ft	ft	
3610.00	3610.00	3610.00	3610.00	7.97	7.97	179.61	-174.90	1.20	174.90	158.96	10.97
3710.00	3710.00	3710.00	3710.00	8.20	8.20	179.61	-174.90	1.20	174.90	158.51	10.67
3810.00	3810.00	3810.00	3810.00	8.42	8.42	179.61	-174.90	1.20	174.90	158.06	10.38
3910.00	3910.00	3910.00	3910.00	8.65	8.65	179.61	-174.90	1.20	174.90	157.61	10.11
4010.00	4010.00	4010.00	4010.00	8.87	8.87	179.61	-174.90	1.20	174.90	157.16	9.86
4110.00	4110.00	4110.00	4110.00	9.10	9.10	179.61	-174.90	1.20	174.90	156.71	9.61
4210.00	4210.00	4210.00	4210.00	9.32	9.32	179.61	-174.90	1.20	174.90	156.26	9.38
4310.00	4310.00	4310.00	4310.00	9.55	9.55	179.61	-174.90	1.20	174.90	155.81	9.16
4410.00	4410.00	4410.00	4410.00	9.77	9.77	179.61	-174.90	1.20	174.90	155.36	8.95
4510.00	4510.00	4510.00	4510.00	10.00	10.00	179.61	-174.90	1.20	174.90	154.91	8.75
4610.00	4610.00	4610.00	4610.00	10.22	10.22	179.61	-174.90	1.20	174.90	154.46	8.56
4710.00	4710.00	4710.00	4710.00	10.45	10.45	179.61	-174.90	1.20	174.90	154.01	8.37
4810.00	4810.00	4810.00	4810.00	10.67	10.67	179.61	-174.90	1.20	174.90	153.56	8.20
4910.00	4910.00	4910.00	4910.00	10.90	10.90	179.61	-174.90	1.20	174.90	153.11	8.03
5010.00	5010.00	5010.00	5010.00	11.12	11.12	179.61	-174.90	1.20	174.90	152.66	7.86
5110.00	5110.00	5110.00	5110.00	11.35	11.35	179.61	-174.90	1.20	174.90	152.21	7.71
5210.00	5210.00	5210.00	5210.00	11.57	11.57	179.61	-174.90	1.20	174.90	151.76	7.56
5310.00	5310.00	5310.00	5310.00	11.79	11.79	179.61	-174.90	1.20	174.90	151.31	7.41
5410.00	5410.00	5410.00	5410.00	12.02	12.02	179.61	-174.90	1.20	174.90	150.87	7.28
5510.00	5510.00	5510.00	5510.00	12.24	12.24	179.61	-174.90	1.20	174.90	150.42	7.14
5610.00	5610.00	5610.00	5610.00	12.47	12.47	179.61	-174.90	1.20	174.90	149.97	7.01
5710.00	5710.00	5710.00	5710.00	12.69	12.69	179.61	-174.90	1.20	174.90	149.52	6.89
5810.00	5810.00	5810.00	5810.00	12.92	12.92	179.61	-174.90	1.20	174.90	149.07	6.77
5910.00	5910.00	5910.00	5910.00	13.14	13.14	179.61	-174.90	1.20	174.90	148.62	6.65
6010.00	6010.00	6010.00	6010.00	13.37	13.37	179.61	-174.90	1.20	174.90	148.17	6.54
6110.00	6110.00	6110.00	6110.00	13.59	13.59	179.61	-174.90	1.20	174.90	147.72	6.43
6210.00	6210.00	6210.00	6210.00	13.82	13.82	179.61	-174.90	1.20	174.90	147.27	6.33
6310.00	6310.00	6310.00	6310.00	14.04	14.04	179.61	-174.90	1.20	174.90	146.82	6.23
6410.00	6410.00	6410.00	6410.00	14.27	14.27	179.61	-174.90	1.20	174.90	146.37	6.13
6510.00	6510.00	6510.00	6510.00	14.49	14.49	179.61	-174.90	1.20	174.90	145.92	6.03
6610.00	6610.00	6610.00	6610.00	14.72	14.72	179.61	-174.90	1.20	174.90	145.47	5.94
6710.00	6710.00	6710.00	6710.00	14.94	14.94	179.61	-174.90	1.20	174.90	145.02	5.85
6810.00	6810.00	6810.00	6810.00	15.17	15.17	179.61	-174.90	1.20	174.90	144.57	5.77
6910.00	6910.00	6910.00	6910.00	15.39	15.39	179.61	-174.90	1.20	174.90	144.12	5.68
7010.00	7010.00	7010.00	7010.00	15.62	15.62	179.61	-174.90	1.20	174.90	143.67	5.60
7110.00	7110.00	7110.00	7110.00	15.84	15.84	179.61	-174.90	1.20	174.90	143.22	5.52
7210.00	7210.00	7210.00	7210.00	16.07	16.07	179.61	-174.90	1.20	174.90	142.77	5.44
7310.00	7310.00	7310.00	7310.00	16.29	16.29	179.61	-174.90	1.20	174.90	142.32	5.37
7410.00	7410.00	7410.00	7410.00	16.51	16.51	179.61	-174.90	1.20	174.90	141.87	5.30
7510.00	7510.00	7510.00	7510.00	16.74	16.74	179.61	-174.90	1.20	174.90	141.43	5.22
7610.00	7610.00	7610.00	7610.00	16.96	16.96	179.61	-174.90	1.20	174.90	140.98	5.16
7710.00	7710.00	7710.00	7710.00	17.19	17.19	179.61	-174.90	1.20	174.90	140.53	5.09
7810.00	7810.00	7810.00	7810.00	17.41	17.41	179.61	-174.90	1.20	174.90	140.08	5.02
7910.00	7910.00	7910.00	7910.00	17.64	17.64	179.61	-174.90	1.20	174.90	139.63	4.96
8010.00	8010.00	8017.67	8017.58	17.86	17.88	180.46	-173.46	-1.41	173.63	137.91	4.86
8110.00	8110.00	8127.84	8126.09	18.09	18.11	96.15	-164.53	-17.52	166.25	130.13	4.60
8210.00	8209.43	8226.33	8219.69	18.31	18.34	110.03	-149.80	-44.10	159.51	122.92	4.36
8310.00	8306.13	8304.36	8290.35	18.54	18.54	125.81	-133.80	-72.97	172.52	135.83	4.70
8410.00	8397.71	8357.34	8336.13	18.78	18.70	135.17	-121.15	-96.42	218.50	182.76	6.11
8510.00	8481.93	8390.46	8363.80	19.08	18.80	136.94	-113.24	-112.81	291.47	256.98	8.45
8610.00	8556.70	8408.59	8378.62	19.49	18.87	130.08	-108.96	-122.33	379.54	345.42	11.13



Weatherford International Ltd.

Anticollision Report



Weatherford

Company: Occidental Permian Ltd. Date: 4/18/2013 Time: 09:02:26 Page: 3
 Field: Eddy Co. NM (Nad'27)
 Reference Site: Cedar Canyon 15 Fee #4H Co-ordinate(NF) Reference: Well: Cedar Canyon 15 Fee #4H Grid North
 Reference Well: Cedar Canyon 15 Fee #4H Vertical (TVD) Reference: SITE 2951.0
 Reference Wellpath: 1 Db: Sybase

Site: Cedar Canyon 16 State #7H
 Well: Cedar Canyon 16 State #7H
 Wellpath: 1 V0 Plan: Plan #1 V1

Inter-Site Error: 0.00 ft

Reference		Offset		Semi-Major Axis		Offset Location		Ctr-Ctr		Edge	Separation	Warning
MD	TVD	MD	TVD	Ref	Offset	TFO-HS	North	East	Distance	Distance	Factor	
ft	ft	ft	ft	ft	ft	deg	ft	ft	ft	ft		
8710.00	8620.19	8414.69	8383.55	20.04	18.89	107.40	-107.52	-125.63	474.83	438.92	13.22	
8810.00	8670.83	8411.36	8380.86	20.80	18.88	65.30	-108.31	-123.82	572.55	536.89	16.06	
8910.00	8707.38	8400.00	8371.63	21.79	18.84	35.59	-110.99	-117.77	669.57	639.01	21.91	
9010.00	8728.94	8384.28	8358.70	23.00	18.78	22.62	-114.71	-109.65	763.67	736.64	28.25	
9110.00	8735.32	8363.56	8341.38	24.40	18.72	17.38	-119.66	-99.40	853.33	827.57	33.12	
9210.00	8736.81	8343.23	8324.12	25.95	18.65	17.30	-124.55	-89.85	942.27	915.70	35.47	
9310.00	8738.30	8327.31	8310.41	27.65	18.61	17.24	-128.40	-82.73	1032.40	1005.02	37.70	
9410.00	8739.80	8306.53	8292.26	29.46	18.55	17.15	-133.31	-73.87	1123.50	1095.28	39.80	
9510.00	8741.29	8300.00	8286.50	31.36	18.53	17.11	-134.79	-71.18	1215.53	1186.49	41.85	
9610.00	8742.78	8274.79	8264.01	33.35	18.46	16.95	-140.30	-61.24	1308.08	1278.15	43.70	
9710.00	8744.28	8250.00	8241.50	35.40	18.40	16.74	-145.34	-52.14	1401.47	1370.65	45.47	
9810.00	8745.77	8250.00	8241.50	37.50	18.40	16.74	-145.34	-52.14	1495.19	1463.51	47.19	
9910.00	8747.27	8236.41	8229.01	39.65	18.36	16.62	-147.95	-47.44	1589.52	1556.96	48.82	
10010.00	8748.76	8225.55	8218.97	41.84	18.34	16.51	-149.94	-43.84	1684.28	1650.83	50.36	
10110.00	8750.25	8215.49	8209.60	44.07	18.31	16.41	-151.73	-40.62	1779.43	1745.09	51.82	
10210.00	8751.75	8200.00	8195.09	46.32	18.28	16.24	-154.35	-35.89	1874.97	1839.74	53.23	
10310.00	8753.24	8200.00	8195.09	48.60	18.28	16.24	-154.35	-35.89	1970.75	1934.62	54.53	
10410.00	8754.73	8200.00	8195.09	50.89	18.28	16.24	-154.35	-35.89	2066.94	2029.88	55.77	
10510.00	8756.23	8181.76	8177.85	53.21	18.23	16.03	-157.24	-30.67	2163.20	2125.28	57.05	
10610.00	8757.72	8174.65	8171.10	55.54	18.22	15.95	-158.31	-28.75	2259.79	2220.97	58.21	
10710.00	8759.22	8167.99	8164.75	57.89	18.20	15.87	-159.28	-26.99	2356.58	2316.86	59.33	
10810.00	8760.71	8150.00	8147.50	60.25	18.16	15.64	-161.76	-22.51	2453.68	2413.12	60.49	
10910.00	8762.20	8150.00	8147.50	62.62	18.16	15.64	-161.76	-22.51	2550.76	2509.27	61.48	
11010.00	8763.70	8150.00	8147.50	65.00	18.16	15.64	-161.76	-22.51	2648.06	2605.64	62.41	
11110.00	8765.19	8150.00	8147.50	67.39	18.16	15.64	-161.76	-22.51	2745.55	2702.19	63.31	
11210.00	8766.68	8150.00	8147.50	69.78	18.16	15.64	-161.76	-22.51	2843.22	2798.92	64.17	
11310.00	8768.18	8150.00	8147.50	72.19	18.16	15.64	-161.76	-22.51	2941.05	2895.80	65.00	
11410.00	8769.67	8130.85	8129.01	74.60	18.12	15.40	-164.17	-18.17	3038.73	2992.70	66.02	
11510.00	8771.17	8126.61	8124.89	77.01	18.11	15.34	-164.67	-17.26	3136.69	3089.76	66.83	
11610.00	8772.66	8122.57	8120.97	79.44	18.10	15.28	-165.14	-16.42	3234.75	3186.92	67.62	
11710.00	8774.15	8118.72	8117.23	81.86	18.09	15.23	-165.57	-15.64	3332.90	3284.16	68.38	
11810.00	8775.65	8100.00	8098.96	84.29	18.05	14.98	-167.55	-12.07	3431.31	3381.82	69.34	
11910.00	8777.14	8100.00	8098.96	86.73	18.05	14.98	-167.55	-12.07	3529.56	3479.13	70.00	
12010.00	8778.63	8100.00	8098.96	89.17	18.05	14.98	-167.55	-12.07	3627.90	3576.54	70.64	
12110.00	8780.13	8100.00	8098.96	91.61	18.05	14.98	-167.55	-12.07	3726.33	3674.04	71.25	
12210.00	8781.62	8100.00	8098.96	94.06	18.05	14.98	-167.55	-12.07	3824.85	3771.61	71.85	
12310.00	8783.12	8100.00	8098.96	96.50	18.05	14.98	-167.55	-12.07	3923.44	3869.26	72.42	

Site: Exist. Cedar Canon 15 #1H
 Well: Exist. Cedar Canon 15 #1H
 Wellpath: 1 V0

Inter-Site Error: 0.00 ft

Reference		Offset		Semi-Major Axis		Offset Location		Ctr-Ctr		Edge	Separation	Warning
MD	TVD	MD	TVD	Ref	Offset	TFO-HS	North	East	Distance	Distance	Factor	
ft	ft	ft	ft	ft	ft	deg	ft	ft	ft	ft		
10.00	10.00	11.00	11.00	0.00	0.00	171.60	-2341.70	345.80	2367.09			No Data
110.00	110.00	97.05	97.05	0.11	0.08	171.60	-2341.89	345.96	2367.35	2367.16	12590.94	
210.00	210.00	194.07	194.07	0.33	0.29	171.59	-2342.48	346.35	2368.01	2367.39	3818.70	
310.00	310.00	283.53	283.53	0.56	0.48	171.59	-2343.33	346.33	2368.94	2367.90	2279.04	
410.00	410.00	383.03	383.02	0.78	0.70	171.61	-2344.59	345.88	2370.13	2368.65	1605.11	
510.00	510.00	488.17	488.14	1.01	0.91	171.62	-2345.79	345.49	2371.20	2369.29	1241.00	
610.00	610.00	595.44	595.41	1.23	1.12	171.63	-2346.72	345.28	2372.03	2369.68	1009.29	
710.00	710.00	703.80	703.77	1.46	1.35	171.64	-2347.22	344.98	2372.45	2369.65	846.30	



Weatherford International Ltd.

Anticollision Report



Weatherford

Company: Occidental Permian Ltd. Date: 4/18/2013 Time: 09:02:26 Page: 4
 Field: Eddy Co. NM (Nad.27)
 Reference Site: Cedar Canyon 15 Fee #4H Co-ordinate(NE) Reference: Well: Cedar Canyon 15 Fee #4H Grid North
 Reference Well: Cedar Canyon 15 Fee #4H Vertical (TVD) Reference: SITE: 2951.0
 Reference Wellpath: 1 Db: Sybase

Site: Exist. Cedar Canon 15 #1H
 Well: Exist. Cedar Canon 15 #1H
 Wellpath: 1 V0

Inter-Site Error: 0.00 ft

Reference		Offset		Semi-Major Axis			Offset Location		Ctr-Ctr	Edge	Separation	Warning
MD	TVD	MD	TVD	Ref	Offset	TFO-HS	North	East	Distance	Distance	Factor	
ft	ft	ft	ft	ft	ft	deg	ft	ft	ft	ft		
810.00	810.00	797.09	797.06	1.68	1.55	171.65	-2347.69	344.65	2372.90	2369.67	736.11	
910.00	910.00	893.21	893.18	1.90	1.75	171.66	-2348.42	344.41	2373.61	2369.96	650.28	
1010.00	1010.00	999.45	999.41	2.13	1.97	171.67	-2349.17	343.88	2374.23	2370.13	579.28	
1110.00	1110.00	1100.97	1100.92	2.35	2.19	171.69	-2349.71	343.00	2374.63	2370.10	523.30	
1210.00	1210.00	1197.32	1197.27	2.58	2.39	171.72	-2350.33	342.10	2375.14	2370.17	478.15	
1310.00	1310.00	1300.35	1300.29	2.80	2.61	171.74	-2351.07	341.13	2375.71	2370.31	439.19	
1410.00	1410.00	1408.93	1408.86	3.03	2.84	171.77	-2351.52	340.05	2375.98	2370.12	405.32	
1510.00	1510.00	1504.00	1503.93	3.25	3.04	171.79	-2351.79	339.13	2376.13	2369.84	378.05	
1610.00	1610.00	1596.01	1595.94	3.48	3.23	171.81	-2352.33	338.40	2376.59	2369.89	354.63	
1710.00	1710.00	1693.47	1693.39	3.70	3.43	171.83	-2353.12	337.76	2377.31	2370.18	333.44	
1810.00	1810.00	1792.54	1792.45	3.93	3.64	171.85	-2353.97	337.17	2378.07	2370.50	314.51	
1910.00	1910.00	1896.62	1896.53	4.15	3.85	171.87	-2354.80	336.54	2378.77	2370.77	297.24	
2010.00	2010.00	2001.29	2001.19	4.38	4.07	171.89	-2355.44	335.84	2379.28	2370.83	281.70	
2110.00	2110.00	2103.97	2103.88	4.60	4.29	171.90	-2355.90	335.21	2379.64	2370.75	267.83	
2210.00	2210.00	2204.00	2203.90	4.83	4.50	171.91	-2356.22	334.73	2379.89	2370.57	255.41	
2310.00	2310.00	2294.65	2294.55	5.05	4.69	171.92	-2356.70	334.57	2380.39	2370.65	244.61	
2410.00	2410.00	2386.64	2386.54	5.28	4.88	171.92	-2357.50	334.75	2381.27	2371.12	234.59	
2510.00	2510.00	2487.25	2487.14	5.50	5.09	171.91	-2358.43	335.42	2382.28	2371.70	225.01	
2610.00	2610.00	2585.95	2585.83	5.73	5.30	171.88	-2359.26	336.60	2383.28	2372.26	216.26	
2710.00	2710.00	2679.12	2678.98	5.95	5.50	171.86	-2360.23	337.73	2384.48	2373.04	208.42	
2810.00	2810.00	2776.97	2776.83	6.18	5.70	171.84	-2361.53	338.75	2385.95	2374.08	201.00	
2910.00	2910.00	2891.72	2891.56	6.40	5.94	171.81	-2362.66	339.97	2387.07	2374.74	193.53	
3010.00	3010.00	3001.33	3001.16	6.62	6.17	171.79	-2363.14	341.06	2387.64	2374.86	186.73	
3110.00	3110.00	3109.01	3108.85	6.85	6.39	171.77	-2363.28	341.94	2387.89	2374.66	180.42	
3210.00	3210.00	3212.63	3212.46	7.07	6.61	171.75	-2363.13	342.80	2387.86	2374.19	174.61	
3310.00	3310.00	3311.51	3311.34	7.30	6.81	171.73	-2362.98	343.56	2387.82	2373.72	169.27	
3410.00	3410.00	3414.16	3413.98	7.52	7.03	171.71	-2362.83	344.31	2387.79	2373.24	164.16	
3510.00	3510.00	3519.88	3519.70	7.75	7.25	171.68	-2362.43	345.28	2387.55	2372.55	159.26	
3610.00	3610.00	3617.45	3617.26	7.97	7.45	171.66	-2361.93	346.32	2387.19	2371.77	154.80	
3710.00	3710.00	3712.34	3712.15	8.20	7.65	171.63	-2361.63	347.31	2387.04	2371.19	150.65	
3810.00	3810.00	3812.87	3812.67	8.42	7.86	171.61	-2361.45	348.38	2387.01	2370.73	146.62	
3910.00	3910.00	3915.17	3914.96	8.65	8.08	171.58	-2361.15	349.53	2386.89	2370.17	142.76	
4010.00	4010.00	4018.77	4018.55	8.87	8.29	171.55	-2360.73	350.71	2386.65	2369.49	139.07	
4110.00	4110.00	4096.78	6402.00	9.10	44.23	73.08	44.04	144.79	2295.99	2269.91	88.04	
4210.00	4210.00	4096.00	6402.01	9.32	44.22	73.37	43.27	144.87	2196.22	2169.91	83.46	
4310.00	4310.00	4095.19	6402.02	9.55	44.21	73.67	42.47	144.95	2096.47	2069.91	78.95	
4410.00	4410.00	4094.36	6402.03	9.77	44.19	73.98	41.64	145.03	1996.74	1969.94	74.52	
4510.00	4510.00	4093.49	6402.04	10.00	44.18	74.31	40.77	145.12	1897.04	1870.00	70.15	
4610.00	4610.00	4092.58	6402.06	10.22	44.16	74.65	39.87	145.21	1797.37	1770.08	65.86	
4710.00	4710.00	4091.64	6402.07	10.45	44.15	75.00	38.93	145.30	1697.75	1670.20	61.63	
4810.00	4810.00	4090.66	6402.08	10.67	44.13	75.37	37.96	145.40	1598.16	1570.35	57.46	
4910.00	4910.00	4089.63	6402.10	10.90	44.11	75.76	36.94	145.51	1498.64	1470.55	53.36	
5010.00	5010.00	4087.00	6402.14	11.12	44.07	76.75	34.32	145.77	1399.18	1370.82	49.35	
5110.00	5110.00	4087.00	6402.14	11.35	44.07	76.75	34.32	145.77	1299.79	1271.13	45.35	
5210.00	5210.00	4086.00	6402.15	11.57	44.05	77.13	33.32	145.87	1200.52	1171.53	41.42	
5310.00	5310.00	4084.36	6402.18	11.79	44.03	77.76	31.69	146.03	1101.36	1072.03	37.55	
5410.00	5410.00	4082.73	6402.21	12.02	44.00	78.38	30.07	146.19	1002.38	972.66	33.73	
5510.00	5510.00	4081.11	6402.23	12.24	43.97	79.00	28.46	146.35	903.62	873.45	29.96	
5610.00	5610.00	4079.50	6402.26	12.47	43.94	79.61	26.86	146.51	805.15	774.46	26.24	
5710.00	5710.00	4077.90	6402.28	12.69	43.92	80.23	25.26	146.67	707.12	675.77	22.56	
5810.00	5810.00	4076.31	6402.31	12.92	43.89	80.84	23.68	146.82	609.72	577.51	18.93	



Weatherford International Ltd.

Anticollision Report



Weatherford®

Company: Occidental Permian Ltd Date: 4/18/2013 Time: 09:02:26 Page: 5
 Field: Eddy Co. NM (Nad 27)
 Reference Site: Cedar Canyon 15 Fee #4H Co-ordinate(NE) Reference: Well: Cedar Canyon 15 Fee #4H, Grid North
 Reference Well: Cedar Canyon 15 Fee #4H Vertical (TVD) Reference: SITE 2951-0
 Reference Wellpath: 1 Db: Sybase

Site: Exist. Cedar Canon 15 #1H
 Well: Exist. Cedar Canon 15 #1H
 Wellpath: 1 VO

Inter-Site Error: 0.00 ft

Reference		Offset		Semi-Major Axis			Offset Location		Ctr-Ctr Distance	Edge Distance	Separation Factor	Warning
MD	TVD	MD	TVD	Ref	Offset	TFO-HS	North	East				
ft	ft	ft	ft	ft	ft	deg	ft	ft	ft	ft		
5910.00	5910.00	8474.73	6402.33	13.14	43.86	81.45	22.11	146.98	513.32	479.77	15.30	
6010.00	6010.00	8473.16	6402.35	13.37	43.84	82.05	20.54	147.13	418.60	382.87	11.71	
6110.00	6110.00	8471.59	6402.38	13.59	43.81	82.66	18.99	147.29	327.04	287.83	8.34	
6210.00	6210.00	8470.04	6402.40	13.82	43.78	83.26	17.44	147.44	242.23	197.11	5.37	
6310.00	6310.00	8468.49	6402.42	14.04	43.76	83.85	15.90	147.59	174.34	119.76	3.19	
6410.00	6410.00	8466.95	6402.45	14.27	43.73	84.45	14.37	147.74	148.68	87.97	2.45	
6510.00	6510.00	8465.42	6402.47	14.49	43.70	85.04	12.85	147.89	183.89	130.65	3.45	
6610.00	6610.00	8463.90	6402.49	14.72	43.68	85.62	11.33	148.04	255.97	211.24	5.72	
6710.00	6710.00	8462.39	6402.52	14.94	43.65	86.21	9.83	148.19	342.37	302.63	8.61	
6810.00	6810.00	8460.89	6402.54	15.17	43.63	86.79	8.33	148.33	434.64	397.69	11.76	
6910.00	6910.00	8459.39	6402.56	15.39	43.60	87.36	6.84	148.48	529.72	494.25	14.93	
7010.00	7010.00	8457.90	6402.58	15.62	43.58	87.93	5.36	148.62	626.33	591.58	18.03	
7110.00	7110.00	8456.42	6402.61	15.84	43.55	88.50	3.89	148.77	723.86	689.52	21.08	
7210.00	7210.00	8454.95	6402.63	16.07	43.53	89.07	2.43	148.91	821.98	787.85	24.08	
7310.00	7310.00	8453.49	6402.65	16.29	43.50	89.63	0.97	149.05	920.50	886.46	27.04	
7410.00	7410.00	8452.03	6402.67	16.51	43.48	90.18	-0.48	149.19	1019.31	985.28	29.95	
7510.00	7510.00	8450.59	6402.69	16.74	43.45	90.74	-1.92	149.33	1118.32	1084.25	32.82	
7610.00	7610.00	8449.15	6402.71	16.96	43.43	91.28	-3.35	149.47	1217.50	1183.35	35.65	
7710.00	7710.00	8447.71	6402.73	17.19	43.40	91.83	-4.78	149.60	1316.80	1282.54	38.43	
7810.00	7810.00	8446.29	6402.76	17.41	43.38	92.37	-6.19	149.74	1416.20	1381.80	41.17	
7910.00	7910.00	8444.87	6402.78	17.64	43.36	92.90	-7.60	149.88	1515.67	1481.13	43.88	
8010.00	8010.00	8443.47	6402.80	17.86	43.33	93.44	-9.01	150.01	1615.21	1580.51	46.55	
8110.00	8110.00	8442.05	6402.82	18.09	43.31	3.24	-10.41	150.15	1714.79	1679.93	49.18	
8210.00	8209.43	8439.77	6402.85	18.31	43.27	1.58	-12.68	150.37	1813.09	1778.36	52.21	
8310.00	8306.13	8436.12	6402.90	18.54	43.21	1.27	-16.32	150.71	1907.82	1873.69	55.91	
8410.00	8397.71	8431.21	6402.97	18.78	43.12	1.20	-21.21	151.18	1997.32	1964.22	60.35	
8510.00	8481.93	8425.20	6403.06	19.08	43.02	1.22	-27.18	151.75	2080.18	2048.46	65.58	
8610.00	8556.70	8424.00	6403.07	19.49	43.00	1.06	-28.38	151.86	2155.24	2125.12	71.57	
8710.00	8620.19	8424.00	6403.07	20.04	43.00	0.92	-28.38	151.86	2221.54	2193.18	78.34	
8810.00	8670.83	8424.00	6403.07	20.80	43.00	0.83	-28.38	151.86	2278.27	2251.71	85.76	
8910.00	8707.38	8410.06	6403.21	21.79	42.76	1.14	-42.25	153.19	2324.69	2299.83	93.49	
9010.00	8728.94	8405.90	6403.23	23.00	42.69	1.18	-46.40	153.60	2360.42	2336.68	99.44	
9110.00	8735.32	8401.61	6403.23	24.40	42.62	1.24	-50.67	154.02	2385.36	2361.51	100.01	
9210.00	8736.81	8397.24	6403.23	25.95	42.54	1.35	-55.02	154.46	2409.50	2384.42	96.08	
9310.00	8738.30	8392.78	6403.21	27.65	42.47	1.46	-59.45	154.90	2437.48	2411.07	92.29	
9410.00	8739.80	8388.24	6403.18	29.46	42.39	1.57	-63.96	155.37	2469.18	2441.37	88.76	
9510.00	8741.29	8383.62	6403.14	31.36	42.31	1.68	-68.56	155.84	2504.46	2475.19	85.56	
9610.00	8742.78	8378.91	6403.08	33.35	42.23	1.80	-73.25	156.33	2543.16	2512.41	82.70	
9710.00	8744.28	8374.11	6403.01	35.40	42.15	1.92	-78.03	156.83	2585.14	2552.89	80.17	
9810.00	8745.77	8361.00	6402.74	37.50	41.92	2.24	-91.05	158.23	2630.26	2596.58	78.10	
9910.00	8747.27	8361.00	6402.74	39.65	41.92	2.24	-91.05	158.23	2678.28	2643.09	76.11	
10010.00	8748.76	8358.24	6402.68	41.84	41.88	2.30	-93.80	158.52	2729.12	2692.46	74.44	
10110.00	8750.25	8350.83	6402.49	44.07	41.76	2.49	-101.16	159.31	2782.60	2744.52	73.07	
10210.00	8751.75	8343.65	6402.31	46.32	41.64	2.66	-108.30	160.07	2838.58	2799.10	71.91	
10310.00	8753.24	8336.68	6402.13	48.60	41.52	2.83	-115.23	160.79	2896.89	2856.06	70.94	
10410.00	8754.73	8329.91	6401.96	50.89	41.41	3.00	-121.96	161.48	2957.42	2915.25	70.12	
10510.00	8756.23	8323.34	6401.78	53.21	41.30	3.16	-128.50	162.14	3020.02	2976.54	69.45	
10610.00	8757.72	8316.95	6401.61	55.54	41.20	3.31	-134.85	162.77	3084.58	3039.81	68.91	
10710.00	8759.22	8310.74	6401.45	57.89	41.10	3.46	-141.03	163.37	3150.96	3104.95	68.47	
10810.00	8760.71	8304.70	6401.28	60.25	41.00	3.61	-147.05	163.96	3219.07	3171.83	68.14	
10910.00	8762.20	8298.00	6401.09	62.62	40.89	3.77	-153.71	164.59	3288.79	3240.35	67.90	



Weatherford International Ltd.

Anticollision Report



Weatherford

Company: Occidental Permian Ltd. Date: 4/18/2013 Time: 09:02:26 Page: 6
 Field: Eddy Co./NM (Nad 27)
 Reference Site: Cedar Canyon 15 Fee #4H Co-ordinate(NE) Reference: Well: Cedar Canyon 15 Fee #4H Grid North
 Reference Well: Cedar Canyon 15 Fee #4H Vertical (TVD) Reference: SITE 2951.0
 Reference Wellpath: 1 Db: Sybase

Site: Exist. Cedar Canon 15 #1H
 Well: Exist. Cedar Canon 15 #1H
 Wellpath: 1 V0

Inter-Site Error: 0.00 ft

Reference		Offset		Semi-Major Axis		TFO-HS	Offset Location		Ctr-Ctr Distance	Edge Distance	Separation Factor	Warning
MD	TVD	MD	TVD	Ref	Offset		North	East				
ft	ft	ft	ft	ft	ft	deg	ft	ft	ft	ft		
11010.00	8763.70	8274.08	6400.44	65.00	40.50	4.35	-177.51	166.90	3360.00	3310.51	67.89	
11110.00	8765.19	8242.62	6399.63	67.39	39.99	5.12	-208.79	170.14	3432.56	3382.06	67.97	
11210.00	8766.68	8212.74	6399.01	69.78	39.52	5.84	-238.49	173.32	3506.37	3454.83	68.03	
11310.00	8768.18	8186.14	6398.78	72.19	39.11	6.48	-264.96	176.03	3581.37	3528.77	68.08	
11410.00	8769.67	8150.86	6398.97	74.60	38.54	7.33	-300.07	179.46	3657.50	3603.84	68.16	
11510.00	8771.17	8109.00	6399.99	77.01	37.86	8.34	-341.74	183.30	3734.64	3679.89	68.22	
11610.00	8772.66	8102.26	6400.22	79.44	37.75	8.50	-348.44	183.90	3812.78	3756.92	68.26	
11710.00	8774.15	8095.87	6400.43	81.86	37.64	8.66	-354.80	184.47	3891.91	3834.95	68.32	
11810.00	8775.65	8089.44	6400.63	84.29	37.53	8.81	-361.21	185.05	3971.97	3913.92	68.42	
11910.00	8777.14	8082.95	6400.82	86.73	37.42	8.97	-367.67	185.64	4052.90	3993.77	68.54	
12010.00	8778.63	8076.42	6401.00	89.17	37.31	9.13	-374.17	186.23	4134.65	4074.44	68.67	
12110.00	8780.13	8069.84	6401.17	91.61	37.20	9.28	-380.72	186.82	4217.17	4155.90	68.83	
12210.00	8781.62	8063.21	6401.33	94.06	37.08	9.44	-387.32	187.43	4300.42	4238.09	68.99	
12310.00	8783.12	8056.53	6401.48	96.50	36.97	9.60	-393.97	188.04	4384.36	4320.97	69.17	

Site: Exist. Harroun 15 #15
 Well: 15 #15
 Wellpath: 1 V0

Inter-Site Error: 0.00 ft

Reference		Offset		Semi-Major Axis		TFO-HS	Offset Location		Ctr-Ctr Distance	Edge Distance	Separation Factor	Warning
MD	TVD	MD	TVD	Ref	Offset		North	East				
ft	ft	ft	ft	ft	ft	deg	ft	ft	ft	ft		
10.00	10.00	4.88	4.88	0.00	0.00	63.37	329.53	657.32	735.29			No Data
110.00	110.00	102.60	102.60	0.11	0.02	63.37	329.63	657.46	735.47	735.34	5890.86	
210.00	210.00	202.87	202.87	0.33	0.09	63.36	329.88	657.68	735.77	735.35	1755.50	
310.00	310.00	301.03	301.03	0.56	0.15	63.36	330.06	658.04	736.19	735.48	1045.54	
410.00	410.00	400.64	400.64	0.78	0.22	63.37	330.23	658.59	736.75	735.76	738.91	
510.00	510.00	498.98	498.98	1.01	0.28	63.36	330.64	659.15	737.46	736.17	573.44	
610.00	610.00	598.67	598.66	1.23	0.34	63.34	331.22	659.80	738.30	736.72	468.94	
710.00	710.00	700.55	700.54	1.46	0.41	63.33	331.73	660.38	739.03	737.16	396.47	
810.00	810.00	800.43	800.41	1.68	0.47	63.31	332.25	660.80	739.64	737.49	344.32	
910.00	910.00	901.20	901.18	1.90	0.53	63.29	332.75	661.19	740.21	737.78	304.31	
1010.00	1010.00	1002.72	1002.71	2.13	0.59	63.27	333.06	661.50	740.62	737.90	272.26	
1110.00	1110.00	1101.12	1101.10	2.35	0.65	63.25	333.48	661.75	741.04	738.04	246.97	
1210.00	1210.00	1202.92	1202.90	2.58	0.68	63.21	334.17	661.86	741.44	738.18	227.49	
1310.00	1310.00	1303.96	1303.94	2.80	0.69	63.16	334.90	661.73	741.65	738.15	212.13	
1410.00	1410.00	1403.37	1403.34	3.03	0.71	63.09	335.76	661.51	741.84	738.11	198.74	
1510.00	1510.00	1509.31	1509.27	3.25	0.70	63.02	336.47	660.99	741.71	737.77	188.50	
1610.00	1610.00	1620.65	1620.61	3.48	0.63	62.99	336.06	659.39	740.26	736.15	180.29	
1710.00	1710.00	1722.72	1722.65	3.70	0.55	62.98	335.11	657.24	737.95	733.70	173.51	
1810.00	1810.00	1821.02	1820.92	3.93	0.47	62.96	334.33	655.12	735.67	731.26	166.95	
1910.00	1910.00	1918.69	1918.57	4.15	0.40	62.94	333.71	653.22	733.65	729.09	161.04	
2010.00	2010.00	2015.88	2015.75	4.38	0.32	62.92	333.24	651.66	732.00	727.30	155.79	
2110.00	2110.00	2112.90	2112.76	4.60	0.24	62.89	332.93	650.36	730.66	725.82	150.85	
2210.00	2210.00	2202.64	2202.50	4.83	0.24	62.89	332.83	650.05	730.30	725.24	144.23	
2310.00	2310.00	2291.95	2291.79	5.05	0.32	62.94	332.64	651.22	731.38	726.00	136.10	
2410.00	2410.00	2390.80	2390.61	5.28	0.40	63.06	332.15	653.63	733.32	727.65	129.34	
2510.00	2510.00	2489.06	2488.83	5.50	0.46	63.22	331.23	656.37	735.39	729.44	123.50	
2610.00	2610.00	2591.12	2590.83	5.73	0.50	63.47	329.40	659.68	737.48	731.26	118.47	
2710.00	2710.00	2694.04	2693.66	5.95	0.54	63.75	326.89	662.91	739.21	732.72	113.97	
2810.00	2810.00	2802.71	2802.27	6.18	0.56	64.02	324.28	665.35	740.18	733.44	109.89	
2910.00	2910.00	2906.10	2905.64	6.40	0.57	64.19	322.36	666.45	740.32	733.35	106.19	



Weatherford International Ltd.

Anticollision Report



Weatherford

Company: Occidental Permian Ltd. Date: 4/18/2013 Time: 09:02:26 Page: 7
 Field: Eddy Co. NM (Nad 27)
 Reference Site: Cedar Canyon 15 Fee #4H Co-ordinate(NE) Reference: Well: Cedar Canyon 15 Fee #4H Grid North
 Reference Well: Cedar Canyon 15 Fee #4H Vertical (TVD) Reference: SITE 29510
 Reference Wellpath: 1 Db: Sybase

Site: Exist. Harroun 15 #15
 Well: 15 #15
 Wellpath: 1 V0

Inter-Site Error: 0.00 ft

Reference MD ft	TVD ft	Offset MD ft	TVD ft	Semi-Major Axis Ref ft	Offset ft	TFO-HS deg	Offset Location North ft	East ft	Ctr-Ctr Distance ft	Edge Distance ft	Separation Factor	Warning
3010.00	3010.00	3009.04	3008.56	6.62	0.56	64.29	321.01	666.77	740.02	732.83	102.92	
3110.00	3110.00	3110.17	3109.69	6.85	0.53	64.37	319.81	666.71	739.46	732.07	100.04	
3210.00	3210.00	3210.24	3209.75	7.07	0.51	64.47	318.46	666.66	738.83	731.24	97.34	
3310.00	3310.00	3311.57	3311.08	7.30	0.49	64.55	317.17	666.43	738.08	730.29	94.82	
3410.00	3410.00	3410.73	3410.23	7.52	0.46	64.62	316.02	666.14	737.32	729.36	92.57	
3510.00	3510.00	3511.28	3510.77	7.75	0.43	64.68	315.02	665.78	736.57	728.42	90.43	
3610.00	3610.00	3610.75	3610.23	7.97	0.40	64.71	314.34	665.28	735.83	727.51	88.50	
3710.00	3710.00	3711.01	3710.50	8.20	0.37	64.73	313.81	664.71	735.08	726.59	86.57	
3810.00	3810.00	3809.61	3809.09	8.42	0.34	64.75	313.24	664.28	734.44	725.75	84.54	
3910.00	3910.00	3909.73	3909.21	8.65	0.32	64.78	312.73	663.90	733.88	724.98	82.45	
4010.00	4010.00	4010.81	4010.29	8.87	0.29	64.79	312.29	663.38	733.23	724.12	80.45	
4110.00	4110.00	4111.17	4110.64	9.10	0.26	64.81	311.74	662.80	732.48	723.16	78.58	
4210.00	4210.00	4210.69	4210.16	9.32	0.22	64.84	311.14	662.30	731.76	722.24	76.84	
4310.00	4310.00	4313.05	4312.52	9.55	0.18	64.87	310.39	661.63	730.86	721.15	75.25	
4410.00	4410.00	4411.72	4411.18	9.77	0.13	64.91	309.48	661.06	729.94	720.05	73.80	
4510.00	4510.00	4512.76	4512.21	10.00	0.14	64.96	308.53	660.46	729.01	718.85	71.75	
4610.00	4610.00	4612.25	4611.70	10.22	0.20	65.01	307.53	659.89	728.06	717.61	69.67	
4710.00	4710.00	4712.27	4711.71	10.45	0.26	65.07	306.48	659.37	727.14	716.41	67.76	
4810.00	4810.00	4812.80	4812.23	10.67	0.32	65.14	305.32	658.84	726.18	715.17	65.93	
4910.00	4910.00	4913.54	4912.97	10.90	0.37	65.21	304.06	658.27	725.15	713.85	64.19	
5010.00	5010.00	5014.60	5014.01	11.12	0.43	65.27	302.84	657.49	723.94	712.35	62.48	
5110.00	5110.00	5112.62	5112.03	11.35	0.47	65.34	301.59	656.90	722.86	711.01	61.01	
5210.00	5210.00	5213.64	5213.03	11.57	0.52	65.41	300.30	656.31	721.79	709.66	59.51	
5310.00	5310.00	5312.51	5311.90	11.79	0.58	65.47	299.22	655.69	720.76	708.37	58.13	
5410.00	5410.00	5412.20	5411.58	12.02	0.63	65.53	298.12	655.17	719.84	707.17	56.80	
5510.00	5510.00	5512.68	5512.05	12.24	0.68	65.60	297.00	654.61	718.87	705.92	55.50	
5610.00	5610.00	5611.23	5610.60	12.47	0.73	65.64	296.09	654.09	718.00	704.78	54.31	
5710.00	5710.00	5711.31	5710.67	12.69	0.78	65.70	295.13	653.67	717.23	703.73	53.14	
5810.00	5810.00	5811.57	5810.92	12.92	0.85	65.76	294.13	653.19	716.38	702.59	51.95	
5910.00	5910.00	5908.11	5907.46	13.14	0.92	65.82	293.16	653.03	715.82	701.78	50.98	
6010.00	6010.00	6008.07	6007.41	13.37	0.98	65.91	292.05	653.15	715.47	701.18	50.05	
6110.00	6110.00	6106.96	6106.30	13.59	1.03	66.00	290.91	653.38	715.22	700.68	49.22	
6210.00	6210.00	6206.82	6206.15	13.82	1.09	66.10	289.75	653.71	715.04	700.28	48.43	
6310.00	6310.00	6306.03	6305.34	14.04	1.14	66.20	288.50	654.15	714.94	699.96	47.73	
6410.00	6410.00	6405.52	6404.83	14.27	1.20	66.33	287.05	654.77	714.93	699.74	47.07	
6510.00	6510.00	6505.52	6504.81	14.49	1.26	66.48	285.36	655.53	714.95	699.56	46.45	
6610.00	6610.00	6604.43	6603.69	14.72	1.31	66.63	283.58	656.41	715.05	699.46	45.87	
6710.00	6710.00	6702.56	6701.81	14.94	1.37	66.80	281.77	657.54	715.37	699.59	45.32	
6810.00	6810.00	6805.15	6804.37	15.17	1.43	66.98	279.87	658.65	715.65	699.67	44.78	
6910.00	6910.00	6909.93	6909.14	15.39	1.51	67.10	278.40	659.05	715.45	699.12	43.80	
7010.00	7010.00	7024.95	7024.14	15.62	1.59	67.15	277.09	657.71	713.95	697.17	42.54	
7110.00	7110.00	7142.04	7141.12	15.84	1.70	67.20	274.67	653.46	709.76	692.38	40.83	
7210.00	7210.00	7233.33	7232.29	16.07	1.73	67.25	272.28	649.35	704.65	687.10	40.16	
7310.00	7310.00	7282.80	7281.74	16.29	1.73	67.31	271.52	649.26	704.13	686.01	38.86	
7410.00	7410.00	7323.00	7321.81	16.51	2.18	67.38	271.79	652.35	711.58	692.80	37.88	
7510.00	7510.00	7365.20	7363.46	16.74	3.17	67.49	273.06	658.96	727.20	707.17	36.30	
7610.00	7610.00	7409.40	7406.41	16.96	4.19	67.68	274.80	669.24	750.22	729.04	35.42	
7710.00	7710.00	7450.00	7445.04	17.19	5.20	67.92	276.46	681.56	780.09	757.77	34.96	
7810.00	7810.00	7490.30	7482.43	17.41	6.14	68.21	278.48	696.42	816.46	792.98	34.78	
7910.00	7910.00	7524.12	7512.90	17.64	7.03	68.45	280.71	710.94	859.06	834.45	34.92	
8010.00	8010.00	7555.52	7540.20	17.86	7.86	68.69	283.35	726.21	907.58	881.93	35.38	



Weatherford International Ltd.

Anticollision Report




Weatherford

Company: Occidental Permian Ltd. Date: 4/18/2013 Time: 09:02:26 Page: 8
 Field: Eddy Co. NM (Nad 27)
 Reference Site: Cedar Canyon 15 Fee #4H Co-ordinate(N/E) Reference: Well: Cedar Canyon 15 Fee #4H Grid: Nort
 Reference Well: Cedar Canyon 15 Fee #4H Vertical (TVD) Reference: SITE 295110
 Reference Wellpath: 1 Db: Sybase

Site: Exist. Harroun 15 #15
 Well: 15 #15
 Wellpath: 1 V0

Inter-Site Error: 0.00 ft

Reference		Offset		Semi-Major Axis			Offset Location		Ctr-Ctr	Edge	Separation	Warning
MD	TVD	MD	TVD	Ref	Offset	TFO-HS	North	East	Distance	Distance	Factor	
ft	ft	ft	ft	ft	ft	deg	ft	ft	ft	ft		
8110.00	8110.00	7587.03	7566.61	18.09	8.60	339.14	285.85	743.20	961.13	934.54	36.15	
8210.00	8209.43	7610.00	7585.19	18.31	9.14	341.10	287.83	756.56	1011.95	984.82	37.30	
8310.00	8306.13	7649.00	7615.09	18.54	10.19	342.54	291.29	781.34	1054.90	1027.16	38.03	
8410.00	8397.71	7664.31	7626.07	18.78	10.75	343.53	292.64	791.91	1089.85	1062.34	39.61	
8510.00	8481.93	7681.00	7637.38	19.08	11.37	344.22	294.23	804.08	1117.13	1090.15	41.40	
8610.00	8556.70	7713.00	7656.75	19.49	12.51	344.62	297.29	829.34	1136.76	1110.12	42.66	
8710.00	8620.19	7713.00	7656.75	20.04	12.51	344.89	297.29	829.34	1148.04	1123.04	45.91	
8810.00	8670.83	7744.00	7672.19	20.80	13.48	344.86	299.68	856.09	1151.32	1127.09	47.52	
8910.00	8707.38	7775.00	7685.21	21.79	13.78	344.61	301.54	884.16	1146.11	1123.04	49.68	
9010.00	8728.94	7808.00	7697.63	23.00	14.07	344.08	303.43	914.67	1131.31	1108.81	50.28	
9110.00	8735.32	7840.00	7708.19	24.40	14.34	343.38	305.23	944.82	1107.41	1084.51	48.35	
9210.00	8736.81	7881.66	7719.51	25.95	14.64	343.10	307.40	984.84	1084.34	1060.41	45.33	
9310.00	8738.30	7925.06	7728.80	27.65	14.85	342.87	309.17	1027.19	1066.43	1041.50	42.78	
9410.00	8739.80	7961.00	7734.45	29.46	15.02	342.72	310.55	1062.66	1054.01	1028.06	40.62	
9510.00	8741.29	8018.61	7740.36	31.36	15.15	342.47	313.64	1119.88	1046.97	1019.94	38.73	
9610.00	8742.78	8096.30	7745.89	33.35	15.28	342.10	319.22	1197.15	1043.55	1015.28	36.91	
9710.00	8744.28	8147.28	7747.66	35.40	15.38	341.95	321.69	1248.03	1042.94	1013.53	35.47	
9810.00	8745.77	8253.06	7750.20	37.50	16.56	341.68	326.49	1353.68	1043.49	1012.62	33.81	
9910.00	8747.27	8338.35	7750.96	39.65	18.65	341.49	330.23	1438.88	1045.42	1013.14	32.38	
10010.00	8748.76	8488.24	7754.85	41.84	22.34	341.12	336.62	1588.56	1045.98	1011.74	30.55	
10110.00	8750.25	8559.49	7758.16	44.07	24.10	340.92	339.55	1659.67	1044.54	1008.77	29.20	
10210.00	8751.75	8626.17	7758.22	46.32	25.74	340.82	341.68	1726.31	1046.79	1009.54	28.11	
10310.00	8753.24	8757.03	7758.11	48.60	28.96	340.67	345.25	1857.11	1049.33	1010.09	26.74	
10410.00	8754.73	8849.44	7759.49	50.89	31.26	340.64	345.74	1949.51	1049.60	1008.66	25.63	
10510.00	8756.23	9001.45	7760.43	53.21	34.90	340.84	342.16	2101.41	1050.34	1007.41	24.47	
10610.00	8757.72	9128.49	7766.69	55.54	38.12	341.08	335.72	2228.11	1045.49	1000.80	23.39	
10710.00	8759.22	9231.51	7774.22	57.89	40.73	341.15	332.35	2330.80	1038.95	992.47	22.35	
10810.00	8760.71	9354.13	7786.88	60.25	43.80	340.94	332.35	2452.75	1030.46	981.77	21.16	
10910.00	8762.20	9427.93	7794.21	62.62	45.64	340.79	332.95	2526.18	1022.84	972.28	20.23	
11010.00	8763.70	9520.23	7801.08	65.00	47.94	340.62	334.16	2618.21	1017.64	965.02	19.34	
11110.00	8765.19	9610.47	7808.09	67.39	50.17	340.40	336.13	2708.16	1012.49	957.74	18.49	
11210.00	8766.68	9696.19	7812.86	69.78	52.29	340.32	336.43	2793.74	1008.80	952.08	17.79	
11310.00	8768.18	9785.98	7816.11	72.19	54.52	340.32	335.58	2883.47	1006.48	947.87	17.17	
11410.00	8769.67	9849.34	7817.35	74.60	56.10	340.34	334.96	2946.81	1005.92	945.68	16.70	
11510.00	8771.17	9936.09	7816.09	77.01	58.25	340.46	333.68	3033.54	1008.23	946.27	16.27	
11610.00	8772.66	10025.95	7813.58	79.44	60.49	340.62	331.94	3123.35	1011.65	948.04	15.90	
11710.00	8774.15	10126.80	7810.49	81.86	63.01	340.81	329.88	3224.13	1015.32	949.98	15.54	
11810.00	8775.65	10192.00	7808.35	84.29	64.63	340.93	328.50	3289.28	1019.75	952.99	15.27	
11910.00	8777.14	10192.00	7808.35	86.73	64.63	340.93	328.50	3289.28	1031.77	964.08	15.24	
12010.00	8778.63	10192.00	7808.35	89.17	64.63	340.93	328.50	3289.28	1053.20	984.57	15.35	
12110.00	8780.13	10192.00	7808.35	91.61	64.63	340.93	328.50	3289.28	1083.46	1013.90	15.58	
12210.00	8781.62	10192.00	7808.35	94.06	64.63	340.93	328.50	3289.28	1121.85	1051.36	15.91	
12310.00	8783.12	10192.00	7808.35	96.50	64.63	340.93	328.50	3289.28	1167.57	1096.14	16.34	

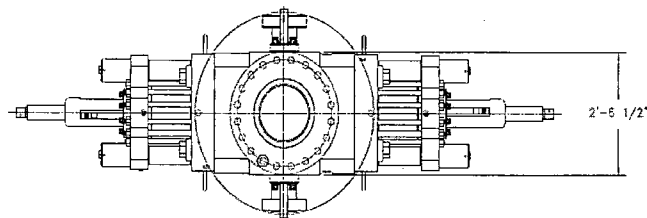

- LEGEND
- ① - 4 1/16"-10M FLANGED END GATE VALVE
 - ② - 4 1/16"-10M FLANGED END GATE VALVE WITH DOUBLE ACTING HYDRAULIC ACTUATOR
 - ③ - 2 1/16"-10M FLANGED END GATE VALVE
 - ④ - 2 1/16"-10M FLANGED END CHECK VALVE
 - ⑤ - DOUBLE STUDDED ADAPTER

SHAFTER BOLTED-COVER SPHERICAL ANNULAR PREVENTER (API 16A MONOGRAMMED, 13 5/8"-5M WP), 10M BOTTOM FLANGE + 5M STUDDED TOP (WEIGHT = 14,300 LBS WITH SHAFTER API 16A HOT OIL RESISTANT ACRYLONITRILE ELEMENT)

CAMERON UM DOUBLE RAM-TYPE PREVENTER (API 16A MONOGRAMMED, 13 5/8"-10M WP), WITH 5" CAMERON PIPE RAMS (CAMRAM FRONT PACKERS & TOP SEALS) IN TOP CAVITY AND CAMERON DS SHEARING BLIND RAMS IN BOTTOM CAVITY. BOTTOM FLANGE + STUDDED TOP (WEIGHT = 24,100 LBS WITH RAMS)

13 5/8"-10M WP CAMERON DRILLING SPOOL (API 16A MONOGRAMMED), STUDDED TOP + FLANGED BOTTOM, WITH 4 1/16"-10M WP FLANGED OUTLETS (WEIGHT APPROXIMATELY 6,000 LBS)

CAMERON UM SINGLE RAM-TYPE PREVENTER (API 16A MONOGRAMMED, 13 5/8"-10M WP), WITH 5" CAMERON PIPE RAMS (CAMRAM FRONT PACKERS & TOP SEALS) - BOTTOM FLANGE + STUDDED TOP (WEIGHT = 10,900 LBS)


H&P FURNISHED
13 5/8"-10M x 13 5/8"-5M
ADAPTER SPOOL 2'-0" LONG

13 5/8 - 10M BOP STACK WITH 13 5/8 - 5M ANNULAR

PROPRIETARY

THIS DRAWING AND THE IDEAS AND INFORMATION INCLUDED IN THIS DRAWING ARE PROPRIETARY AND ARE NOT TO BE REPRODUCED, DISSEMINATED OR DISCLOSED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF A DULY AUTHORIZED OFFICER OF HELMERICH & PAYNE INTERNATIONAL DRILLING CO.

SEE LIFT LUG DETAIL

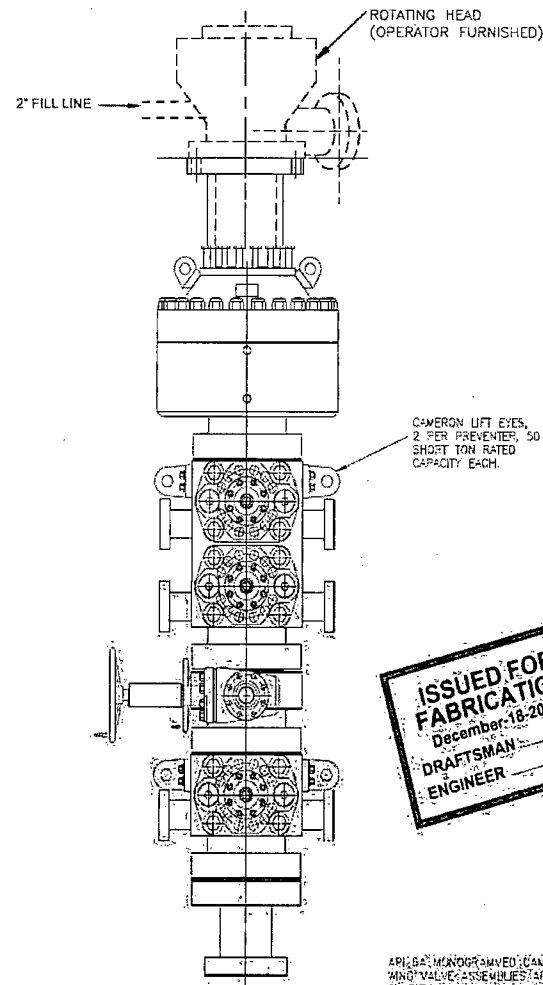

ISSUED FOR
FABRICATION
December-18-2007
DRAFTSMAN
ENGINEER


API 16A MONOGRAMMED CAMERON CHOKES AND KILLS AND VALVE ASSEMBLIES ARE NOT SHOWN FOR CLARITY
WEIGHTS DO NOT INCLUDE HOSES, ADAPTERS, SPOOLS OR QUICK CONNECT FITTINGS

HELMERICH & PAYNE
INTERNATIONAL DRILLING CO.


REV	DATE	DESCRIPTION	BY
1	12/18/07	ISSUED SHEET 01	JLS
2	4-10-07	CHOKES AND KILLS ADAPTER SPOOL	JLS
3	4-10-07	ADDED TO SPACER ADAPTER SPOOL	JLS
4	5-9-07	ADDED ADAPTER SPOOL	JLS
5	4-13-07	CORRECTED BOP STACK	JLS

ENGINEERING APPROVAL	DATE	TITLE
[Signature]		13 5/8"-10M BOP 3 RAM STACK
		FLEXRIC3
CUSTOMER: H&P		PROPERTY: FLEXRIC3
DRAWN	WTS	DATE 12-18-07
SCALE 3/4"=1'	SHEET 1 OF 1	210-P1-07


FLEX3 STD CHOKE MANIFOLD (COMPREHENSIVE)

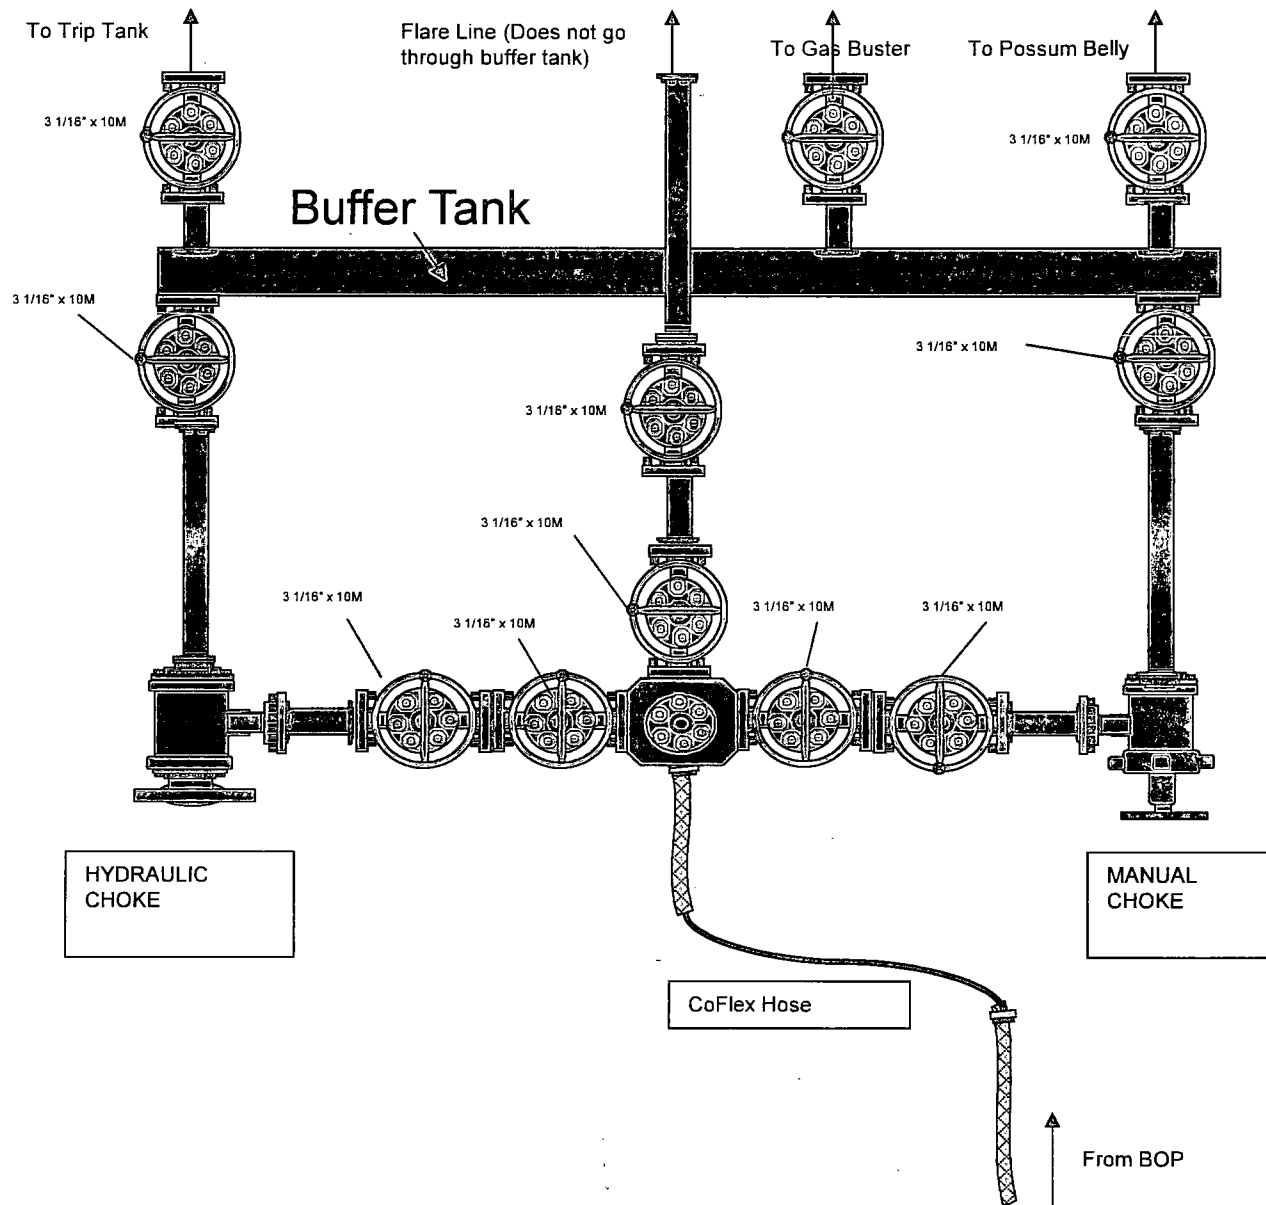


10M REMOTE KILL LINE SCHEMATIC

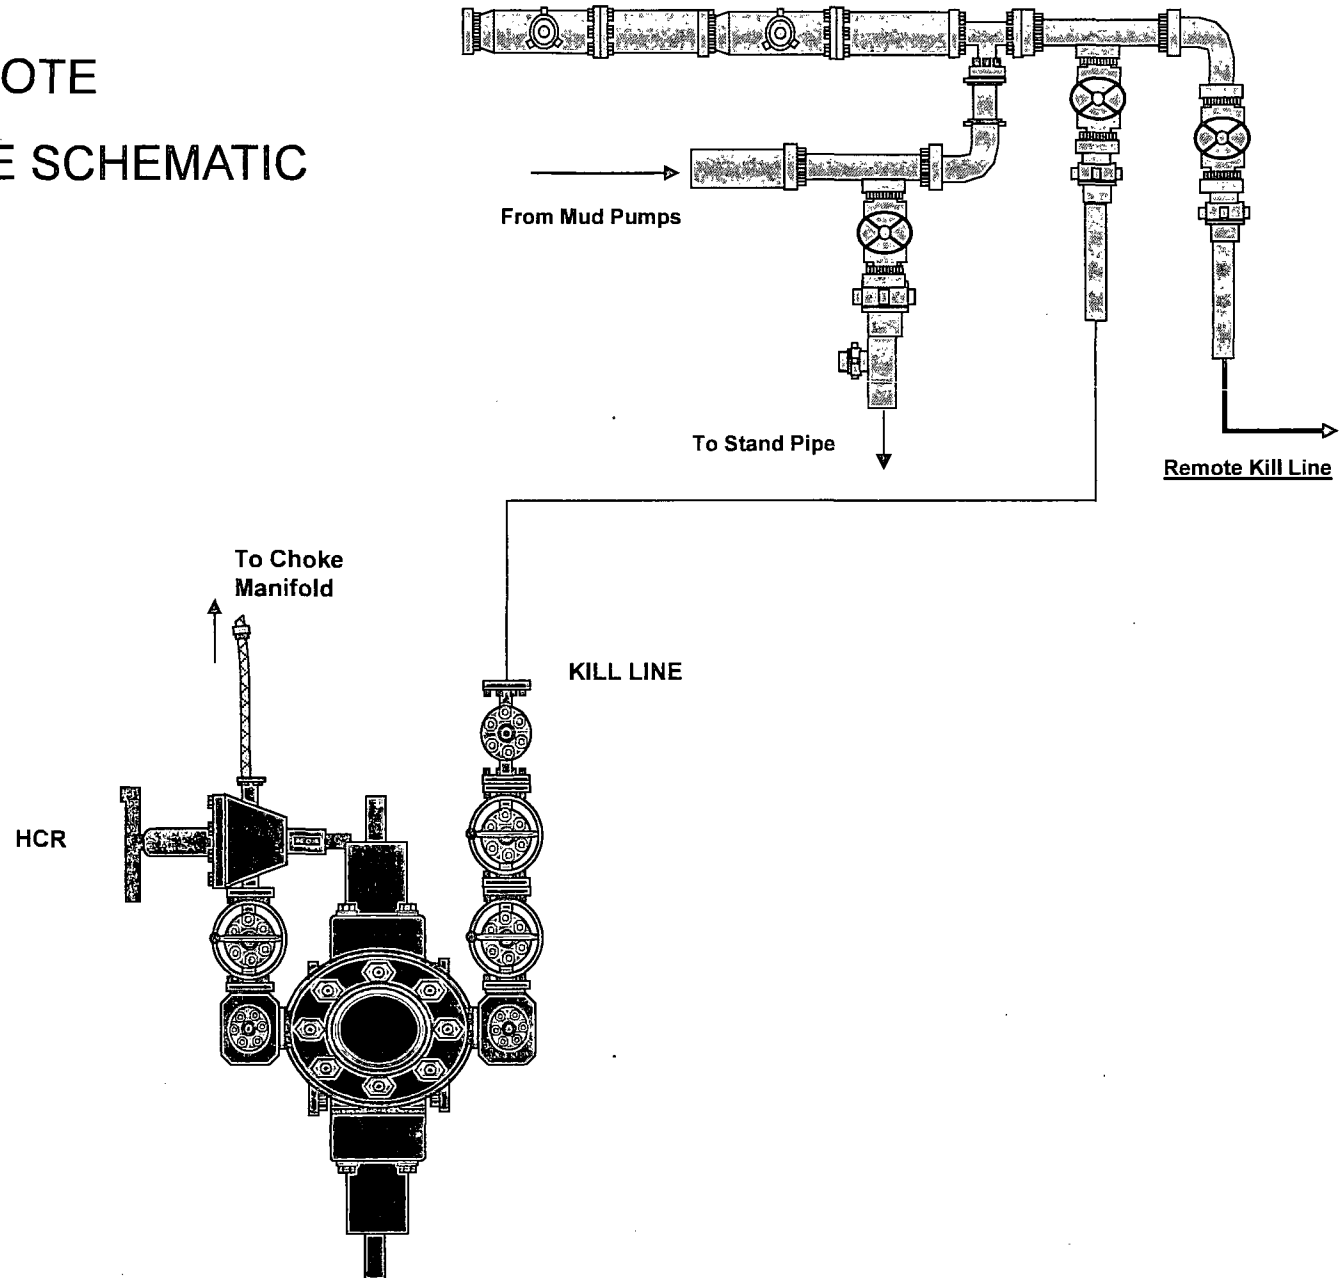


Choke Manifold – Gas Separator (Top View)

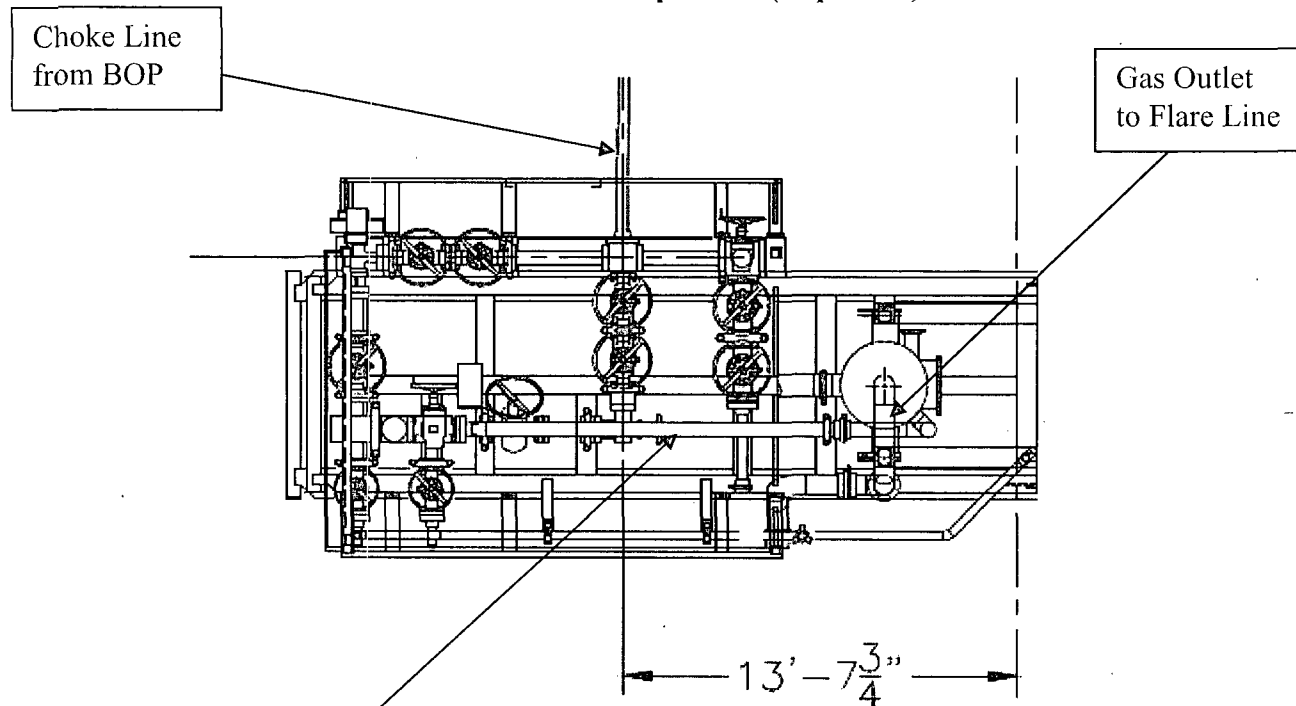

Choke Manifold – Gas Separator (Side View)

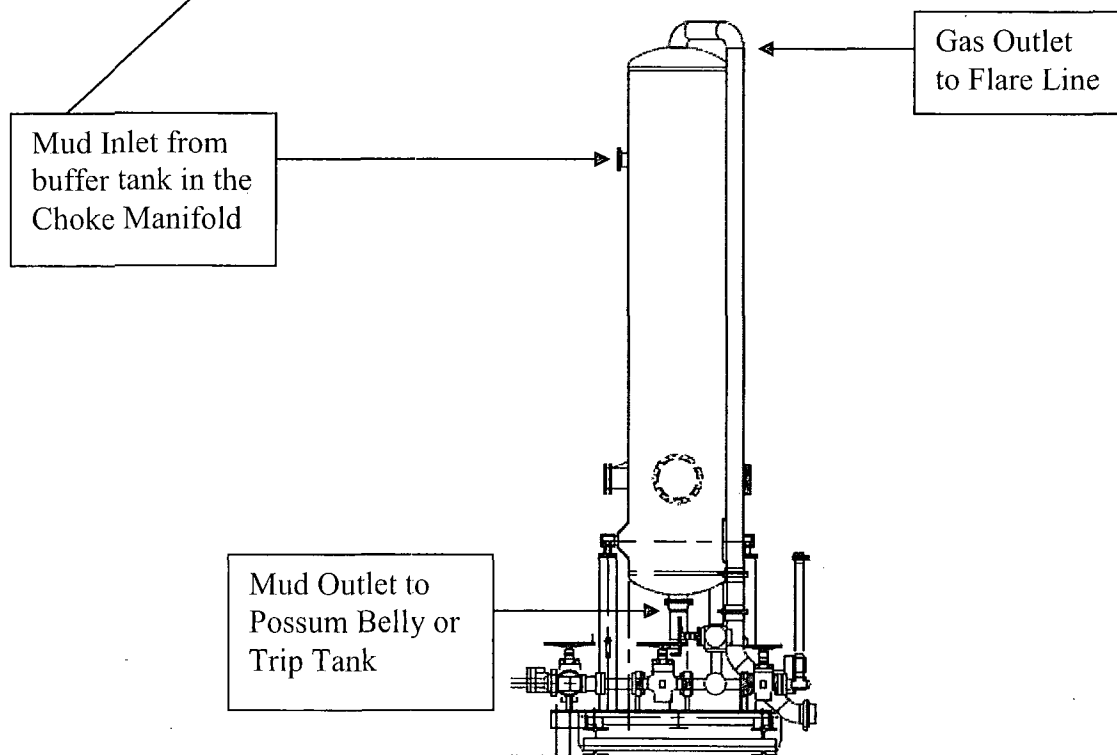

Gas Separator Routing Flex III Rigs

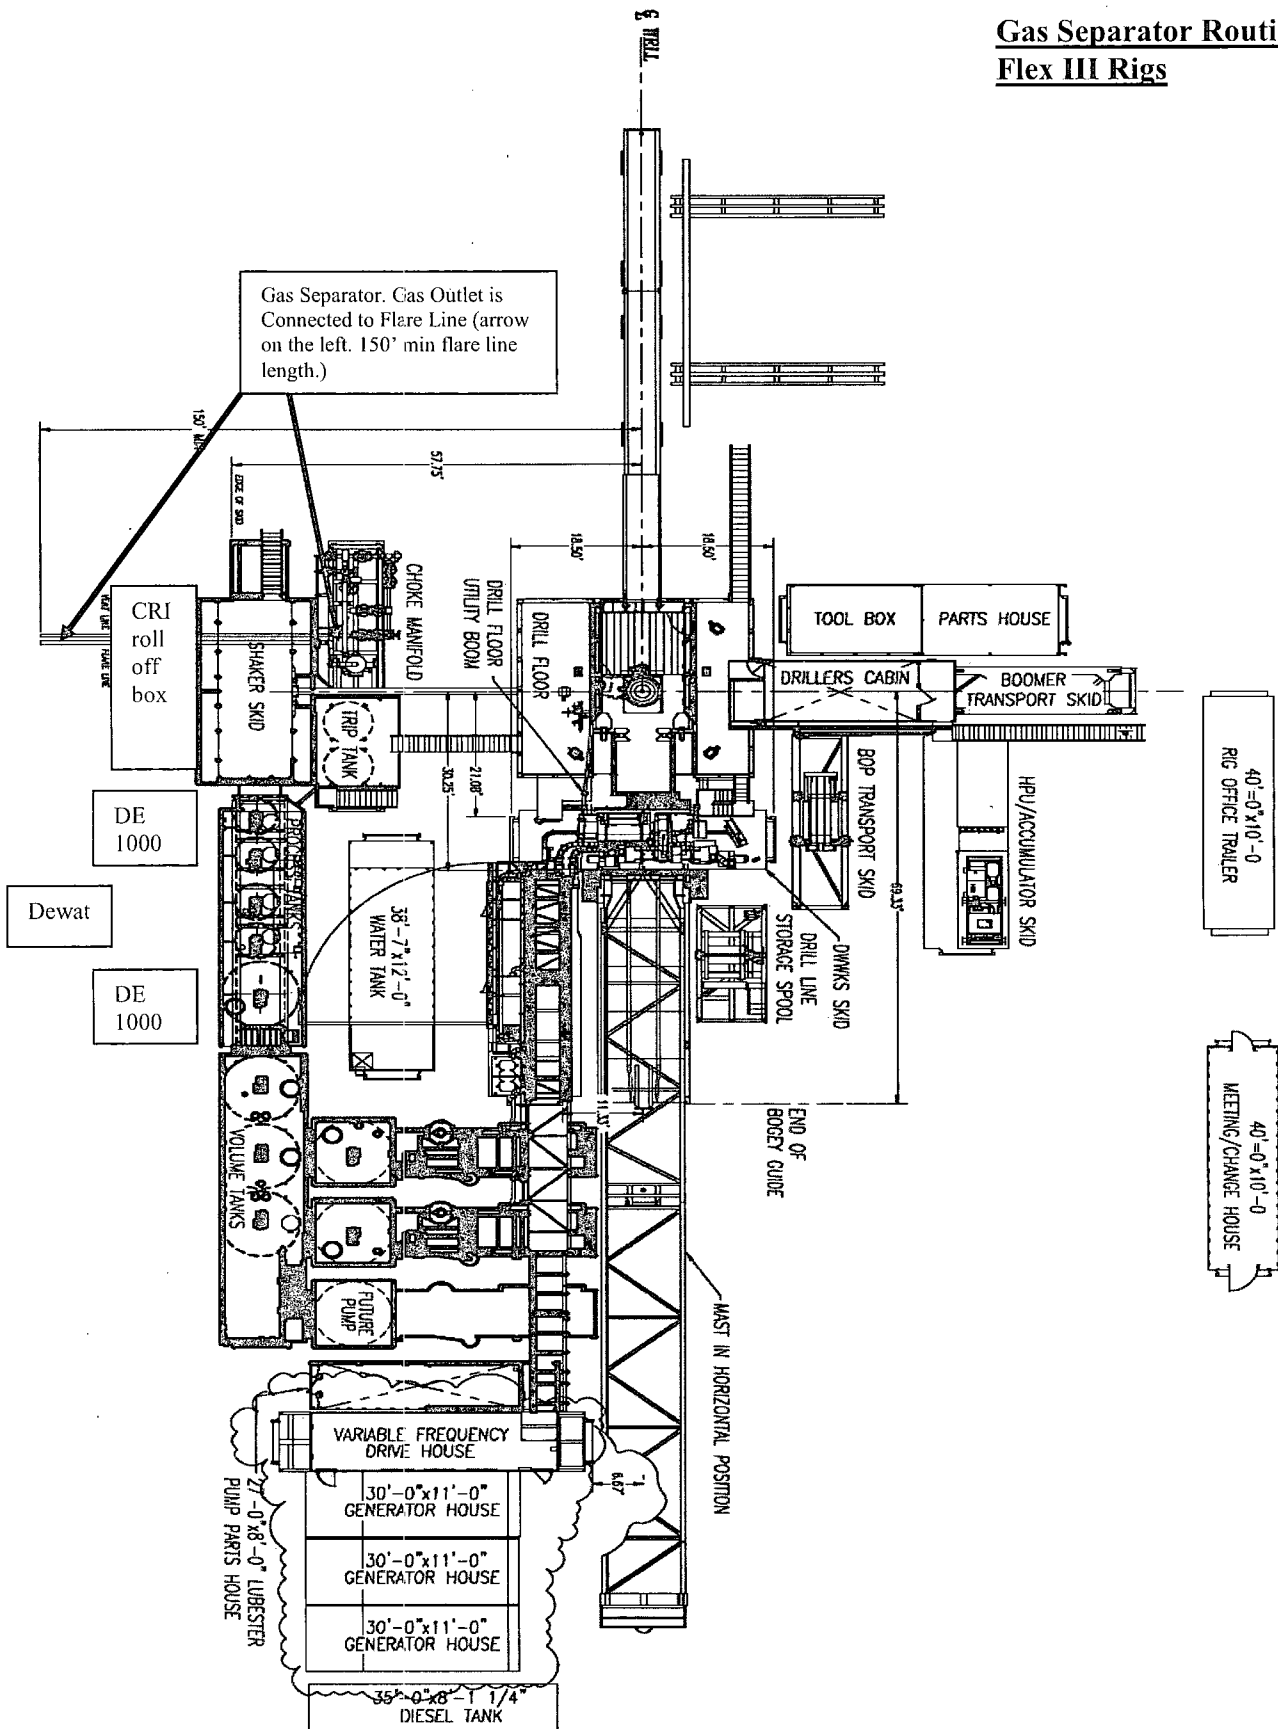



Permian Drilling Hydrogen Sulfide Drilling Operations Plan New Mexico

Scope

This contingency plan establishes guidelines for the public, all company employees, and contract employees who's work activities may involve exposure to hydrogen sulfide (H₂S) gas.

While drilling this well, it is possible to encounter H₂S bearing formations. At all times, the first barrier to control H₂S emissions will be the drilling fluid, which will have a density high enough to control influx.

Objective

1. Provide an immediate and predetermined response plan to any condition when H₂S is detected. All H₂S detections in excess of 10 parts per million (ppm) concentration are considered an Emergency.
2. Prevent any and all accidents, and prevent the uncontrolled release of hydrogen sulfide into the atmosphere.
3. Provide proper evacuation procedures to cope with emergencies.
4. Provide immediate and adequate medical attention should an injury occur.

Discussion

Implementation:	This plan with all details is to be fully implemented before drilling to <u>commence</u> .
Emergency response Procedure:	This section outlines the conditions and denotes steps to be taken in the event of an emergency.
Emergency equipment Procedure:	This section outlines the safety and emergency equipment that will be required for the drilling of this well.
Training provisions:	This section outlines the training provisions that must be adhered to prior to drilling.
Drilling emergency call lists:	Included are the telephone numbers of all persons to be contacted should an emergency exist.
Briefing:	This section deals with the briefing of all people involved in the drilling operation.
Public safety:	Public safety personnel will be made aware of any potential evacuation and any additional support needed.
Check lists:	Status check lists and procedural check lists have been included to insure adherence to the plan.
General information:	A general information section has been included to supply support information.

Hydrogen Sulfide Training

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on the well:

1. The hazards and characteristics of H₂S.
2. Proper use and maintenance of personal protective equipment and life support systems.
3. H₂S detection.
4. Proper use of H₂S detectors, alarms, warning systems, briefing areas, evacuation procedures and prevailing winds.
5. Proper techniques for first aid and rescue procedures.
6. Physical effects of hydrogen sulfide on the human body.
7. Toxicity of hydrogen sulfide and sulfur dioxide.
8. Use of SCBA and supplied air equipment.
9. First aid and artificial respiration.
10. Emergency rescue.

In addition, supervisory personnel will be trained in the following areas:

1. The effects of H₂S on metal components. If high tensile strength tubular is to be used, personnel will be trained in their special maintenance requirements.
2. Corrective action and shut-in procedures when drilling a well, blowout prevention and well control procedures.
3. The contents and requirements of the H₂S Drilling Operations Plan.

H₂S training refresher must have been taken within one year prior to drilling the well. Specifics on the well to be drilled will be discussed during the pre-spud meeting. H₂S and well control (choke) drills will be performed while drilling the well, at least on a weekly basis. This plan shall be available in the well site. All personnel will be required to carry the documentation proving that the H₂S training has been taken.

Service company and visiting personnel

- A. Each service company that will be on this well will be notified if the zone contains H₂S.
- B. Each service company must provide for the training and equipment of their employees before they arrive at the well site.
- C. Each service company will be expected to attend a well site briefing

Emergency Equipment Requirements

1. Well control equipment

The well shall have hydraulic BOP equipment for the anticipated pressures. Equipment is to be tested on installation and follow Oxy Well Control standard, as well as BLM Onshore Order #2.

Special control equipment:

- A. Hydraulic BOP equipment with remote control on ground.
- B. Rotating head
- C. Gas buster equipment shall be installed before drilling out of surface pipe.

2. Protective equipment for personnel

- A. Four (4) 30-minute positive pressure air packs (2 at each briefing area) on location.
- B. Adequate fire extinguishers shall be located at strategic locations.
- C. Radio / cell telephone communication will be available at the rig.
 - Rig floor and trailers.
 - Vehicle.

3. Hydrogen sulfide sensors and alarms

- A. H₂S sensor with alarms will be located on the rig floor, at the bell nipple, and at the flow line. These monitors will be set to alarm at 10 ppm with strobe light, and audible alarm.
- B. Hand operated detectors with tubes.
- C. H₂S monitor tester (to be provided by contract Safety Company.)
- D. There shall be one combustible gas detector on location at all times.

4. Visual Warning Systems

- A. One sign located at each location entrance with the following language:

**Caution – potential poison gas
Hydrogen sulfide
No admittance without authorization**

Wind sock – wind streamers:

- A. One 36" (in length) wind sock located at protection center, at height visible from rig floor.
- B. One 36" (in length) wind sock located at height visible from pit areas.

Condition flags

- A. One each condition flag to be displayed to denote conditions.

green – normal conditions

yellow – potential danger

red – danger, H2S present

- B. Condition flag shall be posted at each location sign entrance.

5. Mud Program

The mud program is designed to minimize the risk of having H2S and other formation fluids at surface. Proper mud weight and safe drilling practices will be applied. H2S scavengers will be used to minimize the hazards while drilling. Below is a summary of the drilling program.

Mud inspection devices:

Garrett gas train or hatch tester for inspection of sulfide concentration in mud system.

6. Metallurgy

- A. Drill string, casing, tubing, wellhead, blowout preventers, drilling spools or adapters, kill lines, choke manifold, lines and valves shall be suitable for the H2S service.
- B. All the elastomers, packing, seals and ring gaskets shall be suitable for H2S service.

7. Well Testing

No drill stem test will be performed on this well.

8. Evacuation plan

Evacuation routes should be established prior to well spud for each well and discussed with all rig personnel.

9. Designated area

- A. Parking and visitor area: all vehicles are to be parked at a predetermined safe distance from the wellhead.
- B. There will be a designated smoking area.
- C. Two briefing areas on either side of the location at the maximum allowable distance from the well bore so they offset prevailing winds perpendicularly, or at a 45-degree angle if wind direction tends to shift in the area.

Emergency procedures

- A. In the event of any evidence of H₂S level above 10 ppm, take the following steps:
 - 1. The Driller will pick up off bottom, shut down the pumps, slow down the pipe rotation.
 - 2. Secure and don escape breathing equipment, report to the upwind designated safe briefing / muster area.
 - 3. All personnel on location will be accounted for and emergency search should begin for any missing, the Buddy System will be implemented.
 - 4. Order non-essential personnel to leave the well site, order all essential personnel out of the danger zone and upwind to the nearest designated safe briefing / muster area.
 - 5. Entrance to the location will be secured to a higher level than our usual "Meet and Greet" requirement, and the proper condition flag will be displayed at the entrance to the location.
 - 6. Take steps to determine if the H₂S level can be corrected or suppressed and, if so, proceed as required.
- B. If uncontrollable conditions occur:
 - 1. Take steps to protect and/or remove any public in the down-wind area from the rig – partial evacuation and isolation. Notify necessary public safety personnel and appropriate regulatory entities (i.e. BLM) of the situation.

2. Remove all personnel to the nearest upwind designated safe briefing / muster area or off location.
3. Notify public safety personnel of safe briefing / muster area.
4. An assigned crew member will blockade the entrance to the location. No unauthorized personnel will be allowed entry to the location.
5. Proceed with best plan (at the time) to regain control of the well. Maintain tight security and safety procedures.

C. Responsibility:

1. Designated personnel.
 - a. Shall be responsible for the total implementation of this plan.
 - b. Shall be in complete command during any emergency.
 - c. Shall designate a back-up.

- All personnel:
1. On alarm, don escape unit and report to the nearest upwind designated safe briefing / muster area upw
 2. Check status of personnel (buddy system).
 3. Secure breathing equipment.
 4. Await orders from supervisor.

- Drill site manager:
1. Don escape unit if necessary and report to nearest upwind designated safe briefing / muster area.
 2. Coordinate preparations of individuals to return to point of release with tool pusher and driller (using the buddy system).
 3. Determine H2S concentrations.
 4. Assess situation and take control measures.

- Tool pusher:
1. Don escape unit Report to up nearest upwind designated safe briefing / muster area.
 2. Coordinate preparation of individuals to return to point of release with tool pusher drill site manager (using the buddy system).
 3. Determine H2S concentration.
 4. Assess situation and take control measures.

- Driller:
1. Don escape unit, shut down pumps, continue rotating DP.

2. Check monitor for point of release.
3. Report to nearest upwind designated safe briefing / muster area.
4. Check status of personnel (in an attempt to rescue, use the buddy system).
5. Assigns least essential person to notify Drill Site Manager and tool pusher by quickest means in case of their absence.
6. Assumes the responsibilities of the Drill Site Manager and tool pusher until they arrive should they be absent.

Derrick man
Floor man #1
Floor man #2

1. Will remain in briefing / muster area until instructed by supervisor.

Mud engineer:

1. Report to nearest upwind designated safe briefing / muster area.
2. When instructed, begin check of mud for ph and H2S level. (Garett gas train.)

Safety personnel:

1. Mask up and check status of all personnel and secure operations as instructed by drill site manager.

Taking a kick

When taking a kick during an H2S emergency, all personnel will follow standard Well control procedures after reporting to briefing area and masking up.

Open-hole logging

All unnecessary personnel off floor. Drill Site Manager and safety personnel should monitor condition, advise status and determine need for use of air equipment.

Running casing or plugging

Following the same “tripping” procedure as above. Drill Site Manager and safety personnel should determine if all personnel have access to protective equipment.

Ignition procedures

The decision to ignite the well is the responsibility of the operator (Oxy Drilling Management). The decision should be made only as a last resort and in a situation where it is clear that:

1. Human life and property are endangered.
2. There is no hope controlling the blowout under the prevailing conditions at the well.

Instructions for igniting the well

1. Two people are required for the actual igniting operation. They must wear self-contained breathing units and have a safety rope attached. One man (tool pusher or safety engineer) will check the atmosphere for explosive gases with the gas monitor. The other man is responsible for igniting the well.
2. Primary method to ignite: 25 mm flare gun with range of approximately 500 feet.
3. Ignite upwind and do not approach any closer than is warranted.
4. Select the ignition site best for protection, and which offers an easy escape route.
5. Before firing, check for presence of combustible gas.
6. After lighting, continue emergency action and procedure as before.
7. All unassigned personnel will remain in briefing area until instructed by supervisor or directed by the Drill Site Manager.

Remember: After well is ignited, burning hydrogen sulfide will convert to sulfur dioxide, which is also highly toxic. **Do not assume the area is safe after the well is ignited.**

Status check list

Note: All items on this list must be completed before drilling to production casing point.

1. H2S sign at location entrance.
2. Two (2) wind socks located as required.
3. Four (4) 30-minute positive pressure air packs (2 at each Briefing area) on location for all rig personnel and mud loggers.
4. Air packs inspected and ready for use.
5. Cascade system and hose line hook-up as needed.
6. Cascade system for refilling air bottles as needed.
7. Condition flag on location and ready for use.
8. H2S detection system hooked up and tested.
9. H2S alarm system hooked up and tested.
10. Hand operated H2S detector with tubes on location.
11. 1 – 100' length of nylon rope on location.
12. All rig crew and supervisors trained as required.
13. All outside service contractors advised of potential H2S hazard on well.
14. No smoking sign posted and a designated smoking area identified.
15. Calibration of all H2S equipment shall be noted on the IADC report.

Checked by: _____ Date: _____

Procedural check list during H2S events

Perform each tour:

1. Check fire extinguishers to see that they have the proper charge.
2. Check breathing equipment to ensure that it is in proper working order.
3. Make sure all the H2S detection system is operative.

Perform each week:

1. Check each piece of breathing equipment to make sure that demand or forced air regulator is working. This requires that the bottle be opened and the mask assembly be put on tight enough so that when you inhale, you receive air or feel air flow.
2. BOP skills (well control drills).
3. Check supply pressure on BOP accumulator stand by source.
4. Check breathing equipment mask assembly to see that straps are loosened and turned back, ready to put on.
5. Check pressure on breathing equipment air bottles to make sure they are charged to full volume. (Air quality checked for proper air grade "D" before bringing to location)
6. Confirm pressure on all supply air bottles.
7. Perform breathing equipment drills with on-site personnel.
8. Check the following supplies for availability.
 - A. Emergency telephone list.
 - B. Hand operated H2S detectors and tubes.

General evacuation plan

1. When the company approved supervisor (Drill Site Manager, consultant, rig pusher, or driller) determines the H₂S gas cannot be limited to the well location and the public will be involved, he will activate the evacuation plan.
2. Drill Site Manager or designee will notify local government agency that a hazardous condition exists and evacuation needs to be implemented.
3. Company or contractor safety personnel that have been trained in the use of H₂S detection equipment and self-contained breathing equipment will monitor H₂S concentrations, wind directions, and area of exposure. They will delineate the outer perimeter of the hazardous gas area. Extension to the evacuation area will be determined from information gathered.
4. Law enforcement personnel (state police, police dept., fire dept., and sheriff's dept.) Will be called to aid in setting up and maintaining road blocks. Also, they will aid in evacuation of the public if necessary.
5. After the discharge of gas has been controlled, company safety personnel will determine when the area is safe for re-entry.

Important: Law enforcement personnel will not be asked to come into a contaminated area. Their assistance will be limited to uncontaminated areas. Constant radio contact will be maintained with them.

Emergency actions

Well blowout – if emergency

1. Evacuate all personnel to “Safe Briefing / Muster Areas” or off location if needed.
2. If sour gas – evacuate rig personnel.
3. If sour gas – evacuate public within 3000 ft radius of exposure.
4. Don SCBA and shut well in if possible using the buddy system.
5. Notify Drilling Superintendent and call 911 for emergency help (fire dept and ambulance) if needed.
6. Implement the Blowout Contingency Plan, and Drilling Emergency Action Plan.
6. Give first aid as needed.

Person down location/facility

1. If immediately possible, contact 911. Give location and wait for confirmation.
2. Don SCBA and perform rescue operation using buddy system.

Toxic effects of hydrogen sulfide

Hydrogen sulfide is extremely toxic. The acceptable ceiling concentration for eight-hour exposure is 10 ppm, which is .001% by volume. Hydrogen sulfide is heavier than air (specific gravity – 1.192) and colorless. It forms an explosive mixture with air between 4.3 and 46.0 percent by volume. Hydrogen sulfide is almost as toxic as hydrogen cyanide and is between five and six times more toxic than carbon monoxide. Toxicity data for hydrogen sulfide and various other gases are compared in table i. Physical effects at various hydrogen sulfide exposure levels are shown in table ii.

Table i
Toxicity of various gases

Common name	Chemical formula	Specific gravity (sc=1)	Threshold limit (1)	Hazardous limit (2)	Lethal concentration (3)
Hydrogen Cyanide	Hcn	0.94	10 ppm	150 ppm/hr	300 ppm
Hydrogen Sulfide	H2S	1.18	10 ppm	250 ppm/hr	600 ppm
Sulfur Dioxide	So2	2.21	5 ppm	-	1000 ppm
Chlorine	Cl2	2.45	1 ppm	4 ppm/hr	1000 ppm
Carbon Monoxide	Co	0.97	50 ppm	400 ppm/hr	1000 ppm
Carbon Dioxide	Co2	1.52	5000 ppm	5%	10%
Methane	Ch4	0.55	90,000 ppm	Combustible above 5% in air	

- 1) threshold limit – concentration at which it is believed that all workers may be repeatedly exposed day after day without adverse effects.
- 2) hazardous limit – concentration that will cause death with short-term exposure.
- 3) lethal concentration – concentration that will cause death with short-term exposure.

Toxic effects of hydrogen sulfide

Table ii
Physical effects of hydrogen sulfide

<u>Percent (%)</u>	<u>Ppm</u>	<u>Concentration</u> <u>Grains</u> <u>100 std. Ft3*</u>	<u>Physical effects</u>
0.001	<10	00.65	Obvious and unpleasant odor.

0.002	10	01.30	Safe for 8 hours of exposure.
0.010	100	06.48	Kill smell in 3 – 15 minutes. May sting eyes and throat.
0.020	200	12.96	Kills smell shortly; stings eyes and throat.
0.050	500	32.96	Dizziness; breathing ceases in a few minutes; needs prompt artificial respiration.
0.070	700	45.36	Unconscious quickly; death will result if not rescued promptly.
0.100	1000	64.30	Unconscious at once; followed by death within minutes.

*at 15.00 psia and 60'f.

Use of self-contained breathing equipment (SCBA)

1. Written procedures shall be prepared covering safe use of SCBA's in dangerous atmosphere, which might be encountered in normal operations or in emergencies. Personnel shall be familiar with these procedures and the available SCBA.
2. SCBA's shall be inspected frequently at random to insure that they are properly used, cleaned, and maintained.
3. Anyone who may use the SCBA's shall be trained in how to insure proper face-piece to face seal. They shall wear SCBA's in normal air and then wear them in a test atmosphere. (note: such items as facial hair {beard or sideburns} and eyeglasses will not allow proper seal.) Anyone that may be reasonably expected to wear SCBA's should have these items removed before entering a toxic atmosphere. A special mask must be obtained for anyone who must wear eyeglasses or contact lenses.
4. Maintenance and care of SCBA's:
 - a. A program for maintenance and care of SCBA's shall include the following:
 1. Inspection for defects, including leak checks.
 2. Cleaning and disinfecting.
 3. Repair.
 4. Storage.
 - b. Inspection, self-contained breathing apparatus for emergency use shall be inspected monthly.
 1. Fully charged cylinders.
 2. Regulator and warning device operation.
 3. Condition of face piece and connections.
 4. Rubber parts shall be maintained to keep them pliable and prevent deterioration.
 - c. Routinely used SCBA's shall be collected, cleaned and disinfected as frequently as necessary to insure proper protection is provided.
5. Persons assigned tasks that requires use of self-contained breathing equipment shall be certified physically fit (medically cleared) for breathing equipment usage at least annually.
6. SCBA's should be worn when:
 - A. Any employee works near the top or on top of any tank unless test reveals less than 10 ppm of H₂S.

- B. When breaking out any line where H₂S can reasonably be expected.
- C. When sampling air in areas to determine if toxic concentrations of H₂S exists.
- D. When working in areas where over 10 ppm H₂S has been detected.
- E. At any time there is a doubt as to the H₂S level in the area to be entered.

Rescue
First aid for H₂S poisoning

Do not panic!

Remain calm – think!

1. Don SCBA breathing equipment.
2. Remove victim(s) utilizing buddy system to fresh air as quickly as possible. (go up-wind from source or at right angle to the wind. Not down wind.)
3. Briefly apply chest pressure – arm lift method of artificial respiration to clean the victim's lungs and to avoid inhaling any toxic gas directly from the victim's lungs.
4. Provide for prompt transportation to the hospital, and continue giving artificial respiration if needed.
5. Hospital(s) or medical facilities need to be informed, before-hand, of the possibility of H₂S gas poisoning – no matter how remote the possibility is.
6. Notify emergency room personnel that the victim(s) has been exposed to H₂S gas.

Besides basic first aid, everyone on location should have a good working knowledge of artificial respiration.

Revised CM 6/27/2012