

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

**SUNDRY NOTICES AND REPORTS ON WELLS**

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well  gas well  other

2. NAME OF OPERATOR  
JOHN E. SCHALK

3. ADDRESS OF OPERATOR  
P. O. BOX 25825 / ALBUQ. NM 87125

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.) 1170' FSL; 950' FWL  
AT SURFACE:  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH:

5. LEASE  
NM-18324

6. IF INDIAN, ALLOTTEE OR TRIBE NAME  
-----

7. UNIT AGREEMENT NAME  
-----

8. FARM OR LEASE NAME  
SCHALK 29-4

9. WELL NO.  
6

10. FIELD OR WILDCAT NAME  
Gobernador Pic. Cliffs

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
Sec. 25, T-29N, R-4W

12. COUNTY OR PARISH  
Rio Arriba



13. STATE  
New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)  
7347'

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:		SUBSEQUENT REPORT OF:	
TEST WATER SHUT-OFF	<input type="checkbox"/>		<input type="checkbox"/>
FRACTURE TREAT	<input type="checkbox"/>		<input type="checkbox"/>
SHOOT OR ACIDIZE	<input type="checkbox"/>		<input type="checkbox"/>
REPAIR WELL	<input type="checkbox"/>		<input type="checkbox"/>
PULL OR ALTER CASING	<input type="checkbox"/>		<input type="checkbox"/>
MULTIPLE COMPLETE	<input type="checkbox"/>		<input type="checkbox"/>
CHANGE ZONES	<input type="checkbox"/>		<input type="checkbox"/>
ABANDON*	<input type="checkbox"/>		<input type="checkbox"/>
(other) Drilling	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>

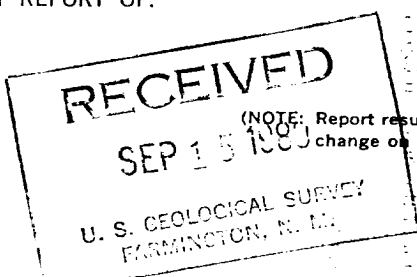

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

9/7/80 Set 10.5# 4-1/2" casing @ 4504' KBM. Cemented w/570 sxs Howco Class 'B' (12 1/2# Gilsonite/Sx). Followed with 200 sxs. 50/50 Class 'B' (6 1/4# Gilsonite & 2% Gel/Sx).

Float Collar @ 4460'.

We anticipate the completion of this well toward the end of September, 1980, depending upon rig availability.

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED: John E. Schalk TITLE: Operator DATE: 9/12/80

(This space for Federal or State office use)

ACCEPTED FOR RECORD

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_

CONDITIONS OF APPROVAL, IF ANY:  
SEP 17 1980

BY RW FARMINGTON DISTRICT

\*See Instructions on Reverse Side