

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ well ☐ gas ☒ well ☐ other

2. NAME OF OPERATOR

M. R. SCHALK

3. ADDRESS OF OPERATOR

P. O. Box 25825/ ALBUQ., NM 87125

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)

AT SURFACE: 950' FSL, 800' FWL, SECTION 23

AT TOP PROD. INTERVAL:

AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐

FRACTURE TREAT ☐

SHOOT OR ACIDIZE ☐

REPAIR WELL ☐

PULL OR ALTER CASING ☐


MULTIPLE COMPLETE ☐

CHANGE ZONES ☐

ABANDON\* ☐

(other) CO-MINGLE MESA VERDE & PICTURE CLIFF


SUBSEQUENT REPORT OF:

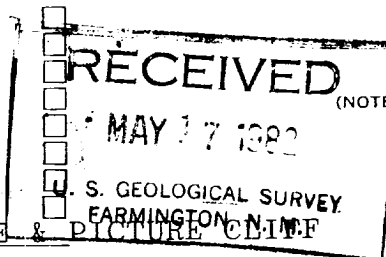

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

PLEASE SEE ATTACHMENT

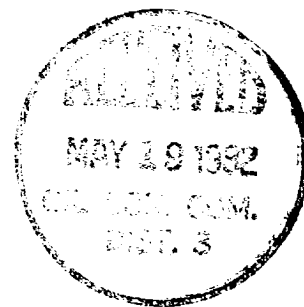

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Steve Schalk TITLE AGENT DATE MAY 14, 1982

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY:

"See Instructions on Reverse Side"

NMOCC

APPROVED

MAY 13 1982

Elliott  
DISTRICT ENGINEER

M. R. SCHALK  
P. O. BOX 25825  
ALBUQUERQUE, NEW MEXICO 87125

AREA CODE 505  
TELEPHONE 247-2294

SCHALK 29-4 #10

Estimated starting date: 5-18-82  
Propose to:

- 1) Perforate Mesa Verde.
- 2) Take 3 hour flow test.
- 3) Frac Mesa Verde.
- 4) Clean up well.
- 5) Shut in for 7 day build up. Run potential test after the 7 days.
- 6) Set drillable bridge plug at 5000'.
- 7) Perforate Pictured Cliffs.
- 8) Take 3 hour flow test.
- 9) Frac Picture Cliffs.
- 10) Clean up well.
- 11) Shut in for 7 day build up on Pictured Cliffs. Run potential test after the 7 days.
- 12) Drill out bridge plug, put both zones together, take potential test & produce both zones.

Note\* Intent of completion is to co-mingle Mesa Verde & Pictured Cliffs.

Note \*\* Any questions on procedure, please contact Thomas S. Schalk (1-817-322-3424)

Note \*\*\* Mr. Dean Elliott gave us verbal approval for this procedure on 5/14/82. *Told him to get state approval for down hole comingling*