



Pro Directional

Survey Report

30-015-45093

JUL 03 2018



PRO DIRECTIONAL

DISTRICT II-ARTESIA O.G.D.

Company: Marathon Oil
Project: Eddy County, NM
Site: Rick Deckard State 25-28-4 (12-14-15-18)
Well: WA #15H
Wellbore: OH
Design: Prelim Plan B

Local Co-ordinate Reference: Well WA #15H
TVD Reference: Well @ 2988.00usft (GL: 2963' + KB: 25' (Prec594))
MD Reference: Well @ 2988.00usft (GL: 2963' + KB: 25' (Prec594))
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: WellPlanner1

Project Eddy County, NM

Map System: US State Plane 1927 (Exact solution)
Geo Datum: NAD 1927 (NADCON CONUS)
Map Zone: New Mexico East 3001

System Datum: Mean Sea Level

Site Rick Deckard State 25-28-4 (12-14-15-18)

Site Position: Northing: 419,495.00 usft Latitude: 32.153070
From: Map Easting: 576,032.96 usft Longitude: -104.087653
Position Uncertainty: 0.00 usft Slot Radius: 13-3/16 " Grid Convergence: 0.13 °

Well WA #15H

Well Position: +N/-S 0.00 usft Northing: 419,495.10 usft Latitude: 32.153070
+E/-W 0.00 usft Easting: 576,062.97 usft Longitude: -104.087556
Position Uncertainty: 0.00 usft Wellhead Elevation: usft Ground Level: 2,963.00 usft

Wellbore OH

Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	HDGM	6/7/2018	7.20	59.90	47,973.90

Design Prelim Plan B

Audit Notes:

Version: Phase: PLAN Tie On Depth: 0.00

Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.00	0.00	0.00	359.87

Survey Tool Program Date 6/25/2018

From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description
0.00	1,850.00	Prelim Plan B (OH)	MWD+IFR1	OWSG MWD + IFR1
1,850.00	5,400.00	Prelim Plan B (OH)	MWD+IFR1	OWSG MWD + IFR1
5,400.00	10,000.00	Prelim Plan B (OH)	MWD+IFR1	OWSG MWD + IFR1
10,000.00	14,392.20	Prelim Plan B (OH)	MWD+IFR1	OWSG MWD + IFR1

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
[RickDeckard#15H]FTP									
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00

Company: Marathon Oil
Project: Eddy County, NM
Site: Rick Deckard State 25-28-4 (12-14-15-18)
Well: WA #15H
Wellbore: OH
Design: Prelim Plan B

Local Co-ordinate Reference: Well WA #15H
TVD Reference: Well @ 2988.00usft (GL: 2963' + KB: 25' (Prec594))
MD Reference: Well @ 2988.00usft (GL: 2963' + KB: 25' (Prec594))
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: WellPlanner1

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	2.00	220.18	1,899.98	-1.33	-1.13	-1.33	2.00	2.00	0.00
2,000.00	4.00	220.18	1,999.84	-5.33	-4.50	-5.32	2.00	2.00	0.00
2,100.00	6.00	220.18	2,099.45	-11.99	-10.13	-11.97	2.00	2.00	0.00
2,200.00	8.00	220.18	2,198.70	-21.30	-17.99	-21.26	2.00	2.00	0.00
2,300.00	10.00	220.18	2,297.47	-33.25	-28.08	-33.19	2.00	2.00	0.00
2,400.00	10.00	220.18	2,395.95	-46.52	-39.29	-46.43	0.00	0.00	0.00
2,500.00	10.00	220.18	2,494.43	-59.78	-50.49	-59.67	0.00	0.00	0.00
2,600.00	10.00	220.18	2,592.91	-73.05	-61.70	-72.91	0.00	0.00	0.00
2,700.00	10.00	220.18	2,691.39	-86.32	-72.90	-86.15	0.00	0.00	0.00
2,800.00	10.00	220.18	2,789.87	-99.58	-84.10	-99.39	0.00	0.00	0.00
2,900.00	10.00	220.18	2,888.35	-112.85	-95.31	-112.63	0.00	0.00	0.00
3,000.00	10.00	220.18	2,986.83	-126.11	-106.51	-125.87	0.00	0.00	0.00
3,100.00	10.00	220.18	3,085.31	-139.38	-117.72	-139.11	0.00	0.00	0.00
3,200.00	10.00	220.18	3,183.79	-152.65	-128.92	-152.35	0.00	0.00	0.00
3,300.00	10.00	220.18	3,282.27	-165.91	-140.13	-165.60	0.00	0.00	0.00
3,400.00	10.00	220.18	3,380.75	-179.18	-151.33	-178.84	0.00	0.00	0.00
3,500.00	10.00	220.18	3,479.23	-192.45	-162.54	-192.08	0.00	0.00	0.00
3,600.00	10.00	220.18	3,577.72	-205.71	-173.74	-205.32	0.00	0.00	0.00
3,700.00	10.00	220.18	3,676.20	-218.98	-184.95	-218.56	0.00	0.00	0.00
3,800.00	10.00	220.18	3,774.68	-232.25	-196.15	-231.80	0.00	0.00	0.00
3,900.00	10.00	220.18	3,873.16	-245.51	-207.35	-245.04	0.00	0.00	0.00
4,000.00	10.00	220.18	3,971.64	-258.78	-218.56	-258.28	0.00	0.00	0.00
4,100.00	10.00	220.18	4,070.12	-272.04	-229.76	-271.52	0.00	0.00	0.00
4,200.00	10.00	220.18	4,168.60	-285.31	-240.97	-284.76	0.00	0.00	0.00
4,300.00	10.00	220.18	4,267.08	-298.58	-252.17	-298.00	0.00	0.00	0.00
4,400.00	10.00	220.18	4,365.56	-311.84	-263.38	-311.25	0.00	0.00	0.00
4,500.00	10.00	220.18	4,464.04	-325.11	-274.58	-324.49	0.00	0.00	0.00
4,600.00	10.00	220.18	4,562.52	-338.38	-285.79	-337.73	0.00	0.00	0.00

Company: Marathon Oil
Project: Eddy County, NM
Site: Rick Deckard State 25-28-4 (12-14-15-18)
Well: WA #15H
Wellbore: OH
Design: Prelim Plan B

Local Co-ordinate Reference: Well WA #15H
TVD Reference: Well @ 2988.00usft (GL: 2963' + KB: 25' (Prec594))
MD Reference: Well @ 2988.00usft (GL: 2963' + KB: 25' (Prec594))
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: WellPlanner1

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,700.00	10.00	220.18	4,661.00	-351.64	-296.99	-350.97	0.00	0.00	0.00
4,800.00	10.00	220.18	4,759.48	-364.91	-308.19	-364.21	0.00	0.00	0.00
4,900.00	10.00	220.18	4,857.97	-378.18	-319.40	-377.45	0.00	0.00	0.00
4,926.94	10.00	220.18	4,884.50	-381.75	-322.42	-381.02	0.00	0.00	0.00
5,000.00	8.54	220.18	4,956.60	-390.74	-330.01	-389.99	2.00	-2.00	0.00
5,100.00	6.54	220.18	5,055.73	-400.76	-338.48	-399.99	2.00	-2.00	0.00
5,200.00	4.54	220.18	5,155.26	-408.14	-344.70	-407.35	2.00	-2.00	0.00
5,300.00	2.54	220.18	5,255.06	-412.85	-348.69	-412.06	2.00	-2.00	0.00
5,400.00	0.54	220.18	5,355.02	-414.90	-350.42	-414.11	2.00	-2.00	0.00
5,426.94	0.00	0.00	5,381.96	-415.00	-350.50	-414.20	2.00	-2.00	0.00
5,500.00	0.00	0.00	5,455.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
5,600.00	0.00	0.00	5,555.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
5,700.00	0.00	0.00	5,655.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
5,800.00	0.00	0.00	5,755.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
5,900.00	0.00	0.00	5,855.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
6,000.00	0.00	0.00	5,955.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
6,100.00	0.00	0.00	6,055.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
6,200.00	0.00	0.00	6,155.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
6,300.00	0.00	0.00	6,255.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
6,400.00	0.00	0.00	6,355.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
6,500.00	0.00	0.00	6,455.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
6,600.00	0.00	0.00	6,555.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
6,700.00	0.00	0.00	6,655.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
6,800.00	0.00	0.00	6,755.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
6,900.00	0.00	0.00	6,855.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
7,000.00	0.00	0.00	6,955.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
7,100.00	0.00	0.00	7,055.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
7,200.00	0.00	0.00	7,155.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
7,300.00	0.00	0.00	7,255.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
7,400.00	0.00	0.00	7,355.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
7,500.00	0.00	0.00	7,455.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
7,600.00	0.00	0.00	7,555.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
7,700.00	0.00	0.00	7,655.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
7,800.00	0.00	0.00	7,755.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
7,900.00	0.00	0.00	7,855.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
8,000.00	0.00	0.00	7,955.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
8,100.00	0.00	0.00	8,055.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
8,200.00	0.00	0.00	8,155.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
8,300.00	0.00	0.00	8,255.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
8,400.00	0.00	0.00	8,355.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
8,500.00	0.00	0.00	8,455.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
8,600.00	0.00	0.00	8,555.02	-415.00	-350.50	-414.20	0.00	0.00	0.00

Company: Marathon Oil
Project: Eddy County, NM
Site: Rick Deckard State 25-28-4 (12-14-15-18)
Well: WA #15H
Wellbore: OH
Design: Prelim Plan B

Local Co-ordinate Reference: Well WA #15H
TVD Reference: Well @ 2988.00usft (GL: 2963' + KB: 25' (Prec594))
MD Reference: Well @ 2988.00usft (GL: 2963' + KB: 25' (Prec594))
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: WellPlanner1

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
8,700.00	0.00	0.00	8,655.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
8,800.00	0.00	0.00	8,755.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
8,900.00	0.00	0.00	8,855.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
9,000.00	0.00	0.00	8,955.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
9,100.00	0.00	0.00	9,055.02	-415.00	-350.50	-414.20	0.00	0.00	0.00
9,124.98	0.00	0.00	9,080.00	-415.00	-350.50	-414.20	0.00	0.00	0.00
(RickDeckard#15H)KOP									
9,150.00	2.75	359.87	9,105.01	-414.40	-350.50	-413.60	11.00	11.00	0.00
9,200.00	8.25	359.87	9,154.76	-409.61	-350.51	-408.81	11.00	11.00	0.00
9,250.00	13.75	359.87	9,203.82	-400.07	-350.53	-399.27	11.00	11.00	0.00
9,300.00	19.25	359.87	9,251.75	-385.87	-350.57	-385.07	11.00	11.00	0.00
9,350.00	24.75	359.87	9,298.09	-367.15	-350.61	-366.35	11.00	11.00	0.00
9,400.00	30.25	359.87	9,342.42	-344.07	-350.66	-343.27	11.00	11.00	0.00
9,450.00	35.75	359.87	9,384.34	-316.84	-350.72	-316.05	11.00	11.00	0.00
9,500.00	41.25	359.87	9,423.45	-285.73	-350.80	-284.93	11.00	11.00	0.00
9,550.00	46.75	359.87	9,459.40	-251.01	-350.87	-250.21	11.00	11.00	0.00
9,600.00	52.25	359.87	9,491.86	-213.00	-350.96	-212.20	11.00	11.00	0.00
9,650.00	57.75	359.87	9,520.53	-172.06	-351.06	-171.26	11.00	11.00	0.00
9,700.00	63.25	359.87	9,545.14	-128.55	-351.15	-127.76	11.00	11.00	0.00
9,750.00	68.75	359.87	9,565.46	-82.89	-351.26	-82.10	11.00	11.00	0.00
9,800.00	74.25	359.87	9,581.32	-35.49	-351.37	-34.70	11.00	11.00	0.00
9,850.00	79.75	359.87	9,592.56	13.21	-351.48	14.00	11.00	11.00	0.00
9,900.00	85.25	359.87	9,599.08	62.76	-351.59	63.56	11.00	11.00	0.00
9,943.15	90.00	359.87	9,600.87	105.85	-351.69	106.65	11.00	11.00	0.00
10,000.00	90.00	359.87	9,600.87	162.71	-351.82	163.51	0.00	0.00	0.00
10,100.00	90.00	359.87	9,600.88	262.71	-352.05	263.51	0.00	0.00	0.00
10,200.00	90.00	359.87	9,600.88	362.71	-352.28	363.51	0.00	0.00	0.00
10,300.00	90.00	359.87	9,600.88	462.71	-352.51	463.51	0.00	0.00	0.00
10,400.00	90.00	359.87	9,600.88	562.71	-352.73	563.51	0.00	0.00	0.00
10,500.00	90.00	359.87	9,600.89	662.71	-352.96	663.51	0.00	0.00	0.00
10,600.00	90.00	359.87	9,600.89	762.71	-353.19	763.51	0.00	0.00	0.00
10,700.00	90.00	359.87	9,600.89	862.71	-353.42	863.51	0.00	0.00	0.00
10,800.00	90.00	359.87	9,600.90	962.71	-353.65	963.51	0.00	0.00	0.00
10,900.00	90.00	359.87	9,600.90	1,062.71	-353.88	1,063.51	0.00	0.00	0.00
11,000.00	90.00	359.87	9,600.90	1,162.71	-354.11	1,163.51	0.00	0.00	0.00
11,100.00	90.00	359.87	9,600.90	1,262.71	-354.34	1,263.51	0.00	0.00	0.00
11,200.00	90.00	359.87	9,600.91	1,362.71	-354.56	1,363.51	0.00	0.00	0.00
11,300.00	90.00	359.87	9,600.91	1,462.71	-354.79	1,463.51	0.00	0.00	0.00
11,400.00	90.00	359.87	9,600.91	1,562.71	-355.02	1,563.51	0.00	0.00	0.00
11,500.00	90.00	359.87	9,600.92	1,662.71	-355.25	1,663.51	0.00	0.00	0.00
11,600.00	90.00	359.87	9,600.92	1,762.70	-355.48	1,763.51	0.00	0.00	0.00
11,700.00	90.00	359.87	9,600.92	1,862.70	-355.71	1,863.51	0.00	0.00	0.00

Company: Marathon Oil
Project: Eddy County, NM
Site: Rick Deckard State 25-28-4 (12-14-15-18)
Well: WA #15H
Wellbore: OH
Design: Prelim Plan B

Local Co-ordinate Reference: Well WA #15H
TVD Reference: Well @ 2988.00usft (GL: 2963' + KB: 25' (Prec594))
MD Reference: Well @ 2988.00usft (GL: 2963' + KB: 25' (Prec594))
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: WellPlanner1

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
11,800.00	90.00	359.87	9,600.93	1,962.70	-355.94	1,963.51	0.00	0.00	0.00
11,900.00	90.00	359.87	9,600.93	2,062.70	-356.16	2,063.51	0.00	0.00	0.00
12,000.00	90.00	359.87	9,600.93	2,162.70	-356.39	2,163.51	0.00	0.00	0.00
12,100.00	90.00	359.87	9,600.93	2,262.70	-356.62	2,263.51	0.00	0.00	0.00
12,200.00	90.00	359.87	9,600.94	2,362.70	-356.85	2,363.51	0.00	0.00	0.00
12,300.00	90.00	359.87	9,600.94	2,462.70	-357.08	2,463.51	0.00	0.00	0.00
12,400.00	90.00	359.87	9,600.94	2,562.70	-357.31	2,563.51	0.00	0.00	0.00
12,500.00	90.00	359.87	9,600.95	2,662.70	-357.54	2,663.51	0.00	0.00	0.00
12,600.00	90.00	359.87	9,600.95	2,762.70	-357.76	2,763.51	0.00	0.00	0.00
12,700.00	90.00	359.87	9,600.95	2,862.70	-357.99	2,863.51	0.00	0.00	0.00
12,800.00	90.00	359.87	9,600.95	2,962.70	-358.22	2,963.51	0.00	0.00	0.00
12,900.00	90.00	359.87	9,600.96	3,062.70	-358.45	3,063.51	0.00	0.00	0.00
13,000.00	90.00	359.87	9,600.96	3,162.70	-358.68	3,163.51	0.00	0.00	0.00
13,100.00	90.00	359.87	9,600.96	3,262.70	-358.91	3,263.51	0.00	0.00	0.00
13,200.00	90.00	359.87	9,600.97	3,362.70	-359.14	3,363.51	0.00	0.00	0.00
13,300.00	90.00	359.87	9,600.97	3,462.70	-359.36	3,463.51	0.00	0.00	0.00
13,400.00	90.00	359.87	9,600.97	3,562.70	-359.59	3,563.51	0.00	0.00	0.00
13,500.00	90.00	359.87	9,600.98	3,662.70	-359.82	3,663.51	0.00	0.00	0.00
13,600.00	90.00	359.87	9,600.98	3,762.70	-360.05	3,763.51	0.00	0.00	0.00
13,700.00	90.00	359.87	9,600.98	3,862.70	-360.28	3,863.51	0.00	0.00	0.00
13,800.00	90.00	359.87	9,600.98	3,962.70	-360.51	3,963.51	0.00	0.00	0.00
13,900.00	90.00	359.87	9,600.99	4,062.70	-360.74	4,063.51	0.00	0.00	0.00
14,000.00	90.00	359.87	9,600.99	4,162.70	-360.96	4,163.51	0.00	0.00	0.00
14,100.00	90.00	359.87	9,600.99	4,262.70	-361.19	4,263.51	0.00	0.00	0.00
14,200.00	90.00	359.87	9,601.00	4,362.70	-361.42	4,363.51	0.00	0.00	0.00
14,300.00	90.00	359.87	9,601.00	4,462.70	-361.65	4,463.51	0.00	0.00	0.00
14,348.20	90.00	359.87	9,601.00	4,510.90	-361.76	4,511.71	0.00	0.00	0.00
[RickDeckard#15H]LTP/BHL									
14,393.20	90.00	359.87	9,601.00	4,555.90	-361.86	4,556.71	0.00	0.00	0.00

Company: Marathon Oil
Project: Eddy County, NM
Site: Rick Deckard State 25-28-4 (12-14-15-18)
Well: WA #15H
Wellbore: OH
Design: Prelim Plan B

Local Co-ordinate Reference: Well WA #15H
TVD Reference: Well @ 2988.00usft (GL: 2963' + KB: 25' (Prec594))
MD Reference: Well @ 2988.00usft (GL: 2963' + KB: 25' (Prec594))
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: WellPlanner1

Design Targets

Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
[RickDeckard#15H]FTP - hit/miss target - Shape	0.00	0.00	0.00	-186.02	-351.02	419,309.08	575,711.95	32.152561	-104.088692
- plan misses target center by 397.26usft at 0.00usft MD (0.00 TVD, 0.00 N, 0.00 E)									
- Point									
[RickDeckard#15H]KOP - plan hits target center - Point	0.00	0.00	9,080.00	-415.00	-350.50	419,080.10	575,712.47	32.151932	-104.088692
[RickDeckard#15H]LTP/I - plan hits target center - Point	0.00	0.00	9,601.00	4,510.90	-361.76	424,006.00	575,701.21	32.165473	-104.088692

Checked By: _____ Approved By: _____ Date: _____

Marathon Oil Corporation

Marathon Oil
Eddy County, NM
Rick Deckard State 25-28-4 (12-14-15-18)
WA #15H
Prelim Plan B
GL: 2963' + KB: 25' (Prec594)

US State Plane 1927 (East solution)
NAD 1927 (NADCON CORUS)
Clarke 1886
New Mexico East 3001
Mean Sea Level

RKB Elevation: Well @ 2968.00usl (GL: 2963' + KB: 25' (Prec594))

N/S	E/W	Northing	Easting	Latitude	Longitude	Spot
0.00	0.00	419495.10	876062.97	32.153070	-104.087556	

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	N/S	E/W	Diag	VSect
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2	1800.00	0.00	0.00	1800.00	0.00	0.00	0.00	0.00
3	2300.00	10.00	220.18	2287.17	-33.25	-28.08	2.00	-33.19
4	4926.94	10.00	220.18	4884.50	-381.75	-322.42	0.00	-381.02
5	5426.94	0.00	0.00	5381.86	-415.00	-350.50	2.00	-414.20
6	9124.88	0.00	0.00	9080.00	-415.00	-350.50	0.00	-414.20
7	9943.14	90.00	359.87	9801.00	4510.90	-361.76	11.00	106.55
8	14348.20	90.00	359.87	9801.00	4510.90	-361.76	0.00	4511.71
9	14393.20	90.00	359.87	9801.00	4555.90	-361.86	0.00	4556.71

WELLBORE TARGET DETAILS (MAP CO-ORDINATES)

Name	TVD	N/S	E/W	Northing	Easting
[RickDeckard#15H]FTP	0.00	-186.02	-351.02	419309.08	875711.95
[RickDeckard#15H]KOP	9080.00	-415.00	-350.50	419080.10	875712.47
[RickDeckard#15H]TP/BHL	9801.00	4510.90	-361.76	424006.00	875701.21



PRODIRECTIONAL




Azimuth to Grid North
True North: -0.15°
Magnetic North: 7.07°
Magnetic Field
Strength: 47873 nanT
Dip Angle: 58.90°
Date: 8/7/2018
Model: HDGM



Azimuth Corrections

Total Magnetic Corr. (M to G): 7.07°

Declination (M to T): 7.20° East

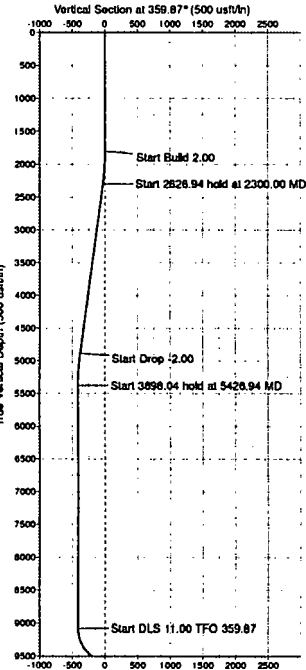

Target Line: 9601' TVD @ 0° VS: 90° INC

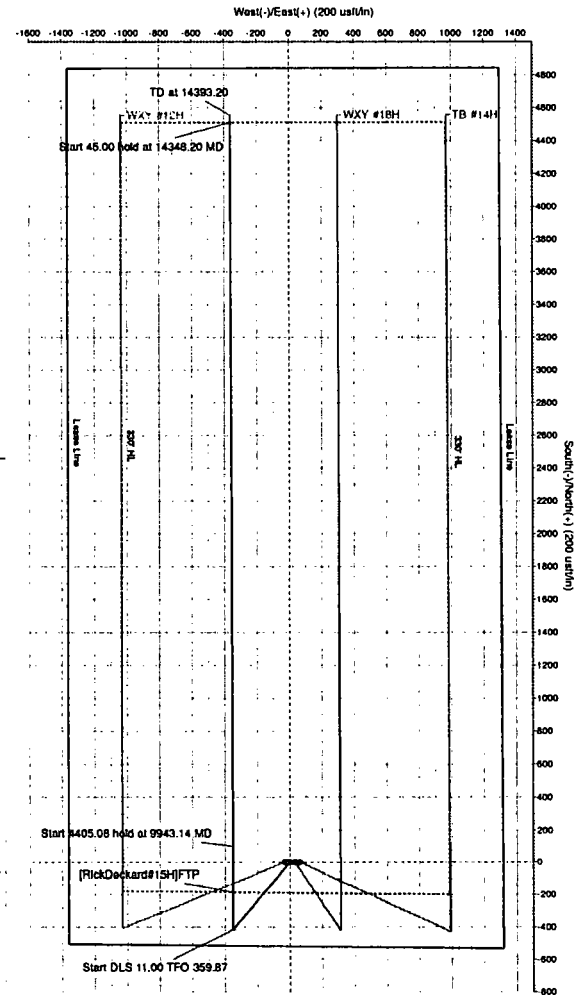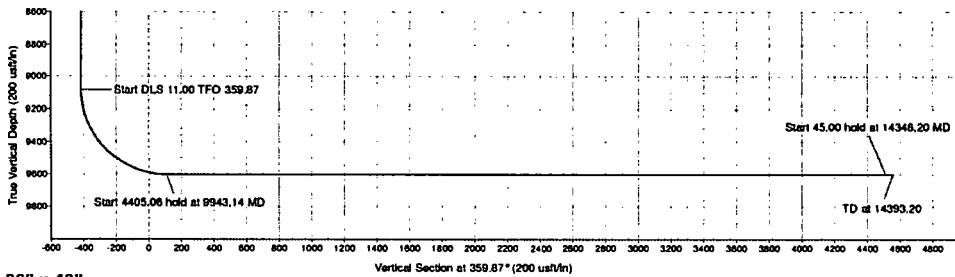

36" x 48"