Form 3160-3 **UNITED STATES** (August 1999) FORM APPROVED DEPARTMENT OF THE INTERIOR OMB NO. 1004-0136 **BUREAU OF LAND MANAGEMENT** Expires: November 30, 2000 5. Lease Serial No. APPLICATION FOR PERMIT TO DRILL OR REENTER SF-080379 la. Type of Work X DRILL-REENTER 6. If Indian, Allotee or Tribe Name 1b. Type of Well Oil Well X Gas Well Other X Single Zone 7. Unit or CA Agreement Name and No. Multiple Zone San Juan 29-6 Unit Name of Operator 8. Lease Name and Well No. <u>Phillips Petroleum Company</u> SJ 29-6 Unit #12C 3a. Address 3b. Phone No. (include area code) 9. API Well No. <u>5525 Highway 64, NBU 3004, Farmington, NM</u> 87401 505-599-3454 <u> 30</u> ~039 Location of Well (Report location clearly and in accordance with any State equirements)* Field and Pool, or Exploratory Blanco Mesaverde At surface Unit I, 1745' FSL & 390' FEL 11. Sec., T., R., M., or Blk. and Survey or Area At proposed prod. zone same as above $oldsymbol{oldsymbol{\mathcal{L}}}$ Section 6, T29N, R6W 14. Distance in miles and direction from nearest town or post office* 12. County or Parish | 13. State 19 miles east by NE of Blanco, NM <u>Rio Arriba,</u> NM 15. Distance from proposed* 16. No. of Acres in lease 17. Spacing Unit dedicated to this well location to nearest 390' property or lease line, ft. 2557.20 acres 318.95 E/2 (Also to nearest drg. unit line, if any) 18. Distance from proposed location* 19. Proposed Depth 20. BLM/BIA Bond No. on file to nearest well, drilling, completed, applied for, on this lease, ft. 6313'__ ES0048 Elevations (Show whether DF, KDB, RT, GL, etc. 22. Approximate date work will start* 23. Estimated duration 6801' GL 2nd Qtr. 2001 20 days 24. Attachments The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form: 1. Well plat certified by a registered surveyor. 4. Bond to cover the operations unless covered by an existing bond on file (see 2. A Drilling Plan Item 20 above). A Surface Use Plan (if the location is on National Forest System Lands, the Operator certification. SUPO shall be filed with the appropriate Forest Service Office). Such other site specific information and/or plans as may be required by the authorized officer. 25. Signuature Name (Printed/Typed) Date lugiton Patsy Clugston 5/1/01

Sr. Regulatory/Proration Clerk

Approved by (Signautre)

/a/ Joel Farrell

Title

Name (Printed/Typed)

Date

AUG 2-1

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowlingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on Reverse)

Title

con account to subject to higherstal and procedural review pursuant to 45 CFR 3185.3 and appeal pursuant to 43 CFR 3165.4.

March Viller Charles & Abell Viller And SUBJECT TO COMPENSED WITH ATTACHED "GENERAL REQUIREMENTS"

PO Box 1980, Hobbs, NM 88241-1980 District II #11 South First, Artesia, NM #8210 District III 1000 Rio Brazus Rd., Aztec, NM 87410 District IV

State of New Mexico
Energy, Minerals & Natural Resources Department

Revised October 18, 1994 Instructions on back Submit to Appropriate District Office State Lease - 4 Copies Fee Lease - 3 Copies

Form C-102


OIL CONSERVATION DIVISION 2040 South Pacheco Santa Fe, NM 87505

> 229 MAY -2 FN 2: 24

2040 South Pacheco, Santa Fe, NM 87505 WELL LOCATION AND ACREAGE DEDICATION PLAT ¹ Pool Name ¹ Pool Code Blanco Mesaverde 72319 * Well Number ³ Property Name Property Code 12C 009257 SAN HAN 29-6 HNIT Elevation Operator Name OCKID No. 6801 PHILLIPS PETROLEUM COMPANY 017654 10 Surface Location East/West line County Feet from the North/South line Feet from the Lot Idn Township Range Section UI. or lot no.

EAST RIO ARRIBA 390 SOUTH 17451 6W 29N 6 T 11 Bottom Hole Location If Different From Surface County North/South line Feet from the East/West line Feet from the Lot Idn Township Range UI, or lot no. Section 15 Order No. 14 Consolidation Code " Dedicated Acres " Joint or Infill 318.95 E/2

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A

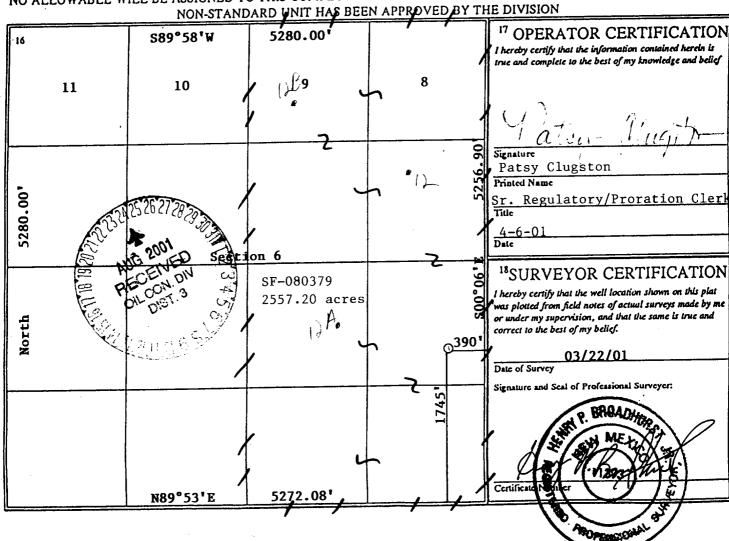

PHILLIPS PETROLEUM COMPANY SAN JUAN 29-6 UNIT No. 12C 76 1745' FSL, 390' FEL SE/4 SEC. 6, T-29-N, R-06-W, N.M.P.M., RIO ARRIBA COUNTY, NEW MEXICO **GROUND LEVEL ELEVATION:** 6801' 21 6321 75 BM 6246 6359 28 73 6700 689 San Juan Camp 33 31 10 ET Windmill & Ð PIPELINE/ £ GOMEZ RANCH QUADRANGLE

PHILLIPS PETROLEUM COMPANY

WELI	L NAME:Sa	<u>n Juan 29-6</u>	6 Unit #12C MV
DRII	LING PROGNOSIS		
1.			1745' FSL & 390' FEL, 16, T29N, R6W
2.	Unprepared Ground Elev	ation:	@ 6801' (unprepared).
3.	The geological name of the surface formation is <u>San Jose</u> .		
4.	Type of drilling tools will be <u>rotary</u> .		
5.	Proposed drilling depth is 6313'.		
6.	The estimated tops of important geologic markers are as follows:		
	Naciamento - 1493' Ojo Alamo - 2755' Kirtland Sh - 2938' Fruitland Fm. 3398' Pictured Cliffs -3708'		Lewis Shale - 3823' Cliff House Ss - 5508' Menefee Fm 5583' Pt. Lookout - 5891' Mancos Sh - 6176'
7.	The estimated depths at which anticipated water, oil, gas or other mineral bearing formations are expected to be encountered are as follows:		
	Gas & Water: Fr	itland -	2755' - 2938' 3398' - 3708' 5508' - 6176'
8.	The proposed casing program is as follows:		
	Production String: 4-1/2	0#, J/K-55 casing avail ", 11.6#, J-5 be set at a	@ 3948' (J-55 will be used, unless the K-55 is the lable.

9. Cement Program:

Surface String:

158.6 sx Type III cement + 2% bwoc Calcium Chloride + 0.25#/sx

Cello-flake + 60.6% FW (1.41 yield = 224 cf).

Intermediate String: Lead Cement: 477.1 sx Type III cement (35:65) Poz + 5#/sx Gilsonite + 0.25 #/sx Cello-Flake + 6% bwoc Bentonite + 10#/sx CSE + 3% bwoc KCL + 0.4% bwoc FL-25 + 0.02#/sx static free + 129% FW (2.37 yield = 1131 cf). Cement to surface with 110% excess casing/hole annular volume.

> Tail Cement: 50.0 sx Type III cement + 0.25#/sx Cello-Flake + 1% Calcium Chloride + 60.5% FW (1.4 yield = 70 cf). Cement to surface with 110% excess of casing/hole annulus volume.

Production String *: 188.6 sx (35:65) Poz Class H cement + 10#/sx CSE + 0.25#/sx Cello-Flake + 0.2% bwoc CD-32 + 5#/sx Gilsonite + 0.5% bwoc FL-52 + 6% bwoc Bentonite + 112.4% FW (2.13 yield = 402 cf). The production string casing cement is designed to cover openhole section with 60% excess. 100 MINIMUM

*The production casing cement is calculated to cover the openhole interval with 60% excess and annular volume 100' within intermediate shoe. Depending on hole conditions, the well may be cemented in a single stage or two staged.

Centralizer Program:

Surface:

Total four (4) 1 @ 10' above shoe & top of 2nd, 4th & 6th joint

Intermediate: Total seven (7) – 10' above shoe, top of 1st, 2nd, 4th, 6th, & 8th its &

1 it. above surface casing.

Production:

None planned.

Turbulators:

Total Three (3) – on intermediate casing at 1st jt. below the Ojo

Alamo and next 2 its up.

- 10. The minimum specifications for pressure control equipment which are to be used, a schematic diagram thereof showing sizes, pressure ratings (or) API series and the testing procedure and testing frequency are enclosed within the APD packet.
- 11. **Drilling Mud Prognosis:**

Surface - spud mud on surface casing.

Intermediate - spud mud generated from natural clays with gel sweeps pretreated w/LCM before entering coal interval.

Below Intermediate - air or gas drilled.

BOP AND RELATED EQUIPMENT CHECK LIST

3M SYSTEM:

2 hydr. rams (pipe & blind) or hydr. ram and annular with blind ram on bottom

Kill Line (2-inch minimum)

1 kill line valve (2-inch minimum)

1 choke line valve

2 chokes (refer to diagram in attachment 1) on choke manifold

Upper kelly cock valve in open position with handle available

Safety valve (in open position) and subs to fit all drill strings in use (with handle available)

Pressure gauged on choke manifold

2 inch minimum choke line

Fill-up line above the uppermost preventer

The BOPs will be pressure tested according to Onshore Order #2 III, A 1 and 30% safety factor.

drilling\BOPck.lst