(December 1990)

N.M. Oil Consultations on Budget Bureau No. 1004-0136

UNITED STATES 1301 W. Grand Avenue Expires: December 31, 1991 DEPARTMENT OF THE INTERHOSIA, NM 88210 5. LEASE

DESI	GN A	TION	AND	SERIAL	NO
_	_				

BUREAU OF LAND MANAGEMENT LC-029419A 6. IF INDIAN, ALLOTTEE OR TRIBE NAME APPLICATION FOR PERMIT TO DRILL OR DEEPEN 1a. TYPE OF WORK 7. UNIT AGREEMENT NAME DRILL 🛛 DEEPEN b. TYPE OF WELL MULTIPLE OIL WELL Gas Well SINGLE 8. FARM OR LEASE NAME, WELL NO 2. NAME OF OPERATOR Skelly Unit #946 Chevron USA Inc. (Mack Energy Agent) 9. API WELL NO. 3. ADDRESS AND TELEPHONE NO. 70-015-10. FIELD AND POOL, OR WILDCAT (505) 748-1288₁ P.O. Box 960, Artesia, NM 88211-0960 Fren Paddock 4. LOCATION OF WELL (Report location clearly and in accordance with any state red 11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA 330 FNL & 1650 FEL At proposed prod. zone Sec 22 T17S R31E 12. COUNTY OR PARISH 13. STATE 14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE 9 miles east of Loco Hills, NM Eddy NM DISTANCE FROM PROPOSED 17. NO OF ACRES IN LEASE TO THIS WELL 101681 LOCATION TO NEAREST 330 PROPERTY OR LEASE LINE, FT 40 (Also to nearest drlg. unit line, if any)
18. DISTANCE FROM PROPOSED LOCATION* 20. ROTARY OR CABLE TOOLS 19. PROPOSED DEPTH TO NEAREST WELL, DRILLING, COMPLETED OR APPLIED FOR, ON THIS LEASE, FT. 660 5500 Rotary 21. ELEVATIONS (Show whether DF, RT, GR, etc.) 22. APPROX. DATE WORK WILL START* 3863' GR **ROSWELL CONTROLLED WATER BASIN** 7/24/2003 23 PROPOSED CASING AND CEMENTING PROGRAM QUANTITY OF CEMENT SIZE OF HOLE GRADE, SIZE OF CASING WEIGHT PER FOOT SETTING DEPTH 17 1/2 J-55,13 3/8 450 WITNESS Circ 48 1620 Suff to Circ 24 12 1/4 J-55, 8 5/8

Chevron USA Inc. proposes to drill to a depth sufficient to test the Paddock and San Andres formation for oil. If productive, 5 1/2" casing will be cemented. If non-productive, the well will be plugged and abandoned in a manner consistent with federal regulation. Specific programs as per Onshore Oil and Gas Order #1 are outlined in the following attachments:

- 1. Surveys
 - Exhibit #1- Well Location Plat
 - Exhibit #2- Vicinity Map
 - Exhibit #3- Location Verification Map

J-55, 5 1/2

2. Drilling Program

7 7/8

- 3. Surface Use & Operating Plan
 - Exhibit #4- One Mile Radius Map
 - **Exhibit #5- Production Facilities Layout**
 - Exhibit #6- Location Layout

4. Certification

17

- 7. Responsibility Statement
- 5. Hydrogen Sulfide Drilling Operation PARPROVAL SUBJECT TO Exhibit #7- H2S Warning Sign Exhibit #8- H2S Safety Equipment

GENERAL REQUIREMENTS AND SPECIAL STIPULATIONS **ATTACHED**

Suff to Circ

6. Blowout Preventers

Exhibit #9- BOPE Schematic

Exhibit #10- Blowout Preventer Requirements

5500

Exhibit #11- Choke Manifold

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any

Production Clerk Mack Energy Corporation (Agent for Chevron USA Inc.) (This space for Federal or State office use) APPROVAL DATE Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. CONDITIONS OF APPROVAL, IF ANY:

/s/ Mary J. Rugwell TITLE

FOR FIELD MANAGER

*See Instructions On Reverse Side

DISTRICT I P.O. Box 1090, Hobbs, NM 68241-1980

State of New Mexico

Energy, Minerals and Natural Resources Department

service Form C-102 Revised February 10, 1994 Submit to Appropriate District Office State Lease - 4 Copies
2003 Lease - 3 Copies

DISTRICT II P.O. Drawer DD, Artesia, NM 88211-0719

DISTRICT IV

DISTRICT III 1000 Rio Brazos Rd., Aztec, NM 87410

P.O. BOX 2088, SANTA FE, N.M. 87504-2088

OIL CONSERVATION DIVISION

P.O. Box 2088

Santa Fe, New Mexico 87504-2088

AMENDED REPORT WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number	Pool Code	F	Pool Name
	26770	Fren	Paddock
Property Code	Pro	perty Name	Well Number
11091	SKELLY UNIT		946
OGRID No.	Operator Name		Elevation
4323	CHEVRON USA INC.		3863'

Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
. B	22	17-S	31-E		330'	NORTH	1650'	EAST	EDDY


Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
Dedicated Acres	loint e	or Infill (Consolidation	Code Or	der No.				
40					aci 710.				

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

ON A NON DIA	DARD UNIT HAS BEEN APPROVED BY T	HE DIVISION
	3862.3' 3866.5' 1650' 1650' 3863.6' 3865.4'	OPERATOR CERTIFICATION I hereby certify the the information contained herein is true and complete to the best of my knowledge and belief.
	GEODETIC COORDINATES NAD 27 NME Y= 664664.7 N X= 647323.8 E LAT. 32'49'34.79"N LONG. 103'51'13.46"W	Jerry W. Sherrell Printed Name Production Clerk Title 7/18/2003
	 	SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervison, and that the same is true and
		June 16, 2003 Date Surveyed Signature & Seal of Professional Surveyor
 		03.11.0582 Certificate No. RONALD J. EDSON 3239 CARY EDSON 12641

LOCATION VERIFICATION MAP

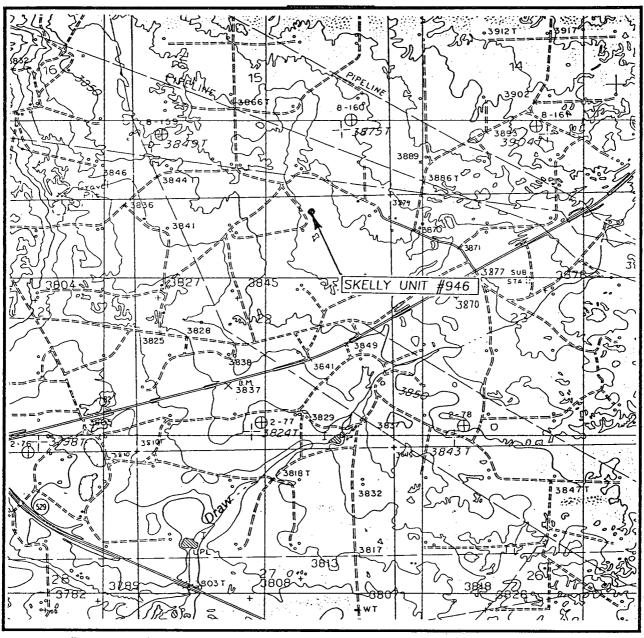

SCALE: 1" = 2000'

MALJAMAR, N.M.

CONTOUR INTERVAL: 10' MALJAMAR, N.M.

SEC. <u>22</u> TWP. <u>17</u>	7-S_RGE. <u>31-E</u>
SURVEY	N.M.P.M.
COUNTY	EDDY
DESCRIPTION 330'	FNL & 1650' FEL
ELEVATION	3863'
OPERATOR Chevi	ronTexaco Corporation
LEASES	KELLY UNIT
U.S.G.S. TOPOGRAI	PHIC MAP

JOHN WEST SURVEYING HOBBS, NEW MEXICO (505) 393-3117

DRILLING PROGRAM

1. Geologic Name of Surface Formation

Quaternary

2. Estimated Tops of Important Geologic Markers:

Surface
505'
1025'
1600'
2450'
3200'
4700'

3. Estimated Depths of Anticipated Fresh Water, Oil and Gas:

Water Sand	150'	Fresh Water
Grayburg	2580'	Oil/Gas
San Andres	3200'	Oil/Gas
Paddock	4800'	Oil/Gas

No other formations are expected to give up oil, gas or fresh water in measurable quantities. Setting 13 3/8" casing to 450' and circulating cement back to surface will protect the surface fresh water sand. Salt Section will be protected by setting 8 5/8" casing to 1620' and circulating cement back to surface. Any shallower zones above TD, which contain commercial quantities of oil and/or gas, will have cement circulated across them by cementing 5 1/2" production casing, which will be run at TD.

4. Casing Program:

Hole Size	Interval	OD Casing	Weight, Grade, Jt, Cond., Type
17 ½"	0-450'	13 3/8"	48#, J-55, ST&C, New, R-3
12 ¼"	0-1620'	8 5/8"	24#, J-55, ST&C, New, R-3
7 7/8"	0-TD	5 1/2"	17#, J-55, LT&C, New, R-3

Drilling Program Page 1

5. Cement Program:

- 13 3/8" Surface Casing: Circulate to Surface with Class C w/2% CaCl2.
- 8 5/8 Intermiate Casing: Circulate to Surface with Class C W/2% CaCl2.
- 5 1/2" Production Casing: Cement Casing with Class C w/6# Salt & 2/10 of 1% CFR-3 per sack. We will run a hole caliper and run sufficient cement to circulate to surface.

6. Minimum Specifications for Pressure Control:

The blowout preventer equipment (BOP) shown in Exhibit #9 will consist of a double ramtype (2000 psi WP) preventer. This unit will be hydraulically operated and the ram type preventer will be equipped with blind rams on top of 4 1/2" drill pipe rams on bottom. The BOP will be nippled up on the 13 3/8" surface casing and tested to 70% of the internal yield of the 13 3/8" casing. This will be tested with the Drilling Rig Pumps (which can test to 1500 psi). The BOP will then be nippled up on the 8 5/8" intermediate casing and tested by a 3rd party to 2000 psi and used continuously until TD is reached. All BOP's and accessory equipment will be tested to 2000 psi before drilling out of intermediate casing. Pipe rams will be operationally checked each 24-hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment (Exhibit #10) will include a Kelly cock and floor safety valve and choke lines and choke manifold (Exhibit #11) with 2000 psi WP rating.

7. Types and Characteristics of the Proposed Mud System:

The well will be drilled to TD with a combination of brine, cut brine and polymer mud system. The applicable depths and properties of this system are as follows:

DEPTH	TYPE	WEIGHT	VISCOSITY	WATERLOSS
0-450	Fresh Water	8.5	28	N.C.
450-16201	Brine	10	30	N.C.
1620°-TD	Cut Brine	9.1	29	N.C.

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept at the well site at all times.

8. Auxiliary Well Control and Monitoring Equipment:

- A. Kelly cock will be kept in the drill string at all times.
- B. A full opening drill pipe-stabbing valve with proper drill pipe connections will be on the rig floor at all times.

Drilling Program Page 2

9. Logging, Testing and Coring Program:

- A. The electric logging program will consist of GR-Dual Laterolog, Spectral Density, Dual Spaced Neutron, CSNG Log and will be ran from T.D. to 8 5/8 casing shoe.
- B. Drill Stem test is not anticipated.
- C. No conventional coring is anticipated.
- D. Further testing procedures will be determined after the 5 1/2" production casing has been cemented at TD based on drill shows and log evaluation.

10. Abnormal Conditions, Pressures, Temperatures and Potential Hazards:

No abnormal pressures or temperatures are anticipated. The estimated bottom hole at TD is 110 degrees and estimated maximum bottom hole pressure is 2300 psig. Low levels of Hydrogen sulfide have been monitors in producing wells in the area, so H2S may be present while drilling of the well a plan is attached to the Drilling program. No major loss of circulation zones has been reported in offsetting wells.

11. Anticipated Starting Date and Duration of Operations:

Road and location work will not begin until approval has been received from the BLM. The anticipated spud date is July 24, 2003. Once commenced, the drilling operation should be finished in approximately 10 days. If the well is productive, an additional 30 days will be required for completion and testing before a decision is made to install permanent facilities.


Drilling Program Page 3

SURFACE USE AND OPERATING PLAN

1. Existing & Proposed Access Roads

- A. The well site and elevation plat for the proposed well is shown in Exhibit #1. It was staked by John West Engineering, Hobbs NM.
- B. All roads to the location are shown in Exhibit below. The existing roads are illustrated in Blue and are adequate for travel during drilling and production operations. Upgrading existing roads prior to drilling well will be done where necessary.
- C. Directions to Location: Go 1 mile east of 529 on Hwy 82, turn north on CR 223, go 3/4 mile, turn east go 3/4 mile, south 1/10 mile, then northeast to location.
- D. Routine grading and maintenance of existing roads will be conducted as necessary to maintain their condition as long as any operations continue on this lease.

Exhibit #4

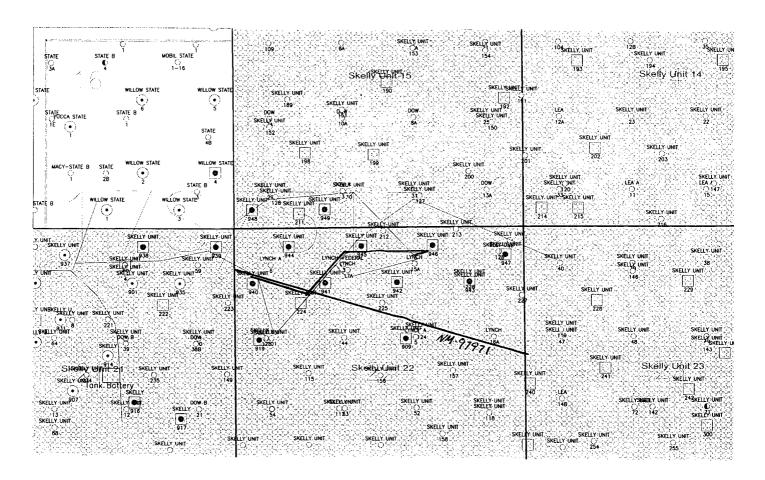

Surface Use Plan Page 4

Chevron USA Inc.

Hydrogen Sulfide Drilling Operation Plan

I. HYDROGEN SULFIDE TRAINING

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on this well:

- 1. The hazards an characteristics of hydrogen sulfide (H2S)
- 2. The proper use and maintenance of personal protective equipment and life support systems.
- 3. The proper use of H2S detectors alarms warning systems, briefing areas, evacuation procedures, and prevailing winds.
- 4. The proper techniques for first aid and rescue procedures.

In addition, supervisory personnel will be trained in the following areas:

- 1. The effects of H2S on metal components. If high tensile tubular are to be used, personnel well be trained in their special maintenance requirements.
- 2. Corrective action and shut-in procedures when drilling or reworking a well, and blowout prevention and well control procedures.
- 3. The contents and requirements of the H2S Drilling Operations Plan and Public Protection Plan.

There will be an initial training session just prior to encountering a known or probable H2S zone (within 3 days or 500 feet) and weekly H2S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H2S Drilling Operations Plan and the Public Protection Plan. This plan shall be available at the well site. All personnel will be required to carry documentation that they have received the proper training.

H2S Plan Page 11

II. H2S SAFETY EQUIPMENT AND SYSTEMS

Note: All H2S safety equipment and systems will be installed, tested, and operational when drilling reaches a depth of 500 feet above, or three days prior to penetrating the first zone containing or reasonable expected to contain H2S.

1. Well Control Equipment:

- A. Flare line.
- B. Choke manifold.
- C. Blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit.
- D. Auxiliary equipment may include if applicable: annular preventer & rotating head.

2. Protective equipment for essential personnel:

A. Mark II Survive air 30-minute units located in the doghouse and at briefing areas, as indicated on well site diagram.

3. H2S detection and monitoring equipment:

A. 1 portable H2S monitors positioned on location for best coverage and response. These units have warning lights and audible sirens when H2S levels of 20 PPM are reached.

4. Visual warning systems:

- A. Wind direction indicators as shown on well site diagram (Exhibit #8).
- B. Caution/Danger signs (Exhibit #7) shall be posted on roads providing direct access to location. Signs will be painted a high visibility yellow with black lettering of sufficient size to be readable at a reasonable distance from the immediate location. Bilingual signs will be used, when appropriate. See example attached.

5. Mud program:

A. The mud program has been designed to minimize the volume of H2S circulated to surface. Proper mud weight, safe drilling practices, and the use of H2S scavengers will minimize hazards when penetrating H2S bearing zones.

6. Metallurgy:

- A. All drill strings, casings, tubing, wellhead, blowout preventer, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H2S service.
- B. All elastomers used for packing and seals shall be H2S trim.

7. Communication:

- A. Radio communications in company vehicles including cellular telephone and 2-way radio.
- B. Land line (telephone) communication at Office.

8. Well testing:

- A. Drill stem testing will be performed with a minimum number of personnel in the immediate vicinity, which are necessary to safely and adequately conduct the test. The drill stem testing will be conducted during daylight hours and formation fluids will not be flowed to the surface. All drill-stem-testing operations conducted in an H2S environment will use the closed chamber method of testing.
- B. There will be no drill stem testing.

EXHIBIT #7

WARNING

YOU ARE ENTERING AN H2S

AUTHORIZED PERSONNEL ONLY


- 1. BEARDS OR CONTACT LENSES NOT ALLOWED
- 2. HARD HATS REQUIRED
- 3. SMOKING IN DESIGNATED AREAS ONLY
- 4. BE WIND CONSCIOUS AT ALL TIMES
- 5. CHECK WITH MACK ENERGY FOREMAN AT OFFICE

MACK ENERGY CORPORATION

1-505-748-1288

. . .

DRILLING LOCATION H2S SAFTY EQUIPMENT Exhibit # 8

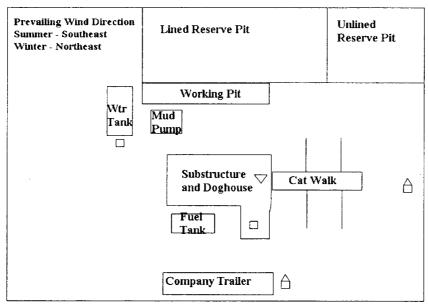

- ── H2S Monitors with alarms at the bell nipple
- ☐ Wind Direction Indicators
- Safe Briefing areas with caution signs and breathing equipment min 150 feet from

Blowout Preventer

Attachment to Exhibit #9 NOTES REGARDING THE BLOWOUT PREVENTERS

Skelly Unit #946 Eddy County, New Mexico


- 1. Drilling nipple to be so constructed that it can be removed without use of a welder through rotary table opening, with minimum I.D. equal to preventer bore.
- 2. Wear ring to be properly installed in head.
- 3. Blow out preventer and all fittings must be in good condition, 2000 psi WP minimum.
- 4. All fittings to be flanged.
- 5. Safety valve must be available on rig floor at all times with proper connections, valve to be full 2000 psi WP minimum.
- 6. All choke and fill lines to be securely anchored especially ends of choke lines.
- 7. Equipment through which bit must pass shall be at least as large as the diameter of the casing being drilled through.
- 8. Kelly cock on Kelly.
- 9. Extension wrenches and hands wheels to be properly installed.
- 10. Blow out preventer control to be located as close to driller's position as feasible.
- 11. Blow out preventer closing equipment to include minimum 40-gallon accumulator, two independent sources of pump power on each closing unit installation all API specifications.

Blowout Preventers Page 15


Chevron USA Inc. Blowout Preventer

Chevron USA Inc.

Exhibit #9 **BOPE Schematic**

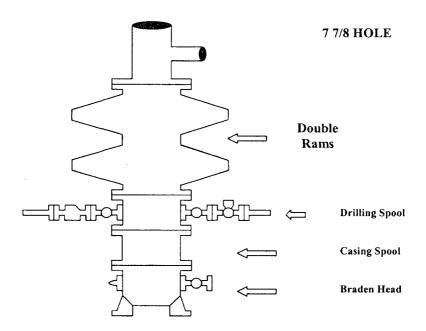

Choke Manifold Requirement (2000 psi WP) No Annular Required

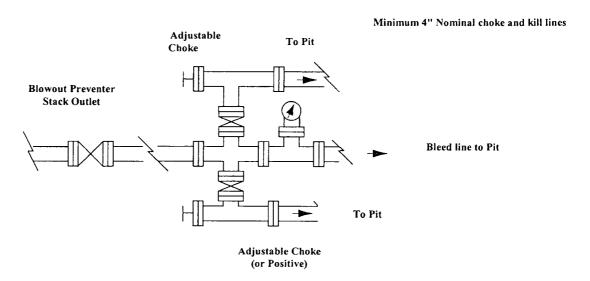


Chevron USA Inc.

Minimum Blowout Preventer Requirements

2000 psi Working Pressure 2 MWP EXHIBIT #10

Stack Requirements

	Stack Requireme	1113	
NO.	Items	Min.	Min.
		I.D.	Nominal
1	Flowline		2"
2	Fill up line		2"
3	Drilling nipple		
4	Annular preventer		
5	Two single or one dual hydraulically operated rams		
6a	Drilling spool with 2" min. kill line and 3" min choke line outlets		2" Choke
6b	2" min. kill line and 3" min. choke line outlets in ram. (Alternate to 6a above)		
7	Valve Gate Plug	3 1/8	
8	Gate valve-power operated	3 1/8	
9	Line to choke manifold		3"
10	Valve Gate Plug	2 1/16	
11	Check valve	2 1/16	
12	Casing head		
13	Valve Gate Plug	1 13/16	
14	Pressure gauge with needle valve		
15	Kill line to rig mud pump manifold		2"

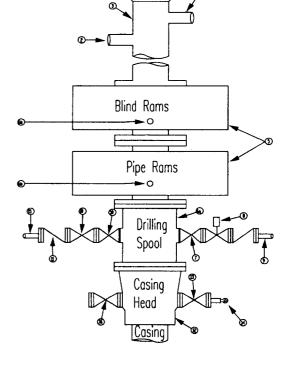

OPTIONAL

16	Flanged Valve	1 13/16	

CONTRACTOR'S OPTION TO FURNISH:

- All equipment and connections above bradenhead or casinghead. Working pressure of preventers to be 2000 psi minimum.
- Automatic accumulator (80 gallon, minimum) capable of closing BOP in 30 seconds or less and, holding them closed against full rated working pressure.
- BOP controls, to be located near drillers' position.
- Kelly equipped with Kelly cock.
- Inside blowout preventer or its equivalent on derrick floor at all times with proper threads to fit pipe being used.
- 6. Kelly saver-sub equipped with rubber casing protector at all times.
- 7. Plug type blowout preventer tester.
- 8. Extra set pipe rams to fit drill pipe in use on location at all times.
- Type RX ring gaskets in place of Type R.

MEC TO FURNISH:

- 1. Bradenhead or casing head and side valves.
- 2. Wear bushing. If required.

GENERAL NOTES:

- Deviations from this drawing may be made only with the express permission of MEC's Drilling Manager.
- 2. All connections, valves, fittings, piping, etc., subject to well or pump pressure must be flanged (suitable clamp connections acceptable) and have minimum working pressure equal to rated working pressure of preventers up through choke valves must be full opening and suitable for high pressure mud service.
- Controls to be of standard design and each marked, showing opening and closing position
- 4. Chokes will be positioned so as not to hamper or delay changing of choke beans.


 Replaceable parts for adjustable choke, or bean

- sizes, retainers, and choke wrenches to be conveniently located for immediate use.
- All valves to be equipped with hand-wheels or handles ready for immediate use.
- 6. Choke lines must be suitably anchored.
- Handwheels and extensions to be connected and ready for use.
- Valves adjacent to drilling spool to be kept open. Use outside valves except for emergency.
- All seamless steel control piping (2000 psi working pressure) to have flexible joints to avoid stress. Hoses will be permitted.
- Casinghead connections shall not be used except in case of emergency.
- 11. Do not use kill line for routine fill up operations.

Chevron USA Inc. Blowout Preventer

Chevron USA Inc.

Exhibit #11
MIMIMUM CHOKE MANIFOLD
3,000, 5,000, and 10,000 PSI Working Pressure
2 M will be used or greater
3 MWP - 5 MWP - 10 MWP

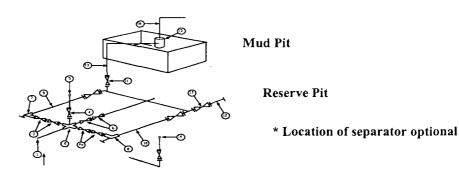

Below Substructure

Mimimum requirements


		3,000 MWP 5,00				,000 MWP					
No.		I.D.	NOMINAL	Rating	I.D.	Nominal	Rating	I.D.	Nominal	Rating	
1	Line from drilling Spool		3"	3,000		3"	5,000		3"	10,000	
2	Cross 3" x 3" x 3" x 2"			3,000			5,000				
2	Cross 3" x 3" x 3" x 2"									10,000	
3	Valve Gate Plug	3 1/8		3,000	3 1/8		5,000	3 1/8		10,000	
4	Valve Gate Plug	1 13/16		3,000	1 13/16		5,000	1 13/16		10,000	
4a	Valves (1)	2 1/16		3,000	2 1/16		5,000	2 1/16		10,000	
5	Pressure Gauge			3,000			5,000			10,000	
6	Valve Gate Plug	3 1/8		3,000	3 1/8		5,000	3 1/8		10,000	
7	Adjustable Choke (3)	2"		3,000	2"		5,000	2"		10,000	
8	Adjustable Choke	1"		3,000	1"		5,000	2"		10,000	
9	Line		3"	3,000		3"	5,000		3"	10,000	
10	Line		2"	3,000		2"	5,000		2"	10,000	
11	Valve Gate Plug	3 1/8		3,000	3 1/8		5,000	3 1/8		10,000	
12	Line		3"	1,000		3"	1,000		3"	2,000	
13	Line		3"	1,000		3"	1,000		3"	2,000	
14	Remote reading compound Standpipe pressure quage			3,000			5,000			10,000	
15	Gas Separator		2' x5'			2' x5'			2' x5'		
16	Line		4"	1,000		4"	1,000		4"	2,000	
17	Valve Gate Plug	3 1/8		3,000	3 1/8		5,000	3 1/8		10,000	

- (1) Only one required in Class 3M
- (2) Gate valves only shall be used for Class 10 M
- (3) Remote operated hydraulic choke required on 5,000 psi and 10,000 psi for drilling.

EQUIPMENT SPECIFICATIONS AND INSTALLATION INSTRUCTION

- 1. All connections in choke manifold shall be welded, studded, flanged or Cameron clamp of comparable rating.
- 2. All flanges shall be API 6B or 6BX and ring gaskets shall be API RX or BX. Use only BX for 10 MWP.
- 3. All lines shall be securely anchored.
- 4. Chokes shall be equipped with tungsten carbide seats and needles, and replacements shall be available.
- 5. Choke manifold pressure and standpipe pressure gauges shall be available at the choke manifold to assist in regulating chokes. As an alternate with automatic chokes, a choke manifold pressure gauge shall be located on the rig floor in conjunction with the standpipe pressure gauge.
- 6. Line from drilling spool to choke manifold should bee as straight as possible. Lines downstream from chokes shall make turns by large bends or 90 degree bends using bull plugged tees.

Blowout Preventers Page 18





August 25, 2003

Oil Conservation Division Attn: Bryan Arrant 1301 W. Grand Avenue Artesia, NM 88210

Re: ROE for Skelly Unit Wells Sec. 22 & 15 T17S R31E

Dear Mr. Arrant:

Per our conversation, I am requesting that you to please approve the Drilling of the Skelly Unit Wells. The H2S concentration from Paddock wells in these sections is low enough that no contingency plan needs to be submitted for these wells or facilities.

If we can be of any further assistance, please feel free to call.

Sincerely,

MACK ENERGY CORPORATION

Jerry W. Sherrell Production Clerk

JWS/

