

# **OCD-ARTESIA**

Month - Year FEB 2:0 2007 OCD - ARTESIA, NIM

Form 3160-3 (April 2004)

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

FORM APPROVED OMB No. 1004-0137 Expires March 31, 2007

5.	Lease Serial No.
	NM NM 115997

6.	If Indian,	Allotee	or	Tribe	Name
----	------------	---------	----	-------	------

APPLICATION FOR PERMIT TO	DRILL OR	REENTER		6. If Indian, Allotee or	I fide Name		
la. Type of work: DRILL REENT	ER			7. If Unit or CA Agreem			
lb. Type of Well: Oil Well Gas Well Other		<u> </u>	le Zone	8. Lease Name and Wel Hoss Cartwright	1110	33 ral#1 <del> </del>	
2. Name of Operator 2. 3028 7 Parallel Petroleum Corporation ROS	well Contro	lled Water Basi	n	9 API Well No.	5 - 6	3901	
3a. Address 1004 North Big Spring, Suite 400 Midland, Texas		. (include area code)	ld co	10. Field and Pool, or Exp		<del></del> )	
4. Location of Well (Report location clearly and in accordance with a				11. <b>\$ec.,</b> T. R. M. or Blk.:	and Survey or A	Area	
At surface 1598' FSL and 94' FWL, Sec 4, T2  At proposed prod. zone 1598' FSL and 660' FWL, Sec 5, 2				5-T20S-R20E			
4. Distance in miles and direction from nearest town or post office*				12. County or Parish	13. Sta		
15 miles south of Hope, New Mexico	1			Chaves	<del>  </del>	NM	
5. Distance from proposed* location to nearest	16. No. of a	cres in lease	17. Spacin	g Unit dedicated to this well	ı		
property or lease line, ft. (Also to nearest drig. unit line, if any)  660'	2091.85		320				
Distance from proposed location*     to nearest well, drilling, completed,	19. Proposed Depth 20. BLM/			BIA Bond No. on file			
applied for, on this lease, ft.	5,200'		NMB	000265			
I. Elevations (Show whether DF, KDB, RT, GL, etc.) GL 4859'	22. Approxi	mate date work will sta	rt*	23. Estimated duration			
GL 4839	24 844-	02/15/2007		30 days			
he following, completed in accordance with the requirements of Onsh	24. Attac		441141-	:- f			
Well plat certified by a registered surveyor.     A Drilling Plan.	iote Oil and Gas			ns unless covered by an ex	isting bond on	file (see	
A Surface Use Plan (if the location is on National Forest Syster SUPO shall be filed with the appropriate Forest Service Office).	n Lands, the	<ul><li>5. Operator certifie</li><li>6. Such other site authorized office</li></ul>	specific inf	ormation and/or plans as m	ay be required	by the	
5. Signature	Name	(Printed/Typed)		D	ate		
What Wahan		Deane Durham			01/08/200	<u> </u>	
itle Drilling Engineer, Parallel Petroleum Corporat	ion						
pproved by (Signature) /s/James Second!	Name	(Printed/Typed)		D	Pate FEB	16 20	
ACTING FIFI D MANAGED	Office	CAI	RLSB	AD FIELD OF	Pica		
pplication approval does not warrant or certify that the applicant ho	olds legal or equi	table title to those righ	its in the sul	piect lease which would enti	itle the applicar	nt to	
onduct operations thereon. Conditions of approval, if any, are attached.				APPROVAL			
itle 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a tates any false, fictitious or fraudulent statements or representations a	crime for any p	erson knowingly and vithin its jurisdiction.	willfully to r	nake to any department or	agency of the	Jnited	

\*(Instructions on page 2)

**SEE ATTACHED FOR CONDITIONS OF APPROVAL** APPROVAL SUBJECT TO GENERAL REQUIREMENTS AND SPECIAL STIPULATIONS **ATTACHED** 



D'STRICT I 16 N. French Dr., Hobbs, NM 88240

1301 W. Grand Avenue, Artesia, NM 88210

DISTRICT III 1000 Rio Brazos Rd., Aztec, NM 87410

NOTE:

State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION 1220 South St. Frances Dr. Santa Fe, NM 87505

Form C-102 Revised October 12, 2005 Submit to Appropriate District Office

State Lease - 4 Copies Fee Lease - 3 Copies

□ AMENDED REPORT

### DISTRICT IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

### WELL LOCATION AND ACREAGE DEDICATION PLAT 99489 Pool Name API Number Wolfcamp Wildcat: Property Code Property Name Well Number HOSS CARTWRIGHT 2020-5 FEDERAL 1 H

# Operator Name Elevation OGRID No. PARALLEL PETROLEUM CORPORATION 4859

### Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
L	4	20 S	20 E		1598	SOUTH	94	WEST	CHAVES

### Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
L	5	20 S	20 E		1598	SOUTH	660	WEST	CHAVES
Dedicated Acres	Joint or	Infill (	Consolidation (	Code Or	der No.			•	
320									

### NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

# Plane Coordinates shown hereon are Transverse Mercator Grid and Conform to the "New Mexico Coordinate System", New Mexico East Zone, North American Datum of 1927. Distances shown hereon are mean horizontal surface values. T-19-S Project Area (SD 4862.2' 6601 (SL) -1036660' BHL) 4841.0 598 4858. 598, Producing Area

Coordinate Table							
Description	Plane Coordinate						
Hoss Cartwright 2020-5 Federal #1							
Surface Location	Y = 581,565.9						
Hoss Cartwright 2020-5 Federal #1							
Penetration Point	Y = 581,570.0						
Hoss Cartwright 2020-5 Federal #1	X = 317,696.6						
Bottom Hole Location	Y = 581,591.5						

# OPERATOR CERTIFICATION

I hereby certify the the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns of working interest or unleased mineral interestin the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division

Signature

Deane Dunham

Printed Name

### SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervison and that the same is true and correct to the best of my belief.

December 19, 2006

Date of Survey

· LVA

Signature & Seal of Professional Surveyor

W.O. Num. 2006-1266

Certificate No. MACON MCDONALD

12185

# ATTACHMENT TO FORM 3160-5 HOSS CARTWRIGHT 2020-5 FEDERAL #1 # Surface Hole Location 1598 FSL AND 94 FWL, SEC 4, 20S, 20E Bottom Hole Location 1598 FSL AND 660 FWL, SEC 5, 20S, 20E CHAVES COUNTY, NEW MEXICO

# **DRILLING PROGRAM**

This well is designed as a horizontal test in the Wolfcamp formation.

# 1. GEOLOGIC NAME OF SURFACE FORMATION

San Andres

# 2. ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS

GL 4859' Glorieta 2439'(+2420') Tubb 3445'(+1414') Yeso 3585' (+1274') Abo Shale 4085' (+774') Abo Carbonate 4199' (+660') Wolfcamp 5037' (-178') Wolfcamp Shale 5130'(-271') TD 5200' Pilot Hole

# 3. ESTIMATED DEPTHS OF ANTICIPATED FRESH WATER, OIL, OR GAS

Fresh water

790'

Oil and Gas

Wolfcamp 5037' (-178')

No H<sub>2</sub>S gas should be encountered

# 4. CASING AND CEMENTING PROGRAM

Casing Size	From To	<u>Weight</u>	<u>Grade</u>	<u>Joint</u>
16" conductor	0'-120'			
8 5/8"	0' – 1500'	24#	J-55	STC
5 1/2"	0' - 9,428'	17#	N-80	LTC

Equivalent or adequate grades and weights of casing may be substituted at time casing is run, depending on availability.

8-5/8" slurry: Lead: 125 sacks (50:50) Poz (Fly Ash): Class C + 5% bwow Sodium Chloride + 10% bwoc Bentonite + 151.7% fresh water. Tail: 200 sacks Class C + 1% bwoc Calcium Chloride + 56.3% fresh water

Note: If cement does not circulate to surface, notify BLM. A temperature survey will be required. Top out to surface with 1" pipe in the annulus.

Note: 5-1/2" Cement casing with enough volume to circulate to surface plus 25%. (Acid soluble CMT). Lead - 560 sacks 50:50 Poz (Fly Ash):Class C CMT + 10% Bentonite + 0.2% FL-52A + 0.2% Sodium Metasilicate + 141% fresh water. Tail - 560 sacks Class H CMT + 0.6% BA-10 + 0.4% CD-32 + 1% FL-62 + 0.1% ASA-301 + 0.4% Sodium Metasilicate + 20 lbs/sack calcium carbonate + 53% fresh water. Cement must tie back to surface casing per completion procedure.

# **Drilling Procedure**

- a. Set 16" conductor pipe as deep as possible up to 120' with a rathole unit.
- b. Drill 11" surface hole to an approximate depth of 1500', using fresh water and viscous sweeps for hole cleaning. Set 8 5/8", 24# J-55 casing with 460 sx, Class C cement (lead will be 50/50 Poz, circulate to surface, 1" if necessary).
- c. Set slips on 8 5/8" CSG. Cut 8 5/8" CSG and NU & test BOP.
- d. Drill 7 7/8" production hole to 5200', using cut brine to an approximate depth of 4000' and a polymer mud system to TD.
- e. Run open-hole logs
- f. Set CMT kick-off plug.
- g. Dress CMT to kick off point at approximately 4283'.
- h. Build angle at 7.6 degrees per 100' to 90 degrees and hold.
- i. Drill 7 7/8" horizontal drain hole to a terminus of 660' FWL.
- j. Run 5 ½" 17# N-80 CSG to TD. Cement with enough volume to circulate to surface plus 25%. (Acid soluble CMT). Lead 560 sacks 50:50 Poz (Fly Ash):Class C CMT + 10% Bentonite + 0.2% FL-52A + 0.2% Sodium Metasilicate + 141% fresh water. Tail 560 sacks Class H CMT + 0.6% BA-10 + 0.4% CD-32 + 1% FL-62 + 0.1% ASA-301 + 0.4% Sodium Metasilicate + 20 lbs/sack calcium carbonate + 53% fresh water. Cement must tie back to surface casing per completion procedure.
- k. Rig Down Rotary Tools

# 5. MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL

The BOP stack will consist of a 3,000 psi working pressure, dual ram type preventer and annular.

A BOP sketch is attached.

# 6. TYPES AND CHARACTERS OF THE PROPOSED MUD SYSTEM

- a. Spud and drill to 1,500' with 8.3 ppg Fresh Water system and viscous sweeps for hole cleaning.
- c. The production section from 1,500' to 4,000' will utilize a cut brine mud system.
- d. The remaining production section from 4,000' to TD will be a polymer mud system with mud weight sufficient to control formation pressures.

# 7. AUXILIARY WELL CONTROL AND MONITORING EQUIPMENT

None required.

# 8. LOGGING, TESTING, AND CORING PROGRAM

Mud logs as well as DLL/CNL/LDT/CAL/GR logging is planned. Drill stem tests, cores and sidewall cores are possible. No MWD GR will be used.

# 9. <u>ABNORMAL CONDITIONS, PRESSURES, TEMPERATURES & POTENTIAL HAZARDS</u>

None anticipated.

BHP expected to be 2,100 psi.

# 10. ANTICIPATED STARTING DATE:

It is planned that operations will commence around first quarter of 2007 with drilling and completion operation lasting about 30 days.

# SURFACE AND OPERATIONS PLAN FOR DRILLING, COMPLETION, AND PRODUCING

# PARALLEL PETROLEUM CORPORATION HOSS CARTWRIGHT 2020-5 FEDERAL #1 SHL: 1598' FSL AND 94' FWL, SEC 4, T20S, R20E CHAVES COUNTY, NEW MEXICO

Well will share a drilling location with the Ben Cartwright 2020-4 Federal #1

# LOCATED:

15 miles South of Hope, New Mexico

# OIL & GAS LEASE:

NM NM 115997

# **RECORD LESSEE:**

Upland Corporation P.O. Box 582 Midland, Texas 79702

# BOND COVERAGE:

\$25,000 statewide bond # NMB000265 of Parallel Petroleum Corporation

# **ACRES IN LEASE:**

2091.85

# **SURFACE OWNER:**

Federal

# **SURFACE TENANT:**

John Woodburn P.O. Box 1477 Hope, NM 88250 505-687-4312

# POOL:

Wolfcamp

### **EXHIBITS:**

- A. Area Road Map
- B. Drilling Rig Layout
- C. Pad Elevation Plat
- D. Vicinity Map
- E. Area Production Map
- F. Topographic & Location Verification Map
- F-1. Topographic map of Cowboy Area access roads and locations
- G. Well Location & Acreage Dedication Map (NMOCD Form C-102)
- H. NMOCD Form C-144, Pit Registration (Original forwarded to NMOCD)
- I. Blow Out Preventer (BOP) Schematic
- J. Choke Manifold Schematic
- K. Estimated Horizontal Survey Calculation Program
- L. Estimated Wellbore Plot

# 1. EXISTING ROADS

- A. Exhibits A and D are area road maps showing existing roads in the vicinity of the site.
- B. Exhibit F and F-1 is a topographic map of the location showing existing roads and the proposed new access road.

# 2. ACCESS ROADS

# A. Length and Width

The access road will be built as shown on Exhibit F and F-1. The existing access road will come off County Road 20 (Bronc Road) and go west 1.3 mile on a former Chaves County maintained road. At the fork take the right (north) road and go 1.4 mile to the location. All of these roads are existing two track ranch roads. The first 1.3 mile of road is formerly Chaves County maintained and improvement to the section of road will be coordinated with the Chaves County Road and Bridge Department. All of the access road will be surfaced with caliche and will be 16' to 24' wide with a total length of 2.7 miles.

# B. Surface Material

Caliche from a commercial source.

# C. Maximum Grade

Less than five percent.

# D. Turnouts

No turnouts are planned for the access road.

# E. Drainage Design

Two low water crossings will be constructed on this section of the access road.

# F. Culverts

It is not anticipated that any culverts will be needed on the access road at this time.

# G. Gates and Cattle Guards

Two cattle guards and gates will be installed on the fence lines in sections 16 and 5.

# 3. LOCATION OF EXISTING WELLS

Existing wells in the immediate area are shown in Exhibit "E".

# 4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES

Necessary production facilities for this well will be located on the well pad.

# 5. LOCATION AND TYPE OF WATER SUPPLY

A water well may be drilled on this location as water supply for both drilling and completion. Upon completion of operations on this site the well may be used for drilling of additional wells on this lease. The well will be made available for the surface tenant upon completion of drilling in this area to use as stock water. A permit will be secured from the New Mexico Office of the State Engineer for this water well. In the alternative, water will be secured and trucked or transported by poly line to the location from a commercial source.

# 6. METHODS OF HANDLING WASTE DISPOSAL

- A. Drilling fluids will be allowed to dry in the drilling pits until the pits are closed.
- B. Water produced during tests will be disposed of in the drilling pits.
- C. Oil produced during tests will be stored in test tanks.
- D. Trash will be contained in a trash trailer and removed from well site.
- E. All trash and debris will be removed from the well site within 30 days after finishing drilling and/or completion operations.

F. The reserve pit will be closed according to BLM and NMOCD regulations and guidelines. This will include leaving the drill cuttings in place in the pit, allowing them to dry, and covering the pit with at least 3' of backfill while not disturbing the pit liner. The cuttings may also be placed in a lined trench along side the drilling pit for disposal. If this disposal method is used the cuttings will be covered with a plastic liner and then covered with a minimum of 3' of backfill.

# 7. <u>ANCILLARY FACILITIES</u>

None required.

# 8. WELL SITE LAYOUT

Exhibit B shows the relative location and dimensions of the well pad, mud pits, reserve pit, and the location of major rig components. Drill site orientation is shown on Exhibit C.

# 9. PLANS FOR RESTORATION OF THE SURFACE

- A. After completion of drilling and/or completion operations, all equipment and other material that will not be used for lease operations will be removed from the site.
- B. After abandonment, all equipment, trash, and debris will be removed and the site will be reclaimed as according to BLM permit stipulations.

# 10. OTHER INFORMATION

### A. Topography

The project is located on open, rolling ridge slopes, with Southeast exposure. The regional drainage of the site being to the south and east to an unnamed tributary of Sargent Canyon.

### B. Soil

Soils are very thin and shallow, tan/pink/grey loamy sandy silts, overlying limestone bedrock.

# C. Flora and Fauna

The location is located on a ridge and the vegetation consist of broom snakeweed, grasses, creosote, cholla, yucca catclaw, prickly pear, beargrass and various species of cacti.

# D. Ponds and Streams

An unnamed tributary of Sargent Canyon, an intermittent stream which flows west to east, is located 1/2 mile south of the site. There are no other rivers, lakes, ponds, or streams in the area.

# E. Residences and Other Structures

The Woodburn Ranch headquarters is located 2 miles south of the site.

# F. Archaeological, Historical, and Cultural Sites

See archaeological report to be submitted by:

Southern New Mexico Archaeological Services, Inc., P.O. Box 1

Bent, New Mexico 88314 Phone 505-671-4797

# G. <u>Land Use</u> Grazing

# H. Surface Ownership Federal

# 11. OPERATOR'S REPRESENTATIVE

Deane Durham, Engineer Parallel Petroleum Corporation 1004 North Big Spring Street, Suite 400 Midland, Texas 79701 Office: (432) 684-3727

# 12. <u>CERTIFICATION</u>


I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and, that the work associated with the operations proposed herein will be performed by Parallel Petroleum Corporation and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved.

1-8-07

Date

Name: Deane Durham

Title: Engineer

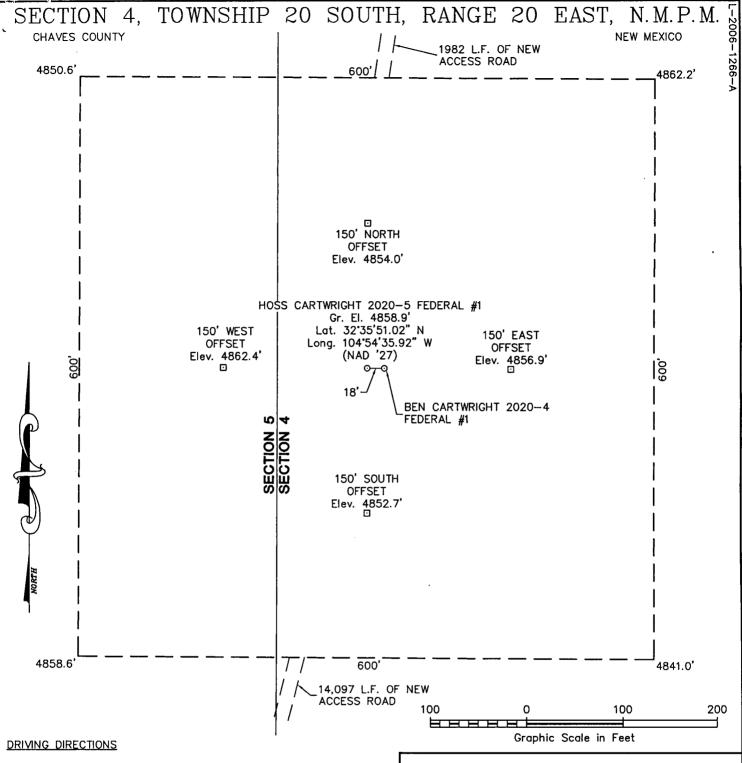

FROM THE INTERSECTION OF U.S. HIGHWAY 82 AND STATE HIGHWAY 449 IN HOPE, NM GO SOUTH ON SAID STATE HIGHWAY 449 2.2 MILES TO THE END OF SAID STATE HIGHWAY 449 AND THE BEGINNING OF COUNTY ROAD 12, THEN CONTINUE SOUTH ANOTHER 4.8 MILES (6.9 TOTAL) TO A FORK IN THE ROAD, THE INTERSECTION OF SAID COUNTY ROAD 12 AND A LEASE ROAD HEADING SOUTHWEST (RIGHT FORK), THEN GO SOUTHWEST ALONG SAID LEASE ROAD 15.0 MILES TO A NEW ACCESS ROAD ON NORTH (RIGHT) SIDE OF ROAD, THEN GO NORTHEAST ALONG SAID ACCESS ROAD 2.7 MILES TO THE PROPOSED LOCATION.



110 W. LOUISIANA, STE. 110 MIDLAND TEXAS, 79701 (432) 687-0865 - (432) 687-0868 FAX


# PARALLEL PETROLEUM CORPORATION

# HOSS CARTWRIGHT 2020-5 FEDERAL #1

Located 1598' FSL & 94' FWL, Section 4
Township 20 South, Range 20 East, N.M.P.M.
Chaves County, New Mexico

Drawn By: LVA	Date: December 21, 2006
Scale: 1"=100'	Field Book: 348 / 64-66
Revision Date:	Quadrangle: South Taylor Tank
W.O. No: 2006-1266	Dwg. No.: L-2006-1266-A

# LOCATION VERIFICATION MAP

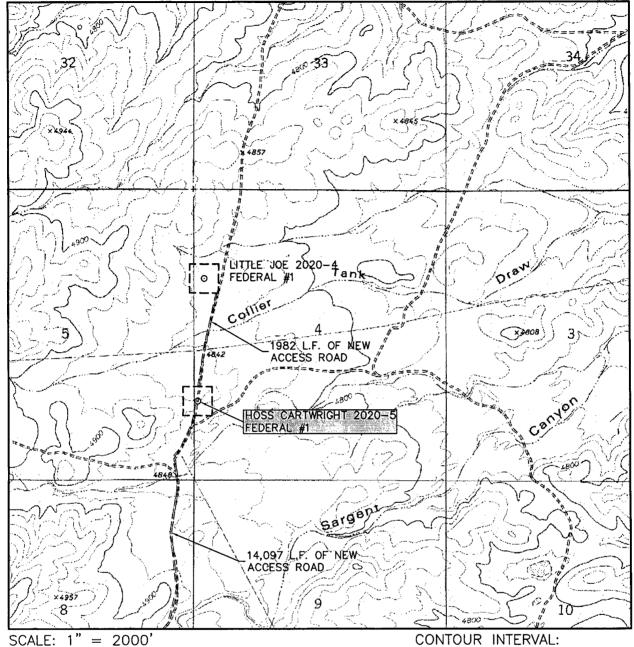

CONTOUR INTERVAL: SOUTH TAYLOR TANK - 20'

SEC. 4 TWP. 20-S RGE. 20-E

SURVEY N.M.P.M.

COUNTY CHAVES

DESCRIPTION 1598' FSL & 94' FWL

ELEVATION 4859'

OPERATOR PARALLEL PETROLEUM CORPORATION


LEASE HOSS CARTWRIGHT 2020-5 FEDERAL

U.S.G.S. TOPOGRAPHIC MAP SOUTH TAYLOR TANK, N.M.



**EXHIBIT F** 


110 W. LOUISIANA, STE. 110 MIDLAND TEXAS, 79701 OF Midland, Inc. (432) 687–0865 – (432) 687–0868 FAX

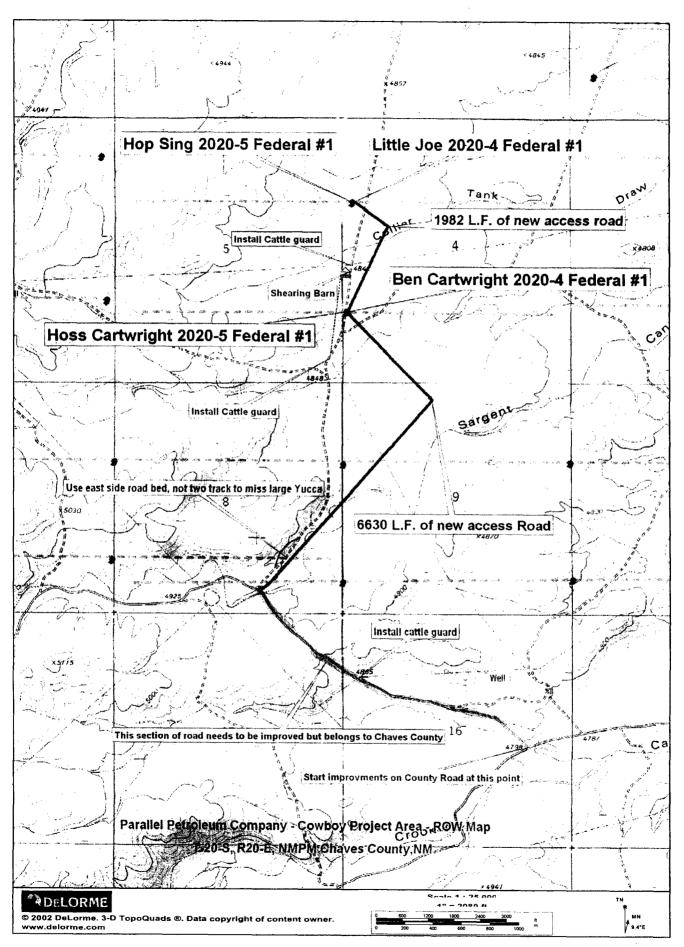

# HIGHLANDER ENVIRONMENTAL CORP. MIDLAND, TEXAS PARALLEL PETROLEUM BOP SCHEMATIC EXHIBIT I CASING HANGER, CASING SPOOL, BRADEN HEAD DATE 7/26/05 DWN. 871 BLIND RAMS PIPE RAMS NOT TO SCALE DRILL FILL ANNUIAR TYPE PREFENTER OR ROTATING HEAD (OPTIONAL) DRILLING NIPPLE OPTION MUST INCLUDE A FILL-UP LINE DO NOT USE KILL LINE FOR FILL UP

MINIMUM BOP SCHEMATIC



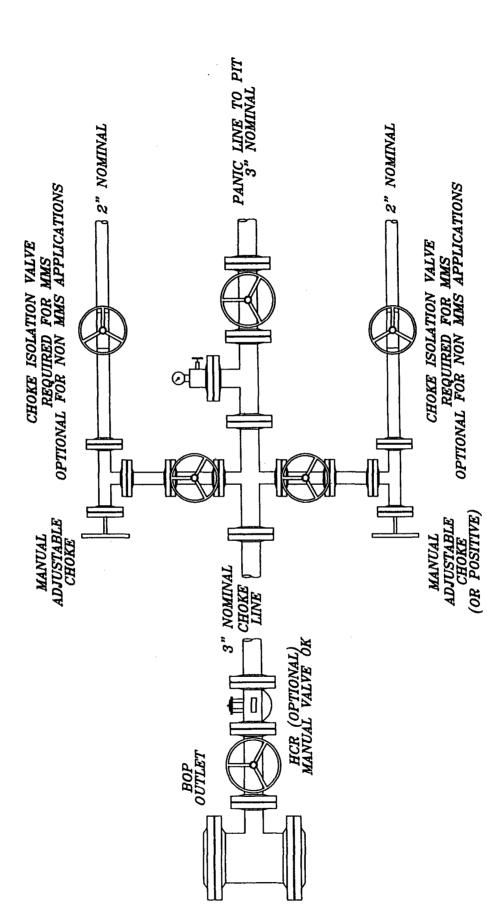

HIGHLANDER ENVIRONMENTAL CORP.
MIDLAND, TEXAS

DATE: 8/17/05
UNIC. BY:
UNIC. BY:
CONSEQUENCES
CONSEQUENCES
CONSEQUENCES

NOT TO SCALE

PARALLEL PETROLEUM CHOKE MANIFOLD

EXHIBIT J

11	PET	AR	A L UM CORF	LE		JRVEY (	CALCULA	ATION	PROGR	AM	
OPER	ATOR:		Parallel Pe	troleum (	Corporation	on	Superviso	rs:			
WELL			Hoss Cart								
LOCA	TION:		Sec. 5 T-2	0-S R-20-E							
API N	UMBER						Š.				
			COMM	ENTS:							
								MAG D			
									ORR.(-/+)	1	
								TOTAL	CORR.(-/+)	0.0	<u>)                                    </u>
		DATE	01/04/07		TIME;	5:51 PM	TRUE TO GRI	D			▼
MINIME	M CURV	ATURE C	ALCULATION	IS(SPE-3362	e) Pl	ROPOSED	DIRECTION	270.0	TARGET T	RACK NTER	ING
SVY NUM	ΜĐ	INC	GRID AZM	TVD	VERT SECT	N-S	E-W	DLS/ 100	ABOVE(+) BELOW(-)		
TIE	0	0.0	0.0	0.0	0.0	0.0	0.0				
1	4283	0.0	0.0	4283.0	0.0	0.0	0.0	0.0	754.0	0.0	0
2	4293	0.8	270.0	4293.0	0.1	0.0	-0.1	7.6	744.0	0.0	0
3	4303	1.5	270.0	4303.0	0.3	0.0	-0.3	7.6	734.0	0.0	0
4	5468	90.0	270.0	5037.4	754.4	0.0	-754.4	7.6	-0.4	0.6	0
5	9428	90.0	270.0	5037.4	4714.4	0.0	-4714.4	0.0	-0.4	0.6	0

KOP @ 4283' MD BUR = 7.6 DEG per 100 FT End Curve @ 5468' MD, 5037' TVD BHL @ 9428' MD, 5037' TVD, 4714' VS

# EXHIBIT L


# Parallel Petroleum Corp.


Parallel Petroleum Corp. 1004 N. Big Spring, Ste 400 Midland, Texas 79701

COMPANY DETAILS

# Hoss Cartwright 2020-5 Federal #1 Sec. 5, T-20-S, R-20-E Eddy County, New Mexico

East(+)/West(-) (200f/in)

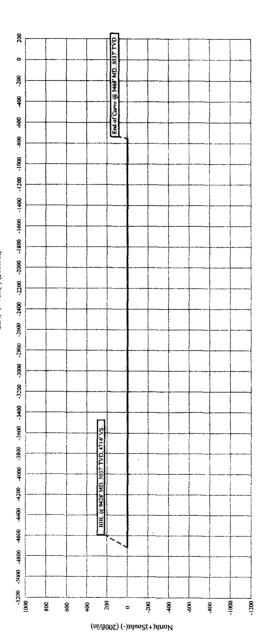

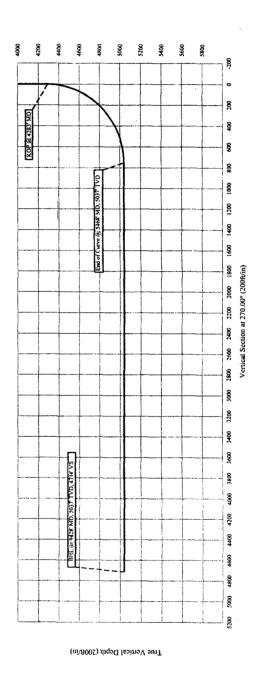



1004 North Big Spring, Suite 400 • Midland, TX 79701 • Ph: 432-684-3727 • Fax: 432-685-6580

June 12, 2006

Mr. Bryan Arrant New Mexico Oil Conservation Division 1301 W. Grand Ave. Artesia, New Mexico 88210

Re: Hydrogen Sulfide Potential

South Hope Area Wolfcamp Program

SW Chaves and Eddy Counties, New Mexico

Dear Mr. Arrant:

Parallel Petroleum Corporation operates the Boxtop 1921-1 Federal #1 well located in Section 1, T-19-S, R-21-E. The well which was tested in the Wolfcamp formation did not have any indications of hydrogen sulfide from this formation. We believe the potential for it on locations in this area are negligible. There are no occupied dwellings in the area of these new drilling locations.

Should you need any additional information regarding this issue, please contact me at the address or phone number listed or email at <a href="mailto:ddurham@plll.com">ddurham@plll.com</a>.

Sincerely,

A. Deane Durham Senior Engineer

### CONDITIONS OF APPROVAL - DRILLING

Well Name & No.

Hoss Cartwright 2020-5 Federal # 1

Operator's Name:

Parallel Petroleum Corp.

Location:

1598'FSL, 94'FWL, SEC4, T20S, R20E, Chaves County, NM 1598'FSL, 660'FWL, SEC5, T20S, R20E, Chaves County, NM

BHL: Lease:

NM-115997

# **I. DRILLING OPERATIONS REQUIREMENTS:**

1. The Bureau of Land Management (BLM) is to be notified at the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220, (505) 361-2822 for wells in Eddy County; and the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (505) 393-3612 for wells in Lea County, in sufficient time for a representative to witness:

# A. Spudding

B. Cementing casing: 16 inch, 8.625 inch, 5.5 inch

# C. BOP tests

- 2. A Hydrogen Sulfide (H2S) Drilling Plan should be activated prior to drilling into the <u>N/A</u> Formation. A copy of the plan shall be posted at the drilling site.
- 3 Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
- 4. Submit a Sundry Notice (Form 3160-5, one original and five copies) for each casing string, describing the casing and cementing operations. Include pertinent information such as; spud date, hole size, casing ( size, weight, grade and thread type), cement (type, quantity and top), water zones and problems or hazards encountered. The Sundry shall be submitted within 15 days of completion of each casing string. The reports may be combined into the same Sundry if they fall within the same 15 day time frame.
- 5. The API No. assigned to the well by NMOCD shall be included on the subsequent report of setting the first casing string.
- 6. A Communitization Agreement covering the acreage dedicated to this well must be filed for approval with the BLM. The effective date of the agreement shall be prior to any sales.
- 7. Gamma-Ray/Neutron logs shall be run from the base of the Salado Formation to the surface; cable speed not to exceed 30 feet per minute.

### II. CASING:

- 1. The <u>8.625</u> inch surface casing shall be set <u>@ APPROXIMATELY 1500 FEET</u>, below usable water and cement circulated to the surface. If cement does not circulate to the surface the appropriate BLM office shall be notified and a temperature survey or cement bond log shall be run to verify the top of the cement. Remedial cementing shall be completed prior to drilling out that string.
- 2. The minimum required fill of cement behind the <u>5-1/2</u> inch production casing is <u>cement shall</u> <u>CIRCULATE TO 200 feet inside the surface casing.</u>
- 3. Whenever a casing string is cemented in the R-111-P Potash Area, cement shall be allowed to stand a minimum of twelve (12) hours under pressure and a total of twenty-four (24) hours before drilling the plug or initiating tests.

# III. PRESSURE CONTROL:

- 1. All BOP systems and related equipment shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2. The BOP and related equipment shall be installed and operational before drilling below the <u>8.625</u> inch casing shoe and shall be tested as described in Onshore Order No. 2. Any equipment failing to test satisfactorily shall be repaired or replaced.
- 2. Minimum working pressure of the blowout preventer and related equipment (BOPE) is 2000 psi.
- 3. The appropriate BLM office shall be notified in sufficient time for a representative to witness the tests.
- A variance to test the \_\_\_\_\_ to the reduced pressure of \_\_\_\_psi with the rig pumps is approved.
- The tests shall be done by an independent service company.
- The results of the test shall be reported to the appropriate BLM office.
- Testing fluid must be water or an appropriate clear liquid suitable for sub-freezing temperatures. Use of drilling mud for testing is not permitted since it can mask small leaks.
- Testing must be done in a safe workman-like manner. Hard line connections shall be required.

Engineers can be reached at 505-706-2779 for any variances that might be necessary.

F Wright 1/29/07