

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals

SUBMIT IN TRIPLICATE - Other instructions on page 2

1. Type of Well <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. NM 96222
2. Name of Operator DEVON ENERGY PRODUCTION COMPANY, LP		6. If Indian, Allottee or Tribe Name
3a. Address 20 North Broadway, Ste 1500, Oklahoma City, OK 73102		7. Unit or CA Agreement Name and No
3b. Phone No. (include area code) 405-552-4615		8. Well Name and No. Ore Ida 14 Federal #5
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) 935 FNL 1705 FEL 14 T24S R29E		9. API Well No. 30-015-29243
		10. Field and Pool, or Exploratory Area Cedar Canyon Delaware
		11. County or Parish, State Eddy NM

12. CHECK APPROPRIATE BOX(es) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input checked="" type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13 Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work and approximate duration thereof. If the proposal deepens directionally or recompletes horizontally, give subsurface location and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirement, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection)


Devon Energy Production Company, LP is preparing Form C108, Application for Authorization to Inject that will be filed with the Oil Conservation Division, Santa Fe, New Mexico office. Devon is proposing to convert the Ore Ida 14 Federal #5 to SWD in the Delaware Bell Canyon zone from 3,182' to 3,490'. The BLM will be furnished a copy of C108 application when filed with the OCD.

Proposed:

1. RIH & set CIBP @ 3,725'. Dump 35' cement on top.
2. RIH & Perforate Delaware Bell Canyon for SWD @ 3,182' - 3,204'; 3,214' - 3,234'; 3,246' - 3,280'; 3,360' - 3,380'; 3,474' - 3,490'.
3. Acidize w/+/- 5000 gallons 7.5% acid and Frac w/+/-120,000# proppant if necessary.
4. RIH w/2-3/8" IPC tubing & packer. Displace w/ packer fluid. Set packer +/- 3,130'. Conduct MIT.
5. Turn to SWD.

Proposed Schemat attached

**SUBJECT TO LIKE
APPROVAL BY STATE**

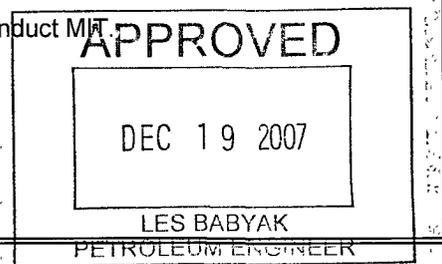

14. I hereby certify that the foregoing is true and correct Name: Ronnie Slack	Title Engineering Technician
Signature <i>Ronnie Slack</i>	Date 12/12/2007

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by	Title	Date
Conditions of approval, if any are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct or operations thereon.	Office	



DEVON ENERGY PRODUCTION COMPANY LP

Well Name: Ore Ida 14 Federal #5		Field: CEDAR CANYON DELAWARE	
Location: 935' FNL & 1705' FEL; Sec 14-T24S-R29E		County: EDDY	State: NM
Elevation: 2974' KB; 2960' GL		Spud Date: 11/30/96	Comp Date: 3/8/97
API#: 30-015-29243	Prepared by: Ronnie Slack	Date: 10/30/07	Rev:

PROPOSED SWD CONVERSION

17-1/2" hole
13-3/8", 48#, H40, 8RD, STC @ 351'
 Cemented w/325 sx to surface

TOC @ 2970' (CBL-1/1/97)

12-1/4" hole
8-5/8", 32#, J55, 8RD, STC, @ 3117'
 Cemented w/1300 sx to surface

Proposed:
 2-3/8" IPC Tubing

Proposed:
 Injection Packer @ +/- 3130'

Proposed SWD Perforations:
DELAWARE BELL CANYON
 3182' - 3204'; 3214' - 3234'; 3246' - 3280'
 3360' - 3380'; 3474' - 3490'

Proposed:
 CIBP @ 3725' w/35' cement on top. PBD @ 3690'

DV Tool @ 5,428'

35' Cement. PBD @ 6,585'
 CIBP @ 6,620' (10/5/05)

BRUSHY CANYON (4/25/97)
 6,668' - 6,704'
 4-26-97: acidize w/5K gals
 5-2-97: fraced w/42K#
 5-16-97: 15 bo, 174 bw

BONE SPRING (1/1/97)
 7,864' - 8,141'
 3-17-97. 33 bo, 132 bw, 175 mcf

7-7/8" Hole
5-1/2", 17#, J55, 8RD, LTC, @ 8,350'
 Cemented w/1036 sx.

4-25-98: TAC parts pushed to 8263'
 PBD @ 8,263'

TD @ 8,350'

