

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

OCD-ARTESIA

S

FORM APPROVED
Budget Bureau No 1004-0135
Expires March 31, 1993

5 Lease Designation and Serial No
NM-01119

6 If Indian, Allottee or Tribe Name

7 If Unit or CA, Agreement Designation

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT-" for such proposals

SUBMIT IN TRIPLICATE

1 Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2 Name of Operator

ExxonMobil Corporation

3 Address and Telephone No

Po Box 4358, CORP MI PO53, Houston, Texas 77210-4358

4 Location of Well (Footage, Sec, T, R, M, or Survey Description)

660' FSL & 660 FEL Sec 31, T 20S, R 28E

8 Well Name and No

Avalon (Delaware) Unit 549

9 API Well No

30-015-24378

10 Field and Pool, or Exploratory Area

Avalon Delaware 3715

11 County or Parish, State

Eddy, NM

12 CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

☐ Notice of Intent

☒ Subsequent Report

☐ Final Abandonment Notice

TYPE OF ACTION

☒ Abandonment

☐ Recompletion

☐ Plugging Back

☐ Casing Repair

☐ Altering Casing

☐ Other

☐ Change of Plans

☐ New Construction

☐ Non-Routine Fracturing

☐ Water Shut-Off

☐ Conversion to Injection

☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form)

13 Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

6-10-08 MIRUWSU. NUBOP

6-11-08 RIH 2 7/8 WORKSTRING TAG CEMENT ON TOP OF CIBP AT 2459'. TEST CSG AT 600 PSI. HELD. MIX 40 BBL OF 10# BRINE WITH 25 SKS SALT GEL. SPOT 25 SKS CLASS C NEAT CEMENT FROM 2439'-2198'. L/D ALL TBG (75JTS) RUWL PERF CSG AT 640' W/4 SHOTS. SET 5 1/2" AD-1 PKR AT 30' W/ONE JT TBG. PRESSURED UP ON TBG TO 1000 PSI IN AN ATTEMPT TO GET AN INJECTION RATE. UNABLE TO INJECT INTO PERFORATIONS AT 640'. PAUL SCHARTZ SAID TO SPOT 25 SKS CLASS C NEAT CEMENT FROM AT LEAST 50' BELOW PERFORATION AT 640'.

6-12-08 L/D PKR TIH W/ 22 JTS TBG TO 715'. PUMP 25 SKS CLASS C NEAT BALANCED PLUG. CALCULATED TOC AT 474'. L/D ALL TBG. RUWL PERFORATE CSG AT 60' AS PER PAUL SCHWARTZ. RDWL. SET PKR AT 30' ON ONE JT TBG. UNABLE TO INJECT INTO 8 5/8" X 13 3/8" ANNULUS. CIRCULATE 30 SKS OF CLASS C NEAT CEMENT UNDER PKR DOWN 5 1/2" CSG THROUGH PERFS AT 60' UP ANNULUS TO SURFACE. L/D PKR. CUT 5 1/2" CSG AT 13' BELOW GRADE WITH AN INTERNAL MECHANICAL CSG CUTTER.

6-13-08 FILL CSG WITH CEMENT FROM 30' TO SURFACE. RDMOWSU.

**Accepted for record
NMOCD**

14 I hereby certify that the foregoing is true and correct

Signed

Chris Luther


Title *workover Tech*

(This space for Federal or State office use)

Approved by

Conditions of approval, if any

Title

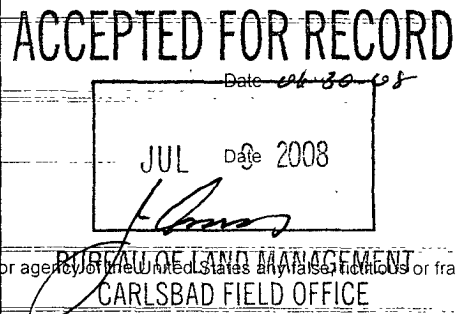

Title 18 U S C Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction

*See Instruction on Reverse Side