## OCD-ARTESIA

Form 3160-3 (April 2004)	FORM APPROVED OMB No. 1004-0137 Expires March 31, 2007						
UNITED STATES  DEPARTMENT OF THE IN  BUREAU OF LAND MANA	5. Lease Serial No. NMNM-98122						
APPLICATION FOR PERMIT TO D	6. If Indian, Allotee or Tribe Name N/A						
1a. Type of work: ✓ DRILL REENTER	7. If Unit or CA Agreement, Name and No. NMNM - 71030						
lb. Type of Well: Oil Well Gas Well Other	Single Zone Multi	ple Zone	8. Lease Name and V SKELLY UNI		(305607		
2. Name of Operator COG Operating LLC (22)	9137)		9. API Well No. 30-015- 38	345			
3a. Address 550 W. Texas Ave., Suite 1300 Midland, TX 79701	330 W. Texas Wei, Suite 1300			10. Field and Pool, or Exploratory  Fren; Glorieta-Yeso 26770			
4. Location of Well (Report location clearly and in accordance with any S At surface 990' FSL & 2310' FEL, Unit O At proposed prod. zone	11. Sec., T. R. M. or Blk and Survey or Area  Sec 21 T17S R31E						
14. Distance in miles and direction from nearest town or post office*		12. County or Parish	13	State			
9 miles East of Loco Hills, N	1 - 6	EDDY	11	NM			
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig, unit line, if any)  990'	<ul><li>16. No. of acres in lease</li><li>720</li></ul>	17. Spacing	acing Unit dedicated to this well				
18. Distance from proposed location*	19. Proposed Depth	20. BLM/B	LM/BIA Bond No. on file				
to nearest well, drilling, completed, applied for, on this lease, ft.  480'	6750	}	NMB000215				
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3805' GL	22 Approximate date work will sta 11/30/2010	rt*	23. Estimated duration 15 c	tion 5 days			
	24. Attachments				<del></del>		
The following, completed in accordance with the requirements of Onshore	Oil and Gas Order No.1, shall be a	ttached to this	s form:				
<ol> <li>Well plat certified by a registered surveyor.</li> <li>A Drilling Plan.</li> </ol>	4. Bond to cover t Item 20 above).	he operation	s unless covered by an	existing bond	l on file (see		
3. A Surface Use Plan (if the location is on National Forest System La SUPO shall be filed with the appropriate Forest Service Office).		specific info	rmation and/or plans as	may be requ	ired by the		
25. Signature	Name (Printed Typed)  Robyn M. Odom		•	Date 08/24/2010			
Title Regulatory Analyst		,			<u> </u>		
Approved by (Signature) /s/ Don Peterson	Name (Printed Typed)	,		Date <b>NOV</b>	2 2 2010		
Title FIELD MANAGER	Office		CARLSBAD FIEL	D OFFIC	E		
Application approval does not warrant or certify that the applicant holds I conduct operations thereon.  Conditions of approval, if any, are attached.	legal or equitable title to those righ	in the subj			icant to R TWO YEAR		
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crim States any false, fictitious or fraudulent statements or representations as to	ne for any person knowingly and vany matter within its jurisdiction.	willfully to m					

\*(Instructions on page 2)

**Roswell Controlled Water Basin** 

NOV 29 2010
NMOCD ARTESIA

Approval Subject to General Requirements & Special Stipulations Attached

SEE ATTACHED FOR CONDITIONS OF APPROVAL

#### MASTER DRILLING PROGRAM

#### 1. **Geologic Name of Surface Formation**

**Ouaternary** 

#### 2. **Estimated Tops of Important Geologic Markers:**

Surface
560'
1150'
1770'
2100'
2715'
3100'
3450'
`4950'
4995'

#### 3. Estimated Depths of Anticipated Fresh Water, Oil and Gas

Water Sand	150'	Fresh Water
Grayburg	3100'	Oil/Gas
San Andres	3450'	Oil/Gas
Glorieta	4950'	Oil/Gas
Yeso Group	4995'	Oil/Gas

No other formations are expected to give up oil, gas or fresh water in measurable quantities. Setting 13 3/8" casing to 450' and circulating cement back to the surface will protect the surface fresh water sand. The Salt Section will be protected by setting 8 5/8" casing to 1800' and circulating cement, in a single or multi-stage job and/or with an ECP, back to the surface. Any shallower zones above TD, which contain commercial quantities of oil and/or gas, will have cement circulated across them. This will be achieved by cementing, with a single or multi-stage job, the 5 1/2" production casing back 200' into the intermediate casing, to be run at TD. (If wellbore conditions arise that require immediate action) and/or a change to this program, COG Operating LLC personnel will always react) See LOA to protect the wellbore and/or the environment.

See COA

#### 4. Casing Program

Hole Size	Interval	OD Casing	Weight	Grade	Jt., Condition	Jt.	burst/collapse/tension
17 1/2"	0-450	13 3/8"	48#	H-40orJ-55	New	ST&C	8.71/3.724/14.91
11"or 224"	0-1800	8 5/8"	24or32#	J-55	New	ST&C	2.91/1.46/5.65
7 7/8"	0-T.D.	5 1/2"	15.5 or17#	J-55orL80	New	LT&C	1.71/1.574/2.20

#### 5. Cement Program

13 3/8" Surface Casing:

Class C, 500 sx, yield 1.32, back to surface

8 5/8" Intermediate Casing:

#### 11" Hole:

**Single Stage:** 50:50:10, 350 sx lead, yield-2.45 + Class C, 200 sx tail, yield-1.32, back to surface.

Multi-Stage: Stage 1: Class C, 350 sx, yield-1.32. Stage 2: 50:50:10, 200 sx, yield-2.45, back to surface. Multi stage tool to be set at approximately, depending on hole conditions, 450' See COA

5 1/2" Production Casing:

**Single Stage:** 35:65:6, 500 sx Lead, yield-2.05 + 50:50:2, 400 sx Tail, yield-1.37, to 200' minimum tie back to intermediate casing.

Multi-Stage: Stage 1: 50:50:2, 400 sx, ~ See COA yield - 1.37; Stage 2: 35:65:6, 500 sx, yield - 2.05, to 200' minimum tie back to intermediate casing. Multi stage tool to be set at approximately, depending on hole conditions, TD - 2000. See COA

#### 6. Minimum Specifications for Pressure Control

The blowout preventer equipment (BOP) shown in Exhibit #9 will consist of a double ram-type (2000 psi WP) preventer. This unit will be hydraulically operated and the ram type preventer will be equipped with blind rams on top of 4 1/2" drill pipe rams on the bottom. The BOP will be nippled up on the 13 3/8" surface casing with BOP equipment and tested together to 1000 psi-by rig pump in one test. The BOP will then be nippled up on the 8 5/8" intermediate casing and tested by a third party to 2000 psi and used continuously until total depth is reached. All BOP's and accessory equipment will be tested to 2000 psi before drilling out of the intermediate casing. Pipe rams will be operationally checked each 24-hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment (Exhibit #10) will include a Kelly cock and floor safety valve, choke lines and a choke manifold (Exhibit #11) with a 2000 psi WP rating.

## 7. Types and Characteristics of the Proposed Mud System

The well will be drilled to TD with a combination of brine, cut brine and polymer mud system. The applicable depths and properties of this system are as follows:

DEPTH	TYPE	WEIGHT	VISCOSITY	WATERLOSS
0-450'	Fresh Water	8.5	28	N.C.
450-18001650	Brine	10	30	N.C.
1800'-TD	Cut Brine	8.7-9.1	29	N.C.

Sec

Sufficient mud materials will be kept at the well site to maintain mud properties and meet minimum lost circulation and weight increase requirements at all times.

### 8. Auxiliary Well Control and Monitoring Equipment

- A. Kelly cock will be kept in the drill string at all times.
- B. A full opening drill pipe-stabbing valve with proper drill pipe connections will be on the rig floor at all times.

## 9. Logging, Testing and Coring Program

- Get COA A. The electric logging program will consist of GR-Dual Laterolog, Spectral Density, Dual Spaced Neutron, CSNG Log and will be run from TD to 8 5/8" casing shoe.
  - B. Drill Stem test is not anticipated.
  - C. No conventional coring is anticipated.
  - D. Further testing procedures will be determined after the 5 ½" production casing has been cemented at TD, based on drill shows and log evaluation.

#### 10. Abnormal Conditions, Pressure, Temperatures and Potential Hazards


No abnormal pressures or temperatures are anticipated. The estimated bottom hole at TD is 110 degrees and the estimated maximum bottom hold pressure is 2300 psig. Measurable gas volumes or Hydrogen Sulfide levels have not been encountered during drilling operations in this area, although a Hydrogen Sulfide Drilling Operation Plan is attached to this program. No major loss of circulation zones has been reported in offsetting wells.

#### 11. Anticipated Starting Date and Duration of Operations

Road and location work will not begin until approval has been received from the BLM. As this is a Master Drilling plan, please refer to the Form 3160-3 for the anticipated start date. Once commenced, drilling operations should be finished in approximately 12 days. If the well is productive, an additional 30 days will be required for completion and testing before a decision is made to install permanent facilities.

# **COG Operating LLC**


# **Exhibit #9 BOPE and Choke Schematic**

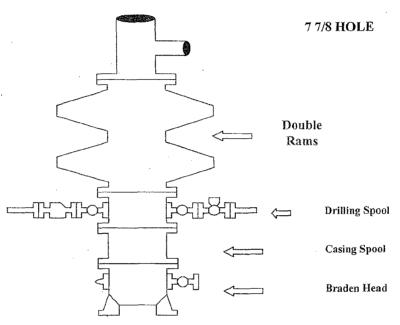

Minimum 4" Nominal choke and kill lines

## Choke Manifold Requirement (2000 psi WP) No Annular Required

#### Adiustable Choke

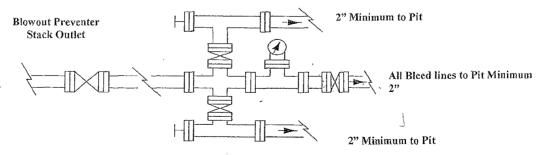

Adjustable Choke (or Positive)

# NOTES REGARDING THE BLOWOUT PREVENTERS Master Drilling Plan Eddy County, New Mexico

- 1. Drilling nipple to be so constructed that it can be removed without use of a welder through rotary table opening, with minimum I.D. equal to preventer bore.
- 2. Wear ring to be properly installed in head.
- 3. Blow out preventer and all fittings must be in good condition, 2000 psi WP minimum.
- 4. All fittings to be flanged.
- 5. Safety valve must be available on rig floor at all times with proper connections, valve to be full 2000 psi WP minimum.
- 6. All choke and fill lines to be securely anchored especially ends of choke lines.
- 7. Equipment through which bit must pass shall be at least as large as the diameter of the casing being drilled through.
- 8. Kelly cock on Kelly.
- 9. Extension wrenches and hands wheels to be properly installed.
- 10. Blow out preventer control to be located as close to driller's position as feasible.
- 11. Blow out preventer closing equipment to include minimum 40-gallon accumulator, two independent sources of pump power on each closing unit installation all API specifications.

Blowout Preventers Page 2