

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☐ gas well ☒ other ☐

2. NAME OF OPERATOR  
El Paso Natural Gas Company

3. ADDRESS OF OPERATOR  
P.O. Box 289, Farmington, NM 87401

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
1810'N, 1650'W  
AT SURFACE:  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH:


16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☐  
(other) ☐

SUBSEQUENT REPORT OF:

☐  
☒  
☐  
☐  
☐  
☐  
☐  
☐  
☐

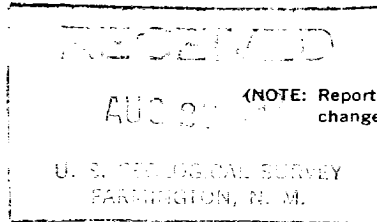

(NOTE: Report results of multiple completion or change on Form 9-330.)



5. LEASE  
SF 078425

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME  
San Juan 29-7 Unit

8. FARM OR LEASE NAME  
San Juan 29-7 Unit

9. WELL NO.  
61A

10. FIELD OR WILDCAT NAME  
Blanco MV & Basin Dakota

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
Sec. 34, T-29-N, R-7-W  
NMPM

12. COUNTY OR PARISH  
Rio Arriba

13. STATE  
New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)  
6747' GL

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

8-24-81: PBSD 8014'. Tested casing to 4500#, Held Ok. Perfed Dakota: 7779,7786,7799,7805,7814,7888,7894,7919,7936,7949,7955,7963,7978,7985,7993' W/1 SPZ. Fraced w/ 223,000# 20/40 sand, 76,000# 10/20 sand, 24,900 gal. wtr. Flushed w/ 16,674 gal. wtr.

8-25-81: Perfed Massive & Lower Point Lookout: 5662,5686,5670,5694,5698,5707,5713,5716,5720,5734,5748,5765,5772,5784,5812,5824,5837,5846,5878,5944,6005,6024,6032,6048,6096' W/1 SPZ. Fraced w/ 61,500# 20/40 sand, 106,608 gal. wtr. Flushed w/ 15,372 gal. wtr.

8-25-81: Perfed Menefee & Cliff House: 5147,5154,5187,5200,5238,5248,5254,5260,5289,5296,5303,5325,5331,5393,5400,

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

5562,5590' W/1 SPZ. Fraced w/ 59,000# 20/40 sand, 177,000 gal. wtr. Flushed

18. I hereby certify that the foregoing is true and correct

SIGNED W/ 14,280 gal. wtr. D. G. Buias TITLE Drilling Clerk DATE Aug. 26, 1981

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY:

\*See Instructions on Reverse Side

NMOCC

27 1981  
BY E. J. M.