DISTRICT I 1625 N. French Dr., Hobbs, NM 88240 DISTRICT II 1301 W. Grand Avenue, Artesia, NN 88210

State of New Mexico Energy, Minerals and Natural Resources Department

Form C-102 Revised July 16, 2010

Submit one copy to appropriate District Office

## DISTRICT III 1000 Rio Brazos Rd., Aztec, NN 87410

DISTRICT IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

## OIL CONSERVATION DIVISION 1220 South St. Francis Dr.


Santa Fe, New Mexico 87505

# WELL LOCATION AND ACREAGE DEDICATION PLAT

☐ AMENDED REPORT

	Number			Pool Code	220		Pool Name	Penasco Dr	, w	
30-019	5-390	S83		3 <del>250</del> 9	DLIU	.At	oka; Glorieta-\	Penasco Dr Yeso. SA-Ye	250	
Property	Code			Property Name					Well Number	
38124	14		TEXAS "32" FEE					2		
ÓGRID N					Elevation.					
16268	33		CĺM	AREX E	NERGY CO.	ERGY CO. OF COLORADO			3412'	
Surface Location										
UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County	
С	32	18 S	26 E		330	NORTH	2310	WEST	EDDY	
			Bottom	Hole Loc	ation If Diffe	erent From Sur	face		**************************************	
UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County	
Dedicated Acre	s Joint o	or Infill Co	nsolidation (	Code Ord	ler No.	-1	<b></b>		5	
40										

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

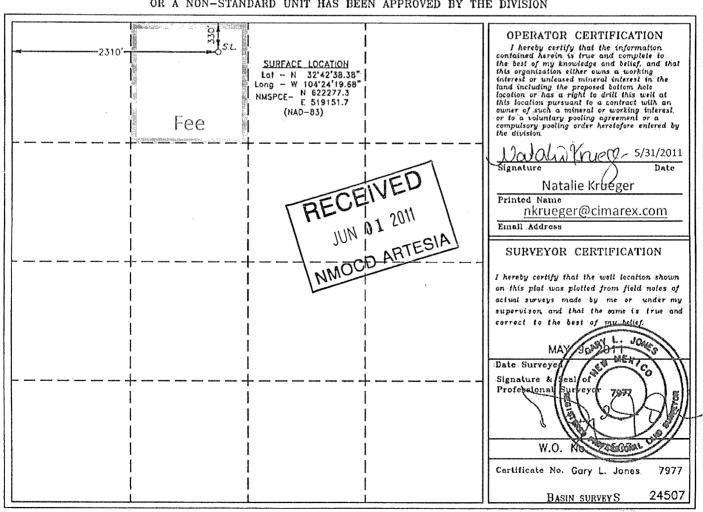

# Mud, Casing, Cementing, and BOP Attachment Texas 32 Fee No. 2

# Cimarex Energy Co. of Colorado Unit C, Section 32 T18S-R26E, Eddy County, NM

In response to questions asked under Section II B of Bulletin NTL-6, the following information is provided for your consideration:

Location:

330 FNL & 2310 FWL

Elevation above sea level:

3412' GR

Proposed drilling depth:

3,000'

Proposed Mud Circulating System:

Depth		Mud Wt	Visc	Fluid Loss	Type Mud	
0,	to	950'	8.4 - 8.8	28	NC	FW
0'	to	3000'	9.9 - 10.1	30-32	NC	Brine water

Sufficient mud materials will be kept on location at all times in order to combat lost circulation or unexpected kicks. In order to run DSTs, open hole logs, and casing, the viscosity and water loss may have to be adjusted in order to meet these needs.

### Casing & Cementing Plan:

String	Hole Size	Depth			Casing OD		Weight	Collar	Grade
Surface	14¾"	0'	to	950'	New	95/8"	36#	STC	J55
Production	8¾"	0'	to	3000'	New	5½"	17#	LTC	N80

### Cementing Plan:

Surface

Lead Slurry: 870 sx Class "C" + 10% W-60 + 1% CaCl2 + 0.25% R-38 + 5# Gilsonite per sx ,14.4 ppg,

1.56 cuft/sx, 7.04 gal/sx fw.

Tail Slurry: 330 sx Class C + 2% CaCl2 + 0.25% R-38, 14.8 ppg, 1.35 cuft/sx, 6.34 gal/sx fw

**TOC** Surface

Production

Lead Slurry: 380 sacks Class C 50/50 Poz + 10% Bentonite + 0.3% FL-10 + 0.25% R-38 + 5% Salt,

Mixed at 11.92 ppg. Yeild 2.37 cuft/sx, 13.52 gal/sx Fresh Water

Tail Slurry: 260 sacks C Star Bond + 0.3% FL-10 + 0.1% C-20 + 0.25% R-38. Mixed at 13.2 ppg,

Yeild 1.55 cuft/sx, 7.86 gal/sx Fresh Water

TOC Surface

<u>Collapse Factor</u>	<u>Burst Factor</u>	<u>Tension Factor</u>
1.125	1.125	1.6

Mud, Casing, Cementing, and BOP Attachment
Texas 32 Fee No. 2
Cimarex Energy Co. of Colorado
Unit O, Section 15
T19S-R29E, Eddy County, NM

## Pressure control Equipment:

Exhibit "E-1" - A 13%" 3000 PSI working pressure B.O.P. consisting of a one set of blind rams and one set of pipe rams and a 3000 psi annular-type preventor. A choke manifold and 120 gallon accumulator with floor and remote operating stations and auxiliary power system. A kelly cock will be installed and maintained in operable condition and a drill string safety valve in the open position will be available on the rig floor. Mud gas seperator will be available if drilling in H2S areas.

BOP unit will be hydraulically operated. Below intermediate casing shoe, BOP will be operated at least once a day while drilling and the blind rams will be operated when out of hole during trips. No abnormal pressure or temperature is expected while drilling. From the base of the surface pipe through the running of production casing, the well will be equipped with a 3000 psi BOP system.

Test BOP equipment and choke manifold to 250 psi low and 3000 psi high and annular BOP to 250 psi low and 1500 psi high by an independent service company.