


(SUBMIT IN TRIPLICATE)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

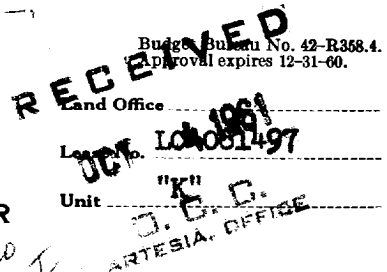

# SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF	SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE	SUBSEQUENT REPORT OF ABANDONMENT	X
NOTICE OF INTENTION TO PULL OR ALTER CASING	SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

30-015-03731 June 16, 1961  
Curtis Hankamer's Gulf-Federal-Dillon  
(Formerly) S. P. Dillon's Gulf-Federal  
Well No. 1 is located 1980 ft. from ~~Box~~ [S] line and 1980 ft. from ~~Ex~~ [W] line of sec. 13  
NE/4 SW/4 13 T26S R29E NMPM  
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)  
Brushy Draw Eddy County New Mexico  
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is 2993 ft.


## DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Mudded hole. Set cement plugs as follows;  
15 sxs - 3129'-3279'  
35 sxs - 900'-1050'  
35 sxs - 450'-600'  
10 sxs - Top of surface casing

Recovered 2788' of 4½" casing.

Placed 4" marker. Pits have not presently been leveled. First opportunity when equipment is available, location will be leveled.



I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Curtis Hankamer

Address 1422 Bank of the Southwest Bldg.

Houston 2, Texas

By Phil C. Hankamer  
Title Engineer