

DISTRICT I

P.O. Box 1980, Hobbs, NM 88240

DISTRICT II

P.O. Box Drawer DD, Artesia, NM 88210

DISTRICT III

1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION

P.O. Box 2088

Santa Fe, New Mexico 87504-2088

WELL API NO.

30 025 06648

5. Indicate Type of Lease

STATE ☐

FEE ☒

6. State Oil / Gas Lease No.

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMITS"
(FORM C-101) FOR SUCH PROPOSALS.

7. Lease Name or Unit Agreement Name

WEATHERLY, MITTIE

1. Type of Well: OIL WELL ☐ GAS WELL ☒ OTHER

2. Name of Operator

CHEVRON USA INC

8. Well No.

2

3. Address of Operator

15 SMITH ROAD, MIDLAND, TX 79705

9. Pool Name or Wildcat

EUNICE SAN ANDRES, NORTH(GAS)

4. Well Location

Unit Letter F : 1980 Feet From The NORTH Line and 990 Feet From The WEST Line

Section 17 Township 21-S Range 37-E NMPM LEA COUNTY

10. Elevation (Show whether DF, RKB, RT,GR, etc.)

11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐
OTHER: ADD PERFS, ACIDIZE & INSTL SUB PUMP ☒

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPERATION ☐ PLUG AND ABANDONMENT ☐
CASING TEST AND CEMENT JOB ☐
OTHER: ☐

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

CHEVRON U.S.A. INC. INTENDS TO ADD PERFS & ACID STIMULATE THE SUBJECT WELL TO INCREASE PRODUCTION FROM THE SAN ANDRES FORMATION. A SUB PUMP WILL ALSO BE INSTALLED. THE PROPOSED WORK SHOULD RETURN THE WELL TO ECONOMIC PRODUCING STATUS.

THE INTENDED PROCEDURE IS AS FOLLOW:

MIRU PU. REL RBP @ 4023. TIH W/BIT TO TOP OF CICR @ 4050. DRILL OUT CICR & CMT TO 5000. RUN GR/CBL/CCL LOG FR 5000-2600. PERF 3950-52, 3957-63, 3970-76, 3990-95, 4005-11, 4016-18, 4028-38, 4056-60, 4070-78. TIH W/PKR TO 3950. ACIDIZE PERFS 3950-4078 W/3800 GALS ANTI-SLUDGE 15% HCL ACID. SET PKR @ 3930. SWAB BACK. REL PKR. TIH W/SUB PUMP ASSEMBLY, TBG SUB, SN, 2 7/8" TBG. TURN WELL OVER TO PRODUCTION.

CURRENT & PROPOSED WELLBORE DIAGRAMS ARE ATTACHED FOR YOUR APPROVAL.



I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

Denise Leake

TITLE Regulatory Specialist

DATE 4/5/2004

Telephone No. 915-687-7375

TYPE OR PRINT NAME

Denise Leake

(This space for State Use)

APPROVED

Gayle W. Wink

TITLE

OC FIELD REPRESENTATIVE II/STAFF MANAGER

DATE APR 13 2004

DeSoto/Nichols 12-93 ver 1.0

Location:

1980' FNL & 990' FWL
 Section: 17
 Township: 21S
 Range: 37E
 County: Lea State: NM

Elevations:

GL: 3473'
 KB: 3486'
 DF: 3485'

Current
Wellbore Diagram

Well ID Info:

Refno: FA7752
 API No: 30-025-06648
 L5/L6: PI61000
 Spud Date: 1/11/52
 Compl. Date: 3/7/52

Surf. Csg: 13 3/8" Spiral Csg
Set: @ 289' w/ 300 sks
Hole Size: 17 1/4"
Circ: Yes **TOC:** Surface
TOC By: Circulated

Interm. Csg: 8 5/8", 28 & 32#, H-40
Set: @ 2790' w/ 2000 sks
Hole Size: 11"
Circ: Yes **TOC:** Surface
TOC By: Circulated

Tbg Detail:

BP @ 3935'
 1 jt. 2 3/8" tbg
 2 3/8" x 4' perf sub
 SN @ 3900'
 8 jts. 2 3/8" EUE 8R J-55 tbg
 TAC @ 3650'
 118 jts. 2 3/8" EUE 8R J-55 tbg

Block Sqz Perfs @ 4010'
 (Sqzd with 350 sks,
 new TOC 2900' by TS)

RBP @ 4023'

CICR @ 4050'
 (No cmt on top)

CIBP @ 5500'
 (30' cmt on top)

CIBP @ 6093'
 (30' cmt on top)

Baker Model D Pkr @ 6170'

CIBP @ 6380'
 (11' Hydromite on top)

COTD: 4023'
PBTD: 4023'
TD: 6650'

Updated: 1/19/04

Perfs:**Status**

4006'	San Andres - Open
4010'	San Andres - Cmt Sqzd
4011'	San Andres - Open
4018'	San Andres - Open
4028'	San Andres - Below RBP
4033'	San Andres - Below RBP
4038'	San Andres - Below RBP

4072-4100'	San Andres - Cmt Sqzd
------------	-----------------------

5668-5710'	Blinbry - Below CIBP
5775-5856'	Blinbry - Below CIBP

6212-34'	Tubb - Below CIBP
6240-52'	Tubb - Below CIBP
6266-80'	Tubb - Below CIBP
6294-6302'	Tubb - Below CIBP

6615-47'	Drinkard - Below CIBP
----------	-----------------------

Prod. Csg: 5 1/2", 15.5#, J-55
Set: @ 6650' w/ 350 sks
Hole Size: 7 7/8"
Circ: No **TOC:** 4058'
TOC By: Temperature Survey

By: A. M. Howell

Location:

1980' FNL & 990' FWL
 Section: 17
 Township: 21S
 Range: 37E
 County: Lea State: NM

Elevations:

GL: 3473'
 KB: 3486'
 DF: 3485'

Tubing Detail:

Centrilift sub pump @ 4000'
 2-7/8" x 10' tbg sub
 SN @ 3940'
 127 jts 2-7/8" EUE J-55 8rd tbg

Block Sqz Perfs @ 4010'
 (Sqzd with 350 sks,
 new TOC 2900' by TS)

CIBP @ 5500'
 (30' cmt on top)

CIBP @ 6093'
 (30' cmt on top)

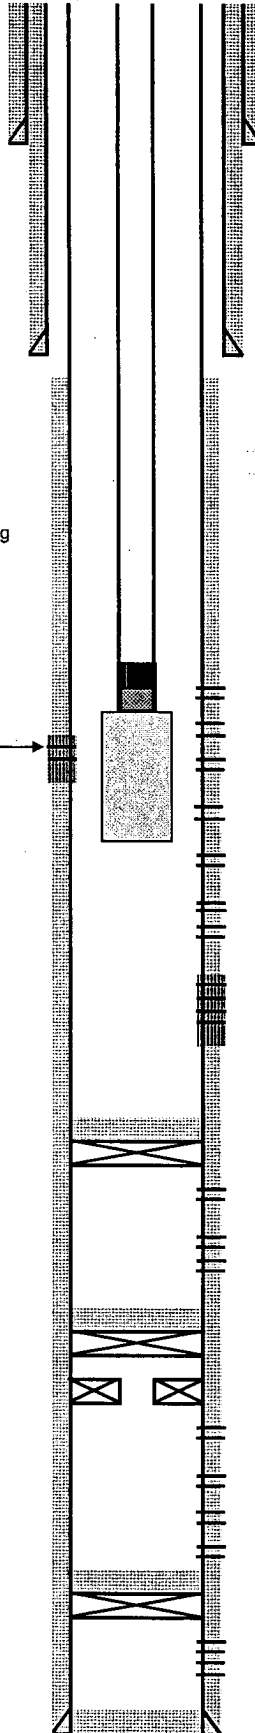
Baker Model D Pkr @ 6170'

CIBP @ 6380'
 (11' Hydromite on top)

COTD: 4023'
PBTD: 4023'
TD: 6650'

Updated: 1/19/04

Proposed Wellbore Diagram

**Well ID Info:**

Refno: FA7752
 API No: 30-025-06648
 L5/L6: PI61000
 Spud Date: 1/11/52
 Compl. Date: 3/7/52

Surf. Csg: 13 3/8" Spiral Csg
Set: @ 289' w/ 300 sks
Hole Size: 17 1/4"
Circ: Yes **TOC:** Surface
TOC By: Circulated

Interm. Csg: 8 5/8", 28 & 32#, H-40
Set: @ 2790' w/ 2000 sks
Hole Size: 11"
Circ: Yes **TOC:** Surface
TOC By: Circulated

Perfs:	Status
3950-52'	San Andres - Open
3957-63'	San Andres - Open
3970-76'	San Andres - Open
3990-95'	San Andres - Open
4005-11'	San Andres - Open
4016-18'	San Andres - Open
4028-38'	San Andres - Open
4056-60'	San Andres - Open
4070-78'	San Andres - Open

4078-4100' San Andres - Cmt Sqzd

5668-5710' Blinebry - Below CIBP
 5775-5856' Blinebry - Below CIBP

6212-34' Tubb - Below CIBP
 6240-52' Tubb - Below CIBP
 6266-80' Tubb - Below CIBP
 6294-6302' Tubb - Below CIBP

6615-47' Drinkard - Below CIBP

Prod. Csg: 5 1/2", 15.5#, J-55
Set: @ 6650' w/ 350 sks
Hole Size: 7 7/8"
Circ: No **TOC:** 4058'
TOC By: Temperature Survey

By: A. M. Howell