

Submit 3 Copies To Appropriate District
Office

District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Avenue, Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103

Revised March 25, 1999

WELL API NO.

30-025-04476

5. Indicate Type of Lease

STATE ☒ FEE ☐

6. State Oil & Gas Lease No.

7. Lease Name or Unit Agreement Name:

Eunice Monument South Unit

8. Well No.

203

9. Pool name or Wildcat

Grayburg, San Andres

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH
PROPOSALS.)

1. Type of Well:

Oil Well ☐ Gas Well ☐ Other Injector

2. Name of Operator

Chevron USA Inc

3. Address of Operator

15 Smith Rd, Midland, TX, 79705

4. Well Location

Unit Letter H : 1913 feet from the North line and 660 feet from the East line

Section 4 Township 21-S Range 36-E NMPM Lea County

10. Elevation (Show whether DR, RKB, RT, GR, etc.)

11. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒

TEMPORARILY ABANDON ☐ CHANGE PLANS ☐

PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐

COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐


CASING TEST AND CEMENT JOB ☐

OTHER: ☐

12. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompilation.

THE COMMISSION MUST BE NOTIFIED 24
HOURS PRIOR TO THE BEGINNING OF
PLUGGING OPERATIONS FOR THE C-103
TO BE APPROVED.

1. Notify OCD 24 hrs prior to MI and RU.
2. RIH Tag 5 1/2" CIBP at 3574, spot 25sx, plug 3574-3400 (Grayburg, San Andres) WOC Tag.
3. Displace hole w/MLF, 9.5# Brine w/25# gel P/BBL.
4. Spot 25sx, plug 2600-2400 (Yates, B-Salt) WOC Tag.
5. Spot 25sx, plug 1400-1200 (7 5/8 Shoe, T-Salt) WOC Tag.
6. Perf 4 holes at 375, sqz 50sx, plug 375-200 (10 3/4 Shoe) WOC Tag.
7. 10sx Surf, install dry hole marker.



I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE G.R. Bledsoe TITLE HES Specialist

DATE 4/27/2004

Type or print name G.R. Bledsoe

Telephone No. (432) 687-7153

(This space for State use)

APPROVED BY Harry W. Wink TITLE FIELD REPRESENTATIVE II/STAFF MANAGER

DATE MAY 18 2004

Conditions of approval, if any:


Submit C-144 when closing pt. cu

PLUGGING & ABANDONMENT WORKSHEET

(3 STRING CSNG)

OPERATOR CHEVRON USA INC.
LEASE NAME EDWICE MONUMENT SOUTH UNIT
WELL # 803 WIC

SECT 4 TWN 21-S RNG 36-E
FROM 1913 NSL 660 EWL
TD 3870 FORMATION @ TD S. ANDRES
PBDT FORMATION @ PBDT GRAYBURG

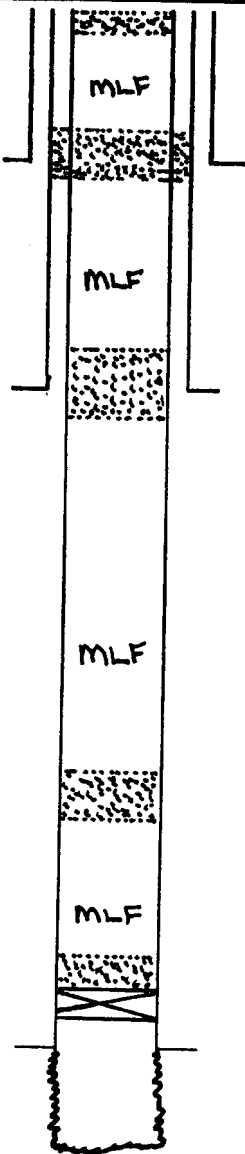

10 3/4
@ 318
TOC SUEF

75 1/8
@ 1286
TOC SUEF

5 1/2
@ 3661
TOC SUEF

TD 3870

	SIZE	SET @	TOC	TOC DETERMINED BY
SURFACE	10 3/4	318	SUEF	Circ
INTMED 1	75 1/8	1286	SUEF	Circ
INTMED 2				
PROD	5 1/2	3661	SUEF	CALC.

	SIZE	TOP	BOT	TOC	DETERMINED BY
LINER 1					
LINER 2					

	CUT & PULL	TOP - BOTTOM
INTMED 1		PERFS
INTMED 2		OPENHOLE
PROD		3661 - 3870

*REQUIRED PLUGS DISTRICT

	PLUG	TYPE PLUG	SACKS CEMENT	DEPTH
RUSTLER (ANHYD)	1	G.S. ANDRES	25	3574
YATES	2	B-SALT	25	2600
QUEEN	3	75 1/8 SHOE	25	1400
GRAYBURG	4	10 3/4 SHOE	50	375
SAN ANDRES	5	SUEF	10	10
CAPITAN REEF				
DELAWARE				
BELL CANYON				
CHERRY CANYON				
BRUSHY CANYON				
BONE SPRING				
GLORIETA				
BLINBRY				
TUBB				
DRINKARD				
ABO				
WC				
PENN				
STRAWN				
ATOKA				
MORROW				
MISS				
DEVONIAN				