

Submit 3 Copies To Appropriate District
Office

District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Avenue, Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103

Revised March 25, 1999

WELL API NO.

30-025-04593

5. Indicate Type of Lease

STATE ☐ FEE ☒

6. State Oil & Gas Lease No.

7. Lease Name or Unit Agreement Name:

Eunice Monument South Unit

8. Well No.

277

9. Pool name or Wildcat

Eunice Monument, Grayburg, San Andres

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH
PROPOSALS.)

1. Type of Well:

Oil Well ☐ Gas Well ☐ Other Injector

2. Name of Operator

Chevron USA Inc

3. Address of Operator

15 Smith Rd, Midland, TX, 79705

4. Well Location

Unit Letter D : 660 feet from the North line and 660 feet from the West line

Section 10 Township 21-S Range 36-E NMPM Lea County

10. Elevation (Show whether DR, RKB, RT, GR, etc.)

11. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒

TEMPORARILY ABANDON ☐ CHANGE PLANS ☐

PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐

COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐


CASING TEST AND CEMENT JOB ☐

OTHER: ☐

12. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompilation.

1. Notify OCD 24 hrs prior to MI and RU.
2. Set 4" CIBP at 3650, spot 25sx, plug 3650-3400 (Grayburg, San Andres) WOC Tag.
3. Perf 4 holes at 2600, sqz 40sx, plug 2600-2400 (Yates, B-Salt) WOC Tag.
4. Spot 25sx, plug 2100-1900 (4" Lnr Top).
5. Perf 4 holes at 1350, sqz 50sx, plug 1350-1150 (7 5/8 Shoe, T-Salt) WOC Tag.
6. Perf 4 holes at 320, sqz 50sx, plug 320-200 (10 3/4 Shoe) WOC Tag.
7. 10sx Surf, install dry hole marker.

THE COMMISSION MUST BE NOTIFIED 24
HOURS PRIOR TO THE BEGINNING OF
PLUGGING OPERATIONS FOR THE C-103
TO BE APPROVED.



I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE G.R. Bledsoe TITLE HES Specialist

DATE 8/27/2004

Type or print name G.R. Bledsoe

Telephone No. (432) 687-7153

(This space for State use)

APPROVED BY Gay W. Wink TITLE FIELD REPRESENTATIVE II / STAFF MANAGER

Conditions of approval, if any:

Submit C144 when Closing pit, 2

MAY 18 2004

PLUGGING & ABANDONMENT WORKSHEET

(3 STRING CSNG)

OPERATOR CHEVRON USA Inc.

LEASE NAME Eunice Monument South Unit


WELL # 277 WIC

SECT 10 TWN 21-S RNG 36-E

FROM 660 NSL 660 EWL 660

TD 3912 FORMATION @ TD S. ANDRES

PBTD FORMATION @ PBTD Grayburg

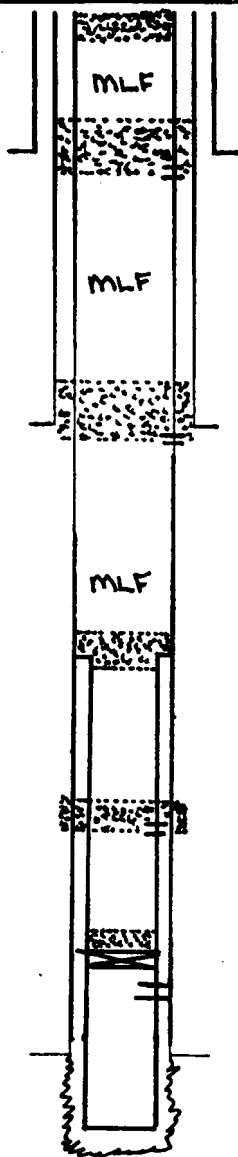

10 3/4

@ 269

TOC SURF

7 5/8

@ 1258

TOC SURF

5 1/2

@ 3793

TOC 2687

TD 3912

	SIZE	SET @	TOC	TOC DETERMINED BY
SURFACE	10 3/4	269	SURF	Circ
INTMED 1	7 5/8	1258	SURF	Circ
INTMED 2				
PROD	5 1/2	3793	2687	CALC

	SIZE	TOP	BOT	TOC	DETERMINED BY
LINER 1	4"	2010	3886	2010	T.S
LINER 2					

	CUT & PULL	TOP - BOTTOM
INTMED 1	PERFS	3718 - 3880
INTMED 2	OPENHOLE	
PROD		

REQUIRED PLUGS DISTRICT

	PLUG	TYPE PLUG	SACKS CEMENT	DEPTH
RUSTLER (ANHYD)	1	CIBP	25	3650
YATES	2	B-SALT	40	2600
QUEEN	3	4" LNE TOP	25	2100
GRAYBURG	4	7 5/8 SHOE	50	1350
SAN ANDRES	5	10 3/4 SHOE	50	320
	6	SURF	10	10
CAPITAN REEF				
DELAWARE				
BELL CANYON				
CHERRY CANYON				
BRUSHY CANYON				
BONE SPRING				
GLORIETA				
BLINBRY				
TUBB				
DRINKARD				
ABO				
WC				
PENN				
STRAWN				
ATOKA				
MORROW				
MISS				
DEVONIAN				