

#### STATE OF NEW MEXICO

#### ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT

#### OIL CONSERVATION DIVISION

2040 S. PACHECO SANTA FE, NEW MEXICO 87505 (505) 827-7131

February 26, 1997

DECESVED MAR - 3 1997

OIL COM. DIV.

Burlington Resources Oil & Gas Company P.O. Box 4289 Farmington, NM 87499-4289 Attention: Peggy Bradfield

Administrative Order NSL-3770

Dear Ms. Bradfield:

Reference is made to your application dated January 27, 1997, for Burlington Resources to drill its proposed San Juan "29-7" Unit Well No. 549 at an unorthodox coal gas well location considered to be "off-pattern" 1550 feet from the North line and 1100 feet from the West line (Unit E) of Section 9, Township 29 North, Range 7 West, NMPM, Basin Fruitland Coal (Gas) Pool, Rio Arriba County, New Mexico. The W/2 of said Section 9 shall be dedicated to said well to form a standard 320-acre gas spacing and proration unit for said pool.

By the authority granted me under the provisions of Rule 8 of the "Special Rules and Regulations for the Basin-Fruitland Coal Gas Pool", as promulgated by Division Order No. R-8768, as amended, the above-described unorthodox coal gas well location is hereby approved.

Sincerely,

William J. Let Director

WJL/MES/kv

cc: Oil Conservation Division - Aztec

U.S. Bureau of Land Management - Farmington

## BURLINGTON RESOURCES

SAN JUAN DIVISION

January 27, 1997

Sent Federal Express

Mr. William LeMay **New Mexico Oil Conservation Division** 2040 South Pacheco Santa Fe, New Mexico 87505

Re:

San Juan 29-7 Unit #549

1550'FNL, 1100'FWL Section 9, T-29-N, R-7-W, Rio Arriba County, New Mexico

API # 30-039-(not yet assigned)

Dear Mr. LeMay:

Burlington Resources is applying for administrative approval of a non-standard location for the above location in the Fruitland Coal formation. This application is considered off-pattern for the Fruitland Coal and is due to terrain in the southwest quarter of the section; at the request of the landowner in the NESW, who has farm buildings; at the request of the Bureau of Land Management; and archaeology.

The following attachments are for your review:

- 1. Application for Permit to Drill.
- 2. Completed C-102 at referenced location.

tadhuld

- 3 Offset operators/owners plat - Burlington is the offset operator
- 4. 7.5 minute topographic map showing the orthodox windows, and enlargement of the map to define topographic features.

We appreciate your earliest consideration of this application.

Sincerely.

Regulatory/Compliance Representative

GIL COM. DIV.

## UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

•	APPLICATION FO	R PERMIT TO DRILL, DEEPE	N, OR PLUG BACK		
1a.	Type of Work DRILL		5. Lease Number SF-078423 Unit Reporting Number 891001650C		
1b.	Type of Well GAS		6. If Indian, All. or Tribe		
2.	Operator  BURLINGTON  RESOURCES Oil 8	Gas Company	7. Unit Agreement Name  San Juan 29-7 Unit		
3.	Address & Phone No. of Operato PO Box 4289, Farmingto		8. Farm or Lease Name San Juan 29-7 Unit 9. Well Number		
	(505) 326-9700		549		
4.	Location of Well 1550'FNL, 1100'FWL Latitude 36 <sup>o</sup> 44.6, Long:	itude 107º 34.8	10. Field, Pool, Wildcat  Basin Fruitland Coal  11. Sec., Twn, Rge, Mer. (NMPM)  Sec 9, T-29-N, R-7-W  API# 30-039-		
			API # 30-039-		
14.	Distance in Miles from Nearest T 2 miles to Navajo City	own	12. County 13. State Rio Arriba NM		
15.	Distance from Proposed Location 1100'	n to Nearest Property or Lease I	ine		
16.	Acres in Lease	والمعتبر	17. Acres Assigned to Well 320 W/2		
18.	Distance from Proposed Location 2000'	n to Nearest Well, Drig, Compl, o	or Applied for on this Lease		
19.	Proposed Depth 2920'	DEGENT	20. Rotary or Cable Tools Rotary		
21.	Elevations (DF, FT, GR, Etc.) 6132' GR	JAN 2 8 1997	22. Approx. Date Work will Start		
23.	Proposed Casing and Cementing See Operations Plan a		0		
24.	Authorized by:	Brad huld	1-9-97		
	Regulatory/	Compliance Administrato	r Date		
PERM	AIT NO.	APPROVAL D	ATE		
APPF	ROVED BY	TITLE	DATE		

District I PO Box 1980, Hobbs, NM 88241-1980 District II PO Drawer DD, Artesia, NM 88211-0719 District III 1000 Rio Brazos Rd., Aztec, NM 87410 District IV

PO Box 2088. Santa Fe. NM 87504-2088

### State of New Mexico Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION PO Box 2088 Santa Fe, NM 87504-2088 Form C-102
Revised February 21, 1994
Instructions on back
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

AMENDED REPORT

#### WELL LOCATION AND ACREAGE DEDICATION PLAT


API Number	API Number Pool Code Pool Name			
30-039-	71629	Basin Fruitland Coal		
' Property Code	* Property Name		* Well Number	
7465	San Juan 29-7 Unit		549	
'OGRID No.		perator Name	' Elevation	
14538	BURLINGTON RESOU	RCES OIL & GAS COMPANY	6132'	
	19. 🚓			

#### 10 Surface Location

Towaship 9 29-N	7-W	Lot Ida	Feet from the	North/South line North	Feet from the	East/West line West	County R.A.
9 29-N			1550	North	1100	West	א כו
							1 1.00
	11 Bott	tom Hol	e Location I	f Different Fro	om Surface		
tion Township	Range	Lot ida	Feet from the	North/South line	Feet from the	East/West tipe	County
Lic	n Township	<del></del>	<del></del>	. <del> </del>		Bottom Hole Location If Different From Surface  Township Range Lot Ida Feet from the North/South line Feet from the	

13 Dedicated Acres 13 Joint or Infill 16 Consolidation Code 15 Order No. W/320

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

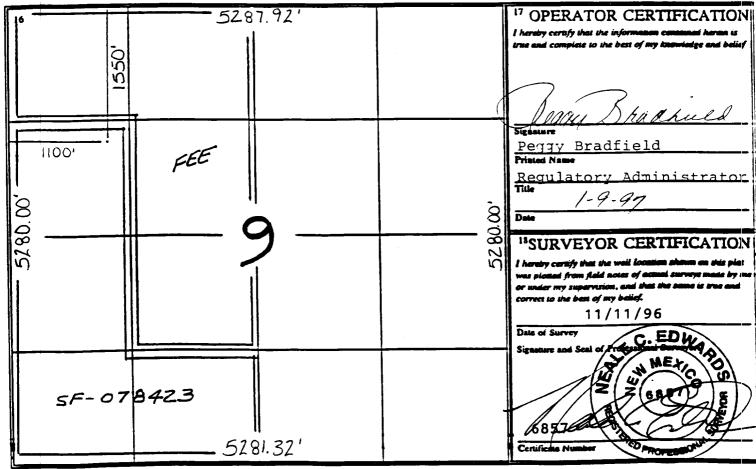

#### OPERATIONS PLAN

Well Name: San Juan 29-7 Unit #549

Location: 1550'FNL, 1100'FWL Section 9, T-29-N, R-7-W

Latitude 36° 44.6, Longitude 107° 34.8

Rio Arriba County, NM

Formation: Basin Fruitland Coal

Elevation: 6132'GL

Formation:	Top	Bottom	Contents
Surface	San Jose	1900'	
Ojo Alamo	1900'	2115'	aquifer
Kirtland	2115'	2630'	_
Fruitland	2630'	2915'	gas
Fruitland Coal	2650 <b>'</b>	2915 <b>'</b>	gas
Total Depth	2920'		_

Logging Program: Mud logs from 2620' to Total Depth.

Coring Program: none

#### Mud Program:

Interval	Type	Weight	Vis.	Fluid Loss
0- 125'	Spud		40-50	no control
125-2620'	Non-dispersed	8.4-9.0	30-60	no control
2620-2920'	Air			

#### Casing Program (as listed, the equivalent, or better):

Hole Size	Depth Interval	Csg.Size	Wt.	Grade
12 1/4"	0' - 125'	9 5/8"	32.3#	H-40
8 3/4"	0' - 2620'	7"	20.0#	K-55
6 1/4"	2520' - 2920'	5 1/2"	15.5#	K-55
Tubing Program:				
	0' - 2920'	2 3/8"	4.7#	J-55

Float Equipment: 9 5/8" surface casing - saw tooth guide shoe. Centralizers will be run in accordance with Onshore Order #2.

7" intermediate casing - guide shoe and self-fill float collar. Three centralizers run every fourth joint above shoe. Two turbolizing type centralizers - one below and one into the base of the Ojo Alamo @ 2115'. Standard centralizers thereafter every fourth joint up to the base of the surface pipe.

 $5\ 1/2$ " production casing - float shoe on bottom and pre-drilled liner run to the 7" casing with a minimum 100' overlap. Liner hanger is a double slip grip type.

Wellhead Equipment: 9 5/8" x 7" x 2 3/8" x 11" 3000 psi xmas tree assembly.

#### Cementing:

- 9 5/8" surface casing cement with 103 sx Class "B" cement with  $1/4 \, \#$ flocele/sx and 3% calcium chloride (118 cu.ft. of slurry, 200% excess to circulate to surface). WOC 12 hrs. Test casing to 600 psi/30 minutes.
- 7" intermediate casing lead w/379 sacks 65/35 Class "B" Pozmix with 2% calcium chloride, 3 pps gilsonite, and 1/4#/sack flocele. Tail with 100 sacks Class "B" neat with 2% calcium chloride (789 cu.ft., 100% excess to circulate to surface).
- 5 1/2" liner uncemented.

#### BOP and tests:

Surface to intermediate TD - 11" 2000 psi (minimum) double gate BOP stack (Reference Figure #1). Prior to drilling out surface casing, test rams to

Intermediate TD to Total Depth - 7 1/6" 3000 psi (minimum) double gate BOP stack (Reference Figure #2). Prior to drilling out intermediate casing, test blind rams and casing to 2500 psi for 30 minutes; all pipe rams and casing to 2500 psi for 30 minutes each.

From surface to TD - choke manifold (Reference Figure #3).

Pipe rams will be actuated at least once each day and blind rams actuated once each trip to test proper functioning. An upper kelly cock valve with handle and drill string safety valves to fit each drill string will be maintained and available on the rig floor.

#### Additional information:

- The Fruitland Coal formation will be completed.
- Anticipated pore pressure for the Fruitland is 1000 psi.
- This gas is dedicated.
- New casing will be utilized.
- Pipe movement (either rotation or reciprocation) will be done if hole conditions permit.

Date: //14/97 Drilling Engineer: 7 2/




#### San Juan 29-7 Unit #549 Multi-Point Surface Use Plan


- 1. Existing Roads Refer to Map No. 1. Existing roads used to access the proposed location will be properly maintained for the duration of the project. Bureau of Land Management right-of-way has been applied for as shown on Map No. 1.
- Planned Access Road Refer to Map No. 1. The required new access road is shown on Map No. 1. The gradient, shoulder, crowning and other design elements will meet or exceed those specified by the responsible government agency. The new access road surface will not exceed twenty feet (20') in width. No additional turnarounds or turnouts will be required. Upon completion of the project, the access road will be adequately drained to control soil erosion. Approximately 1800' of access road will be constructed. Pipelines are indicated on Map No. 1A.
- 3. Location of Existing Wells Refer to Map No. 1A.
- 4. Location of Existing and/or Proposed Facilities if Well is Productive
  - a. On the Well Pad Refer to Plat No. 1, anticipated production facilities plat.
  - b. Off the Well Pad Anticipated facilities off the well pad will be applied for as required.
- 5. Location and Type of Water Supply Water will be hauled by truck for the proposed project and will be obtained from San Juan 29-6 Water Well #1 in located in SW/4 Section 28, T-29-N, R-6-W, New Mexico.
- 6. Source of Construction Materials If construction materials are required for the proposed project, such materials will be obtained from a commercial quarry.
- 7. Methods of Handling Waste Materials All garbage and trash materials will be removed from the site for proper disposal. A portable toilet will be provided for human waste and serviced in a proper manner. If liquids are left in the reserve pit after completion of the project, the pit will be fenced until the liquids have had adequate time to dry. The location clean-up will not take place until such time as the reserve pit can be properly covered over to prevent run-off from carrying waste materials into the watershed. Reserve pits will be lined as needed with either 12 mil bio-degradable plastic liner or a bentonite liner. All earthen pits will be so constructed as to prevent leakage from occurring; no earthen pit will be located on natural drainage. Generation of hazardous waste is not anticipated. Federal regulations will be adhered to regarding handling and disposal of such waste if so generated.
- 8. Ancillary Facilities None anticipated.
- 9. Wellsite Layout Refer to the location diagram and to the wellsite cut and fill diagram (Figure No. 4). The blow pit will be constructed with a 2'/160' grade to allow positive drainage to the reserve pit and prevent standing liquids in the blow pit.

- 10. Plans for Restoration of the Surface After completion of the proposed project, the location will be cleaned and leveled. The location will be left in such a condition that will enable reseeding operations to be carried out. Seed mixture as designated by the responsible government agency will be used. The reseeding operations will be performed during the time period set forth by the responsible government agency. The permanent location facilities will be painted as designated by the responsible government agency.
- 11. Surface Ownership Bureau of Land Management
- 12. Other Information Environmental stipulations as outlined by the responsible government agency will be adhered to. Refer to the archaeological report for a description of the topography, flora, fauna, soil characteristics, dwellings, historical and cultural sites.
- 13. Operator's Representative and Certification Burlington Resources Oil & Gas Company Regional Drilling Manager, Post Office Box 4289, Farmington, NM 87499, telephone (505) 326-9700. I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan, are to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by Burlington Resources Oil and Gas Company and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved.

Regulatory/Compliance Administrator


pb

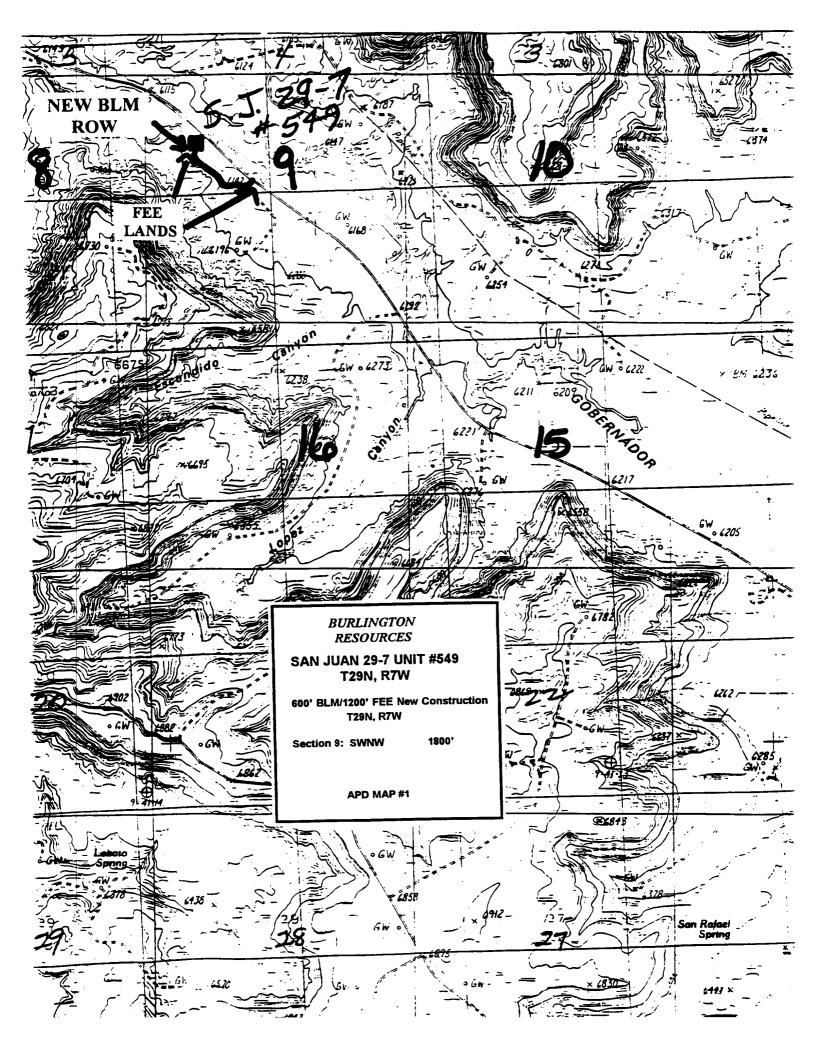


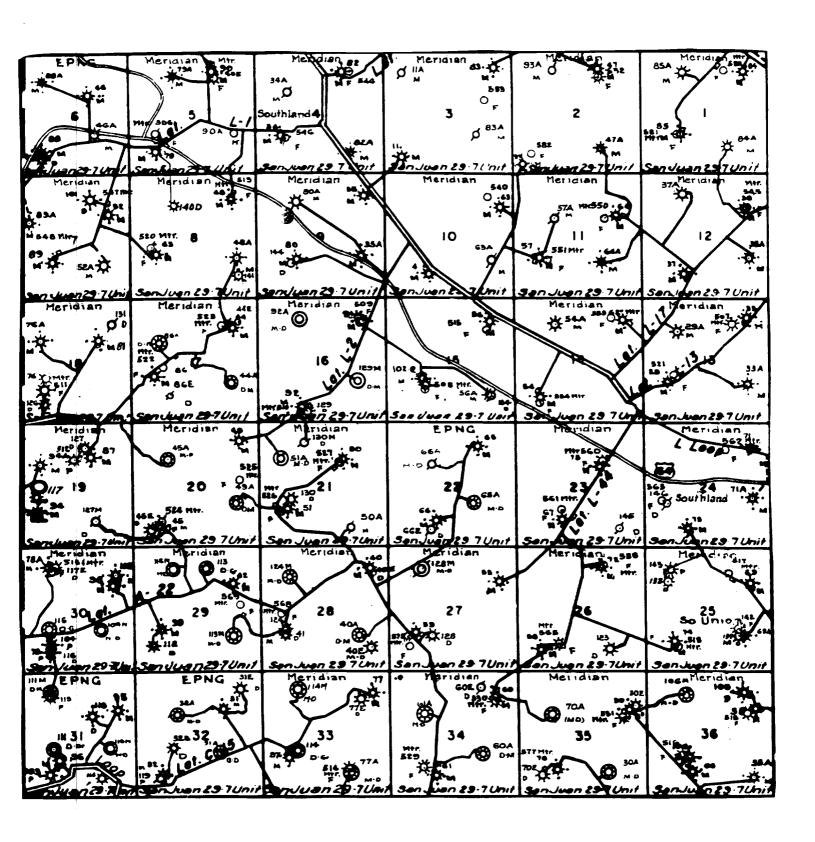

MERIDIAN OIL INC.
Pipeline Map
T-29-N, R-07-W
San Juan County, New Mexico

## BURLINGTON RESOURCES PLAT#1

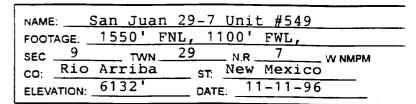

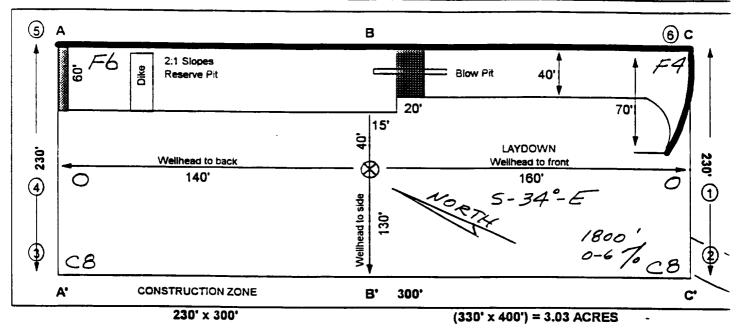

Reserve Pit Dike: to be 8' above Deep side (overflow - 3' wide and 1' above shallow side).

Blow Pit: overflow pipe halfway between top and bottom and to extend over plastic liner and into blow pit.




Note: Contractor should call One-Call for location of any marked or unmarked buried pipelines or cable on well pad and/or access road at least two (2) working days prior to construction

#### **BURLINGTON RESOURCES OIL AND GAS COMPANY**

# San Juan 29-7 Unit #549 OFFSET OPERATOR \ OWNER PLAT Non Standard Location Fruitland Coal Formation Well

Township 29 North, Range 7 West

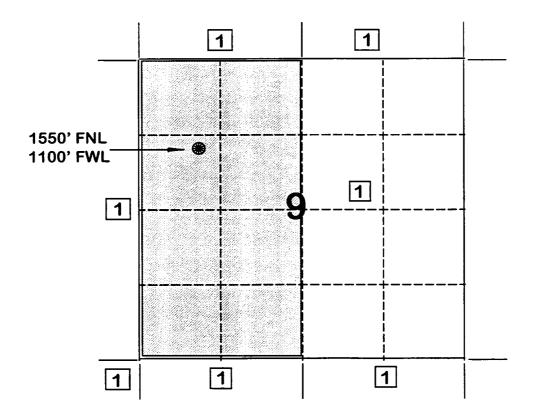

1) Burlington Resources Oil and Gas Company Successor to Meridian Oil Inc.

