

Submit 3 Copies To Appropriate District
Office

State of New Mexico

Energy, Minerals and Natural Resources

District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Ave., Artesia, NM 88210

District III

1000 Rio Brazos Rd. Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

HOBBS OCD

JUN 22 2011

RECEIVED

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.

Santa Fe, NM 87505

WELL API NO.

30-025-05810

5. Indicate Type of Lease

STATE ☐FEE ☒

6. State Oil & Gas Lease NO.

7. Lease Name or Unit Agreement Name

North Monument Grayburg/SA Unit

Blk 17

8. Well Number

15

9. OGRID Numer

873

10. Pool Name

Eunice Monument; G/SA

SUNDRY NOTICES AND REPORTS ON WELLS

(DON NOT USE THIS FORM FOR PROPOSALS TO DRILL OR DEEPEN OR PLUG BACK TO A DIFFERENT RESERVIOR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator

Apache Corporation

3. Address of Operator

303 Veterans Airpark Lane, Ste. 3000, Midland, TX 79705

4. Well Location

Unit Letter **O** : **330** feet from the **S** line and **2310** feet from th **E** line
Section **33** Township **19S** Range **37E** NMPM County **Lea**

11. Elevation (Show whether DR, RKB, RT, GR, etc.)

3568' GR

12. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐TEMPORARILY ABANDON ☐PULL OR ALTER CASING ☐DOWNHOLE COMMINGLE ☐PLUG AND ABANDON ☒CHANGE PLANS ☐MULTIPLE COMPL ☐OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐COMMENCE DRILLING OPNS. ☐CASING/CEMENT JOB ☐ALTERING CASING ☐P AND A ☐OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work.) SEE RULE 1103. For Multiple Completions: Attach wellbore diagram or proposed completion or recompletion.

Apache Corporation proposes to P&A the above mentioned well by the attached procedure.

The Oil Conservation Division Must be notified
24 hours prior to the beginning of plugging operations.Spud Date: Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

Guinn Burks

TITLE

Reclamation Foreman

DATE

6/21/11

Type or print name

Guinn Burks

E-mail add.

guinn.burks@apachecorp.com

PHONE:

432-556-9143

For State Use Only

APPROVED BY:

Mark White

TITLE

Compliance Officer

DATE

06-23-2011

Conditions of Approval (if any):



WELL BORE INFO.

LEASE NAME	North Monument Grayburg/SA Unit Blk 17
WELL #	15
API #	30-025-05810
COUNTY	Lea

15 1/2" hole


12 1/2" 50# @ 244'
w/300 sx to surf

9 5/8" 40# @ 1397'
w/450 sx to surf

8 3/4" hole

CIBP @ 3800' w/no cmt
7' 24# @ 3847'
w/100 sx cmt Cal TOC @ 3145'

6 1/4" OH @ 3847'-3915'

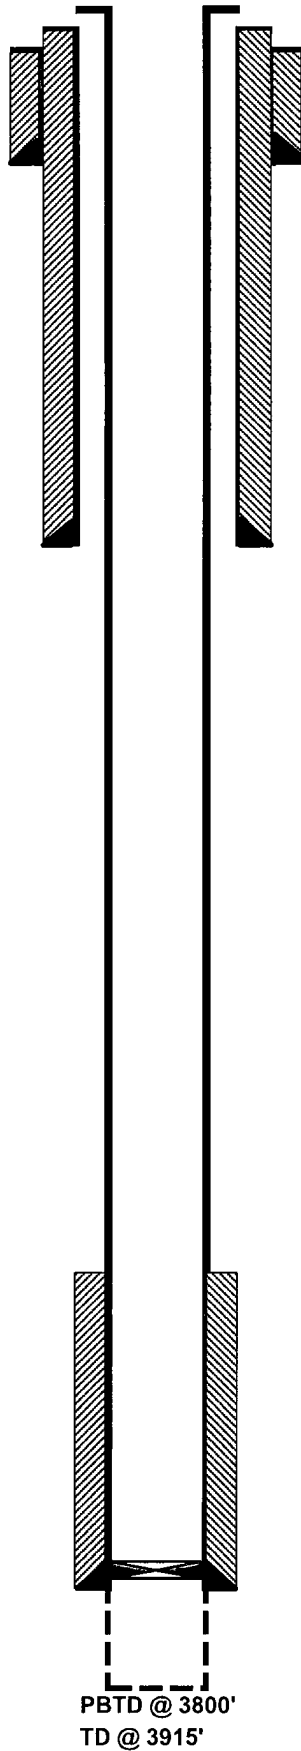



WELL BORE INFO.

15 1/2" hole


12 1/2" 50# @ 244'
w/300 sx to surf

9 5/8" 40# @ 1397'
w/450 sx to surf

8 3/4" hole

CIBP @ 3800' w/no cmt
7' 24# @ 3847'
w/100 sx cmt Cal TOC @ 3145'

6 1/4" OH @ 3847'-3915'

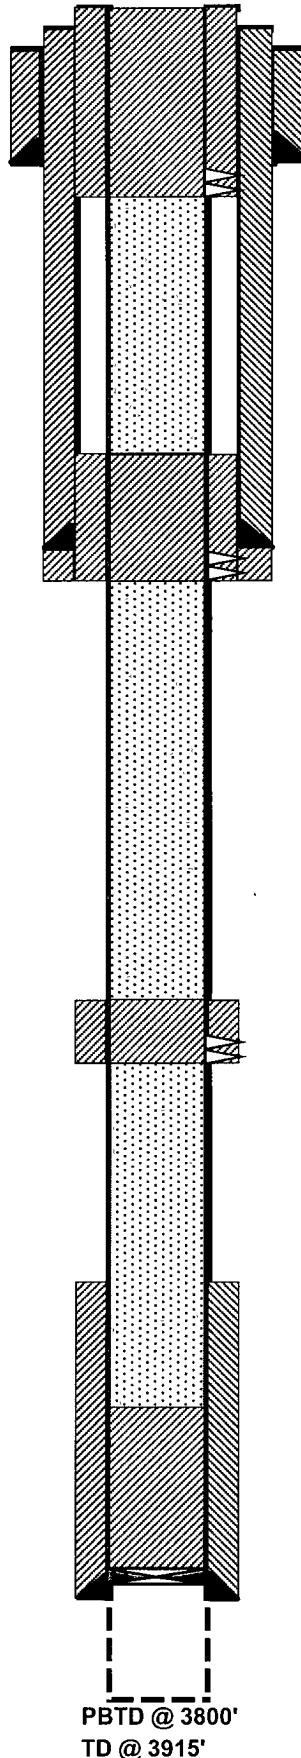

LEASE NAME	North Monument Grayburg/SA Unit Blk 17
WELL #	15
API #	30-025-05810
COUNTY	Lea

PROPOSED PROCEDURE

4. PUH & perf @ 300' & sqz 110 sx Class "C" cmt from 300' to surf, circ 7' to surf (Shoe & Water Baord)

3. PUH & perf @ 1450' & sqz 75 sx Class "C" cmt from 1450'-1300' WOC/TAG (Shoe & Top of Salt)

2. PUH & perf @ 2535' & sqz 60 sx Class "C" cmt from 2535'-2435' WOC/TAG (Base of Salt)

1. MIRU & RIH w/ tbg & verify CIBP @ 3800', circ w/MLF & spot 40 sx Class "C" cmt from 3800'-3400' WOC/TAG (CIBP & Queen)