

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd. Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

HOBBS OIL CONSERVATION DIVISION

AUG 09 2011 1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-33877
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease NO.
7. Lease Name or Unit Agreement Name W.B. Maveety
8. Well Number 11
9. OGRID Numer 873
10. Pool Name Monument; Abo

4. Well Location Unit Letter B : 520 feet from the N line and 2310 feet from th E line Section 35 Township 19S Range 36E NMPM County Lea	11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3647' GR
---	---

RECEIVED
SUNDRY NOTICES AND REPORTS ON WELLS
(DON NOT USE THIS FORM FOR PROPOSALS TO DRILL OR DEEPEN OR PLUG BACK TO A DIFFERENT RESERVIOR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐
2. Name of Operator
Apache Corporation
3. Address of Operator
303 Veterans Airpark Lane, Ste. 3000, Midland, TX 79705

4. Well Location
Unit Letter **B** : **520** feet from the **N** line and **2310** feet from th **E** line
Section **35** Township **19S** Range **36E** NMPM County **Lea**
11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3647' GR

12. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐
COMMENCE DRILLING OPNS. ☐
CASING/CEMENT JOB ☐
ALTERING CASING ☐
P AND A ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work.) SEE RULE 1103. For Multiple Completions: Attach wellbore diagram or proposed completion or recompletion.

Apache Corporation proposes to P&A the above mentioned well by the attached procedure.

The Oil Conservation Division Must be notified
24 hours prior to the beginning of plugging operations.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE *Guinn Burks* TITLE Reclamation Foreman DATE 8/8/11
Type or print name Guinn Burks E-mail add. guinn.burks@apachecorp.com PHONE: 432-556-9143
For State Use Only
APPROVED BY: *[Signature]* TITLE STAT NGR DATE 8-9-2011
Conditions of Approval (if any):

AUG 10 2011



WELL BORE INFO.

LEASE NAME

W.B. Maveety

WELL #

11

API #

30-025-33877

COUNTY

Lea

11" Hole

8 5/8" 24# @ 1167'
w/400 sx cmt to surf

TOC @ 3000'

CIBP @ 4207' w/ 30 sx cmt TOC @ 3913'


7 7/8" Hole

CIBP @ 6900' w/no cmt
Perfs @ 6948'-7074'

Perfs @ 7138'-7207'

Perfs @ 7250'-7372'

5 1/2" 15.5# @ 7610'
W/1225 sx TOC @ 3000'

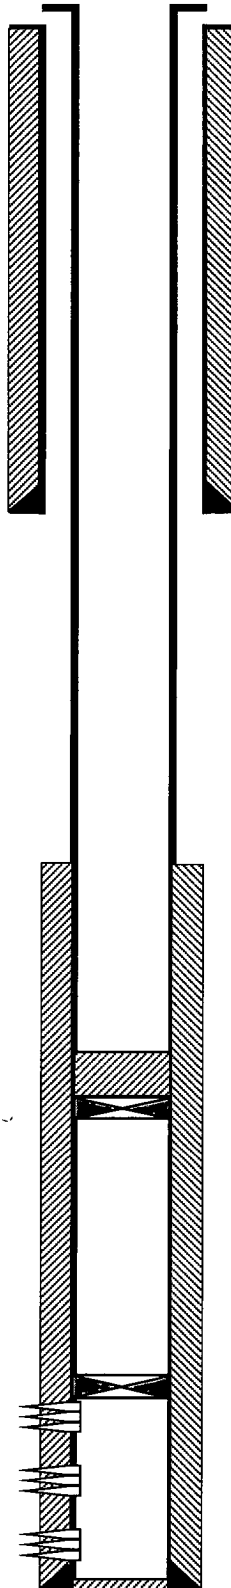

PBTD @ 3913'
TD @ 7610'



WELL BORE INFO.

LEASE NAME	W.B. Maveety
WELL #	11
API #	30-025-33877
COUNTY	Lea

PROPOSED PROCEDURE

11" Hole

8 5/8" 24# @ 1167'
w/400 sx cmt to surf

TOC @ 3000'

CIBP @ 4207' w/ 30 sx cmt TOC @ 3913'


7 7/8" Hole

CIBP @ 6900' w/no cmt
Perfs @ 6948'-7074'

Perfs @ 7138'-7207'

Perfs @ 7250'-7372'

5 1/2" 15.5# @ 7610'
W/1225 sx TOC @ 3000'

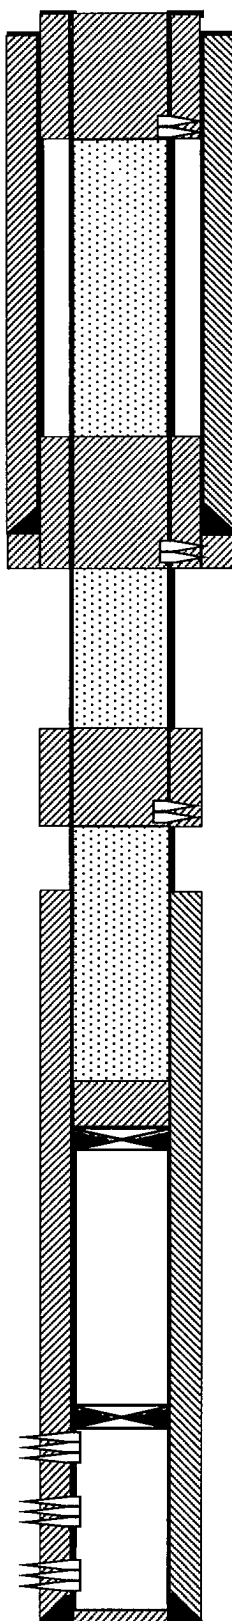

PBTD @ 3913'
TD @ 7610'

4. PUH & perf @ 350' & sqz 110 sx Class "C" cmt from 350' to surf, circ all strings to surf. (Water board)

3. PUH & perf @ 1207' & sqz 50 sx Class "C" cmt from 1207'-1107' WOC/ TAG (Shoe & Top of Salt)

2. PUH & perf @ 2470' & sqz 75 sx Class "C" cmt from 2470'-2320' WOC/TAG (Base of Salt)

1. MIRU, RIH w/ tbg & verify plug @ 3913' & CIRC w/ MLF.