

Devon Energy

Project: Lea County, NM (NAD-83)

Site: Thistle Unit Sec 22-27 Trac Pad

Well: Thistle Unit 96H

Wellbore: OH

Design: Plan #2

3707.6' GE + 23.5' KB @ 3731.10usft

Ground Level: 3707.60



Azimuths to Grid North
True North: -0.42°
Magnetic North: 6.42°

Magnetic Field
Strength: 48166.0snT
Dip Angle: 60.12°
Date: 9/20/2017
Model: HDGM

PROJECT DETAILS: Lea County, NM (NAD-83)

Geodetic System: US State Plane 1983

Datum: North American Datum 1983

Ellipsoid: GRS 1980

Zone: New Mexico Eastern Zone






SECTION DETAILS

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSec	Annotation
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
4000.00	0.00	0.00	4000.00	0.00	0.00	0.00	0.00	0.00	Start Build 1.00
4229.29	2.29	90.00	4229.23	0.00	4.59	1.00	90.00	0.14	Start 4044.78 hold at 4229.29 MD
8274.07	2.29	90.00	8270.77	0.00	166.41	0.00	0.00	4.92	Start Drop -1.00
8503.36	0.00	0.00	8500.00	0.00	171.00	1.00	180.00	5.05	Start 1097.05 hold at 8503.36 MD
9600.41	0.00	0.00	9597.05	0.00	171.00	0.00	0.00	5.05	Start DLS 10.00 TFO 179.58
10497.84	89.74	179.58	10170.00	-570.37	175.19	10.00	179.58	575.30	Start 7128.59 hold at 10497.84 MD
17626.43	89.74	179.58	10202.00	-7698.70	227.57	0.00	0.00	7702.06	TD at 17626.43

DESIGN TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Latitude	Longitude
LP (TU 96)	10170.00	-570.37	175.19	32° 17' 42.8837 N	103° 33' 11.0256 W
PBHL (TU 96)	10202.00	-7698.70	227.57	32° 16' 32.3448 N	103° 33' 11.0195 W
SHL (TU 96)	0.00	0.00	0.00	32° 17' 48.5402 N	103° 33' 13.0182 W

OCD – HOBBS
11/10/2017
RECEIVED

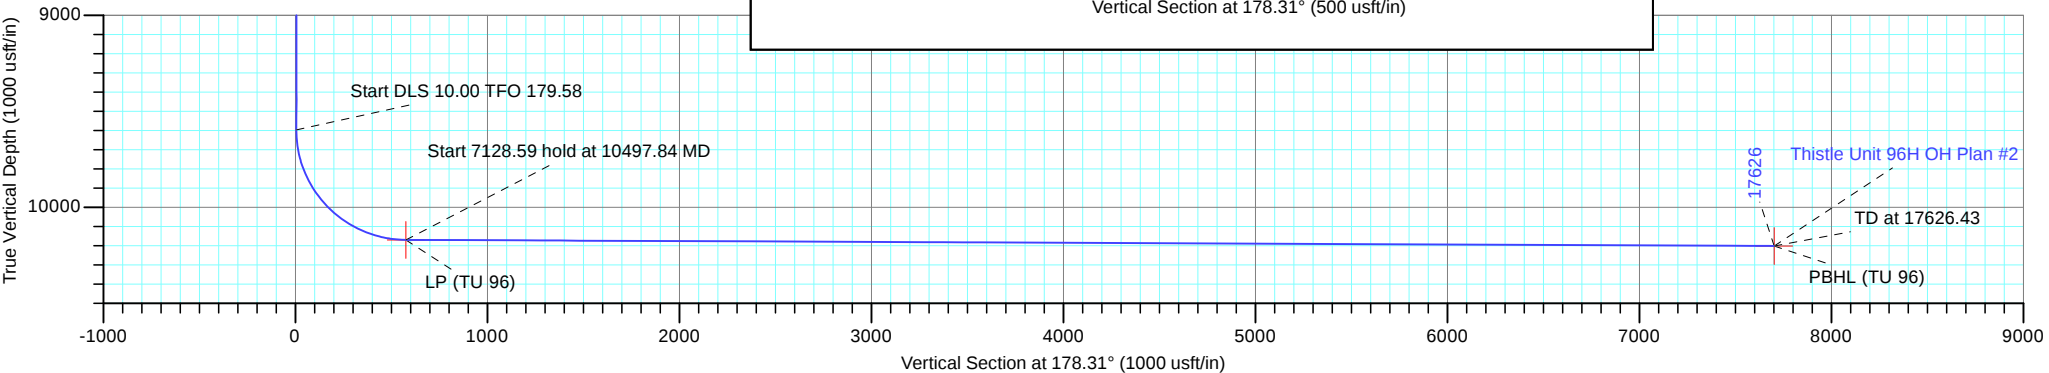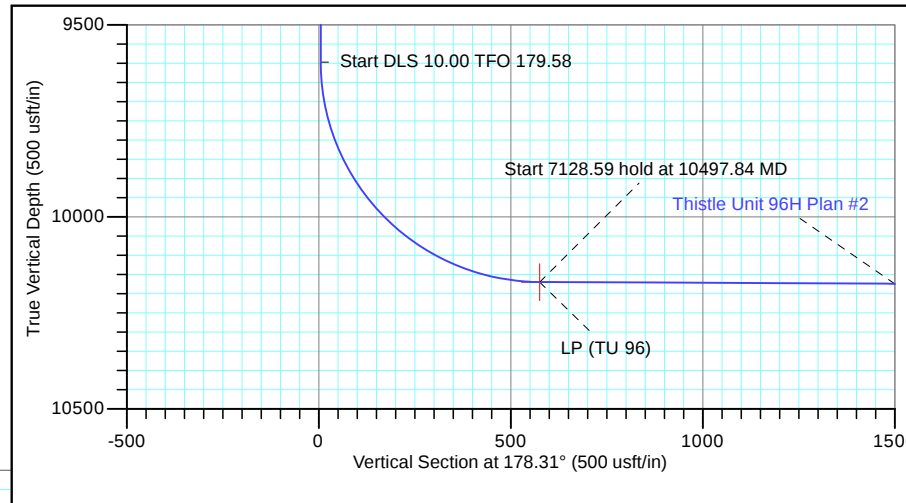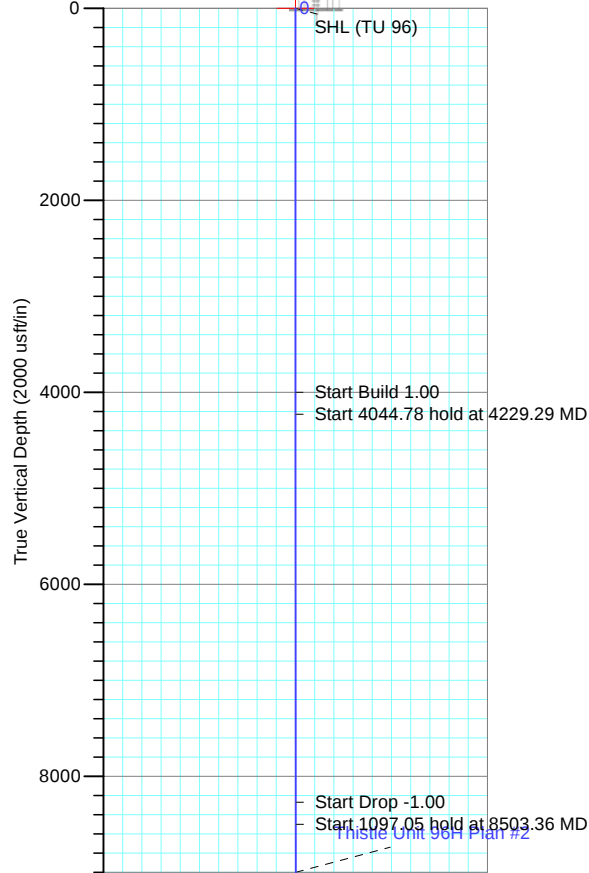


LEAM DRILLING SYSTEMS LLC
2010 East Davis, Conroe, Texas 77301
Phone: 936/756-7577, Fax: 936/756-7595

Plan: Plan #2 (Thistle Unit 96H/OH)
Thistle Unit Sec 22-27 Trac Pad
Created By: Dustin Ault
Date: 16:32, September 20 2017
Approved: _____ Date: _____

Devon Energy

Project: Lea County, NM (NAD-83)
Site: Thistle Unit Sec 22-27 Trac Pad
Well: Thistle Unit 96H
Wellbore: OH
Design: Plan #2



Azimuths to Grid North
True North: -0.42°
Magnetic North: 6.42°

Magnetic Field
Strength: 48166.0snT
Dip Angle: 60.12°
Date: 9/20/2017
Model: HDGM



PROJECT DETAILS: Lea County, NM (NAD-83)
Geodetic System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: New Mexico Eastern Zone



SECTION DETAILS									
MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	Vsect	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
4000.00	0.00	0.00	4000.00	0.00	0.00	0.00	0.00	0.00	
4229.29	2.29	90.00	4229.23	0.00	4.59	1.00	90.00	0.14	
8274.07	2.29	90.00	8270.77	0.00	166.41	0.00	0.00	4.92	
8503.36	0.00	0.00	8500.00	0.00	171.00	1.00	180.00	5.05	
9600.41	0.00	0.00	9597.05	0.00	171.00	0.00	0.00	5.05	
10497.84	89.74	179.58	10170.00	-570.37	175.19	10.00	179.58	575.30	
17626.43	89.74	179.58	10202.00	-7698.70	227.57	0.00	0.00	7702.06	PBHL (TU 96)

DESIGN TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
LP (TU 96)	10170.00	-570.37	175.19	472020.07	782437.04	32° 17' 42.8837 N	103° 33' 11.0256 W
PBHL (TU 96)	10202.00	-7698.70	227.57	464891.74	782489.42	32° 16' 32.3448 N	103° 33' 11.0195 W
SHL (TU 96)	0.00	0.00	0.00	472590.44	782261.85	32° 17' 48.5402 N	103° 33' 13.0182 W

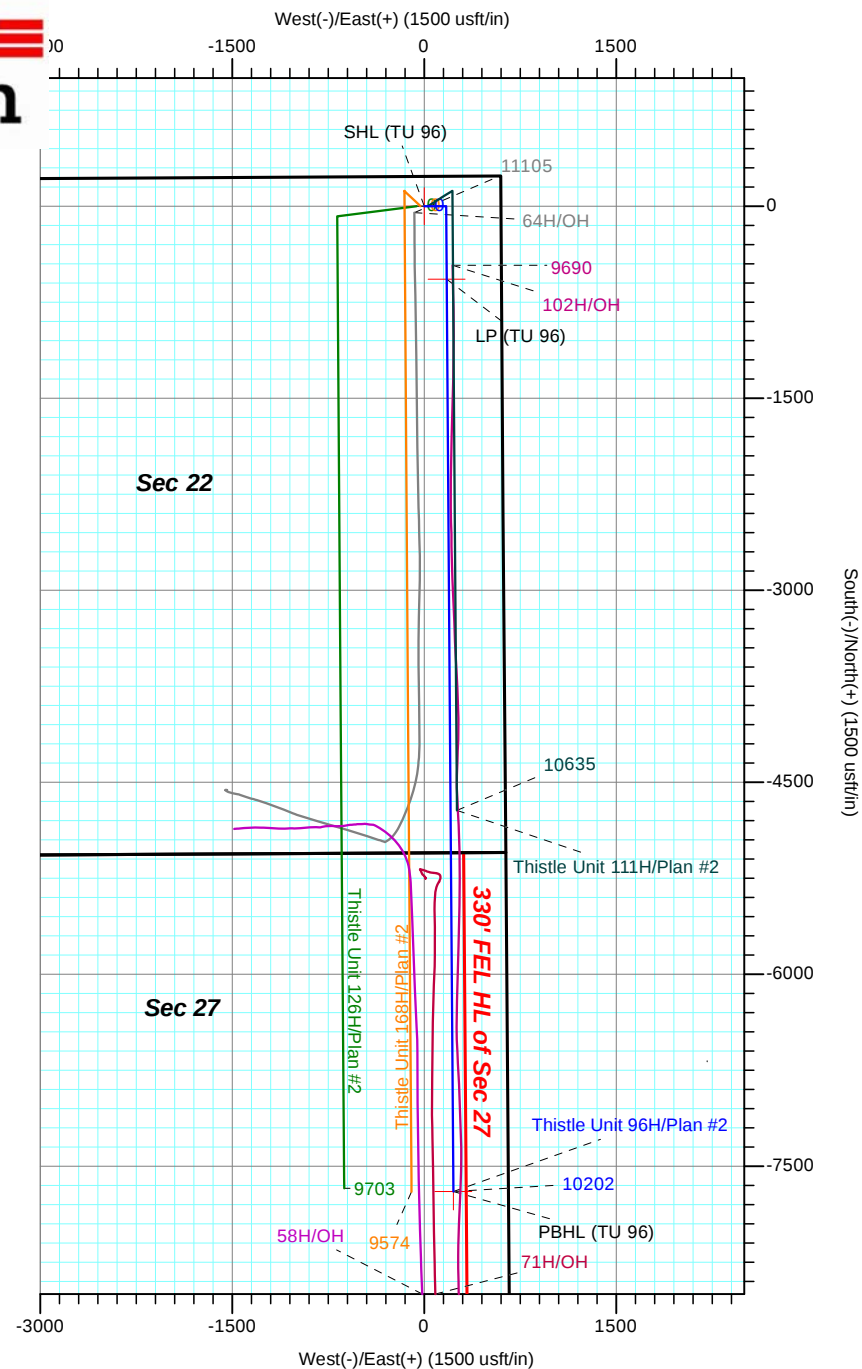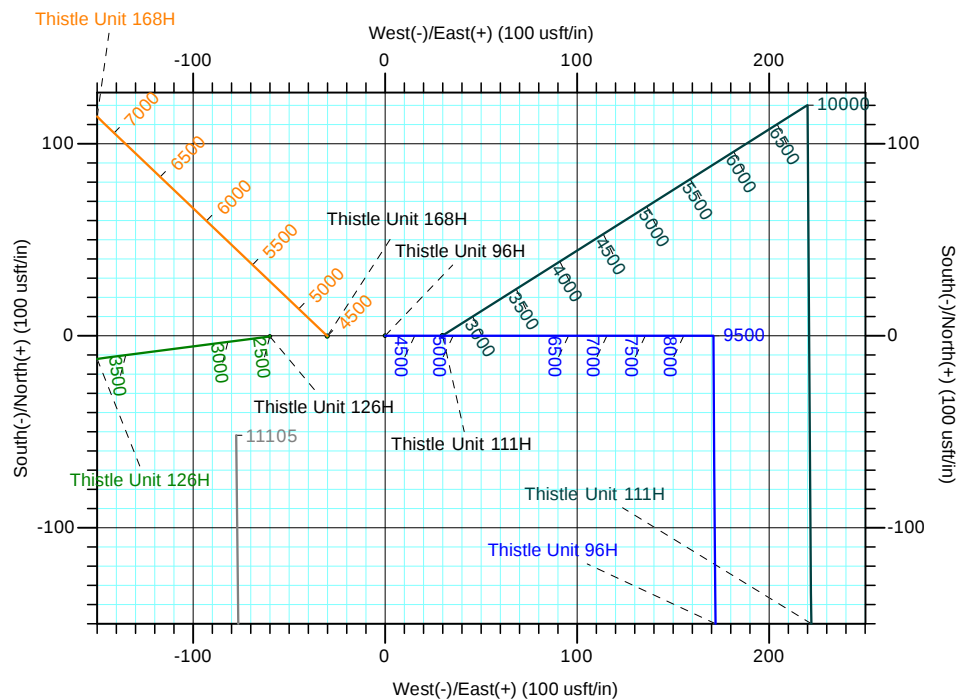

LEAM DRILLING SYSTEMS LLC
2010 East Davis, Conroe, Texas 77301
Phone: 936/756-7577, Fax: 936/756-7595

Plan: Plan #2 (Thistle Unit 96H/OH)
Thistle Unit Sec 22-27 Trac Pad
Created By: Dustin Ault
Date: 16:40, September 20 2017
Approved: _____
Date: _____

Devon Energy

Lea County, NM (NAD-83)

Thistle Unit Sec 22-27 Trac Pad

Thistle Unit 96H

OH

Plan: Plan #2

Standard Planning Report

20 September, 2017

LEAM Drilling Systems LLC

Planning Report

Database:	EDM 5000.1 Multi User Db	Local Co-ordinate Reference:	Well Thistle Unit 96H
Company:	Devon Energy	TVD Reference:	3707.6' GE + 23.5' KB @ 3731.10usft
Project:	Lea County, NM (NAD-83)	MD Reference:	3707.6' GE + 23.5' KB @ 3731.10usft
Site:	Thistle Unit Sec 22-27 Trac Pad	North Reference:	Grid
Well:	Thistle Unit 96H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #2		

Project	Lea County, NM (NAD-83)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site		Thistle Unit Sec 22-27 Trac Pad			
Site Position:		Northing:	472,548.43 usft	Latitude:	32° 17' 48.4331 N
From:	Map	Easting:	777,932.69 usft	Longitude:	103° 34' 3.4563 W
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "	Grid Convergence:	0.41 °

Well	Thistle Unit 96H					
Well Position	+N/-S	42.01 usft	Northing:	472,590.44 usft	Latitude:	32° 17' 48.5402 N
	+E/-W	4,329.16 usft	Easting:	782,261.85 usft	Longitude:	103° 33' 13.0182 W
Position Uncertainty		0.00 usft	Wellhead Elevation:	0.00 usft	Ground Level:	3,707.60 usft

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	HDGM	9/20/2017	6.83	60.12	48,166

Design	Plan #2			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.00	0.00	0.00	178.31

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
4,000.00	0.00	0.01	4,000.00	0.00	0.00	0.00	0.00	0.00	0.01	
4,229.29	2.29	90.00	4,229.23	0.00	4.59	1.00	1.00	0.00	90.00	
8,274.07	2.29	90.00	8,270.77	0.00	166.41	0.00	0.00	0.00	0.00	
8,503.36	0.00	0.01	8,500.00	0.00	171.00	1.00	-1.00	0.00	180.00	
9,600.41	0.00	0.01	9,597.05	0.00	171.00	0.00	0.00	0.00	0.01	
10,497.84	89.74	179.58	10,170.00	-570.37	175.19	10.00	10.00	20.01	179.58	
17,626.43	89.74	179.58	10,202.00	-7,698.70	227.57	0.00	0.00	0.00	0.00	PBHL (TU 96)

LEAM Drilling Systems LLC

Planning Report

Database:	EDM 5000.1 Multi User Db	Local Co-ordinate Reference:	Well Thistle Unit 96H
Company:	Devon Energy	TVD Reference:	3707.6' GE + 23.5' KB @ 3731.10usft
Project:	Lea County, NM (NAD-83)	MD Reference:	3707.6' GE + 23.5' KB @ 3731.10usft
Site:	Thistle Unit Sec 22-27 Trac Pad	North Reference:	Grid
Well:	Thistle Unit 96H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #2		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
SHL (TU 96)									
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,400.00	0.00	0.00	0.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00
2,600.00	0.00	0.00	2,600.00	0.00	0.00	0.00	0.00	0.00	0.00
2,700.00	0.00	0.00	2,700.00	0.00	0.00	0.00	0.00	0.00	0.00
2,800.00	0.00	0.00	2,800.00	0.00	0.00	0.00	0.00	0.00	0.00
2,900.00	0.00	0.00	2,900.00	0.00	0.00	0.00	0.00	0.00	0.00
3,000.00	0.00	0.00	3,000.00	0.00	0.00	0.00	0.00	0.00	0.00
3,100.00	0.00	0.00	3,100.00	0.00	0.00	0.00	0.00	0.00	0.00
3,200.00	0.00	0.00	3,200.00	0.00	0.00	0.00	0.00	0.00	0.00
3,300.00	0.00	0.00	3,300.00	0.00	0.00	0.00	0.00	0.00	0.00
3,400.00	0.00	0.00	3,400.00	0.00	0.00	0.00	0.00	0.00	0.00
3,500.00	0.00	0.00	3,500.00	0.00	0.00	0.00	0.00	0.00	0.00
3,600.00	0.00	0.00	3,600.00	0.00	0.00	0.00	0.00	0.00	0.00
3,700.00	0.00	0.00	3,700.00	0.00	0.00	0.00	0.00	0.00	0.00
3,800.00	0.00	0.00	3,800.00	0.00	0.00	0.00	0.00	0.00	0.00
3,900.00	0.00	0.00	3,900.00	0.00	0.00	0.00	0.00	0.00	0.00
4,000.00	0.00	0.00	4,000.00	0.00	0.00	0.00	0.00	0.00	0.00
Start Build 1.00									
4,100.00	1.00	90.00	4,100.00	0.00	0.87	0.03	1.00	1.00	0.00
4,200.00	2.00	90.00	4,199.96	0.00	3.49	0.10	1.00	1.00	0.00
4,229.29	2.29	90.00	4,229.23	0.00	4.59	0.14	1.00	1.00	0.00
Start 4044.78 hold at 4229.29 MD									
4,300.00	2.29	90.00	4,299.88	0.00	7.42	0.22	0.00	0.00	0.00
4,400.00	2.29	90.00	4,399.80	0.00	11.42	0.34	0.00	0.00	0.00
4,500.00	2.29	90.00	4,499.72	0.00	15.42	0.46	0.00	0.00	0.00
4,600.00	2.29	90.00	4,599.64	0.00	19.42	0.57	0.00	0.00	0.00
4,700.00	2.29	90.00	4,699.56	0.00	23.42	0.69	0.00	0.00	0.00
4,800.00	2.29	90.00	4,799.48	0.00	27.42	0.81	0.00	0.00	0.00

LEAM Drilling Systems LLC

Planning Report

Database:	EDM 5000.1 Multi User Db	Local Co-ordinate Reference:	Well Thistle Unit 96H
Company:	Devon Energy	TVD Reference:	3707.6' GE + 23.5' KB @ 3731.10usft
Project:	Lea County, NM (NAD-83)	MD Reference:	3707.6' GE + 23.5' KB @ 3731.10usft
Site:	Thistle Unit Sec 22-27 Trac Pad	North Reference:	Grid
Well:	Thistle Unit 96H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #2		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,900.00	2.29	90.00	4,899.40	0.00	31.42	0.93	0.00	0.00	0.00
5,000.00	2.29	90.00	4,999.32	0.00	35.42	1.05	0.00	0.00	0.00
5,100.00	2.29	90.00	5,099.24	0.00	39.42	1.16	0.00	0.00	0.00
5,200.00	2.29	90.00	5,199.16	0.00	43.42	1.28	0.00	0.00	0.00
5,300.00	2.29	90.00	5,299.08	0.00	47.42	1.40	0.00	0.00	0.00
5,400.00	2.29	90.00	5,399.00	0.00	51.43	1.52	0.00	0.00	0.00
5,500.00	2.29	90.00	5,498.92	0.00	55.43	1.64	0.00	0.00	0.00
5,600.00	2.29	90.00	5,598.84	0.00	59.43	1.76	0.00	0.00	0.00
5,700.00	2.29	90.00	5,698.76	0.00	63.43	1.87	0.00	0.00	0.00
5,800.00	2.29	90.00	5,798.68	0.00	67.43	1.99	0.00	0.00	0.00
5,900.00	2.29	90.00	5,898.60	0.00	71.43	2.11	0.00	0.00	0.00
6,000.00	2.29	90.00	5,998.52	0.00	75.43	2.23	0.00	0.00	0.00
6,100.00	2.29	90.00	6,098.44	0.00	79.43	2.35	0.00	0.00	0.00
6,200.00	2.29	90.00	6,198.36	0.00	83.43	2.47	0.00	0.00	0.00
6,300.00	2.29	90.00	6,298.28	0.00	87.43	2.58	0.00	0.00	0.00
6,400.00	2.29	90.00	6,398.20	0.00	91.43	2.70	0.00	0.00	0.00
6,500.00	2.29	90.00	6,498.12	0.00	95.43	2.82	0.00	0.00	0.00
6,600.00	2.29	90.00	6,598.04	0.00	99.44	2.94	0.00	0.00	0.00
6,700.00	2.29	90.00	6,697.96	0.00	103.44	3.06	0.00	0.00	0.00
6,800.00	2.29	90.00	6,797.88	0.00	107.44	3.17	0.00	0.00	0.00
6,900.00	2.29	90.00	6,897.80	0.00	111.44	3.29	0.00	0.00	0.00
7,000.00	2.29	90.00	6,997.72	0.00	115.44	3.41	0.00	0.00	0.00
7,100.00	2.29	90.00	7,097.64	0.00	119.44	3.53	0.00	0.00	0.00
7,200.00	2.29	90.00	7,197.56	0.00	123.44	3.65	0.00	0.00	0.00
7,300.00	2.29	90.00	7,297.48	0.00	127.44	3.77	0.00	0.00	0.00
7,400.00	2.29	90.00	7,397.40	0.00	131.44	3.88	0.00	0.00	0.00
7,500.00	2.29	90.00	7,497.32	0.00	135.44	4.00	0.00	0.00	0.00
7,600.00	2.29	90.00	7,597.24	0.00	139.44	4.12	0.00	0.00	0.00
7,700.00	2.29	90.00	7,697.16	0.00	143.45	4.24	0.00	0.00	0.00
7,800.00	2.29	90.00	7,797.08	0.00	147.45	4.36	0.00	0.00	0.00
7,900.00	2.29	90.00	7,897.00	0.00	151.45	4.47	0.00	0.00	0.00
8,000.00	2.29	90.00	7,996.92	0.00	155.45	4.59	0.00	0.00	0.00
8,100.00	2.29	90.00	8,096.84	0.00	159.45	4.71	0.00	0.00	0.00
8,200.00	2.29	90.00	8,196.76	0.00	163.45	4.83	0.00	0.00	0.00
8,274.07	2.29	90.00	8,270.77	0.00	166.41	4.92	0.00	0.00	0.00
Start Drop -1.00									
8,300.00	2.03	90.00	8,296.68	0.00	167.39	4.95	1.00	-1.00	0.00
8,400.00	1.03	90.00	8,396.64	0.00	170.07	5.02	1.00	-1.00	0.00
8,503.36	0.00	0.01	8,500.00	0.00	171.00	5.05	1.00	-1.00	0.00
Start 1097.05 hold at 8503.36 MD									
8,600.00	0.00	0.00	8,596.64	0.00	171.00	5.05	0.00	0.00	0.00
8,700.00	0.00	0.00	8,696.64	0.00	171.00	5.05	0.00	0.00	0.00
8,800.00	0.00	0.00	8,796.64	0.00	171.00	5.05	0.00	0.00	0.00
8,900.00	0.00	0.00	8,896.64	0.00	171.00	5.05	0.00	0.00	0.00
9,000.00	0.00	0.00	8,996.64	0.00	171.00	5.05	0.00	0.00	0.00
9,100.00	0.00	0.00	9,096.64	0.00	171.00	5.05	0.00	0.00	0.00
9,200.00	0.00	0.00	9,196.64	0.00	171.00	5.05	0.00	0.00	0.00
9,300.00	0.00	0.00	9,296.64	0.00	171.00	5.05	0.00	0.00	0.00
9,400.00	0.00	0.00	9,396.64	0.00	171.00	5.05	0.00	0.00	0.00
9,500.00	0.00	0.00	9,496.64	0.00	171.00	5.05	0.00	0.00	0.00
9,600.41	0.00	0.00	9,597.05	0.00	171.00	5.05	0.00	0.00	0.00
Start DLS 10.00 TFO 179.58									
9,650.00	4.96	179.58	9,646.58	-2.14	171.02	7.20	10.00	10.00	0.00

LEAM Drilling Systems LLC

Planning Report

Database:	EDM 5000.1 Multi User Db	Local Co-ordinate Reference:	Well Thistle Unit 96H
Company:	Devon Energy	TVD Reference:	3707.6' GE + 23.5' KB @ 3731.10usft
Project:	Lea County, NM (NAD-83)	MD Reference:	3707.6' GE + 23.5' KB @ 3731.10usft
Site:	Thistle Unit Sec 22-27 Trac Pad	North Reference:	Grid
Well:	Thistle Unit 96H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #2		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
9,700.00	9.96	179.58	9,696.14	-8.63	171.06	13.68	10.00	10.00	0.00
9,750.00	14.96	179.58	9,744.95	-19.42	171.14	24.46	10.00	10.00	0.00
9,800.00	19.96	179.58	9,792.63	-34.41	171.25	39.46	10.00	10.00	0.00
9,850.00	24.96	179.58	9,838.82	-53.51	171.39	58.55	10.00	10.00	0.00
9,900.00	29.96	179.58	9,883.17	-76.55	171.56	81.59	10.00	10.00	0.00
9,950.00	34.96	179.58	9,925.35	-103.38	171.76	108.41	10.00	10.00	0.00
10,000.00	39.96	179.58	9,965.03	-133.78	171.98	138.80	10.00	10.00	0.00
10,050.00	44.96	179.58	10,001.90	-167.52	172.23	172.54	10.00	10.00	0.00
10,100.00	49.96	179.58	10,035.70	-204.35	172.50	209.36	10.00	10.00	0.00
10,150.00	54.96	179.58	10,066.15	-243.98	172.79	248.98	10.00	10.00	0.00
10,200.00	59.96	179.58	10,093.04	-286.12	173.10	291.11	10.00	10.00	0.00
10,250.00	64.96	179.58	10,116.15	-330.43	173.43	335.41	10.00	10.00	0.00
10,300.00	69.96	179.58	10,135.31	-376.60	173.77	381.57	10.00	10.00	0.00
10,350.00	74.96	179.58	10,150.38	-424.26	174.12	429.22	10.00	10.00	0.00
10,400.00	79.96	179.58	10,161.23	-473.05	174.48	478.00	10.00	10.00	0.00
10,450.00	84.96	179.58	10,167.79	-522.60	174.84	527.54	10.00	10.00	0.00
10,497.84	89.74	179.58	10,170.00	-570.37	175.19	575.30	10.00	10.00	0.00
Start 7128.59 hold at 10497.84 MD - LP (TU 96)									
10,500.00	89.74	179.58	10,170.01	-572.53	175.21	577.46	0.00	0.00	0.00
10,600.00	89.74	179.58	10,170.46	-672.53	175.94	677.43	0.00	0.00	0.00
10,700.00	89.74	179.58	10,170.91	-772.52	176.68	777.41	0.00	0.00	0.00
10,800.00	89.74	179.58	10,171.36	-872.52	177.41	877.38	0.00	0.00	0.00
10,900.00	89.74	179.58	10,171.81	-972.52	178.15	977.36	0.00	0.00	0.00
11,000.00	89.74	179.58	10,172.26	-1,072.51	178.88	1,077.33	0.00	0.00	0.00
11,100.00	89.74	179.58	10,172.71	-1,172.51	179.62	1,177.30	0.00	0.00	0.00
11,200.00	89.74	179.58	10,173.15	-1,272.51	180.35	1,277.28	0.00	0.00	0.00
11,300.00	89.74	179.58	10,173.60	-1,372.50	181.09	1,377.25	0.00	0.00	0.00
11,400.00	89.74	179.58	10,174.05	-1,472.50	181.82	1,477.23	0.00	0.00	0.00
11,500.00	89.74	179.58	10,174.50	-1,572.49	182.55	1,577.20	0.00	0.00	0.00
11,600.00	89.74	179.58	10,174.95	-1,672.49	183.29	1,677.18	0.00	0.00	0.00
11,700.00	89.74	179.58	10,175.40	-1,772.49	184.02	1,777.15	0.00	0.00	0.00
11,800.00	89.74	179.58	10,175.85	-1,872.48	184.76	1,877.12	0.00	0.00	0.00
11,900.00	89.74	179.58	10,176.30	-1,972.48	185.49	1,977.10	0.00	0.00	0.00
12,000.00	89.74	179.58	10,176.74	-2,072.48	186.23	2,077.07	0.00	0.00	0.00
12,100.00	89.74	179.58	10,177.19	-2,172.47	186.96	2,177.05	0.00	0.00	0.00
12,200.00	89.74	179.58	10,177.64	-2,272.47	187.70	2,277.02	0.00	0.00	0.00
12,300.00	89.74	179.58	10,178.09	-2,372.46	188.43	2,377.00	0.00	0.00	0.00
12,400.00	89.74	179.58	10,178.54	-2,472.46	189.17	2,476.97	0.00	0.00	0.00
12,500.00	89.74	179.58	10,178.99	-2,572.46	189.90	2,576.95	0.00	0.00	0.00
12,600.00	89.74	179.58	10,179.44	-2,672.45	190.64	2,676.92	0.00	0.00	0.00
12,700.00	89.74	179.58	10,179.89	-2,772.45	191.37	2,776.89	0.00	0.00	0.00
12,800.00	89.74	179.58	10,180.34	-2,872.45	192.11	2,876.87	0.00	0.00	0.00
12,900.00	89.74	179.58	10,180.78	-2,972.44	192.84	2,976.84	0.00	0.00	0.00
13,000.00	89.74	179.58	10,181.23	-3,072.44	193.58	3,076.82	0.00	0.00	0.00
13,100.00	89.74	179.58	10,181.68	-3,172.44	194.31	3,176.79	0.00	0.00	0.00
13,200.00	89.74	179.58	10,182.13	-3,272.43	195.05	3,276.77	0.00	0.00	0.00
13,300.00	89.74	179.58	10,182.58	-3,372.43	195.78	3,376.74	0.00	0.00	0.00
13,400.00	89.74	179.58	10,183.03	-3,472.42	196.52	3,476.71	0.00	0.00	0.00
13,500.00	89.74	179.58	10,183.48	-3,572.42	197.25	3,576.69	0.00	0.00	0.00
13,600.00	89.74	179.58	10,183.93	-3,672.42	197.98	3,676.66	0.00	0.00	0.00
13,700.00	89.74	179.58	10,184.38	-3,772.41	198.72	3,776.64	0.00	0.00	0.00
13,800.00	89.74	179.58	10,184.82	-3,872.41	199.45	3,876.61	0.00	0.00	0.00
13,900.00	89.74	179.58	10,185.27	-3,972.41	200.19	3,976.59	0.00	0.00	0.00
14,000.00	89.74	179.58	10,185.72	-4,072.40	200.92	4,076.56	0.00	0.00	0.00

LEAM Drilling Systems LLC

Planning Report

Database:	EDM 5000.1 Multi User Db	Local Co-ordinate Reference:	Well Thistle Unit 96H
Company:	Devon Energy	TVD Reference:	3707.6' GE + 23.5' KB @ 3731.10usft
Project:	Lea County, NM (NAD-83)	MD Reference:	3707.6' GE + 23.5' KB @ 3731.10usft
Site:	Thistle Unit Sec 22-27 Trac Pad	North Reference:	Grid
Well:	Thistle Unit 96H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #2		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
14,100.00	89.74	179.58	10,186.17	-4,172.40	201.66	4,176.53	0.00	0.00	0.00
14,200.00	89.74	179.58	10,186.62	-4,272.39	202.39	4,276.51	0.00	0.00	0.00
14,300.00	89.74	179.58	10,187.07	-4,372.39	203.13	4,376.48	0.00	0.00	0.00
14,400.00	89.74	179.58	10,187.52	-4,472.39	203.86	4,476.46	0.00	0.00	0.00
14,500.00	89.74	179.58	10,187.97	-4,572.38	204.60	4,576.43	0.00	0.00	0.00
14,600.00	89.74	179.58	10,188.42	-4,672.38	205.33	4,676.41	0.00	0.00	0.00
14,700.00	89.74	179.58	10,188.86	-4,772.38	206.07	4,776.38	0.00	0.00	0.00
14,800.00	89.74	179.58	10,189.31	-4,872.37	206.80	4,876.36	0.00	0.00	0.00
14,900.00	89.74	179.58	10,189.76	-4,972.37	207.54	4,976.33	0.00	0.00	0.00
15,000.00	89.74	179.58	10,190.21	-5,072.36	208.27	5,076.30	0.00	0.00	0.00
15,100.00	89.74	179.58	10,190.66	-5,172.36	209.01	5,176.28	0.00	0.00	0.00
15,200.00	89.74	179.58	10,191.11	-5,272.36	209.74	5,276.25	0.00	0.00	0.00
15,300.00	89.74	179.58	10,191.56	-5,372.35	210.48	5,376.23	0.00	0.00	0.00
15,400.00	89.74	179.58	10,192.01	-5,472.35	211.21	5,476.20	0.00	0.00	0.00
15,500.00	89.74	179.58	10,192.46	-5,572.35	211.95	5,576.18	0.00	0.00	0.00
15,600.00	89.74	179.58	10,192.90	-5,672.34	212.68	5,676.15	0.00	0.00	0.00
15,700.00	89.74	179.58	10,193.35	-5,772.34	213.42	5,776.12	0.00	0.00	0.00
15,800.00	89.74	179.58	10,193.80	-5,872.34	214.15	5,876.10	0.00	0.00	0.00
15,900.00	89.74	179.58	10,194.25	-5,972.33	214.88	5,976.07	0.00	0.00	0.00
16,000.00	89.74	179.58	10,194.70	-6,072.33	215.62	6,076.05	0.00	0.00	0.00
16,100.00	89.74	179.58	10,195.15	-6,172.32	216.35	6,176.02	0.00	0.00	0.00
16,200.00	89.74	179.58	10,195.60	-6,272.32	217.09	6,276.00	0.00	0.00	0.00
16,300.00	89.74	179.58	10,196.05	-6,372.32	217.82	6,375.97	0.00	0.00	0.00
16,400.00	89.74	179.58	10,196.50	-6,472.31	218.56	6,475.94	0.00	0.00	0.00
16,500.00	89.74	179.58	10,196.94	-6,572.31	219.29	6,575.92	0.00	0.00	0.00
16,600.00	89.74	179.58	10,197.39	-6,672.31	220.03	6,675.89	0.00	0.00	0.00
16,700.00	89.74	179.58	10,197.84	-6,772.30	220.76	6,775.87	0.00	0.00	0.00
16,800.00	89.74	179.58	10,198.29	-6,872.30	221.50	6,875.84	0.00	0.00	0.00
16,900.00	89.74	179.58	10,198.74	-6,972.29	222.23	6,975.82	0.00	0.00	0.00
17,000.00	89.74	179.58	10,199.19	-7,072.29	222.97	7,075.79	0.00	0.00	0.00
17,100.00	89.74	179.58	10,199.64	-7,172.29	223.70	7,175.77	0.00	0.00	0.00
17,200.00	89.74	179.58	10,200.09	-7,272.28	224.44	7,275.74	0.00	0.00	0.00
17,300.00	89.74	179.58	10,200.53	-7,372.28	225.17	7,375.71	0.00	0.00	0.00
17,400.00	89.74	179.58	10,200.98	-7,472.28	225.91	7,475.69	0.00	0.00	0.00
17,500.00	89.74	179.58	10,201.43	-7,572.27	226.64	7,575.66	0.00	0.00	0.00
17,600.00	89.74	179.58	10,201.88	-7,672.27	227.38	7,675.64	0.00	0.00	0.00
17,626.43	89.74	179.58	10,202.00	-7,698.70	227.57	7,702.06	0.00	0.00	0.00
TD at 17626.43 - PBHL (TU 96)									

LEAM Drilling Systems LLC

Planning Report

Database:	EDM 5000.1 Multi User Db	Local Co-ordinate Reference:	Well Thistle Unit 96H
Company:	Devon Energy	TVD Reference:	3707.6' GE + 23.5' KB @ 3731.10usft
Project:	Lea County, NM (NAD-83)	MD Reference:	3707.6' GE + 23.5' KB @ 3731.10usft
Site:	Thistle Unit Sec 22-27 Trac Pad	North Reference:	Grid
Well:	Thistle Unit 96H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #2		

Design Targets									
Target Name	Dip Angle	Dip Dir.	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
- hit/miss target	(°)	(°)	(usft)	(usft)	(usft)	(usft)	(usft)		
- Shape									
SHL (TU 96)	0.00	0.00	0.00	0.00	0.00	472,590.44	782,261.85	32° 17' 48.5402 N	103° 33' 13.0182 W
- plan hits target center									
- Point									
LP (TU 96)	0.00	0.00	10,170.00	-570.37	175.19	472,020.07	782,437.04	32° 17' 42.8837 N	103° 33' 11.0256 W
- plan hits target center									
- Point									
PBHL (TU 96)	0.00	0.00	10,202.00	-7,698.70	227.57	464,891.74	782,489.42	32° 16' 32.3448 N	103° 33' 11.0195 W
- plan hits target center									
- Point									

Plan Annotations					
Measured	Vertical	Local Coordinates			
Depth	Depth	+N/-S	+E/-W		
(usft)	(usft)	(usft)	(usft)	Comment	
4,000.00	4,000.00	0.00	0.00	Start Build 1.00	
4,229.29	4,229.23	0.00	4.59	Start 4044.78 hold at 4229.29 MD	
8,274.07	8,270.77	0.00	166.41	Start Drop -1.00	
8,503.36	8,500.00	0.00	171.00	Start 1097.05 hold at 8503.36 MD	
9,600.41	9,597.05	0.00	171.00	Start DLS 10.00 TFO 179.58	
10,497.84	10,170.00	-570.37	175.19	Start 7128.59 hold at 10497.84 MD	
17,626.43	10,202.00	-7,698.70	227.57	TD at 17626.43	