

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: ☐ DRILL ☐ REENTER		5. Lease Serial No.
1b. Type of Well: ☐ Oil Well ☐ Gas Well ☐ Other		6. If Indian, Allottee or Tribe Name
1c. Type of Completion: ☐ Hydraulic Fracturing ☐ Single Zone ☐ Multiple Zone		7. If Unit or CA Agreement, Name and No.
2. Name of Operator 372098		8. Lease Name and Well No. 327335
3a. Address	3b. Phone No. (include area code)	9. API Well No. 30-025-47019
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface At proposed prod. zone		10. Field and Pool, or Exploratory 96994
14. Distance in miles and direction from nearest town or post office*		11. Sec., T. R. M. or Blk. and Survey or Area
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any)		12. County or Parish
16. No of acres in lease		13. State
17. Spacing Unit dedicated to this well		
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft.		
19. Proposed Depth		
20. BLM/BIA Bond No. in file		
21. Elevations (Show whether DF, KDB, RT, GL, etc.)		
22. Approximate date work will start*		
23. Estimated duration		
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be requested by the BLM. |

25. Signature	Name (Printed/Typed)	Date
Title		
Approved by (Signature)	Name (Printed/Typed)	Date
Title		
Office		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

GCP REC 03/23/2020

SL

(Continued on page 2)

APPROVED WITH CONDITIONS
Approval Date: 02/27/2020

Kz
03/27/2020

*(Instructions on page 2)



TOTAL SAFETY

MARATHON OIL COMPANY

ENDER WIGGINS F C 25-34-14

WXY Well # 6H

WC Well # 7H

WA Well # 10H

TB Well # 11H

WD Well # 12H

WC Well # 13H

SHL: 2451' FNL & 1735' FWL of Unit Letter 'F', Section 14, T-25S, R-34E

BHL: 150' FNL & 1325' FWL of Unit Letter 'D', Section 11, T-25S, R-34E

LEA County, New Mexico

Rig: H&P 498

3/22/2018

EMERGENCY MEDICAL PROCEDURES
DO NOT PANIC
REMAIN CALM-THINK

1. HOLD YOUR BREATH. (DO NOT INHALE, STOP BREATHING)
2. PUT ON BREATHING APPARATUS. (NOTE: DO NOT ATTEMPT RESCUE UNTIL YOU HAVE PUT ON BREATHING APPARATUS.)
3. REMOVE VICTIM (S) TO FRESH AIR AS QUICKLY AS POSSIBLE.
4. BE SURE YOU HAVE MOVED VICTIM OUT OF CONTAMINATED AREA BEFORE REMOVING YOUR RESPIRATOR.
5. APPLY MOUTH-TO-MOUTH ARTIFICIAL RESPIRATION, WHICH IS MORE EFFECTIVE, WHILE SOMEONE ELSE GETS THE OXYGEN RESUSCITATOR. RENDER OXYGEN RESUSCITATION ONLY IF PORPERLY TRAINED IN ITS USE.
6. PROVIDE FOR PROMPT TRANSPORTATION TO HOSPITAL AND CONTUNUE GIVING ARTIFICIAL RESPIRATION IF NEEDED.
7. HOSPITAL (S) OR MEDICAL FACILITIES NEED TO BE INFORMED BEFOREHAND, OF THE POSSIBILITY OF H2S GAS POISONING, NO MATTER HOW REMOTE THE POSSIBLITY IS.

Lea Regional Medical Center	(575)492-5000
5419 N Lovington Hwy, Hobbs, NM 88240	
AMBULANCE	911
FIRE DEPARTMENT- HOBBS, NM	(575) 397-9308
POLICE - HOBBS, NM	(575) 397-9265

8. NOTIFY EMERGENCY-ROOM PERSONEL THAT THE VICTIM (S) HAVE POSSIBLY BEEN EXPOSED TO H2S GAS POISONING.

TOTAL SAFETY INC
1420 East Greene St.
Carlsbad, NM 88220

THIS H2S DRILLING OPERATIONS PLAN WAS
PREPARED BY: Sean Chamblee
Strategic Account Manager
Cell: 713-703-6295

TOTAL SAFETY INC
1420 East Greene St
Carlsbad, NM 88220
Phone: 432-561-5049

H2S DRILLING OPERATIONS PLAN INDEX

I. INTRODUCTION

- A. Oil Company Address and Legal Description of Well Site
- B. Directions to Well Site
- C. Purpose of Plan

II. LOCATION LAYOUT

- A. Location Map
- B. General & Specific Area Maps

III. SAFETY EQUIPMENT

- A. Safety Equipment Provided by TOTAL SAFETY INC.
- B. Type of Equipment and Storage Locations
- C. Maximum Number of People on Location at any one time

IV. OPERATING PROCEDURES

- A. Blowout Prevention Measures During Drilling
- B. Gas Monitoring Equipment
- C. Crew Training and Protection
- D. Metallurgical Considerations
- E. Mud Program and Treating
- F. Well Control Equipment

V. OPERATING CONDITIONS

- A. Definition of Warning Flags
- B. Circulating Out Kick (Wait and Weight Method)
- C. Coring Operations in H2S Bearing Zones

VI. EMERGENCY PROCEDURES

- A. Sounding Alarm
- B. Drilling Crew Actions
- C. Responsibilities of Personnel
- D. Steps to be Taken
- E. Company and Contract Personnel
- F. Leak Ignition
- G. General Equipment
- H. Critical Operations

VII. LIST OF APPENDICES

- A. Emergency and Medical Facilities
- B. Law Enforcement Agencies and Fire Fighting Facilities
- C. Well Control Specialists
- D. Governmental Agencies

VIII. RESIDENTS AND LANDOWNERS

- A. Radius of Exposure Map with Residences Shown
- B. Residents Within Radius of Exposure and Telephone Numbers

IX. ADDITIONAL INFORMATION

- A. Hydrogen Sulfide Essay
- B. Hydrogen Sulfide Hazards
- C. Toxicity Table
- D. Treatment
- E. Characteristics of H₂S
- F. Safe Practices

INTRODUCTION

H2S DRILLING OPERATIONS PLAN

This Drilling Operations Plan was written specifically for:

**MARATHON OIL COMPANY
3122 NATIONAL PARKS HIGHWAY
CALRSBAD, NM 88220**

Action Plan for Accidental Release of H2S

ENDER WIGGINS F C 25-34-14

WXY Well # 6H

WC Well # 7H

WA Well # 10H

TB Well # 11H

WD Well # 12H

WC Well # 13H

LEA COUNTY, NM

Information, provisions and practices, as set forth in this plan, may be subject to revision and/or updating.

3-22-2018

**MARATHON OIL COMPANY
3122 NATIONAL PARKS HIGHWAY
CARLSBAD, NM 88220**

ENDER WIGGINS F C 25-34-14

WXY Well # 6H

WC Well # 7H

WA Well # 10H

TB Well # 11H

WD Well # 12H

WC Well # 13H

LEA COUNTY, NM

Directions:

FROM CARLSBAD, NM, AT THE INTERSECTION OF W. GREENE ST. AND N. CANAL ST. HEAD EAST ON W. GREENE STREET TOWARD S. CANAL ST. FOR 2.2 MILES TO REFINERY ROAD ON THE RIGHT. TRAVEL SOUTHEAST ON REFINERY ROAD FOR 12.5 MILES TO NEW MEXICO STATE HIGHWAY 31 ON THE LEFT. TRAVEL NORTHEAST ON NEW MEXICO STATE HIGHWAY 31 FOR 2.4 MILES TO NEW MEXICO STATE HIGHWAY 128 E ON THE RIGHT. TRAVEL SOUTHEAST ON NEW MEXICO STATE HIGHWAY 128 E. FOR 38.7 TO BATTLE AXE ROAD ON THE RIGHT. TRAVEL ON BATTLE AXE RD. FOR 0.3 MILES. TURN RIGHT TO STAY ON BATTLE AXE ROAD AND CONTINUE FOR 2.6 MILES. TURN RIGHT TO STAY ON BATTLE AXE ROAD AND CONTINUE FOR 2.6 MILES. AGAIN, TURN RIGHT TO STAY ON BATTLE AXE ROAD AND CONTINUE FOR 2.6 MILES TO AN EXISTING LEASE ROAD ON THE RIGHT. TRAVEL SOUTHEAST ON SAID EXISTING ROAD FOR 0.8 MILES TO THE PROPOSED.

**GPS Coordinates: 32.1310249, -103.44368638
LEA COUNTY, NEW MEXICO**

PURPOSE OF PLAN: The purpose of this plan is to safeguard the lives of the public, contract personnel and company personnel in the event of equipment failure or disasters during drilling or completion operations in formations that may contain Hydrogen Sulfide Gas, H₂S.

As a precautionary measure, this Drilling Plan has been prepared to assure the safety of all concerned, should a disaster occur. However, the Oil Company Representative may have specified materials and practices for the drilling or completion of this well, which supercede the minimum requirements as outlined in this plan.

Definitions: For the purpose of this plan the following definitions are to be referred to:

Controlled Release – Any release that is planned and occurs during normal operations. A controlled release is managed per the procedures outlined in this section.

Uncontrolled Release – Any release that is unplanned and not immediately contained utilizing established shut-in procedures. An uncontrolled release is normally associated with a loss of well control.

SCBA – (Self Contained Breathing Apparatus) – A full-face mask respirator with a supplied positive pressure air source.

Donned SCBA – When it is required per this plan to “**don**” a SCBA, personnel will be 100% masked up and be on supplied breathing air.

SCBA On Person – When it is required per this plan to have SCBA “on person”, personnel will be required to wear the SCBA equipment - but not be masked up.

“Qualified Buddy” – Person who has been fit tested and is trained and is familiar with the requirements of donning an SCBA. This person will provide immediate assistance to another person who may be utilizing an SCBA or SkaPack in an IDLH atmosphere in the event of an emergency situation.

In Scope Personnel – Rig Personnel who will be working or otherwise present in potential H₂S release areas, including the rig floor, cellar, pits, and shaker areas. This would not include 3rd party contractors who do not have a function, besides evacuating the rig, during an emergency condition such as during a well control event or H₂S / LEL alarm. All qualified personnel that have a function to shut a well in during an emergency will be considered In-Scope per this plan

Out of Scope Personnel –. All personnel that are not in scope will be Out of Scope per the definition of this plan

H₂S Office – Onsite office trailer space or vehicle that will be designated as the H₂S office

Marathon H2S Plan Custodian – Marathon HES Advisor, Supervisor or Technician that has been specifically assigned per the authorization page of this plan to maintain this document.

SAFETY EQUIPMENT

All H2S related Safety Equipment must be installed, tested and Operational at a depth of 500 feet above, or 3 days prior to penetrating the first zone expected to contain H2S.

SAFETY EQUIPMENT PROVIDED BY TOTAL SAFETY INC.

<u>QTY</u>	<u>EQUIPMENT</u>
6 each	30-minute self-contained breathing apparatus
6 each	ELSA Escape Packs
1 Lot	Sufficient low-pressure airline hose with quick connects
1	6 Channel fixed H2S monitor
4	H2S Sensors (Loc determined at rig up – General: Cellar, Shale Shaker, floor/driller area)
4	Explosion proof Alarm Station (1-Drill Floor, 1- Pits/Shakers, 1- Generators, 1 Quarters area)
10	Personal H2S Monitors
1	Gastec pump type gas detector
Set	Various range of H2s & SO2 detector tubes
2 each	Windsocks w/frames and poles
1 Set	H2S and briefing area signs
1 Set	Well condition signs and flags
1	Flare Gun & Flares

TYPE OF EQUIPMENT AND STORAGE LOCATIONS

1. There will be six 30-minute self-contained breathing apparatus on location. They will be positioned as follows: Two at Briefing Area #1 Two at Briefing Area #2, Two at rig dog house. SCBA Facepieces will be equipped with voice amplifiers for effective means of communication when using protective breathing apparatus.
2. There will be six Escape-type packs on location. One for the Derrickman. One on the Shaker. One at the bottom of rig dog house stairway and spares.
3. A Gastec, pump type, gas detector with low and high range detector tubes for H₂S and SO₂ will be located in the doghouse
4. Two Briefing Areas will be designated at opposite ends of the location.
5. The Briefing Area most upwind is designated as the Safety Briefing Area #1. In an emergency, personnel must assemble at this upwind area for instructions from their supervisor.
6. The H₂S 'Safety' trailer provided by Total Safety, Inc. will contain a cascade system of at least 5 each -300 C.F. air cylinders that will provide a continuous air supply to air lines located on the rig. Note: This trailer will **Only** be provided if H₂S conditions require the use of the Air Trailer. (If Required)
7. Two windsocks will be installed so as to be visible from all parts of the location.
8. A well condition warning sign will be displayed at the location entrance to advise of current operating conditions. The condition signs must be at least 200' from the entrance but not more than 500' away.
9. A list of emergency telephone numbers will be kept on rig floor, tool pusher's trailer, the Oil Company's trailer and in the "safety" trailer (if Provided).
10. The primary means of communication will be cell phones.

11. A barricade will be available to block the entrance to location should an emergency occur. In most cases the use of a vehicle is used to block the entrance.
12. A 6-channel H₂S monitor will be located in the doghouse. The 3 sensors will be installed: one on the shale shaker, one at the Cellar, one at the rig floor.
13. An undulating high and low pitch siren and light will be installed on the derrick "A" leg.
14. If H₂S concentration reach 10 ppm an explosion-proof bug blower (fan) will be installed under the rig floor to disperse possible accumulations of H₂S.
15. Any time it is necessary to flare gas containing H₂S, a Sulfur Dioxide monitor or Detector tubes will be used to determine SO₂ concentrations.
16. A flare gun with flares will also be provided in the event it is necessary to ignite the well from a safe distance.

OPERATING PROCEDURES

BLOWOUT PREVENTION MEASURES DURING DRILLING

1. Blowout Prevention Requirements:

All BOP equipment shall meet the American Petroleum Institute specifications as to materials acceptable for H₂S service and tested accordingly (or to BLM specifications).

2. Drilling String Requirements:

All drill string components are to be of material that meets the American Petroleum Institute's specifications for H₂S service. All drill string components should be inspected to IADC critical service specifications prior to running in well.

GAS MONITORING EQUIPMENT

1. A continuous H₂S detection system, consisting of three H₂S detectors and an audible/visual warning system will be in operating during all phases of this H₂S Drilling Operations Plan. The detection system will be adjusted and calibrated such that an H₂S exposure of 10 ppm or higher (at any sensor) will trigger the audible and visual portion (wailing or yelping siren) of the warning system (i.e. H₂S continually present at or above threshold levels) a trained operator or H₂S supervisor will monitor the H₂S detection system.

2. When approaching or completing H₂S formations, crewmembers may attach personnel H₂S monitors to their person.

3. Hand held H₂S sampling gas detectors will be used to check areas not covered by automatic monitoring equipment.

CREW TRAINING AND PROTECTION

1. All personal working at the well site will be properly trained in accordance with the general training requirements outlined in the API Recommended Practices for Safe Drilling of Wells Containing H₂S. The training will cover, but will not be limited to, the following:
 - a. General information of H₂S AND SO₂ GAS
 - b. Hazards of these gases
 - c. Safety equipment on location
 - d. Proper use and care of personal protective equipment
 - e. Operational procedures in dealing with H₂S gas
 - f. Evacuation procedures
 - g. First aid, reviving an H₂S victim, toxicity, etc.
 - h. Designated Safe Briefing Areas
 - i. Buddy System
 - j. Regulations
 - k. Review of Drilling Operations Plan
2. Initial training shall be completed when drilling reaches, a depth of 500' above or 3 days prior to penetrating (whichever comes first) the first zone containing or expected to contain H₂S. It must also include a review of the site specific Drilling Operations Plan and, if applicable, the Public Protections Plan.
3. Weekly H₂S and well control drills for all personnel on each working crew shall be conducted.
4. All training sessions and drills shall be recorded on the driller's log or its equivalent.
5. Safety Equipment:

As outlined in the Safety Equipment index, H₂S safety protection equipment will be available to/or assigned each person on location.
6. One person (by job title) shall be designated and identified to all on-site personnel as the person primarily responsible for the overall operation of the on-site safety and training programs. This will be the PIC

METALLURGICAL CONSIDERATIONS

1. Steel drill pipe used in H₂S environments should have yield strength of 95,000psi or less because of potential embrittlement problems. Must conform to the current National Association of Corrosion Engineers (NACE) Standard MR-0175-90, Material Requirement, Sulfide Stress Cracking Resistant Metallic Material for Oil Field Equipment. Drill stem joints near the top of the drill string are normally under the highest stress levels during drilling and do not have the protection of elevated down hole temperatures. These factors should be considered in design of the drill string. Precautions should be taken to minimize drill string stress caused by conditions such as excessive dogleg severity, improper torque, whip, abrasive wear or tool joints and joint imbalance. American Petroleum Institute, Bulletin RR 7G, will be used as a guideline for drill string precautions.
2. Corrosion inhibitors may be applied to the drill pipe or to the mud system as an additional safeguard.
3. Blowout preventors should meet or exceed the recommendations for H₂S service as set forth in the latest edition of API RI 53.

MUD PROGRAM AND TREATING

1. It is of utmost importance that the mud be closely monitored for detection of H₂S and reliability of the H₂S treating chemicals.
2. Identification and analysis of sulfides in the mud and mud filtrates will be carried out per operators prescribed procedures.
3. The mud system will be pre-treated with Zinc Carbonate, Ironite Sponge or similar chemicals of H₂S control prior to drilling into the H₂S bearing formation. Sufficient quantities of corrosion inhibitor should be on location to treat the drill string during Drill Stem Test Operations. Additionally, Aqua Ammonia should be on hand to treat the drill string for crew protection, should H₂S be encountered while tripping string following drill stem testing

WELL CONTROL EQUIPMENT

1. Flare System

- a. A flare system shall be designed and installed to safely gather and burn H₂S Bearing gas.
 - 1. Flare lines shall be located as far from the operating site as feasible and in a manner to compensate for wind changes.
 - 2. The flare line mouth shall be located not less than 150' from wellbore.
 - 3. Flare lines shall be straight unless targeted with running tees.
 - 4. Flare Gun & Flares to ignite the well

2. Remote Controlled Choke

- a. A remote controlled choke shall be installed for all H₂S drilling and where feasible for completion operations. A remote controlled valve may be used in lieu of this requirement for completions operations.

3. Mud-gas separators and rotating heads shall be installed and operable for all exploratory wells.

OPERATING CONDITIONS

A Well Condition Sign and Flag will be posted on all access roads to the location. The sign shall be legible and large enough to be read by all persons entering the well site and be placed a minimum of 200' but no more than 500' from the well site which allows vehicles to turn around at a safe distance prior to reaching the site.

DEFINITION OF WARNING FLAGS

1. Condition:
GREEN-NORMAL OPERATIONS
Any operation where the possibility of encountering H₂S exists but no H₂S has been detected.
2. Condition:
YELLOW-POTENTIAL DANGER, CAUTION
Any operation where the possibility of encountering H₂S exists and in all situations where concentrations of H₂S are detected in the air below the threshold level (10ppm)
 - a. Cause of condition:
 - *Circulating up drill breaks
 - *Trip gas after trip
 - *Circulating out gas on choke
 - *Poisonous gas present, but below threshold concentrations
 - *Drill stem test
 - b. Safety Action:
 - *Check safety equipment and keep it with you
 - *Be alert for a change in condition
 - *Follow instructions
3. Condition:
RED-EXTREME DANGER
Presence of H₂S at or greater than 10ppm. Breathing apparatus must be worn.
 - a. Safety action:

*MASK UP. All personal will have protective breathing equipment with them. All nonessential personnel will move to the Safe Briefing Area and stay there until instructed to do otherwise. All essential Qualified Personnel, using the “Buddy System” (those necessary to maintain control of the well) will don breathing apparatus to perform operations related to well control.

The decision to ignite the well is the responsibility of the operator’s on-site representative and should be made only as a last resort, when it is clear that:

- *human life is endangered
- *there is no hope of controlling the well under prevailing conditions

Order evacuation of local people within the danger zone. Request help from local authorities, State Police, Sheriff’s Dept. and Service Representative.

CIRCULATING OUT KICK (WAIT AND WEIGHT METHOD)

If it is suspected that H₂S is present with the gas whenever a kick is taken, the wait and weight method of eliminating gas and raising the mud will be followed.

1. Wait and Weight Method:

a. The wait and Weight Method is:

- *increase density of mud in pits to ‘kill’ weight mud.
- *open choke and bring pump to initial circulating pressure by holding casing pressure at original valve until pump is up to predetermined speed.
- *when initial circulating pressure is obtained on drill pipe, zero pump stroke counter and record time.
- *reduce drill pipe pressure from initial circulating pressure to final circulating pressure by using pump strokes and/or time according to graph
- *when ‘kill’ weight mud is at the bit, hold final circulating pressure until kill weight mud is to surface.

b. If a kick has occurred, the standard blowout procedure will be followed and the wait and weight method will be used to kill the well. When the well has been put on the choke and circulation has been established, the following safety procedure must be established.

- *determine when gas is anticipated to reach surface.

- *all non-essential personnel must be moved to safe briefing area
- *all remaining personnel will check out and keep with them their protective breathing apparatus.
- *mud men will see that the proper amount of H₂S scavenging chemical is in the mud and record times checked
- *make sure ignition flare is burning and valves are open to designated flare stacks

CORING OPERATIONS IN H₂S BEARING ZONES

1. Personal protective breathing apparatus will be worn from 10 to 15 stands in advance of retrieving the core barrel. Cores to be transported should be sealed and marked to the presence of H₂S.
 - a. Yellow Caution Flag will be flown at the well condition sign.
 - b. The “NO SMOKING” rule will be enforced

DRILL STEM TESTING OF H₂S ZONES

1. The DST subsurface equipment will be suitable for H₂S service as recommended by the API
2. Drill stem testing of H₂S zone will be conducted in daylight hours
3. All non-essential personnel will be moved to an established safe area or off location
4. The “NO SMOKING” rule will be enforced
5. DST fluids will be circulated through a remote controlled choke and a separator to permit flaring of gas. A continuous pilot light will be used.
6. A yellow or red flag will be flown at entrance to location depending on present gas condition
7. If warranted, the use of Aqua Ammonia for neutralizing the toxicity of H₂S from drill string
 - a. During drill stem tests adequate Filming Amine for H₂S corrosion and Aqua Ammonia for neutralizing H₂S should be on location.
8. On completion of DST, if H₂S contaminated formation fluids or gases are present in drill string, floor workers will be masked up before test valve is removed from drill string and continue “mask

on” conditions until such time that readings in the work area do not exceed 10ppm of H₂S gas.

EMERGENCY PROCEDURES

SOUNDING ALARM

In case of an alarm the crews will muster up at the designated area. Total Safety will be dispatched with (2) HES Techs who are to go in under protective breathing air and check the alarm readings and sniff ambient air for the presence of H₂S.

By no means are the Co. Rep or HES Advisor to go in under air with the HES Tech. If there is another method in place where the Rig Manager is to go in with the Tech we need to ensure that the rig company has cleared them and that they are properly trained.

1. The fact is to be instilled in the minds of all rig personnel that the sounding alarm means only one thing: H₂S IS PRESENT. Everyone is to proceed to his assigned station and the contingency plan is put into effect.

DRILLING CREW ACTIONS

1. All personnel will don their protective breathing apparatus. The driller will take necessary precautions as indicated in operating procedures.
2. The Buddy system will be implemented. All personnel will act upon directions from the operator's on-site representative.
3. If there are non-essential personnel on location, they will move off location.
4. Entrance to the location will be patrolled, and the proper well condition flag will be displayed at the entrance to the location.

RESPONSIBILITIES OF PERSONNEL

In order to assure the proper execution of this plan, it is essential that one person be responsible for and in complete charge of implementing these procedures. The responsibility will be as follows:

1. The operator's on-site representative or his assistant
2. Contract Tool Pusher

STEPS TO BE TAKEN

In the event of an accidental release of a potentially hazardous volume of H₂S, the following steps will be taken:

1. Contact by the quickest means of communications: the main offices of Oil Company & Contractor as listed on the preceding page.
2. An assigned crewmember will blockade the entrance to the location. No unauthorized personnel will be allowed entry into the location.
3. The operator's on-site representative will remain on location and attempt to regain control of the well.
4. The drilling company's rig superintendent will begin evacuation of those persons in immediate danger. He will begin by telephoning residents in the danger zone. In the event of no contact by telephoning, the tool pusher will proceed at once to each dwelling for a person-to-person contact. In the event the tool pusher cannot leave the location, he will assign a responsible crewmember to proceed in the evacuation of local residents. Upon arrival, the Sheriff's Department and TOTAL SAFETY personnel will aid in further evacuation.

LEAK IGNITION

Leak Ignition procedure: (used to ignite a leak in the event it becomes necessary to protect the public)

1. Two men, the operator's on-site representative and the contractor's rig superintendent or TOTAL SAFETY's representative(s), wearing self-contained pressure demand air masks must determine the perimeter of the flammable area. This should be done with one man using an H₂S detector and the other one using a flammable gas detector. The flammable perimeter should be established at 30% to 40% of the lower flammable limits.
2. After the flammable perimeter has been established and all employees and citizens have been removed from the area, the ignition team should move to the up-wind area of the leak perimeter and fire a flare into the area if the leak isn't ignited on the first attempt, move in 20 to 30 feet and fire again. Continue moving in and firing until the leak is ignited or the flammable gas detector indicates the ignition

- team is moving into the hazardous area. If trouble is incurred in igniting the leak by firing toward the leak, try firing 40 degrees to 90 degrees to each side of the area where you have been firing. If still no ignition is accomplished ignite the copper line burner and push it into the leak area. This should accomplish ignition. If ignition is not possible due to the makeup of the gas, the toxic leak perimeter must be established and maintained to insure evacuation is completed and continue until the emergency is secure.
3. The following equipment and man-power will be required to support the ignition team:
 - a. one flare gun with flares
 - b. four pressure demand air packs
 - c. two nylon ropes tied to the ignition team
 - d. two men in a clear area equipped with air packs
 - e. portable propane bottle with copper line
 4. The person with the final authority to ignite the well.

GENERAL EQUIPMENT

1. Two areas on the location will be designated as Briefing Areas. The one that is upwind from the well will be designated a the "Safe Briefing Area"
2. In the case of an emergency, personnel will assemble in the upwind area as per prior instructions from the operator's representative.
3. The H2S "Safety" trailer provide by TOTAL SAFETY will contain 10 air cylinders, a resuscitator, one 30-minute air pack and will have a windsock.
4. Two other windsocks will be installed.
5. A condition warning sign will be displayed at the location entrance.
6. A list of emergency telephone numbers will be kept on the rig floor, tool pusher's trailer and the Oil Company's trailer.
7. Two barricades will be available to block the entrance to location.
8. An undulating high and low pitch siren will be installed.
9. A telephone line or mobile phone will be available at the well site for incoming and outgoing communications.

CRITICAL OPERATIONS

These guidelines will be implemented during H2S alarms on drilling locations with the intent of minimizing catastrophic damage of “**critical tasks**” ONLY and exposure of field personnel (e.g. cement in the stack).

We will wait on Total Safety (or H2S Safety Company) for all other alarm events that aren't defined as “critical”.

- 1.) H2S alarm sounds, crews secure well, and muster based off of wind direction. MOC Operation, MOC Safety, and H2S service company notification will be made and representative from the H2S Service Company is in route to location.
- 2.) Two qualified in scope personnel will don SCBA, utilizing the "buddy system", and respond to area of H2S alarm location to verify the presence of H2S utilizing hand held four gas analyzer or other approved and provided method.
- 3.) If no H2S is found, the “all clear” will be authorized by the Marathon Oil Drilling Superintendent and HES to resume operations. H2S service company will still be required to respond.

Note: Personnel will return to muster area awaiting H2S service company and additional equipment if H2S is verified.

Note: Personnel will be trained annually on H2S and the elements of this guideline. The MOC HES Advisor and Co Man will receive hands on training from a H2S service company field tech, on how to properly identify the location of the alarming sensor, and the proper method for checking the alarmed area.

APPENDICES

EMERGENCY & MEDICAL FACILITIES:

Marathon Oil Corporation Emergency Numbers

Brent Evans	Drilling Manager	blevans@marathonoil.com	832 967-8474
Mark Bly	Drilling Superintendent	permiansuper@marathonoil.com	281-840-0467
Chad Butler	Drilling Superintendent	permiansuper@marathonoil.com	281-840-0467
Jacob Beaty	Drilling Engineer	jabeaty@marathonoil.com	713-296-1915
Noah Adams	HES Professional	njadams@marathonoil.com	713-591-4068
Nick Rogers	Lead HES Advisor	permianndches@marathonoil.com	281-659-3734
Scott Doughty	Lead HES Advisor	permianndches@marathonoil.com	281-659-3734
H&P 480	Company Man	Hp480@marathonoil.com	281-768-9946
H&P 498	Company Man	Hp498@marathonoil.com	281-745-0771
H&P 441	Company Man	Hp441@marathonoil.com	
H&P 423	Company Man	Hp423@marathonoil.com	
Precision 594	Company Man	Prec594@marathonoil.com	
H&P 480	HES Advisor	Hp480hes@marathonoil.com	
H&P 498	HES Advisor	Hp498hes@marathonoil.com	
H&P 441	HES Advisor	Hp441hes@marathonoil.com	
H&P 423	HES Advisor	Hp423hes@marathonoil.com	
Precision 594	HES Advisor	Prec594hes@marathonoil.com	


Emergency Services Area Numbers: Or Call 911

Sheriff (Eddy County, NM)	575-887-7551	New Mexico Poison Control	800-222-1222
Sheriff (Lea County, NM)	575-396-3611	Border Patrol (Las Cruces, NM)	575-528-6600
New Mexico State Police	575-392-5580/5588	Energy Minerals & Natural Resources Dept.	575-748-1283
Carlsbad Medical Center	575-887-4100	Environmental Health Dept.	505-476-8600
Lea Regional Medical Center	575-492-5000	OSHA (Santa Fe, NM)	505-827-2855
Police (Carlsbad, NM)	575-885-2111		
Police (Hobbs, NM)	575-392-9265		
Fire (Carlsbad, NM)	575-885-3124		
Fire (Hobbs, NM)	575-397-9308		
Ambulance Service	911	TOTAL SAFETY H2S – SAFETY SERVICES	432-561-5049

1. For Life Flight, 1st dial “911” They will determine nearest helicopter and confirm the need for helicopter.

RESIDENTS AND LANDOWNERS

AERIAL SATELLITE MAP

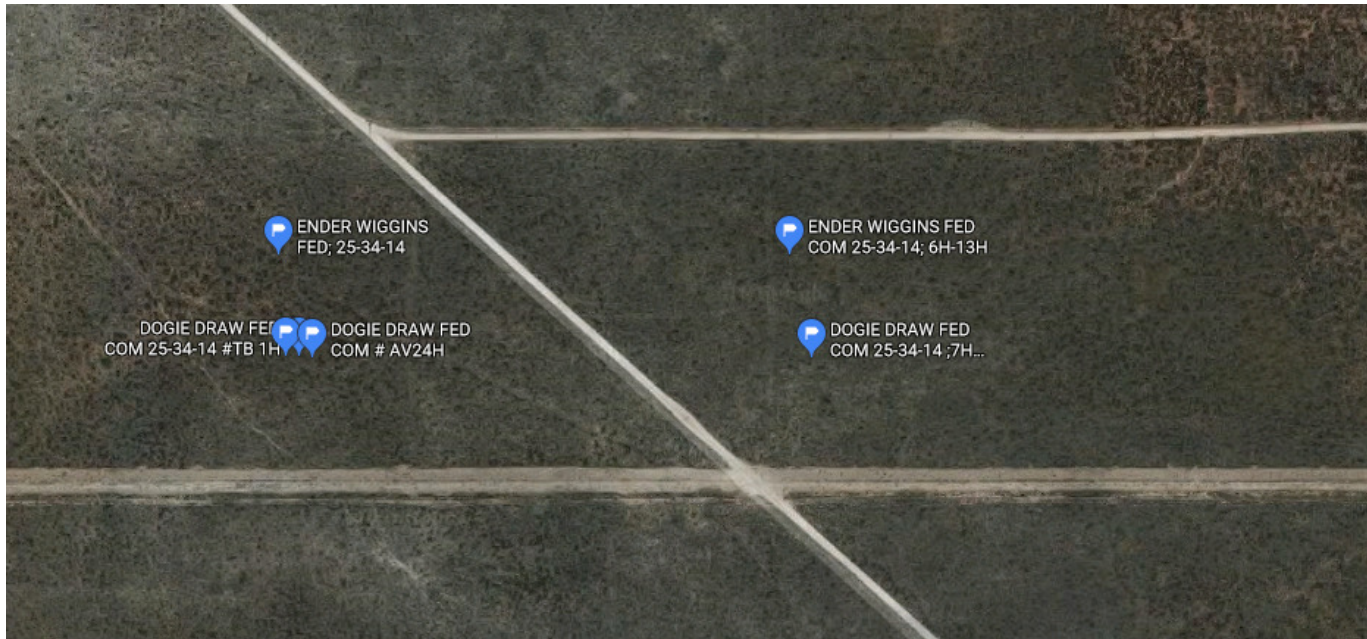

RESIDENCE

THERE ARE NO RESIDENCE WITHIN 1 MILE RADIUS OF WELL LOCATION.

ADDITIONAL INFORMATION

A. HYDROGEN SULFIDE ESSAY

A deadly enemy of those people employed in the petroleum industry, this gas can paralyze or kill quickly. At least part of the answer lies in education in the hazards, symptoms, characteristics, safe practices, treatment, and the proper use of personal protective equipment.

B. HYDROGEN SULFIDE HAZARDS

The principal hazard to personnel is asphyxiation or poisoning by inhalation. Hydrogen Sulfide is a colorless, flammable gas having an offensive odor and a sweetish taste. It is highly toxic and doubly hazardous because it is heavier than air (specific gravity = 1.19). Its offensive odor, like that of a rotten egg, has been used as an indicator by many old timers in the oil field, but is not a reliable warning of the presence of gas in a dangerous concentration because people differ greatly in their ability to detect smells. Where high concentrations are encountered, the olfactory nerves are rapidly paralyzed, diluting the sense of smell as a warning indicator. A concentration of a few hundredths of one percent higher than that causing irritation can cause asphyxia and death—in other words there is a very narrow margin between consciousness and unconsciousness, and between unconsciousness and death.

Where high concentrations cause respiratory paralysis, spontaneous breathing does not return unless artificial respiration is applied. Although breathing is paralyzed the heart may continue beating for ten minutes after the attack.

C. PHYSIOLOGICAL SYSTEMS

ACUTE: results in almost instantaneous asphyxia, with seeming respiratory paralysis acute poisoning, or strangulation, may occur after even a few seconds inhalation of high concentration and results in panting respiration, pallor, cramps, paralysis and almost immediate loss of consciousness with extreme rapidity from respiratory and cardiac paralysis. One breath of a sufficiently high concentration may have this result.

SUBACUTE: RESULTS IN IRRITATION, PRINCIPALLY OF THE EYES, PERSISTENT COUGH, TIGHTENING OR BURNING IN THE CHEST AND SKIN IRRITATION FOLLOWS BY DEPRESSION OF THE CENTRAL NERVOUS SYSTEM. The eye irritation ranges in severity from mild conjunctivitis to swelling and bulging of the conjunctiva photophobia (abnormal intolerance of light) and temporary blindness.

D. TREATMENT

1. Victim should be removed to fresh air immediately by rescuers wearing respiratory protective equipment. Protect yourself while rescuing.
2. If the victim is not breathing, begin immediately to apply artificial respiration. (See other chart for the chances for life after breathing has stopped.) If a resuscitator is available let another employee get it and prepare for use.
3. Treat for shock, keep victim warm and comfortable
4. Call a doctor, in all cases, victims of poisoning should be attended by a physician.

E. CHARACTERISTICS OF H₂S

1. Extremely Toxic (refer to chart for toxicity of Hydrogen Sulfide).
2. Heavier than air. Specific gravity= 1.19.
3. Colorless, has odor of rotten eggs.
4. Burns with a blue flame and produces sulfur Dioxide (SO₂) gas, which is very irritating to eyes and lungs. The SO₂ is also toxic and can cause serious injury.
5. H₂S is almost as toxic as hydrogen cyanide.
6. H₂S forms explosive mixture, with air between 4.3% and 46% by volume.
7. Between 5 and 6 times as toxic as carbon monoxide.
8. Produces irritation to eyes, throat, and respiratory tract.
9. Threshold Limit Value (TLV) maximum of eight hours exposure without protective respiratory equipment-10ppm.

F. SAFE PRACTICES

If you are faced with an H₂S problem in your operations, the following safe practices are recommended:


1. Be absolutely sure all concerned are familiar with the hazards concerning H₂S and how to avoid it.
2. All employees should know how to operate and maintain respiration equipment.
3. Be able to give and demonstrate artificial respiration.
4. Post areas where there is poisonous gas with suitable warning signs.
5. Be sure all new employees are thoroughly schooled before they are sent to the field-tomorrow may be too late.
6. Teach men to avoid gas whenever possible-work on the windward side, have fresh air mask available.
7. Never let bad judgment guide you-wear respiratory equipment when gauging tanks, etc. Never try to hold your breath in order to enter a contaminated atmosphere.
8. In areas of high concentration, a two-man operation is preferred.
9. Never enter a tank, cellar or other enclosed place where gas can accumulate without proper respiratory protective equipment and a safety belt secured to a lifeline held by another person outside.
10. Always check out danger areas first with H₂S detectors before allowing anyone to enter. DO NOT TRY TO DETERMINE THE PRESENCE OF GAS BY its ODOR.
11. Wear proper respiratory equipment for the job at hand. Never take a chance with equipment with which you are unfamiliar. If in doubt, consult your supervisor.
12. Carry out practice drills every month with emergency and maintenance breathing air equipment. Telling or showing a group how to operate equipment is not enough-make them show you.
13. Maximum care should be taken to prevent the escape of fumes into the air of working places by leaks, etc.
14. Communication such as radio and telephones should be provided for those people employed where H₂S may be present.

TOXICITY OF HYDROGEN SULFIDE TO MEN

H ₂ S Per Cent (PPM)**	0 - 2 Minutes	0 - 15 Minutes	15 - 30 Minutes	30 Minutes to 1 hour	1 - 4 Hours	4 - 8 Hours	4 - 48 Hours
0.005 (50)				Mild Conjunctiv- ities; respiratory tract irritation			
0.010 (100)				Throat			
0.010 (100)		Coughing; irritation of respiration; eyes; loss of pain in eyes; sense of smell sleepiness	Disturbed respiration; pain in eyes; sleepiness	Throat	Salivation & mucous dis- charge; sharp pain in eyes; coughing	Increased symptoms*	Hemorrhage & death*
0.015 (150)							
0.020 (200)		Loss of sense of smell	Throat & eye irritation	Throat & eye irritation	Difficult breathing; blurred vision; effects light & shy	Serious irritating & death*	Hemorrhage & death*
0.025 (250)							
0.035 (350)	Irritation of eyes; loss of sense of smell	Irritation of eyes	Painful secretion of tears; weariness	Light & shy; nasal catarrh; pain in eyes; difficult breathing	Hemorrhage & death		
0.035 (350)		Irritation of eyes; loss of smell	Difficult respiration coughing; irritation of eyes	Increased irritation of eyes and nasal tract; dull pain head; weariness; light shy	Dizziness weak- ness; increased irritation; death	Death*	
0.050 (500)	Coughing collapse & unconscious- ness	Respiratory disturbances; irritation of eyes; collapse	Serious eye irritation; palpitation of heart; few cases of death*	Severe pain in eyes and head dizziness; trem- bling of extre- mities; great weakness & death*			
0.060 (600)							
0.070 (700)	Collapse *	Collapse*					
0.808 (800)	unconscious- ness; death*	unconscious- ness; death*					
0.100 (1000)							
0.150 (1500)							

*Data secured from experiments of dogs which have susceptibility similar to men. **PPM - parts per million

MARATHON OIL - FLEX III PAD (Closed Loop System)

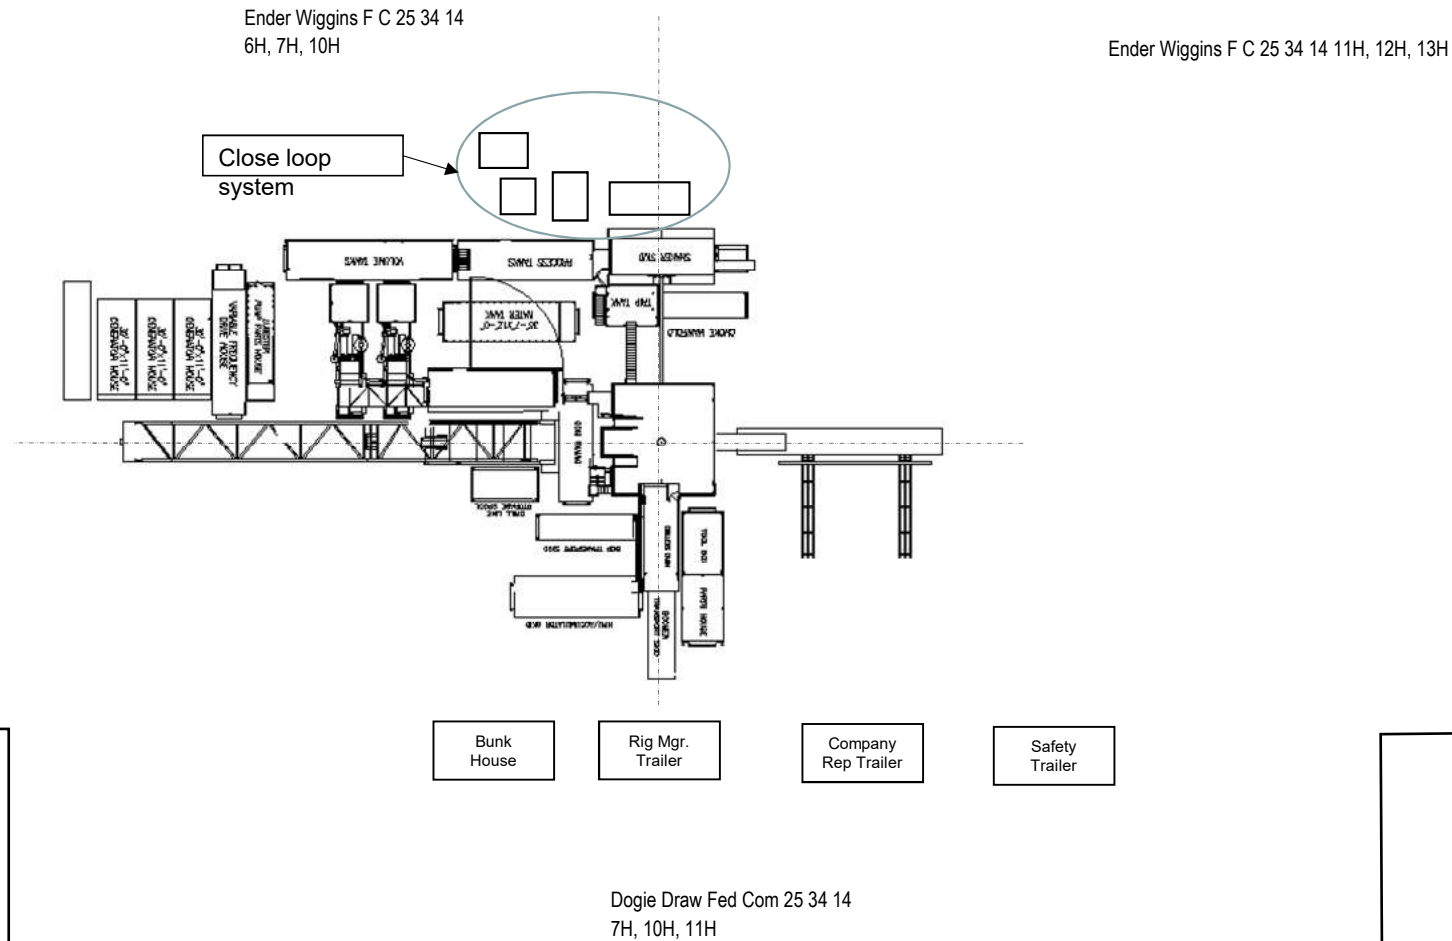



LEA COUNTY, NM (NAD27) ENDER
WIGGINS F C 25-34-14
WA #10H

PLAN # 1
H&P 498

WELL DETAILS:

Ground Level: 3332.00
+N/-S +E/-W Northing Easting Latitude Longitude
0.00 0.00 412477.30 775643.10 32° 7' 51.186 N 103° 26' 34.423 W

SECTION DETAILS

MD	INC	AZI	TVD	+N/-S	+E/-W	DLEG	TFACE	VSECT	TARGET
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
3000.00	0.00	0.00	3000.00	0.00	0.00	0.00	0.00	0.00	
3400.00	8.00	100.00	3398.70	-4.84	27.46	2.00	100.00	-4.84	
5800.00	8.00	100.00	5775.34	-62.84	356.40	0.00	0.00	-62.84	
6200.00	0.00	0.00	6174.05	-67.68	383.85	2.00	180.00	-67.68	
12125.95	0.00	0.00	12100.00	-67.68	383.85	0.00	0.00	-67.68	
13025.95	90.00	4.00	12672.96	503.88	423.82	10.00	4.00	503.88	
13585.95	90.00	4.00	12672.96	1062.51	462.88	0.00	0.00	1062.51	
13810.45	90.00	359.51	12672.96	1286.85	469.76	2.00	-90.00	1286.85	
20105.79	90.00	359.51	12673.00	7581.96	416.08	0.00	104.71	7581.96	BHL[EW\WA#10H]
20150.79	90.00	359.51	12673.00	7626.96	415.70	0.00	0.00	7626.96	

DESIGN TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting
BHL[EW\WA#10H]	12673.00	7581.96	416.08	420059.23	776059.18
FTP[EW\WA#10H]	12673.00	-35.41	479.22	412441.89	776122.32

DRILLING TARGET: 12673' TVD @ 0VS // 90.0° INC.

TARGET WINDOW: 15' UP // 15' DOWN

SITE DETAILS: ENDER WIGGINS FEDERAL 25-34-14
SITE CENTRE NORTHING: 412477.30
EASTING: 775643.10

POSITIONAL UNCERTAINTY: 0.00
CONVERGENCE: 0.47
LOCAL NORTH: GRID

PROJECT DETAILS: LEA COUNTY, NM (NAD27)
GEODETIC SYSTEM: US STATE PLANE 1927 (EXACT SOLUTION)
DATUM: NAD 1927 (NADCON CONUS)
ELLIPSOID: CLARKE 1866
ZONE: NEW MEXICO EAST 3001

SYSTEM DATUM: MEAN SEA LEVEL

FORMATION TOP DETAILS

TVDPATH	MDPATH	FORMATION
845.00	845.00	RUSTLER
1348.00	1348.00	SALADO
3547.00	3549.76	CASTILE
5071.00	5088.73	BASE OF SALT
5356.00	5376.53	LAMAR
5387.00	5407.84	BELL CANYON
6696.00	6721.95	CHERRY CANYON
7996.00	8021.95	BRUSHY CANYON
9291.00	9316.95	BONE SPRING
10332.00	10357.95	1ST BONE SPRING SAND
10910.00	10935.95	2ND BONE SPRING SAND
10954.00	10979.95	3RD BONE SPRING SAND
12377.00	12415.07	TBSG LOWER TARGET
12407.00	12449.95	WOLFCAMP
12430.00	12477.62	WOLFCAMP X
12518.00	12594.44	WOLFCAMP Y
12532.00	12615.32	WC Y TARGET
12558.00	12656.64	WOLFCAMP A
12673.00	20113.60	WOLFCAMP A TARGET

MAP SYSTEM: US STATE PLANE 1927 (EXACT SOLUTION)
DATUM: NAD 1927 (NADCON CONUS)
ELLIPSOID: CLARKE 1866
ZONE NAME: NEW MEXICO EAST 3001


LOCAL ORIGIN: WELL WA #10H, GRID NORTH

LATITUDE: 32° 7' 51.186 N
LONGITUDE: 103° 26' 34.423 W

GRID EAST: 775643.10
GRID NORTH: 412477.30
SCALE FACTOR: 1.000

GEOMAGNETIC MODEL: HDGM
SAMPLE DATE: 13-MAR-18
MAGNETIC DECLINATION: 6.73°
DIP ANGLE FROM HORIZONTAL: 59.82°
MAGNETIC FIELD STRENGTH: 47930
TO CONVERT MAGNETIC NORTH TO GRID, ADD 6.26°




TO CONVERT MAGNETIC NORTH TO TRUE, ADD 6.73° EAST
TO CONVERT TRUE NORTH TO GRID, SUBTRACT 0.47°



AZIMUTHS TO GRID NORTH
TRUE NORTH: -0.47°
MAGNETIC NORTH: 6.26°

MAGNETIC FIELD
STRENGTH: 47929.65NT
DIP ANGLE: 59.82°
DATE: 3/13/2018
MODEL: HDGM

To convert Magnetic North to Grid, Add 6.26°
To convert True North to Grid, Subtract 0.47°

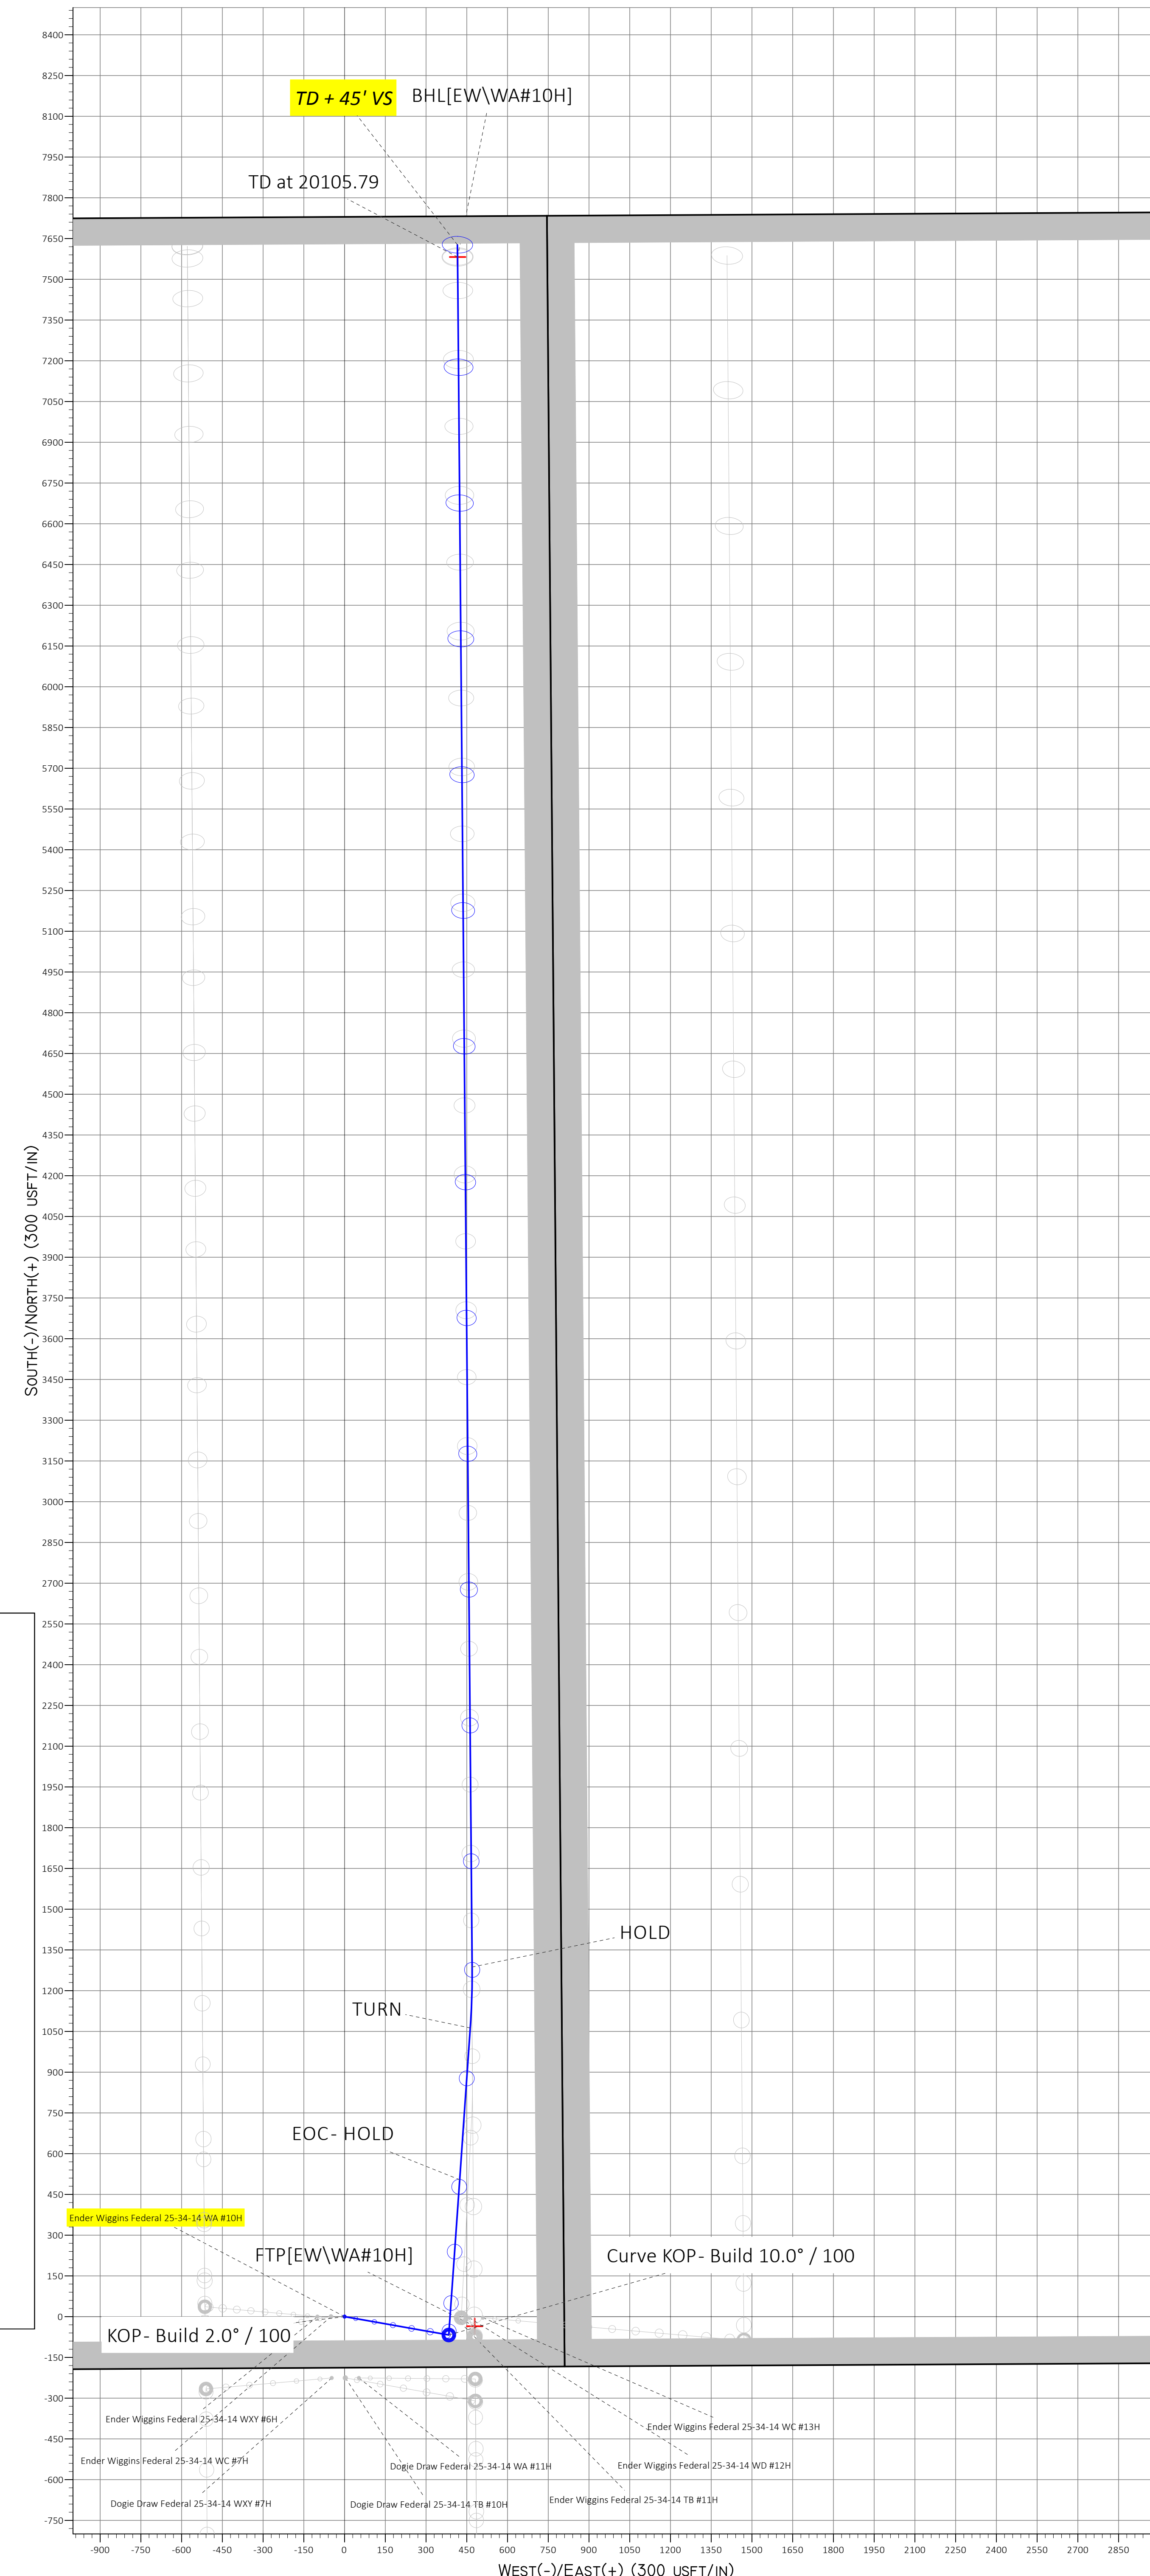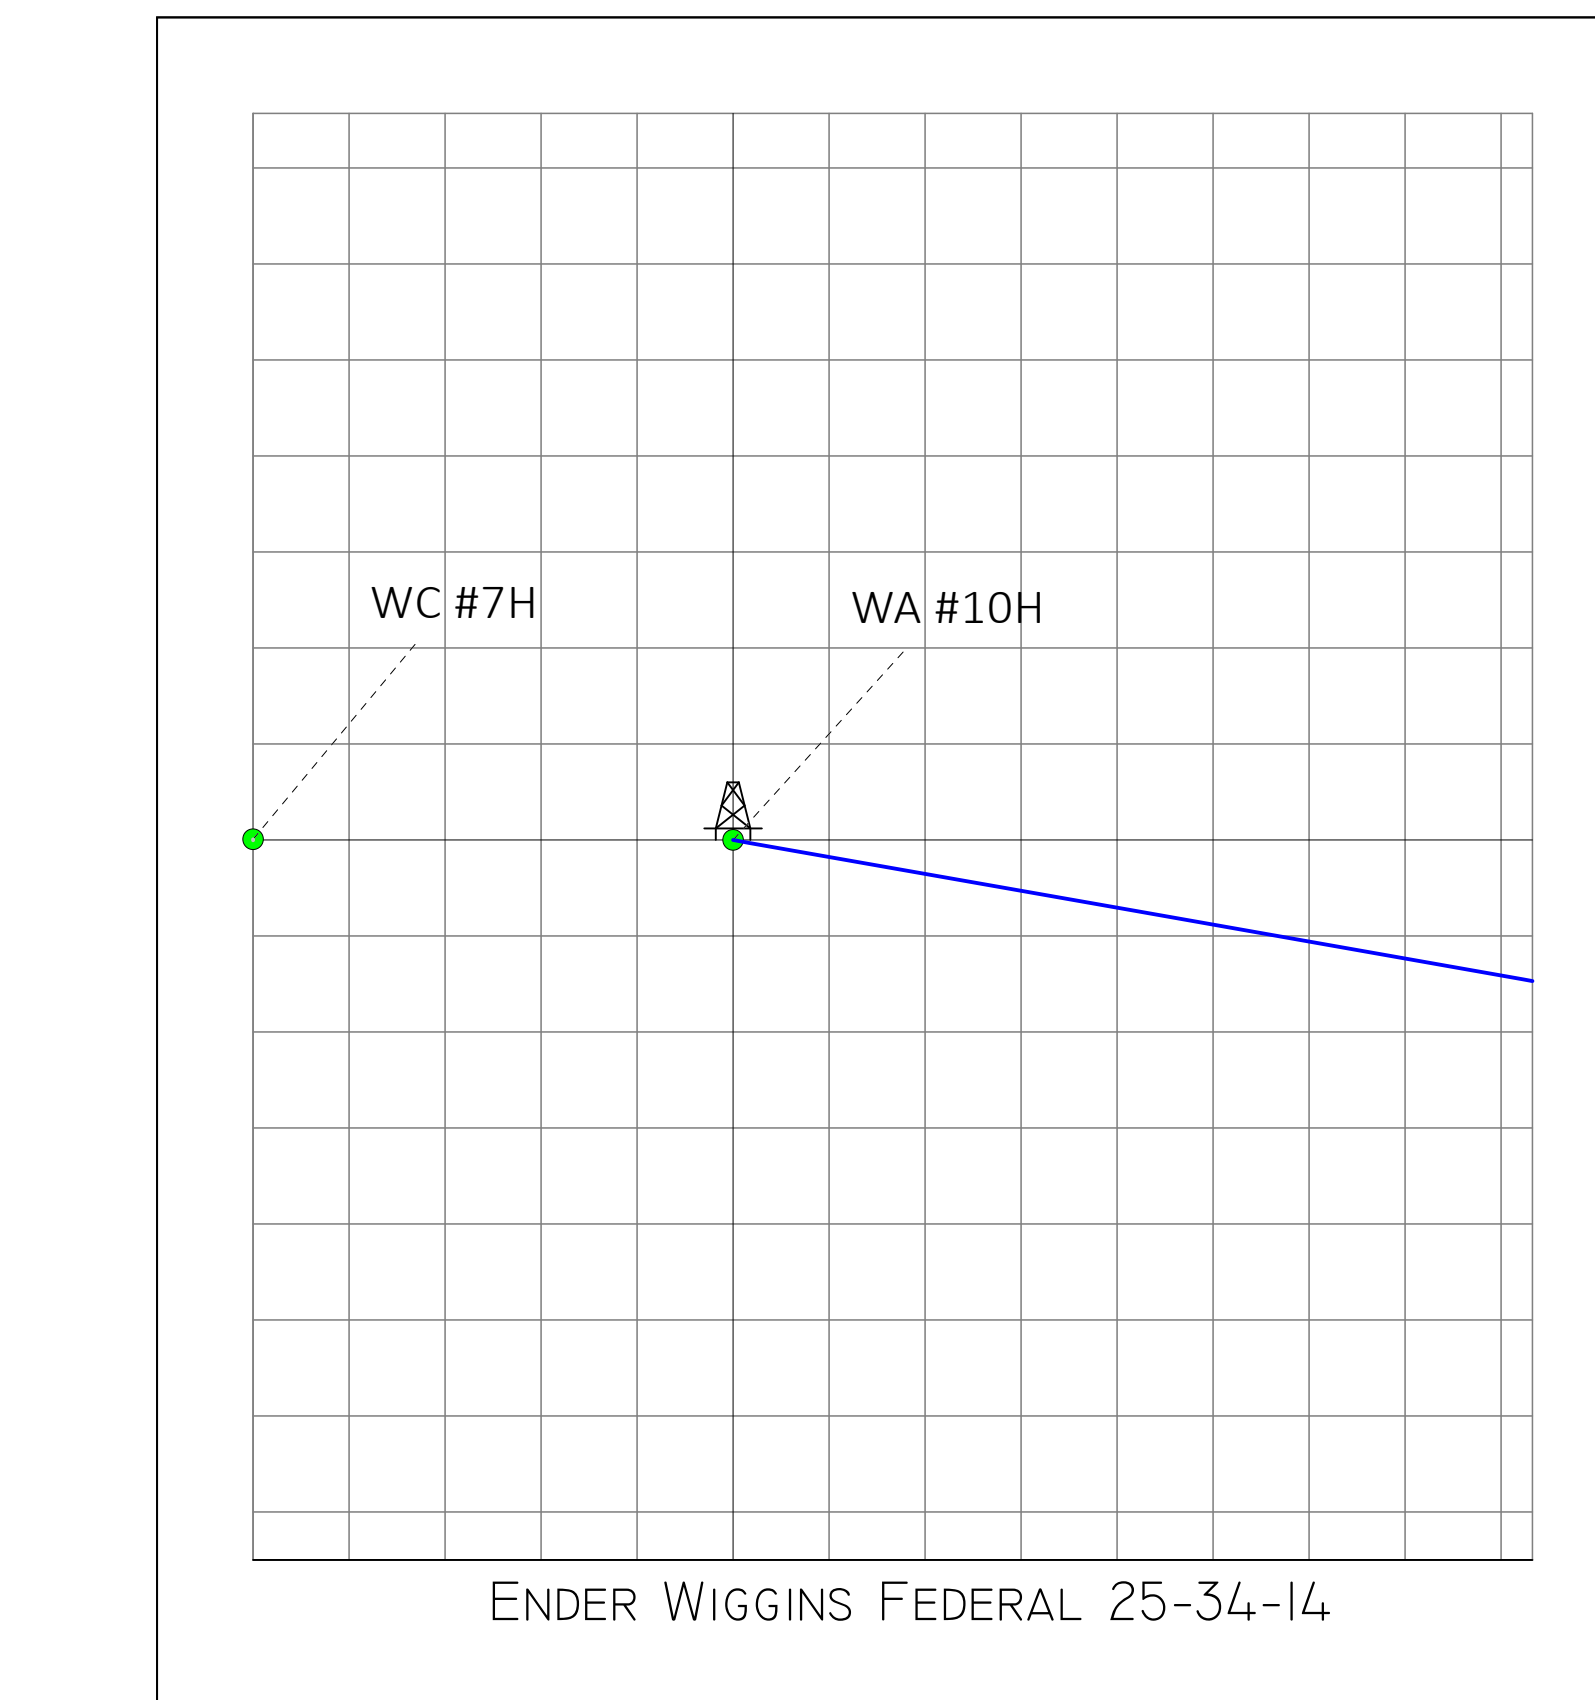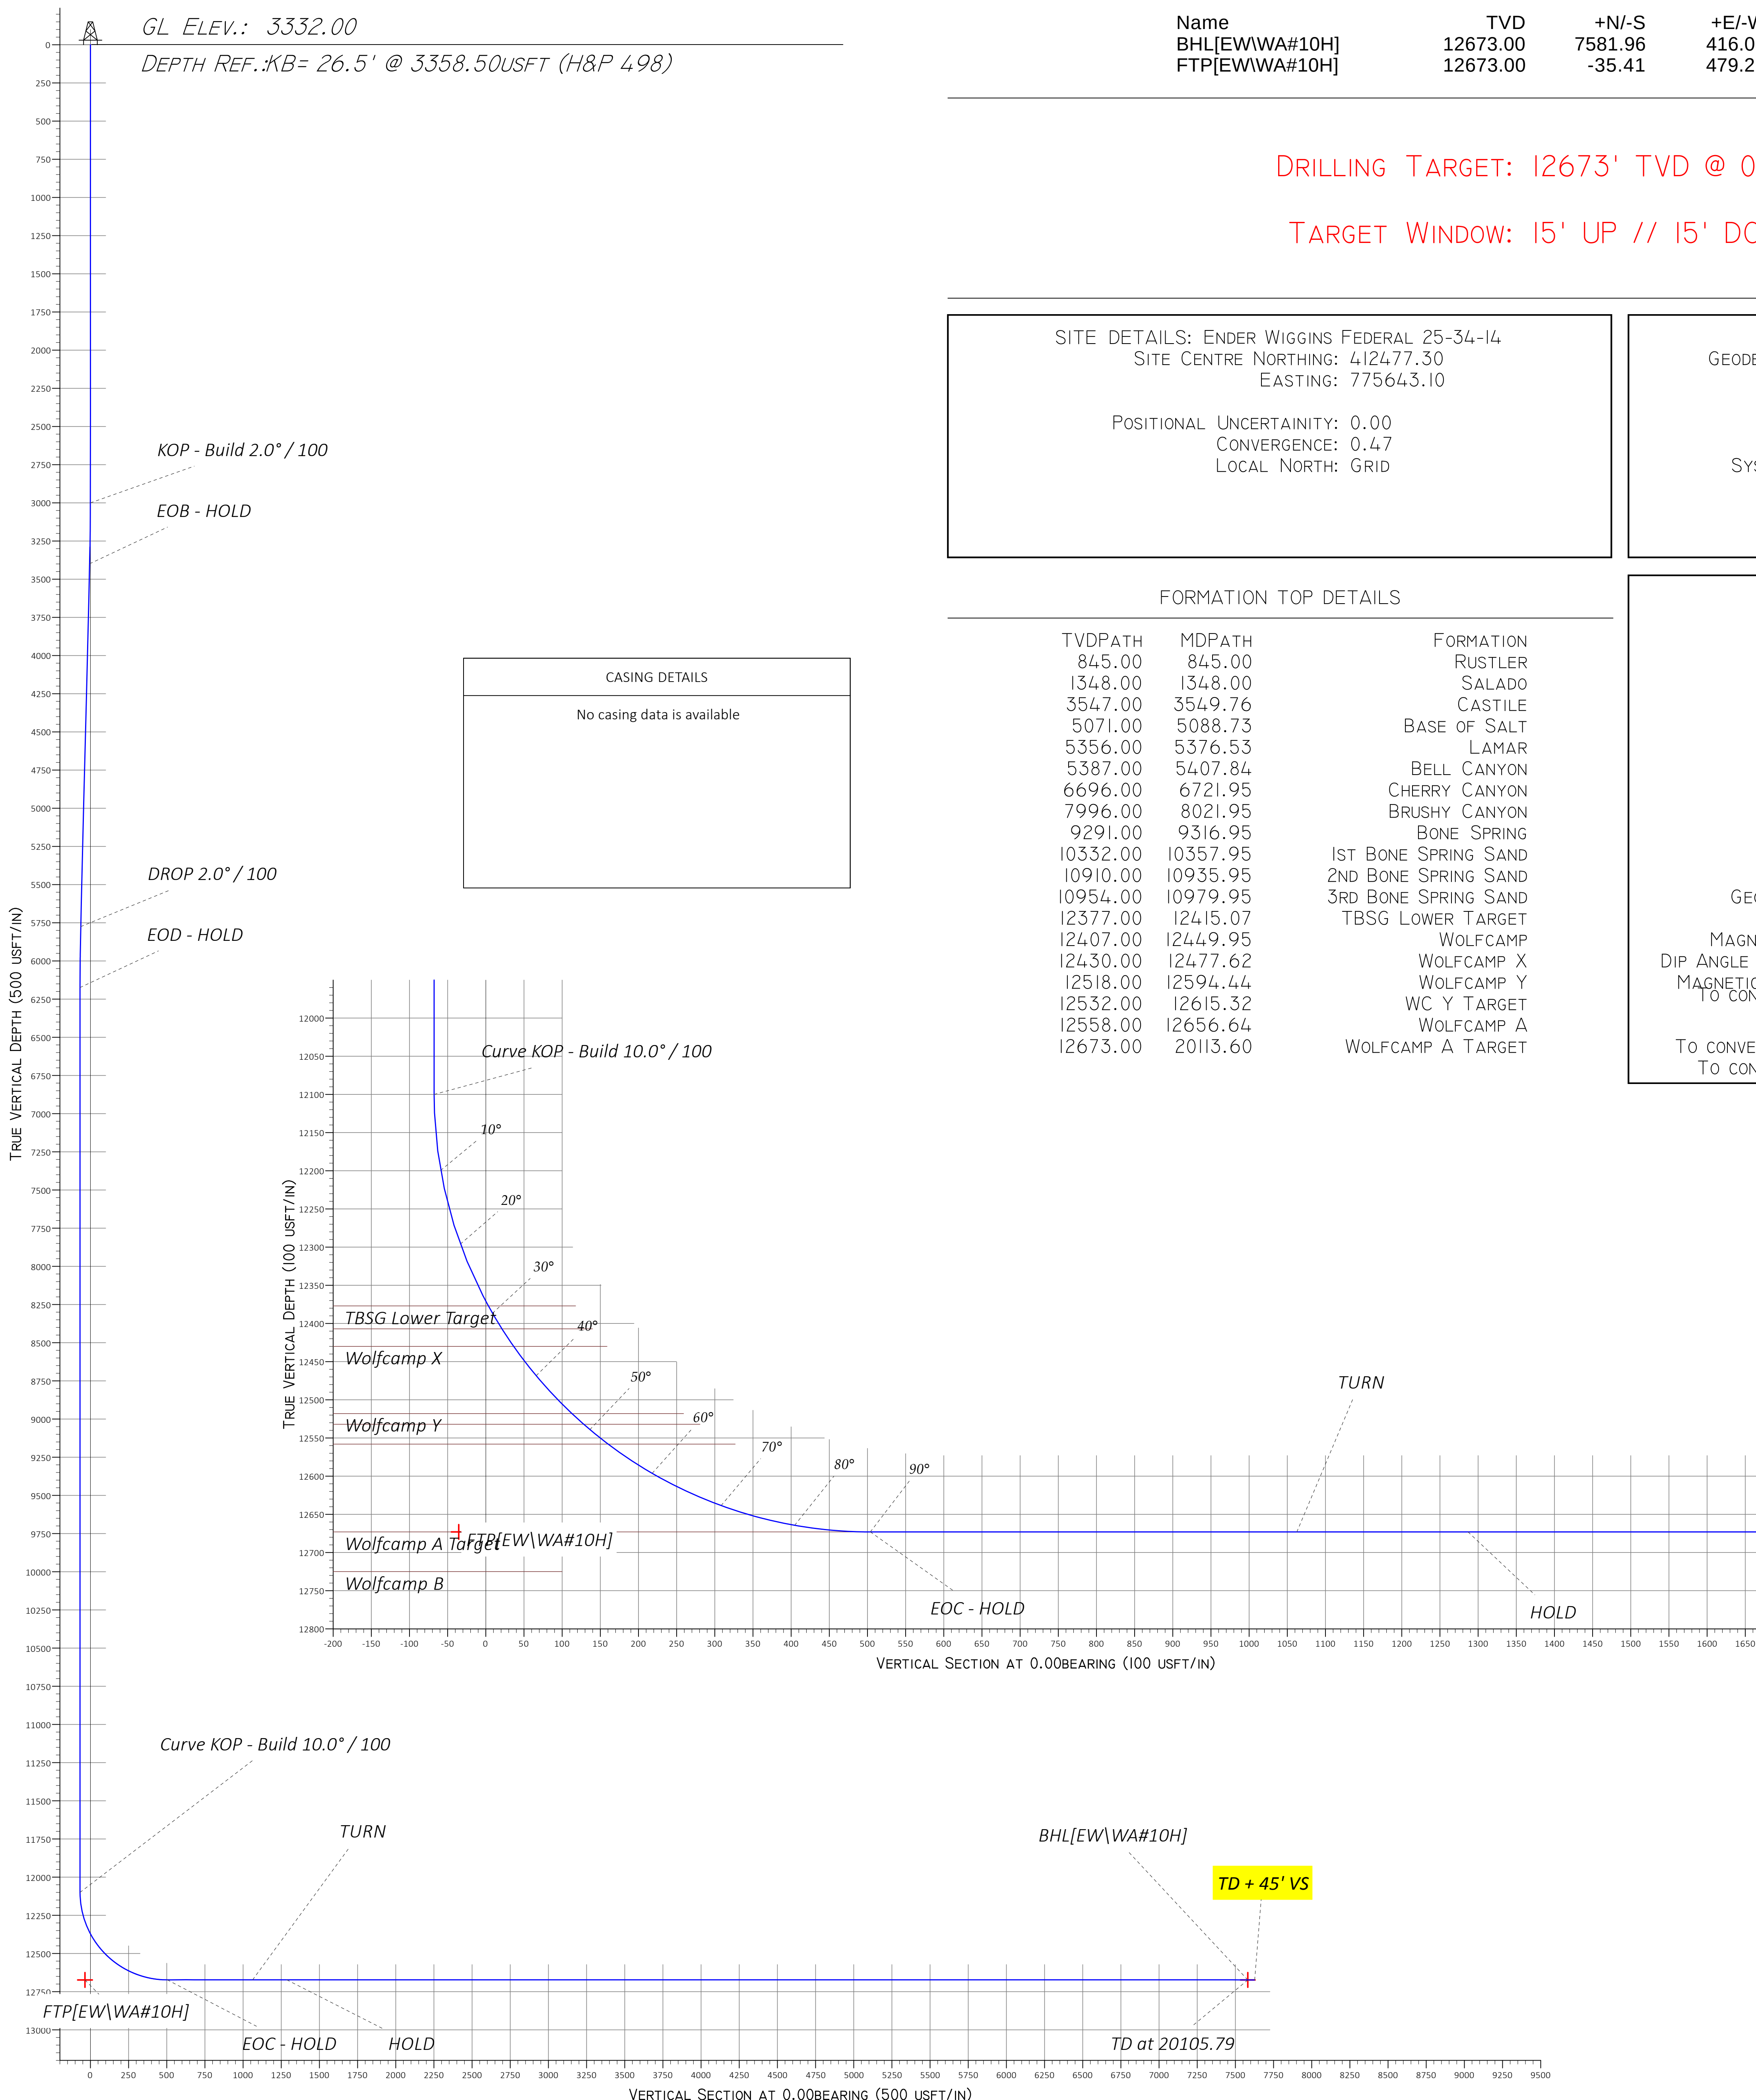

Marathon Oil Permian, LLC

Lea County, NM (NAD27)

Ender Wiggins F C 25-34-14

WA #10H

OH

Plan: Plan # 1

Standard Planning Report

16 March, 2018



Planning Report

Database:	Midland District	Local Co-ordinate Reference:	Well WA #10H
Company:	Marathon Oil Permian, LLC Lea	TVD Reference:	KB= 26.5' @ 3358.50usft (H&P 498)
Project:	County, NM (NAD27)	MD Reference:	KB= 26.5' @ 3358.50usft (H&P 498)
Site:	Ender Wiggins F C 25-34-14 WA	North Reference:	Grid
Well:	#10H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan # 1		

Project	Lea County, NM (NAD27)		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		Using geodetic scale factor

Site		Ender Wiggins F C 25-34-14			
Site Position:		Northing:	412,477.30 usft	Latitude:	32° 7' 51.186 N
From:	Map	Easting:	775,643.10 usft	Longitude:	103° 26' 34.423 W
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "	Grid Convergence:	0.47 °

Well	WA #10H					
Well Position	+N/-S	0.00 usft	Northing:	412,477.30 usft	Latitude:	32° 7' 51.186 N
	+E/-W	0.00 usft	Easting:	775,643.10 usft	Longitude:	103° 26' 34.423 W
Position Uncertainty		0.00 usft	Wellhead Elevation:	0.00 usft	Ground Level:	3,332.00 usft

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	HDGM	3/13/2018	6.73	59.82	47,930

Design	Plan # 1			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (bearing)
	0.00	0.00	0.00	0.00

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (bearing)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
3,000.00	0.00	0.00	3,000.00	0.00	0.00	0.00	0.00	0.00	0.00	
3,400.00	8.00	100.00	3,398.70	-4.84	27.46	2.00	2.00	0.00	100.00	
5,800.00	8.00	100.00	5,775.35	-62.84	356.40	0.00	0.00	0.00	0.00	
6,200.00	0.00	0.00	6,174.05	-67.68	383.85	2.00	-2.00	0.00	180.00	
12,125.95	0.00	0.00	12,100.00	-67.68	383.85	0.00	0.00	0.00	0.00	
13,025.95	90.00	4.00	12,672.96	503.88	423.82	10.00	10.00	0.00	4.00	
13,585.95	90.00	4.00	12,672.96	1,062.51	462.88	0.00	0.00	0.00	0.00	
13,810.45	90.00	359.51	12,672.96	1,286.85	469.76	2.00	0.00	-2.00	-90.00	
20,105.79	90.00	359.51	12,673.00	7,581.96	416.08	0.00	0.00	0.00	104.71	BHL[EWWA#10H]
20,150.79	90.00	359.51	12,673.00	7,626.96	415.70	0.00	0.00	0.00	0.00	

Planning Report

Database:	Midland District	Local Co-ordinate Reference:	Well WA #10H
Company:	Marathon Oil Permian, LLC Lea	TVD Reference:	KB= 26.5' @ 3358.50usft (H&P 498)
Project:	County, NM (NAD27)	MD Reference:	KB= 26.5' @ 3358.50usft (H&P 498)
Site:	Ender Wiggins F C 25-34-14 WA	North Reference:	Grid
Well:	#10H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan # 1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (bearing)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
845.00	0.00	0.00	845.00	0.00	0.00	0.00	0.00	0.00	0.00
Rustler									
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,348.00	0.00	0.00	1,348.00	0.00	0.00	0.00	0.00	0.00	0.00
Salado									
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,400.00	0.00	0.00	0.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00
2,600.00	0.00	0.00	2,600.00	0.00	0.00	0.00	0.00	0.00	0.00
2,700.00	0.00	0.00	2,700.00	0.00	0.00	0.00	0.00	0.00	0.00
2,800.00	0.00	0.00	2,800.00	0.00	0.00	0.00	0.00	0.00	0.00
2,900.00	0.00	0.00	2,900.00	0.00	0.00	0.00	0.00	0.00	0.00
3,000.00	0.00	0.00	3,000.00	0.00	0.00	0.00	0.00	0.00	0.00
KOP - Build 2.0° / 100									
3,100.00	2.00	100.00	3,099.98	-0.30	1.72	-0.30	2.00	2.00	0.00
3,200.00	4.00	100.00	3,199.84	-1.21	6.87	-1.21	2.00	2.00	0.00
3,300.00	6.00	100.00	3,299.45	-2.73	15.46	-2.73	2.00	2.00	0.00
3,400.00	8.00	100.00	3,398.70	-4.84	27.46	-4.84	2.00	2.00	0.00
EOB - HOLD									
3,500.00	8.00	100.00	3,497.73	-7.26	41.16	-7.26	0.00	0.00	0.00
3,549.76	8.00	100.00	3,547.00	-8.46	47.98	-8.46	0.00	0.00	0.00
Castile									
3,600.00	8.00	100.00	3,596.76	-9.67	54.87	-9.67	0.00	0.00	0.00
3,700.00	8.00	100.00	3,695.78	-12.09	68.57	-12.09	0.00	0.00	0.00
3,800.00	8.00	100.00	3,794.81	-14.51	82.28	-14.51	0.00	0.00	0.00
3,900.00	8.00	100.00	3,893.84	-16.92	95.99	-16.92	0.00	0.00	0.00
4,000.00	8.00	100.00	3,992.86	-19.34	109.69	-19.34	0.00	0.00	0.00
4,100.00	8.00	100.00	4,091.89	-21.76	123.40	-21.76	0.00	0.00	0.00
4,200.00	8.00	100.00	4,190.92	-24.18	137.10	-24.18	0.00	0.00	0.00
4,300.00	8.00	100.00	4,289.94	-26.59	150.81	-26.59	0.00	0.00	0.00
4,400.00	8.00	100.00	4,388.97	-29.01	164.52	-29.01	0.00	0.00	0.00
4,500.00	8.00	100.00	4,488.00	-31.43	178.22	-31.43	0.00	0.00	0.00

Planning Report

Database:	Midland District	Local Co-ordinate Reference:	Well WA #10H
Company:	Marathon Oil Permian, LLC Lea	TVD Reference:	KB= 26.5' @ 3358.50usft (H&P 498)
Project:	County, NM (NAD27)	MD Reference:	KB= 26.5' @ 3358.50usft (H&P 498)
Site:	Ender Wiggins F C 25-34-14 WA	North Reference:	Grid
Well:	#10H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan # 1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (bearing)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,600.00	8.00	100.00	4,587.02	-33.84	191.93	-33.84	0.00	0.00	0.00
4,700.00	8.00	100.00	4,686.05	-36.26	205.63	-36.26	0.00	0.00	0.00
4,800.00	8.00	100.00	4,785.08	-38.68	219.34	-38.68	0.00	0.00	0.00
4,900.00	8.00	100.00	4,884.10	-41.09	233.04	-41.09	0.00	0.00	0.00
5,000.00	8.00	100.00	4,983.13	-43.51	246.75	-43.51	0.00	0.00	0.00
5,088.73	8.00	100.00	5,071.00	-45.65	258.91	-45.65	0.00	0.00	0.00
Base of Salt									
5,100.00	8.00	100.00	5,082.16	-45.93	260.46	-45.93	0.00	0.00	0.00
5,200.00	8.00	100.00	5,181.18	-48.34	274.16	-48.34	0.00	0.00	0.00
5,300.00	8.00	100.00	5,280.21	-50.76	287.87	-50.76	0.00	0.00	0.00
5,376.53	8.00	100.00	5,356.00	-52.61	298.36	-52.61	0.00	0.00	0.00
Lamar									
5,400.00	8.00	100.00	5,379.24	-53.18	301.57	-53.18	0.00	0.00	0.00
5,407.84	8.00	100.00	5,387.00	-53.37	302.65	-53.37	0.00	0.00	0.00
Bell Canyon									
5,500.00	8.00	100.00	5,478.26	-55.59	315.28	-55.59	0.00	0.00	0.00
5,600.00	8.00	100.00	5,577.29	-58.01	328.99	-58.01	0.00	0.00	0.00
5,700.00	8.00	100.00	5,676.32	-60.43	342.69	-60.43	0.00	0.00	0.00
5,800.00	8.00	100.00	5,775.35	-62.84	356.40	-62.84	0.00	0.00	0.00
DROP 2.0° / 100									
5,900.00	6.00	100.00	5,874.59	-64.96	368.40	-64.96	2.00	-2.00	0.00
6,000.00	4.00	100.00	5,974.21	-66.47	376.98	-66.47	2.00	-2.00	0.00
6,100.00	2.00	100.00	6,074.07	-67.38	382.14	-67.38	2.00	-2.00	0.00
6,200.00	0.00	0.00	6,174.05	-67.68	383.85	-67.68	2.00	-2.00	0.00
EOD - HOLD									
6,300.00	0.00	0.00	6,274.05	-67.68	383.85	-67.68	0.00	0.00	0.00
6,400.00	0.00	0.00	6,374.05	-67.68	383.85	-67.68	0.00	0.00	0.00
6,500.00	0.00	0.00	6,474.05	-67.68	383.85	-67.68	0.00	0.00	0.00
6,600.00	0.00	0.00	6,574.05	-67.68	383.85	-67.68	0.00	0.00	0.00
6,700.00	0.00	0.00	6,674.05	-67.68	383.85	-67.68	0.00	0.00	0.00
6,721.95	0.00	0.00	6,696.00	-67.68	383.85	-67.68	0.00	0.00	0.00
Cherry Canyon									
6,800.00	0.00	0.00	6,774.05	-67.68	383.85	-67.68	0.00	0.00	0.00
6,900.00	0.00	0.00	6,874.05	-67.68	383.85	-67.68	0.00	0.00	0.00
7,000.00	0.00	0.00	6,974.05	-67.68	383.85	-67.68	0.00	0.00	0.00
7,100.00	0.00	0.00	7,074.05	-67.68	383.85	-67.68	0.00	0.00	0.00
7,200.00	0.00	0.00	7,174.05	-67.68	383.85	-67.68	0.00	0.00	0.00
7,300.00	0.00	0.00	7,274.05	-67.68	383.85	-67.68	0.00	0.00	0.00
7,400.00	0.00	0.00	7,374.05	-67.68	383.85	-67.68	0.00	0.00	0.00
7,500.00	0.00	0.00	7,474.05	-67.68	383.85	-67.68	0.00	0.00	0.00
7,600.00	0.00	0.00	7,574.05	-67.68	383.85	-67.68	0.00	0.00	0.00
7,700.00	0.00	0.00	7,674.05	-67.68	383.85	-67.68	0.00	0.00	0.00
7,800.00	0.00	0.00	7,774.05	-67.68	383.85	-67.68	0.00	0.00	0.00
7,900.00	0.00	0.00	7,874.05	-67.68	383.85	-67.68	0.00	0.00	0.00
8,000.00	0.00	0.00	7,974.05	-67.68	383.85	-67.68	0.00	0.00	0.00
8,021.95	0.00	0.00	7,996.00	-67.68	383.85	-67.68	0.00	0.00	0.00
Brushy Canyon									
8,100.00	0.00	0.00	8,074.05	-67.68	383.85	-67.68	0.00	0.00	0.00
8,200.00	0.00	0.00	8,174.05	-67.68	383.85	-67.68	0.00	0.00	0.00
8,300.00	0.00	0.00	8,274.05	-67.68	383.85	-67.68	0.00	0.00	0.00
8,400.00	0.00	0.00	8,374.05	-67.68	383.85	-67.68	0.00	0.00	0.00
8,500.00	0.00	0.00	8,474.05	-67.68	383.85	-67.68	0.00	0.00	0.00
8,600.00	0.00	0.00	8,574.05	-67.68	383.85	-67.68	0.00	0.00	0.00

Planning Report

Database:	Midland District	Local Co-ordinate Reference:	Well WA #10H
Company:	Marathon Oil Permian, LLC Lea	TVD Reference:	KB= 26.5' @ 3358.50usft (H&P 498)
Project:	County, NM (NAD27)	MD Reference:	KB= 26.5' @ 3358.50usft (H&P 498)
Site:	Ender Wiggins F C 25-34-14 WA	North Reference:	Grid
Well:	#10H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan # 1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (bearing)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
8,700.00	0.00	0.00	8,674.05	-67.68	383.85	-67.68	0.00	0.00	0.00
8,800.00	0.00	0.00	8,774.05	-67.68	383.85	-67.68	0.00	0.00	0.00
8,900.00	0.00	0.00	8,874.05	-67.68	383.85	-67.68	0.00	0.00	0.00
9,000.00	0.00	0.00	8,974.05	-67.68	383.85	-67.68	0.00	0.00	0.00
9,100.00	0.00	0.00	9,074.05	-67.68	383.85	-67.68	0.00	0.00	0.00
9,200.00	0.00	0.00	9,174.05	-67.68	383.85	-67.68	0.00	0.00	0.00
9,300.00	0.00	0.00	9,274.05	-67.68	383.85	-67.68	0.00	0.00	0.00
9,316.95	0.00	0.00	9,291.00	-67.68	383.85	-67.68	0.00	0.00	0.00
Bone Spring									
9,400.00	0.00	0.00	9,374.05	-67.68	383.85	-67.68	0.00	0.00	0.00
9,500.00	0.00	0.00	9,474.05	-67.68	383.85	-67.68	0.00	0.00	0.00
9,600.00	0.00	0.00	9,574.05	-67.68	383.85	-67.68	0.00	0.00	0.00
9,700.00	0.00	0.00	9,674.05	-67.68	383.85	-67.68	0.00	0.00	0.00
9,800.00	0.00	0.00	9,774.05	-67.68	383.85	-67.68	0.00	0.00	0.00
9,900.00	0.00	0.00	9,874.05	-67.68	383.85	-67.68	0.00	0.00	0.00
10,000.00	0.00	0.00	9,974.05	-67.68	383.85	-67.68	0.00	0.00	0.00
10,100.00	0.00	0.00	10,074.05	-67.68	383.85	-67.68	0.00	0.00	0.00
10,200.00	0.00	0.00	10,174.05	-67.68	383.85	-67.68	0.00	0.00	0.00
10,300.00	0.00	0.00	10,274.05	-67.68	383.85	-67.68	0.00	0.00	0.00
10,357.95	0.00	0.00	10,332.00	-67.68	383.85	-67.68	0.00	0.00	0.00
1st Bone Spring Sand									
10,400.00	0.00	0.00	10,374.05	-67.68	383.85	-67.68	0.00	0.00	0.00
10,500.00	0.00	0.00	10,474.05	-67.68	383.85	-67.68	0.00	0.00	0.00
10,600.00	0.00	0.00	10,574.05	-67.68	383.85	-67.68	0.00	0.00	0.00
10,700.00	0.00	0.00	10,674.05	-67.68	383.85	-67.68	0.00	0.00	0.00
10,800.00	0.00	0.00	10,774.05	-67.68	383.85	-67.68	0.00	0.00	0.00
10,900.00	0.00	0.00	10,874.05	-67.68	383.85	-67.68	0.00	0.00	0.00
10,935.95	0.00	0.00	10,910.00	-67.68	383.85	-67.68	0.00	0.00	0.00
2nd Bone Spring Sand									
10,979.95	0.00	0.00	10,954.00	-67.68	383.85	-67.68	0.00	0.00	0.00
3rd Bone Spring Sand									
11,000.00	0.00	0.00	10,974.05	-67.68	383.85	-67.68	0.00	0.00	0.00
11,100.00	0.00	0.00	11,074.05	-67.68	383.85	-67.68	0.00	0.00	0.00
11,200.00	0.00	0.00	11,174.05	-67.68	383.85	-67.68	0.00	0.00	0.00
11,300.00	0.00	0.00	11,274.05	-67.68	383.85	-67.68	0.00	0.00	0.00
11,400.00	0.00	0.00	11,374.05	-67.68	383.85	-67.68	0.00	0.00	0.00
11,500.00	0.00	0.00	11,474.05	-67.68	383.85	-67.68	0.00	0.00	0.00
11,600.00	0.00	0.00	11,574.05	-67.68	383.85	-67.68	0.00	0.00	0.00
11,700.00	0.00	0.00	11,674.05	-67.68	383.85	-67.68	0.00	0.00	0.00
11,800.00	0.00	0.00	11,774.05	-67.68	383.85	-67.68	0.00	0.00	0.00
11,900.00	0.00	0.00	11,874.05	-67.68	383.85	-67.68	0.00	0.00	0.00
12,000.00	0.00	0.00	11,974.05	-67.68	383.85	-67.68	0.00	0.00	0.00
12,100.00	0.00	0.00	12,074.05	-67.68	383.85	-67.68	0.00	0.00	0.00
12,125.95	0.00	0.00	12,100.00	-67.68	383.85	-67.68	0.00	0.00	0.00
Curve KOP - Build 10.0° / 100									
12,150.00	2.40	4.00	12,124.04	-67.18	383.89	-67.18	10.00	10.00	0.00
12,200.00	7.40	4.00	12,173.84	-62.92	384.19	-62.92	10.00	10.00	0.00
12,250.00	12.40	4.00	12,223.08	-54.34	384.79	-54.34	10.00	10.00	0.00
12,300.00	17.40	4.00	12,271.38	-41.52	385.68	-41.52	10.00	10.00	0.00
12,350.00	22.40	4.00	12,318.38	-24.54	386.87	-24.54	10.00	10.00	0.00
12,400.00	27.40	4.00	12,363.72	-3.54	388.34	-3.54	10.00	10.00	0.00
12,415.07	28.91	4.00	12,377.00	3.55	388.83	3.55	10.00	10.00	0.00
TBSG Lower Target									

Planning Report

Database:	Midland District	Local Co-ordinate Reference:	Well WA #10H
Company:	Marathon Oil Permian, LLC Lea	TVD Reference:	KB= 26.5' @ 3358.50usft (H&P 498)
Project:	County, NM (NAD27)	MD Reference:	KB= 26.5' @ 3358.50usft (H&P 498)
Site:	Ender Wiggins F C 25-34-14 WA	North Reference:	Grid
Well:	#10H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan # 1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (bearing)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
12,449.95	32.40	4.00	12,407.00	21.29	390.08	21.29	10.00	10.00	0.00
Wolfcamp									
12,450.00	32.40	4.00	12,407.05	21.32	390.08	21.32	10.00	10.00	0.00
12,477.62	35.17	4.00	12,430.00	36.64	391.15	36.64	10.00	10.00	0.00
Wolfcamp X									
12,500.00	37.40	4.00	12,448.04	49.85	392.07	49.85	10.00	10.00	0.00
12,550.00	42.40	4.00	12,486.38	81.84	394.31	81.84	10.00	10.00	0.00
12,594.44	46.85	4.00	12,518.00	112.97	396.49	112.97	10.00	10.00	0.00
Wolfcamp Y									
12,595.65	46.97	4.00	12,518.83	113.85	396.55	113.85	10.00	10.00	0.00
FTP[EWWA#10H]									
12,600.00	47.40	4.00	12,521.78	117.04	396.77	117.04	10.00	10.00	0.00
12,615.32	48.94	4.00	12,532.00	128.42	397.57	128.42	10.00	10.00	0.00
WC Y Target									
12,650.00	52.40	4.00	12,553.98	155.18	399.44	155.18	10.00	10.00	0.00
12,656.64	53.07	4.00	12,558.00	160.45	399.81	160.45	10.00	10.00	0.00
Wolfcamp A									
12,700.00	57.40	4.00	12,582.71	195.98	402.29	195.98	10.00	10.00	0.00
12,750.00	62.40	4.00	12,607.78	239.12	405.31	239.12	10.00	10.00	0.00
12,800.00	67.40	4.00	12,628.98	284.27	408.46	284.27	10.00	10.00	0.00
12,850.00	72.40	4.00	12,646.15	331.10	411.74	331.10	10.00	10.00	0.00
12,900.00	77.40	4.00	12,659.17	379.24	415.11	379.24	10.00	10.00	0.00
12,950.00	82.40	4.00	12,667.93	428.33	418.54	428.33	10.00	10.00	0.00
13,000.00	87.40	4.00	12,672.37	478.00	422.01	478.00	10.00	10.00	0.00
13,025.95	90.00	4.00	12,672.96	503.88	423.82	503.88	10.00	10.00	0.00
EOC - HOLD									
13,100.00	90.00	4.00	12,672.96	577.74	428.99	577.74	0.00	0.00	0.00
13,200.00	90.00	4.00	12,672.96	677.50	435.96	677.50	0.00	0.00	0.00
13,300.00	90.00	4.00	12,672.96	777.26	442.94	777.26	0.00	0.00	0.00
13,400.00	90.00	4.00	12,672.96	877.01	449.91	877.01	0.00	0.00	0.00
13,500.00	90.00	4.00	12,672.96	976.77	456.89	976.77	0.00	0.00	0.00
13,585.95	90.00	4.00	12,672.96	1,062.51	462.88	1,062.51	0.00	0.00	0.00
TURN									
13,600.00	90.00	3.72	12,672.96	1,076.53	463.83	1,076.53	2.00	0.00	-2.00
13,700.00	90.00	1.72	12,672.96	1,176.41	468.57	1,176.41	2.00	0.00	-2.00
13,800.00	90.00	359.72	12,672.96	1,276.40	469.83	1,276.40	2.00	0.00	-2.00
13,810.45	90.00	359.51	12,672.96	1,286.85	469.76	1,286.85	2.00	0.00	-2.00
HOLD									
13,900.00	90.00	359.51	12,672.96	1,376.39	468.99	1,376.39	0.00	0.00	0.00
14,000.00	90.00	359.51	12,672.96	1,476.39	468.14	1,476.39	0.00	0.00	0.00
14,100.00	90.00	359.51	12,672.96	1,576.39	467.28	1,576.39	0.00	0.00	0.00
14,200.00	90.00	359.51	12,672.96	1,676.38	466.43	1,676.38	0.00	0.00	0.00
14,300.00	90.00	359.51	12,672.96	1,776.38	465.57	1,776.38	0.00	0.00	0.00
14,400.00	90.00	359.51	12,672.96	1,876.38	464.72	1,876.38	0.00	0.00	0.00
14,500.00	90.00	359.51	12,672.96	1,976.37	463.86	1,976.37	0.00	0.00	0.00
14,600.00	90.00	359.51	12,672.96	2,076.37	463.01	2,076.37	0.00	0.00	0.00
14,700.00	90.00	359.51	12,672.96	2,176.37	462.15	2,176.37	0.00	0.00	0.00
14,800.00	90.00	359.51	12,672.96	2,276.36	461.30	2,276.36	0.00	0.00	0.00
14,900.00	90.00	359.51	12,672.96	2,376.36	460.45	2,376.36	0.00	0.00	0.00
15,000.00	90.00	359.51	12,672.96	2,476.35	459.59	2,476.35	0.00	0.00	0.00
15,100.00	90.00	359.51	12,672.96	2,576.35	458.74	2,576.35	0.00	0.00	0.00
15,200.00	90.00	359.51	12,672.96	2,676.35	457.88	2,676.35	0.00	0.00	0.00
15,300.00	90.00	359.51	12,672.96	2,776.34	457.03	2,776.34	0.00	0.00	0.00

Planning Report

Database:	Midland District	Local Co-ordinate Reference:	Well WA #10H
Company:	Marathon Oil Permian, LLC Lea	TVD Reference:	KB= 26.5' @ 3358.50usft (H&P 498)
Project:	County, NM (NAD27)	MD Reference:	KB= 26.5' @ 3358.50usft (H&P 498)
Site:	Ender Wiggins F C 25-34-14 WA	North Reference:	Grid
Well:	#10H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan # 1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (bearing)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
15,400.00	90.00	359.51	12,672.96	2,876.34	456.18	2,876.34	0.00	0.00	0.00
15,500.00	90.00	359.51	12,672.96	2,976.34	455.32	2,976.34	0.00	0.00	0.00
15,600.00	90.00	359.51	12,672.96	3,076.33	454.47	3,076.33	0.00	0.00	0.00
15,700.00	90.00	359.51	12,672.96	3,176.33	453.61	3,176.33	0.00	0.00	0.00
15,800.00	90.00	359.51	12,672.96	3,276.33	452.76	3,276.33	0.00	0.00	0.00
15,900.00	90.00	359.51	12,672.96	3,376.32	451.91	3,376.32	0.00	0.00	0.00
16,000.00	90.00	359.51	12,672.96	3,476.32	451.05	3,476.32	0.00	0.00	0.00
16,100.00	90.00	359.51	12,672.96	3,576.31	450.20	3,576.31	0.00	0.00	0.00
16,200.00	90.00	359.51	12,672.96	3,676.31	449.35	3,676.31	0.00	0.00	0.00
16,300.00	90.00	359.51	12,672.96	3,776.31	448.49	3,776.31	0.00	0.00	0.00
16,400.00	90.00	359.51	12,672.97	3,876.30	447.64	3,876.30	0.00	0.00	0.00
16,500.00	90.00	359.51	12,672.97	3,976.30	446.79	3,976.30	0.00	0.00	0.00
16,600.00	90.00	359.51	12,672.97	4,076.30	445.93	4,076.30	0.00	0.00	0.00
16,700.00	90.00	359.51	12,672.97	4,176.29	445.08	4,176.29	0.00	0.00	0.00
16,800.00	90.00	359.51	12,672.97	4,276.29	444.23	4,276.29	0.00	0.00	0.00
16,900.00	90.00	359.51	12,672.97	4,376.29	443.38	4,376.29	0.00	0.00	0.00
17,000.00	90.00	359.51	12,672.97	4,476.28	442.52	4,476.28	0.00	0.00	0.00
17,100.00	90.00	359.51	12,672.97	4,576.28	441.67	4,576.28	0.00	0.00	0.00
17,200.00	90.00	359.51	12,672.97	4,676.27	440.82	4,676.27	0.00	0.00	0.00
17,300.00	90.00	359.51	12,672.97	4,776.27	439.97	4,776.27	0.00	0.00	0.00
17,400.00	90.00	359.51	12,672.97	4,876.27	439.11	4,876.27	0.00	0.00	0.00
17,500.00	90.00	359.51	12,672.97	4,976.26	438.26	4,976.26	0.00	0.00	0.00
17,600.00	90.00	359.51	12,672.97	5,076.26	437.41	5,076.26	0.00	0.00	0.00
17,700.00	90.00	359.51	12,672.97	5,176.26	436.56	5,176.26	0.00	0.00	0.00
17,800.00	90.00	359.51	12,672.98	5,276.25	435.70	5,276.25	0.00	0.00	0.00
17,900.00	90.00	359.51	12,672.98	5,376.25	434.85	5,376.25	0.00	0.00	0.00
18,000.00	90.00	359.51	12,672.98	5,476.25	434.00	5,476.25	0.00	0.00	0.00
18,100.00	90.00	359.51	12,672.98	5,576.24	433.15	5,576.24	0.00	0.00	0.00
18,200.00	90.00	359.51	12,672.98	5,676.24	432.30	5,676.24	0.00	0.00	0.00
18,300.00	90.00	359.51	12,672.98	5,776.23	431.45	5,776.23	0.00	0.00	0.00
18,400.00	90.00	359.51	12,672.98	5,876.23	430.59	5,876.23	0.00	0.00	0.00
18,500.00	90.00	359.51	12,672.98	5,976.23	429.74	5,976.23	0.00	0.00	0.00
18,600.00	90.00	359.51	12,672.98	6,076.22	428.89	6,076.22	0.00	0.00	0.00
18,700.00	90.00	359.51	12,672.98	6,176.22	428.04	6,176.22	0.00	0.00	0.00
18,800.00	90.00	359.51	12,672.98	6,276.22	427.19	6,276.22	0.00	0.00	0.00
18,900.00	90.00	359.51	12,672.99	6,376.21	426.34	6,376.21	0.00	0.00	0.00
19,000.00	90.00	359.51	12,672.99	6,476.21	425.49	6,476.21	0.00	0.00	0.00
19,100.00	90.00	359.51	12,672.99	6,576.21	424.64	6,576.21	0.00	0.00	0.00
19,200.00	90.00	359.51	12,672.99	6,676.20	423.79	6,676.20	0.00	0.00	0.00
19,300.00	90.00	359.51	12,672.99	6,776.20	422.93	6,776.20	0.00	0.00	0.00
19,400.00	90.00	359.51	12,672.99	6,876.19	422.08	6,876.19	0.00	0.00	0.00
19,500.00	90.00	359.51	12,672.99	6,976.19	421.23	6,976.19	0.00	0.00	0.00
19,600.00	90.00	359.51	12,672.99	7,076.19	420.38	7,076.19	0.00	0.00	0.00
19,700.00	90.00	359.51	12,673.00	7,176.18	419.53	7,176.18	0.00	0.00	0.00
19,800.00	90.00	359.51	12,673.00	7,276.18	418.68	7,276.18	0.00	0.00	0.00
19,900.00	90.00	359.51	12,673.00	7,376.18	417.83	7,376.18	0.00	0.00	0.00
20,000.00	90.00	359.51	12,673.00	7,476.17	416.98	7,476.17	0.00	0.00	0.00
20,105.79	90.00	359.51	12,673.00	7,581.96	416.08	7,581.96	0.00	0.00	0.00
TD at 20105.79 - BHL[EW/WA#10H]									
20,113.60	90.00	359.51	12,673.00	7,589.77	416.01	7,589.77	0.00	0.00	0.00
Wolfcamp A Target									
20,150.79	90.00	359.51	12,673.00	7,626.96	415.70	7,626.96	0.00	0.00	0.00
TD + 45' VS									

Planning Report

Database:	Midland District	Local Co-ordinate Reference:	Well WA #10H
Company:	Marathon Oil Permian, LLC Lea	TVD Reference:	KB= 26.5' @ 3358.50usft (H&P 498)
Project:	County, NM (NAD27)	MD Reference:	KB= 26.5' @ 3358.50usft (H&P 498)
Site:	Ender Wiggins F C 25-34-14 WA	North Reference:	Grid
Well:	#10H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan # 1		

Design Targets									
Target Name									
- hit/miss target	Dip Angle	Dip Dir.	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
- Shape	(°)	(bearing)	(usft)	(usft)	(usft)	(usft)	(usft)		
BHL[EWWA#10H] - plan hits target center - Point	0.00	0.00	12,673.00	7,581.96	416.08	420,059.23	776,059.18	32° 9' 6.177 N	103° 26' 28.854 W
FTP[EWWA#10H] - plan misses target center by 229.96usft at 12595.65usft MD (12518.83 TVD, 113.85 N, 396.55 E) - Point	0.00	0.00	12,673.00	-35.41	479.22	412,441.89	776,122.32	32° 7' 50.796 N	103° 26' 28.854 W

Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (bearing)	
845.00	847.00	Rustler		0.00		
1,348.00	1,350.00	Salado		0.00		
3,549.76	3,549.00	Castile		0.00		
5,088.73	5,073.00	Base of Salt		0.00		
5,376.53	5,358.00	Lamar		0.00		
5,407.84	5,389.00	Bell Canyon		0.00		
6,721.95	6,698.00	Cherry Canyon		0.00		
8,021.95	7,998.00	Brushy Canyon		0.00		
9,316.95	9,293.00	Bone Spring		0.00		
10,357.95	10,334.00	1st Bone Spring Sand		0.00		
10,935.95	10,912.00	2nd Bone Spring Sand		0.00		
10,979.95	10,956.00	3rd Bone Spring Sand		0.00		
12,415.07	12,379.00	TBSG Lower Target		0.00		
12,449.95	12,409.00	Wolfcamp		0.00		
12,477.62	12,432.00	Wolfcamp X		0.00		
12,594.44	12,520.00	Wolfcamp Y		0.00		
12,615.32	12,534.00	WC Y Target		0.00		
12,656.64	12,560.00	Wolfcamp A		0.00		
20,113.60	12,675.00	Wolfcamp A Target		0.00		

Plan Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
3,000.00	3,000.00	0.00	0.00	KOP - Build 2.0° / 100
3,400.00	3,398.70	-4.84	27.46	EOB - HOLD
5,800.00	5,775.35	-62.84	356.40	DROP 2.0° / 100
6,200.00	6,174.05	-67.68	383.85	EOD - HOLD
12,125.95	12,100.00	-67.68	383.85	Curve KOP - Build 10.0° / 100
13,025.95	12,672.96	503.88	423.82	EOC - HOLD
13,585.95	12,672.96	1,062.51	462.88	TURN
13,810.45	12,672.96	1,286.85	469.76	HOLD
20,105.79	12,673.00	7,581.96	416.08	TD at 20105.79
20,150.79	12,673.00	7,626.96	415.70	TD + 45' VS

MARATHON OIL PERMIAN LLC

DRILLING AND OPERATIONS PLAN

WELL NAME / NUMBER: ENDER WGGINS FEDERAL COM 25 34 14 WA 10H

STATE: NEW MEXICO

COUNTY: LEA

	NS-Foot	NS Indicator	EW-Foot	EW Indicator	TWSP	Range	Section	Aliquot/Lot/Trac	Latitude (NAD 83)	Longitude (NAD 83)	County	State	Meridian	Lease Type	Lease Number	Elevation (ft SS)	MD (RKB)	TVD (RKB)
SHL	2451	FNL	1835	FWL	25S	34E	14	SENW	32.13101023 N	103.44336336 W	Lea	NM	NMP	P	FEE	3332	26.5	26.5
KOP	2383	FNL	2314	FWL	25S	34E	14	SENW	32.1308153 N	103.4421252 W	Lea	NM	NMP	P	FEE	-8741	12125	12100
EXIT	0	FNL	2315	FWL	25S	34E	14	NENW	32.1376553 N	103.4418129 W	Lea	NM	NMP	P	FEE	-9314	14945	12673
PPP	0	FSL	2315	FWL	25S	34E	11	SESW	32.1376553 N	103.4418129 W	Lea	NM	NMP	F	NMNM113419	-9314	14945	12673
EXIT	2640	FSL	2317	FWL	25S	34E	11	NESW	32.1449944 N	103.4418155 W	Lea	NM	NMP	F	NMNM113419	-9314	17615	12673
PPP	2640	FNL	2317	FWL	25S	34E	11	SENW	32.1449944 N	103.4418155 W	Lea	NM	NMP	F	NMNM108476	-9314	17615	12673
BHL	150	FNL	2319	FWL	25S	34E	11	NENW	32.1518411 N	103.4418178 W	Lea	NM	NMP	F	NMNM108476	-9314	20106	12673

1. GEOLOGIC NAME OF SURFACE FORMATION

a. Permian/Quaternary Alluvium

2. ESTIMATED TOPS OF GEOLOGICAL MARKERS & DEPTHS OF ANTICIPATED FRESH WATER, OIL OR GAS

Formation	True Vertical Depth (ft)	Measured Depth (ft)	Lithologies	Mineral Resources	Producing Formation
Rustler	908	908	Anhydrite/Dolomite	BRINE	N
Salado	1411	1411	Salt/Anhydrite	BRINE	N
Castile	3610	3613	Base Salt	BRINE	N
Base of Salt	5134	5152	Limy Sands	BRINE	N
Lamar	5419	5440	Sand/Shales	OIL	Y
Bell Canyon	5450	5471	Sands/Shale	OIL	Y
Cherry Canyon	6759	6785	Sands/Carbonates	OIL	Y
Brushy Canyon	8059	8085	Sands/Carbonates	OIL	Y
Bone Spring	9368	9394	Sands/Carbonates	OIL	Y
1 st Bone Spring Sand	10395	10421	Sands/Carbonates	OIL	Y
2 nd Bone Spring	10973	10999	Sands/Carbonates	OIL	Y

Sand					
3 rd Bone Spring Sand	12017	12043	Sands/Carbonates	OIL	Y
Wolfcamp	12470	12528	Carbonates/Shales/Sand s	OIL	Y
Wolfcamp X	12493	12559	Carbonates/Shales/Sand s	OIL	Y
Wolfcamp Y	12581	12696	Carbonates/Shales/Sand s	OIL	Y
Wolfcamp A	12621	12780	Carbonates/Shales/Sand s	OIL	Y
Wolfcamp D	13917	N/A	Carbonates/Shales/Sand s	OIL	Y

DEEPEST EXPECTED FRESH WATER: 400' TVD

ANTICIPATED BOTTOM HOLE PRESSURE: 8,870 psi

ANTICIPATED BOTTOM HOLE TEMPERATURE: 195°F

ANTICIPATED ABNORMAL PRESSURE: N

ANTICIPATED ABNORMAL TEMPERATURE: N

3. CASING PROGRAM

String Type	Hole Size	Csg Size	Top Set MD	Bottom Set MD	Top Set TVD	TVDBottom Set	Weight (lbs/ft)	Grade	Conn.	SF Collapse	SF Burst	SF Tension
Surface	<u>17 1/2</u>	<u>13 3/8</u>	<u>0</u>	<u>950</u>	<u>0</u>	<u>950</u>	<u>54.5</u>	<u>J55</u>	<u>STC</u>	<u>5.52</u>	<u>2.5</u>	<u>2.5</u>
Intermediate I	<u>12 1/4</u>	<u>9 5/8</u>	<u>0</u>	<u>5421</u>	<u>0</u>	<u>5400</u>	<u>40</u>	<u>J55</u>	<u>LTC</u>	<u>1.74</u>	<u>1.15</u>	<u>2.19</u>
Intermediate II	<u>8 3/4</u>	<u>7</u>	<u>0</u>	<u>1201</u> <u>6</u>	<u>0</u>	<u>1199</u> <u>0</u>	<u>29</u>	<u>P110</u>	<u>BTC</u>	<u>2.21</u>	<u>1.18</u>	<u>1.9</u>
Production Liner	<u>6 1/8</u>	<u>4 1/2</u>	<u>1170</u> <u>0</u>	<u>1984</u> <u>8</u>	<u>1170</u> <u>0</u>	<u>1253</u> <u>2</u>	<u>13.5</u>	<u>P110</u>	<u>BTC</u>	<u>1.33</u>	<u>1.56</u>	<u>1.88</u>

Minimum safety factors: Burst 1.125 Collapse 1.125 Tension 1.8 Wet/1.6 Dry

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Does casing meet API specifications? If no, attach casing specification sheet.	Y

Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

4. CEMENT PROGRAM:

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity (sks)	Yield (ft3/sks)	Density (ppg)	Slurry Volume (ft3)	Excess (%)	Cement Type	Additives
Surface	Tail	--	0	950	992	1.33	14.8	1320	100	Class C	N/A
Intermediate I	Lead	--	0	4300	1347	1.75	12.8	2357	75	Class C	0.02 Gal/Sk Defoamer + 0.5% Extender + 1% Accelerator
Intermediate I	Tail	--	4300	5421	396	1.33	14.8	527	50	Class C	0.3 % Retarder
Intermediate II	Lead	--	0	10900	1032	2.7	11	2786	70	Class C	0.85% retarder + 10% extender + 0.02 gal/sk defoamer + 2.0% Extender + 0.15% Viscosifier
Intermediate II	Tail	--	10900	12016	200	1.09	15.6	218	30	Class H	3% extender + 0.15% Dispersant + 0.03 gal/sk retarder
Production Liner	Tail	--	11800	20105	833	1.22	14.5	1017	30	Class H	0.1% retarder + 3.5% extender + 0.3% fluid loss + 0.1% Dispersant

Stage tool depth(s) will be adjusted based on hole conditions and cement volumes will be adjusted proportionally. Stage tool will be set a minimum of 50 feet below previous casing and a minimum of 200 feet above current shoe. Lab reports with the 500 psi compressive strength time for the cement will be onsite for review.

Pilot hole depth: N/A TVD/MD

KOP: N/A TVD/MD

Plug top	Plug Bottom	Excess (%)	Quantity (sx)	Density (ppg)	Yield (ft3/sx)	Water gal/sk	Slurry Description and Cement Type

Attach plugging procedure for pilot hole.

N/A

5. PRESSURE CONTROL EQUIPMENT

BOP installed and tested before drilling which hole?	Size?	Min. Required WP	Type	✓	Tested to:
12 ¼"	13 5/8	10000	Annular	x	50% of working pressure
			Blind Ram	x	8000
			Pipe Ram		
			Double Ram	x	
			Other*		
8 ¾"	13 5/8	10000	Annular	x	50% of working pressure
			Blind Ram	x	8000
			Pipe Ram		
			Double Ram	x	
			Other *		
6 1/8"	13 5/8	10000	Annular	x	50% of working pressure
			Blind Ram	x	8000
			Pipe Ram		
			Double Ram	x	
			Other *		

*Specify if additional ram is utilized.

BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to

the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock, full opening safety valve / inside BOP and choke lines and choke manifold. See attached schematics.

Y	Formation integrity test will be performed per Onshore Order #2. On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.i.
Y	A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart.
N	Are anchors required by manufacturer?
Y	A multibowl wellhead is being used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested. See attached schematic.

6. MUD PROGRAM:

Top Depth	Bottom Depth	Mud Type	Min. Weight (ppg)	Max. Weight (ppg)	Additional Characteristics
<u>0</u>	<u>950</u>	<u>Water Based Mud</u>	<u>8.4</u>	<u>8.8</u>	
<u>950</u>	<u>5421</u>	<u>Brine</u>	<u>9.9</u>	<u>10.2</u>	
<u>5421</u>	<u>12016</u>	<u>Cut Brine</u>	<u>8.8</u>	<u>9.4</u>	
<u>12016</u>	<u>20105</u>	<u>Oil Based mud</u>	<u>11.5</u>	<u>13.5</u>	

Losses or gains in the mud system will be monitored visually/manually as well as with an electronic PVT. The necessary mud products for additional weight and fluid loss control will be on location at all times.

7. AUXILIARY WELL CONTROL AND MONITORING EQUIPMENT

- a. A Kelly cock will be in the drill string at all times.
- b. A full opening drill pipe stabbing valve having the appropriate connections will be on the rig floor unobstructed and readily accessible at all times.
- c. Hydrogen Sulfide detection equipment will be in operation after drilling out the surface casing shoe until the production casing is cemented. Breathing equipment will be on location upon drilling the surface casing shoe until total depth is reached. **If Hydrogen Sulfide is encountered , measured amounts and formations will be reported to the BLM**

8. LOGGING / CORING AND TESTING PROGRAM:

- A. Mud Logger: None.
- B. DST's: None.
- C. Open Hole Logs: GR while drilling from Intermediate casing shoe to TD.

9. POTENTIAL HAZARDS:

- A. H2S detection equipment will be in operation after drilling out the surface casing shoe until the production casing has been cemented. Breathing equipment will be on location from drilling out the surface shoe until production casing is cemented. If H2S is encountered the operator will comply with Onshore Order #6.
- B. No abnormal temperatures or pressures are anticipated. All personnel will be familiar with all aspects of safe operation of equipment being used to drill this well. Adequate flare lines will be installed off the mud/gas separator where gas may be flared safely.
- C. No losses are anticipated at this time.
- D. All personnel will be familiar with all aspects of safe operation of equipment being used to drill this well.
- E. Adequate flare lines will be installed off the mud/gas separator where gas may be flared safely.

10. ANTICIPATED STARTING DATE AND DURATION OF OPERATIONS

Road and location construction will begin after the BLM has approved the APD. Anticipated spud date will be as soon as possible after BLM approval and as soon as a rig will be available. Move in operations and drilling is expected to take 30 days.

Batch Drilling Plan

- Marathon Oil Permian LLC. respectfully requests the option to “batch” drill sections of a well with intentions of returning to the well for later completion.
- When it is determined that the use of a “batch” drilling process to increase overall efficiency and reduce rig time on location, the following steps will be utilized to ensure compliant well control before releasing drilling rig during the batch process.
- Succeeding a successful cement job, fluid levels will be monitored in both the annulus and casing string to be verified static.
- A mandrel hanger packoff will be ran and installed in the multi-bowl wellhead isolating and creating a barrier on the annulus. This packoff will be tested to 5,000 PSI validating the seals.
- At this point the well is secure and the drilling adapter will be removed from the wellhead.
- A 13-5/8” 5M temporary abandonment cap will be installed on the wellhead by stud and nut flange. The seals of the TA cap will then be pressure tested to 5,000 PSI.
- The drilling rig will skid to the next well on the pad to continue the batch drilling process.
- When returning to the well with the TA cap, the TA cap will be removed and the BOP will be nipped up on the wellhead.
- A BOP test will then be conducted according to Onshore Order #2 and drilling operations will resume on the subject well.

Request for Surface Rig

- Marathon Oil Permian LLC. Requests the option to contract a surface rig to drill, set surface casing and cement on the subject well. If the timing between rigs is such that Marathon Oil Permian LLC. would not be able to preset the surface section, the primary drilling rig will drill the well in its entirety per the APD.