

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd. Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-12478
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease NO. B-1543-1
7. Lease Name or Unit Agreement Name North Monument Grayburg/SA Unit Blk 14
8. Well Number 32
9. OGRID Numer 873
10. Pool Name Eunice Monument; Grayburg/SA
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3586' GR

SUNDRY NOTICES AND REPORTS ON WELLS (DON NOT USE THIS FORM FOR PROPOSALS TO DRILL OR DEEPEN OR PLUG BACK TO A DIFFERENT RESERVIOR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>	
2. Name of Operator Apache Corporation	
3. Address of Operator 303 Veterans Airpark Lane, Ste. 3000, Midland, TX 79705	
4. Well Location Unit Letter P : 660 feet from the S line and 660 feet from the E line Section 36 Township 19S Range 36E NMPM County Lea	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3586' GR	

12. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK	<input type="checkbox"/>	PLUG AND ABANDON	<input checked="" type="checkbox"/>
TEMPORARILY ABANDON	<input type="checkbox"/>	CHANGE PLANS	<input type="checkbox"/>
PULL OR ALTER CASING	<input type="checkbox"/>	MULTIPLE COMPL	<input type="checkbox"/>
DOWNHOLE COMMINGLE	<input type="checkbox"/>		
OTHER:	<input type="checkbox"/>		

SUBSEQUENT REPORT OF:

REMEDIAL WORK	<input type="checkbox"/>
COMMENCE DRILLING OPNS.	<input type="checkbox"/>
CASING/CEMENT JOB	<input type="checkbox"/>
ALTERING CASING	<input type="checkbox"/>
P AND A	<input type="checkbox"/>
OTHER:	<input type="checkbox"/>

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work.) SEE RULE 1103. For Multiple Completions: Attach wellbore diagram or proposed completion or recompletion.

Apache Corporation proposes to P&A the above mentioned well by the attached procedure.

The Oil Conservation Division Must be notified
24 hours prior to the beginning of plugging operations.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Guinn Burks TITLE Reclamation Foreman DATE 3/28/12

Type or print name Guinn Burks E-mail add. guinn.burks@apachecorp.com PHONE: 432-556-9143

For State Use Only

APPROVED BY: [Signature] TITLE STATE MGR DATE 4-11-2012

Conditions of Approval (if any):

APR 11 2012



WELL BORE INFO.

LEASE NAME

NMGSAU

WELL #

1432

API #

30-025-12478

COUNTY

Lea

17 1/2" Hole
13 3/8" 48# @ 317'
w/ 300 sx CIRC to surf

12 1/4" Hole
9 5/8" 40# @ 2801'
w/ 1300 sx to surf

Casing leaks @ 3213', 3488'-2519'

CIBP @ 3650' w/ cmt to 3007' due to csg leaks

CIBP @ 3775' Unkn w/ cmt


(10/80) CIBP @ 4500' w/ 35' cmt

(10/80) cmt plug @ 5065'-5165'

(10/80) cmt plug @ 6801'-6901'

(10/80) CIBP @ 9475' w/ cmt

8 5/8" Hole
7" 26# @ 9785'
w/ 500 sx TOC @ 2880'
Open Hole @ 9785'-9822'

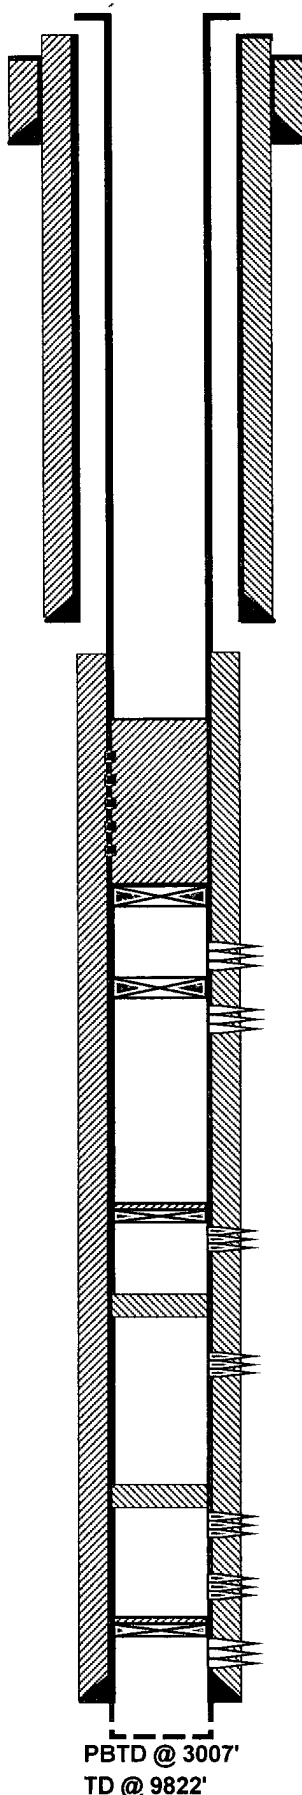

Perfs @ 3721'-3724'

Perfs @ 3782'-3885"

Perfs @ 4574'-4575' sqzd w/365 sx cmt

Perfs @ 5710'-5745' sqzd w/ 100 sx cmt

Perfs @ 7160'-7277' sqzd w/ 50 sx cmt

Perfs @ 7590'-7670' sqzd off

Perfs @ 9501'-9538'

PBTD @ 3007'
TD @ 9822'



WELL BORE INFO.

17 1/2" Hole
13 3/8" 48# @ 317'
w/ 300 sx CIRC to surf

12 1/4" Hole
9 5/8" 40# @ 2801'
w/ 1300 sx to surf

Casing leaks @ 3213', 3488'-2519'

CIBP @ 3650' w/ cmt to 3007' due to csg leaks

CIBP @ 3775' Unkn w/ cmt

(10/80) CIBP @ 4500' w/ 35' cmt

(10/80) cmt plug @ 5065'-5165'

(10/80) cmt plug @ 6801'-6901'

(10/80) CIBP @ 9475' w/ cmt

8 5/8" Hole
7" 26# @ 9785'
w/ 500 sx TOC @ 2880'
Open Hole @ 9785'-9822'

LEASE NAME

NMGSAU

WELL #

1432


API #

30-025-12478

COUNTY

Lea

PROPOSED PROCEDURE

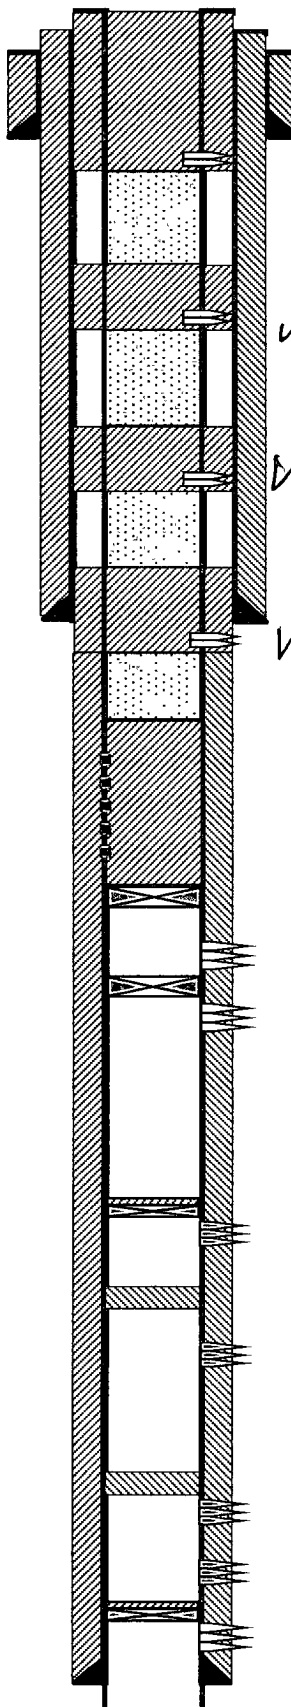

5. PUH & perf @ 367' & sqz 125 sx Class "C" cmt from 367' to surf.

4. PUH & perf @ 1330' & sqz 75 sx Class "C" cmt from 1330' - 1230' WOC/TAG (Top of Salt)

3. PUH & perf @ 2295' & sqz 75 sx Class "C" cmt from 2295'-2195' WOC/TAG (Base of Salt)

2. PUH & perf @ 2850' & sqz 75 sx Class "C" cmt from 2850' - 2750' WOC/TAG (Shoe)

1. MIRU, RIH w/ tbg & tag cmt plug @ 3007', CIRC w/ MLF.

Perfs @ 3721'-3724'

Perfs @ 3782'-3885"

Perfs @ 4574'-4575' sqzd w/365 sx cmt

Perfs @ 5710'-5745' sqzd w/ 100 sx cmt

Perfs @ 7160'-7277' sqzd w/ 50 sx cmt

Perfs @ 7590'-7670' sqzd off

Perfs @ 9501'-9538'

PBTD @ 3007'

TD @ 9822'