

District I
1625 N. French Dr., Hobbs, NM 88240

District II
1301 W. Grand Ave., Artesia, NM 88210

District III
1000 Rio Brazos Rd. Aztec, NM 87410

District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

HOBBS OGD

JUN 18 2012

RECEIVED

Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-03380
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease NO. EO-0392
7. Lease Name or Unit Agreement Name State WE "B"
8. Well Number 3
9. OGRID Numer 873
10. Pool Name Eumont; Yates/7 Rvrs/QN (Oil)

SUNDRY NOTICES AND REPORTS ON WELLS
(DON NOT USE THIS FORM FOR PROPOSALS TO DRILL OR DEEPEN OR PLUG BACK TO A DIFFERENT RESERVIOR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>
2. Name of Operator Apache Corporation
3. Address of Operator 303 Veterans Airpark Lane, Ste. 3000, Midland, TX 79705
4. Well Location Unit Letter C : 1980 feet from the N line and 1980 feet from th W line Section 1 Township 21S Range 35E NMPM County Lea
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3565' GR

12. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐
COMMENCE DRILLING OPNS. ☐
CASING/CEMENT JOB ☐
ALTERING CASING ☐
P AND A ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work.) SEE RULE 1103. For Multiple Completions: Attach wellbore diagram or proposed completion or recompletion.

Apache Corporation proposes to P&A the above mentioned well by the attached procedure.

The Oil Conservation Division Must be notified
24 hours prior to the beginning of plugging operations.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Guinn Burks TITLE Reclamation Foreman DATE 6/7/12

Type or print name Guinn Burks E-mail add. guinn.burks@apachecorp.com PHONE: 432-556-9143

For State Use Only

APPROVED BY: Mary L Brown TITLE Compliance Officer DATE 6/19/2012

Conditions of Approval (if any):

JUN 19 2012



WELL BORE INFO.

13 3/4" Hole
9 5/8" 36# @ 329'
w/300 sx to surf

LEASE NAME

State WE "B"

WELL #

3

API #

30-025-03380

COUNTY

Lea

TOC @ 1997' by TS


EU perfs @ 3220'-3410' sqzd 10/80 w/400 sx cmt

(6/07) CIBP @ 3775' w/2 sx cmt

EU perfs @ 3798'-3856'

8 3/4" Hole
7" 23# @ 3890'
w/ 652 sx TOC @ 1997' by TS

PBTD @ 3760'
TD @ 3890'

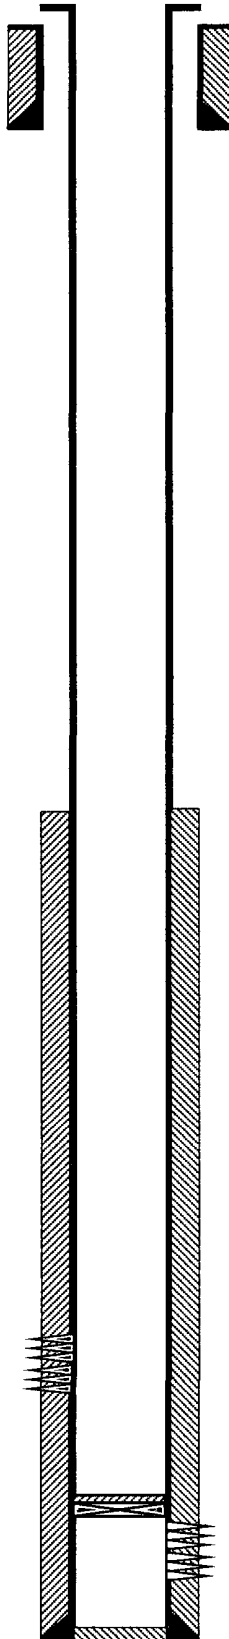



TOC @ 1997' by TS

(6/07) CIBP @ 3775' w/2 sx cmt

LEASE NAME
WELL #
API #
COUNTY

State WE "B"

WELL #

3


API #

30-025-03380

COUNTY

Lea

PROPOSED PROCEDURE

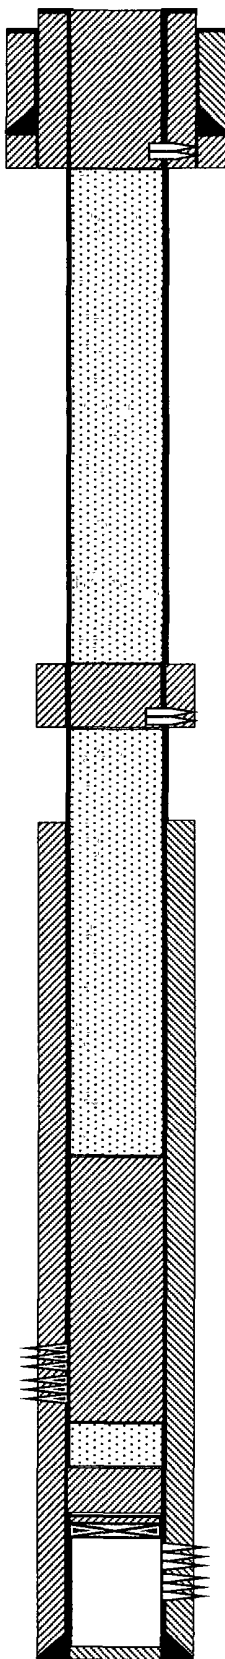

PBTD @ 3760'

TD @ 3890'

4 PUH & perf @ 379' & sqz 135 sx Class "C" cmt from 379' to surf, CIRC 7" to surf. (Water Board & Shoe)

Perf @ 1483

3. PUH & perf @ 1583' & sqz 80 sx Class "C" cmt from 1583'-1483' WOC/TAG (Top of Salt)

2. PUH & spot 115 sx Class "C" cmt from 3460'-2780'
WOC/TAG (Sqzd perfs & Yates & Base of Salt)

1. MIRU, RIH w/ tbg & spot 25 sx Class "C" cmt from 3775'-3625' Verify CIBP

EU perfs @ 3798'-3856'