

Submit 1 Copy To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 R10 Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
October 13, 2009

OIL CONSERVATION DIVISION

RECEIVED

South St. Francis Dr.
Santa Fe, NM 87505

JUN 26 2012

SUNDRY REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-31991
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐		5. Indicate Type of Lease STATE ☒ FEE ☐
2. Name of Operator CHEVRON USA INC		6. State Oil & Gas Lease No. B-1031
3. Address of Operator 15 SMITH RD, MIDLAND, TX 79705		7. Lease Name or Unit Agreement Name NEW MEXICO 'AB' STATE
4. Well Location Unit Letter J: 2085 feet from the SOUTH line and 1872 feet from the EAST line Section 6 Township 18S Range 35E NMPM County LEA		8. Well Number 10
11. Elevation (Show whether DR, RKB, RT, GR, etc.)		9. OGRID Number
		10. Pool name or Wildcat VACUUM DRINKARD

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: Test New Zone



OTHER:



13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

As per the conversation with Elidio Gonzales on June 25th, 2012, Chevron U.S.A plans to recomplete the subject well as follows:

1. Abandon the existing perfs (7600'-7908') by setting 35' of cement on top of the CIBP at 7550'.
2. Perforate with 2 JSPF: 5142-46', 5180-84', 5210-14', 5284-88', 5308-12', 5326-30', 5348-52', 5392-96'.
3. Acidize and swab test.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

TITLE Petroleum Engineer

DATE 6-25-12

Type or print name Edgar Acero

E-mail address: eadx@chevron.com

PHONE: 432-687-7343

For State Use Only

APPROVED BY:

TITLE

STAFF NGR

DATE

6-26-2012

Conditions of Approval (if any):

JUN 26 2012

New Mexico AB State 10

Lease Name: NEW MEXICO "AB"
 Surf. Loc.: 2085 FSL & 1872 FEL
 County: LEA St.: NM

Well #: 10
 API: 30-025-31991
 Surface: Tshp/Rng: 18S/35E
 Unit Ltr.: J Section: 6

Surface Casing

Size: 8 5/8
 Wt., Grd.: 24#
 Depth: 1495'
 Sxs Cmt: 650
 Circulate: Yes (80 sxs)
 TOC: Surface
 Hole Size: 11

KB: 3989'
 DF:
 GL: 3975'
 Ini. Spud: 11/10/93
 Ini. Comp.: 12/24/93

Production Casing


Size: 5 1/2
 Wt. Grd: 15.5# & 17
 Depth: 8200'
 Sxs Cmt: 2195
 Circulate: Yes (199 sxs)
 TOC: Surface
 Hole Size: 7 7/8


DV Tool @ 5016'

CIBP @ 7550'

7600' - 7908'

TD: 8200'

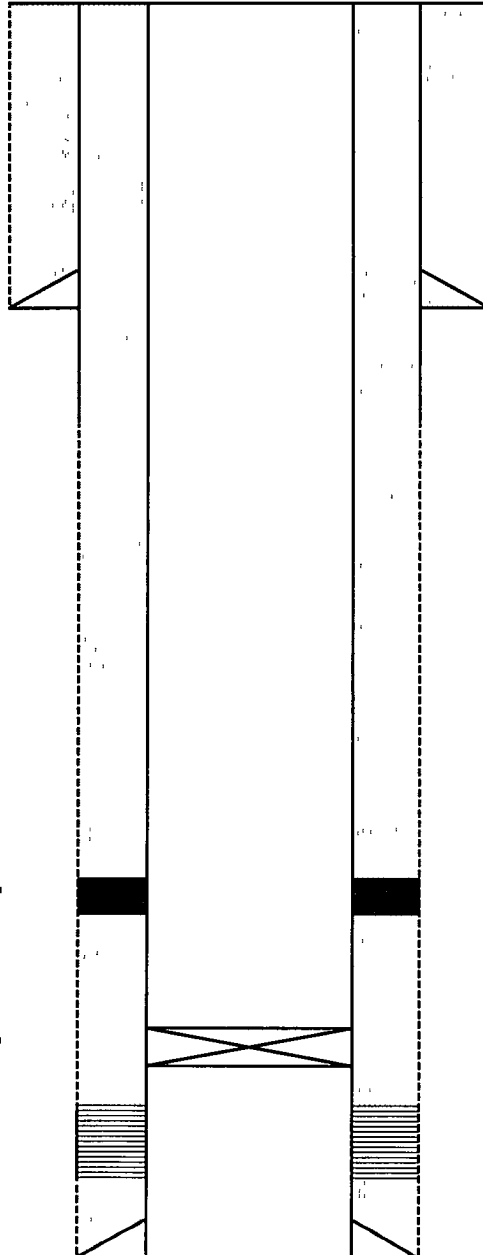

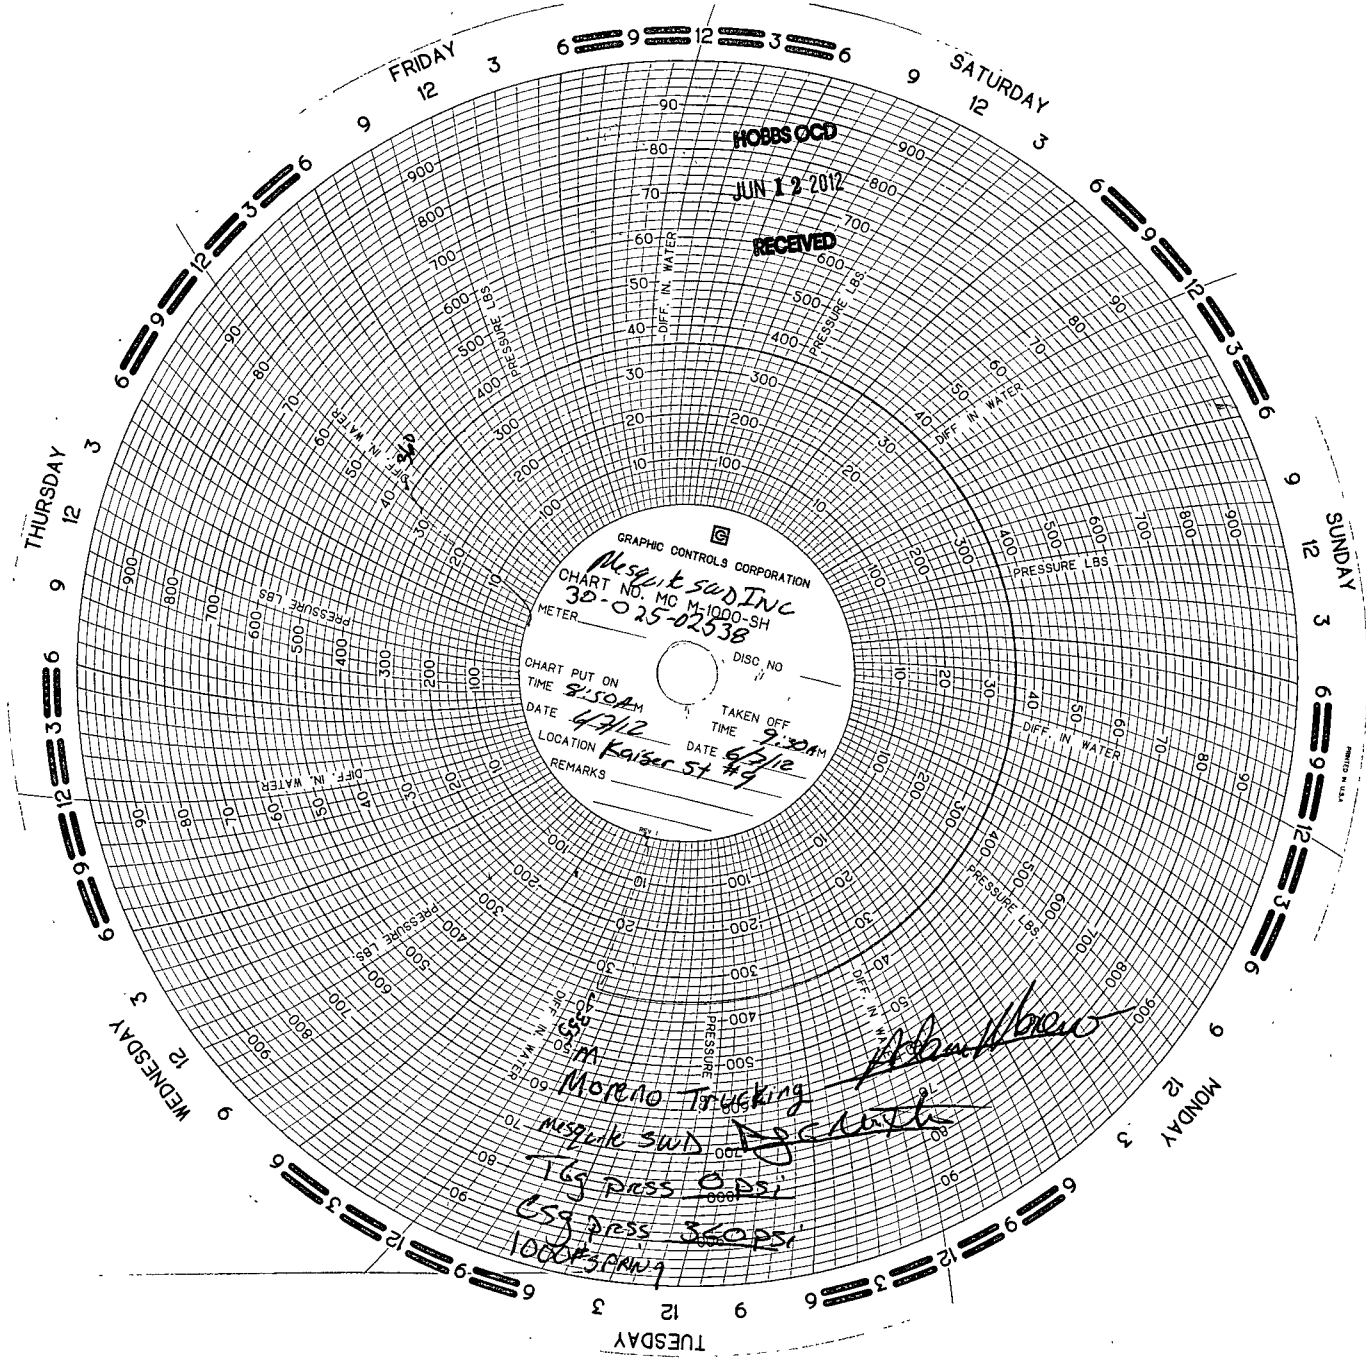

GRAPHIC CONTROLS CORPORATION
Mesquite SWD INC
CHART NO. MC M-1000-SH
30-025-02538
METER

DISC NO
CHART PUT ON TIME 8:50AM
DATE 4/2/12
TAKEN OFF TIME 9:30AM
DATE 4/2/12
LOCATION Kaiser St #9
REMARKS

MORENO TRUCKING
Mesquite SWD
T69 PRESS 0 PSI
CS9 PRESS 360 PSI
1000 PSI
Signature