

Submit 1 Copy To Appropriate District Office
 District I - (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II - (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III - (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV - (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New-Mexico
 Energy, Minerals and Natural Resources
 OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

Form C-103
 Revised August 1, 2011

HOBBS OCD
 JAN 28 2013
 RECEIVED

WELL API NO. 30-025-05698
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. A9130
7. Lease Name or Unit Agreement Name East Eumout Unit
8. Well Number 77
9. OGRID Number 192463
10. Pool name or Wildcat Eumout Yates TR Qn
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3591'

SUNDRY NOTICES AND REPORTS ON WELLS
 (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well Gas Well Other

2. Name of Operator
OXY USA WTP Limited Partnership

3. Address of Operator
P.O. Box 50250 Midland, TX 79710

4. Well Location
 Unit Letter N : 660 feet from the South line and 1980 feet from the West line
 Section 27 Township 19S Range 37E NMPM County Lea

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO: PERFORM REMEDIAL WORK <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> TEMPORARILY ABANDON <input checked="" type="checkbox"/> CHANGE PLANS <input type="checkbox"/> PULL OR ALTER CASING <input type="checkbox"/> MULTIPLE COMPL <input type="checkbox"/> DOWNHOLE COMMINGLE <input type="checkbox"/> OTHER: <u>MIT - TA Extension (1yr.)</u> <input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF: REMEDIAL WORK <input type="checkbox"/> ALTERING CASING <input type="checkbox"/> COMMENCE DRILLING OPNS. <input type="checkbox"/> P AND A <input type="checkbox"/> CASING/CEMENT JOB <input type="checkbox"/> OTHER: <input type="checkbox"/>
--	---

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD- 3900' PBD- 3598' Perfs- 3698-3829' CIBP- 3598'

OXY USA WTP LP respectfully requests to extend the Temporarily Abandon Status Approval. This unit is currently being evaluated for possible infill drilling and re-initiating the waterflood.

1. Notify NMOCD of casing integrity test 24hrs in advance.
2. RU pump truck, circulate well with treated water, pressure test casing to 500# for 30 min.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE David Stewart TITLE Regulatory Advisor DATE 1/24/13

Type or print name David Stewart E-mail address: david_stewart@oxy.com PHONE: 432-685-5717
 For State Use Only


APPROVED BY: [Signature] TITLE Dist. MGR DATE 1-28-2013

CONDITION OF APPROVAL FOR TA: Notify OCD Hobbs office 24 hours prior to running MIT Test & Chart.

15

OXY USA WTP LP
East Eumont Unit #77
API No. 30-025-05698

12-1/4" hole @ 345'
8-5/8" csg @ 345'
w/ 275sx-TOC-Surf-Circ

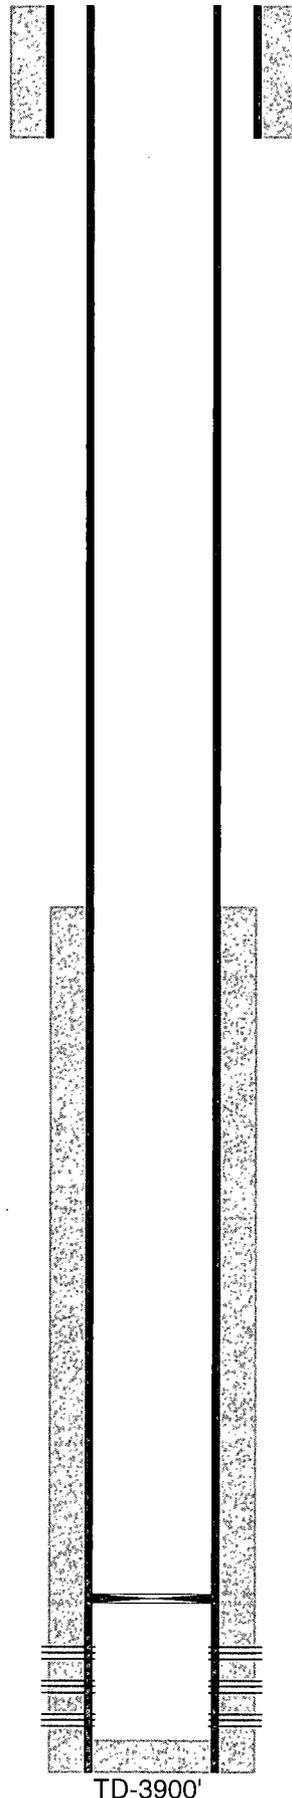

7-7/8" hole @ 3900'
5-1/2" csg @ 3900'
w/ 800sx-TOC-2110'-TS

7/92-CIBP @ 3598'

Perfs @ 3698-3829'

TD-3900'

OXY USA WTP LP - 192463

East Eumont Unit – 2013 Plans

OXY USA WTP LP respectfully requests a 1 year extension on the temporary abandonment of this well for further evaluation of the waterflood unit. OXY is in the process of submitting drilling permits to carry out a project that includes revitalizing the northern portion of the unit and testing potential in the southern portion of the unit. The project entails drilling 4 new wells in 2013 and the APDs for these are currently being prepared. These wells will decrease the primary production spacing from 40 acre to 20 acre spacing. Along with the newly drilled well, the wells in the immediately surrounding area will be worked over. There will be 5 producing wells re-stimulated with more appropriate completions for the reservoir and 5 injection wells will be cleaned out and stimulated to ensure sufficient flooding. In the South portion of the field, Oxy has identified 4 test wells to recomplete in new zones and evaluate the potential of the inactive portion of the field. From the results of the project, Oxy will evaluate and determine the potential reactivation of this well.