

OPERATOR'S COPY
HOBBS OCDFORM APPROVED
OMB No. 1004-0136
Expires July 31, 2010UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

MAY 29 2013

APPLICATION FOR PERMIT TO DRILL OR REENTER

RECEIVED

1a. Type of Work: ☒ DRILL ☐ REENTER		5. Lease Serial No. NMNM120357	
1b. Type of Well: ☒ Oil Well ☐ Gas Well ☐ Other ☒ Single Zone ☐ Multiple Zone		6. If Indian, Allottee or Tribe Name	
2. Name of Operator CHESAPEAKE OPERATING INC Chevron USA Inc		7. If Unit or CA Agreement, Name and No.	
3a. Address PO BOX 18496 OKLAHOMA CITY, OK 73154-0496		8. Lease Name and Well No. NEREID 1 FEDERAL 2H	
3b. Phone No. (include area code) Ph: 405-935-2896		9. API Well No. 30-005-29205	
4. Location of Well (Report location clearly and in accordance with any State requirements.)* At surface NESE 1980FSL 100FEL At proposed prod. zone NWSW 1980FSL 330FWL		10. Field and Pool, or Exploratory UNKNOWN WILDCAT 606 5153110	
14. Distance in miles and direction from nearest town or post office* 14 MILES FROM MALJAMAR, NM		11. Sec., T., R., M., or Blk. and Survey or Area Sec 1 T15S R31E Mer NMP SME: FEE	
15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 100 FT FROM EAST SECTION LINE		12. County or Parish CHAVES	
16. No. of Acres in Lease 641.44		13. State NM	
17. Spacing Unit dedicated to this well 160.00		18. Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft. 1320 FROM NEAREST WELL	
19. Proposed Depth 13536 MD 8810 TVD		20. BLM/BIA Bond No. on file ESB000159	
21. Elevations (Show whether DF, KB, RT, GL, etc.) 4362 GL		22. Estimated duration 20 DAYS	
22. Approximate date work will start 03/01/2013		23. Estimated duration 20 DAYS	

24. Attachments

ROSWELL CONTROLLED WATER BASIN

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification
- Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature (Electronic Submission)	Name (Printed/Typed) ERIN CARSON Ph: 405-935-2896	Date 01/11/2013
Title AUTHORIZED REPRESENTATIVE		
Approved by (Signature) Daniel May 23	Name (Printed/Typed) Daniel May 23	Date 4/29/13
Title Assistant Field Manager, Lands And Minerals	Office ROSWELL FIELD OFFICE	APPROVED FOR 2 YEARS

Application approval does not warrant or certify the applicant holds legal or equitable interest in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Additional Operator Remarks (see next page)

Electronic Submission #180812 verified by the BLM Well Information System
For CHESAPEAKE OPERATING INC, sent to the Roswell
Committed to AFMSS for processing by DAVID GLASS on 01/14/2013 (13DRG0497AE)

DECLARED WATER BASIN

CEMENT BEHIND 133"
CASING MUST BE BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED **
APPROVAL SUBJECT TO
GENERAL REQUIREMENTS AND
SPECIAL STIPULATIONS ATTACHED

WITNESS

MAY 30 2013

Revisions to Operator-Submitted EC Data for APD #180812

	Operator Submitted	BLM Revised (AFMSS)
Lease:	NMNM120357	NMNM120357
Agreement:		
Operator:	CHESAPEAKE OPERATING INC PO BOX 18496 OKLAHOMA CITY, OK 73151-0496 Ph: 405-935-2896	CHESAPEAKE OPERATING INC PO BOX 18496 OKLAHOMA CITY, OK 73154-0496 Ph: 405-767-4275
Admin Contact:	ERIN CARSON AUTHORIZED REPRESENTATIVE P O BOX 18496 OKLAHOMA CITY, OK 73154 Ph: 405-935-2896 E-Mail: erin.carson@chk.com	ERIN CARSON AUTHORIZED REPRESENTATIVE PO BOX 18496 OKLAHOMA CITY, OK 73154-0496 Ph: 405-935-2896 E-Mail: erin.carson@chk.com
Tech Contact:	ERIN CARSON AUTHORIZED REPRESENTATIVE P O BOX 18496 OKLAHOMA CITY, OK 73154	ERIN CARSON AUTHORIZED REPRESENTATIVE PO BOX 18496 OKLAHOMA CITY, OK 73154-0496
Well Name:	NEREID 1 FEDERAL	NEREID 1 FEDERAL
Number:	2H	2H
Location:		
State:	NM	NM
County:	CHAVES	CHAVES
S/T/R:	Sec 1 T15S R31E Mer NMP	Sec 1 T15S R31E Mer NMP
Surf Loc:	NESE Lot 1 1980FSL 100FEL	NESE 1980FSL 100FEL
Field/Pool:	G-05 S1531110; ABO-WOLFCA	UNKNOWN UNDESIGNATED-ABO-WOLFCAMP
Bond:	ESB000159	ESB000159

ONSHORE ORDER NO. 1
Chesapeake Operating, Inc. Agent for CHEVRON
Nereid 1 Federal 2H
Chaves, NM

CONFIDENTIAL -- TIGHT HOLE
DRILLING PLAN
PAGE: 1

OHSORE OIL & GAS ODER NO. 1
Approval of Operations on Onshore
Federal and Indian Oil and Gas Leases

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (CFR 43, Part 3160) and the approved Application for Permit to Drill. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling and completion operations.

Approval of this application does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease, which would entitle the applicant to conduct operations thereon.

1. FORMATION TOPS

The estimated tops of important geologic markers are as follows:

FORMATION	SUB-SEA	KBTVD	MD
Rustler	2925	1460	
Queen	1150	3235	
Grayburg	725	3660	
San Andres	425	3960	
Tubb	-2325	6710	
Abo Shale	-3200	7585	
Wolfcamp	-4450	8835	
Lateral TD	-4425	8810	13536

2. ESTIMATED DEPTH OF WATER, OIL, GAS & OTHER MINERAL BEARING FORMATIONS

The estimated depths at which the top and bottom of the anticipated water, oil, gas, or other mineral bearing formations are expected to be encountered are as follows:

Substance	Formation	Depth
Oil/Gas	Queen	3235
Oil/Gas	Wolfcamp	8835

All shows of fresh water and minerals will be reported and protected.

3. BOP EQUIPMENT

Will have a minimum of a 3000 psi rig stack (see proposed schematic) for drill out below surface casing. Stack will be tested as specified in the attached testing requirements.

4. CASING PROGRAM

a. The proposed casing program will be as follows:

Purpose	From	To	Hole Size	Csg Size	Weight	Grade	Thread	Condition
Surface	0'	400'	17-1/2"	13-3/8"	48 #	H-40	STC	New
Shallow Intermediate	0'	3,950'	12-1/4"	9-5/8"	40 #	J-55	LTC	New
Production	0'	13,536'	8-3/4"	5-1/2"	17.0 #	P-110	LTC	New

b. Casing design subject to revision based on geologic conditions encountered.

c. Casing Safety Factors are calculated for worst case scenarios. If for any reason the casing program requires casing set deeper than the following design then the Safety Factors will be recalculated & sent to the BLM prior to drilling.

SF Calculations based on the following design.

Surface Casing: 1600'

Intermediate Casing: 4750'

Production Casing: 15,250' MD/10,500' TVD (5000' VS @ 90 deg Inc)

Casing String	Min SF Burst	Min SF Collapse	Min SF Tension
Surface	1.28	1.06	1.94
Shallow Intermediate	1.28	1.25	1.99
Production	1.34	1.65	1.76

Min SF is the smallest of a group of safety factors that include the following considerations:

	Surf	Int	Prod
Burst Design			
Pressure Test- Surface, Int, Prod Csg P external: Water P internal: Test psi + next section heaviest mud in csg	X	X	X
Displace to Gas- Surf Csg P external: Water P internal: Dry Gas from Next Csg Point	X		
Frac at Shoe, Gas to Surf- Int Csg P external: Water P internal: Dry Gas, 15 ppg Frac Gradient		X	
Stimulation (Frac) Pressures- Prod Csg P external: Water P internal: Max inj pressure w/ heaviest injected fluid			X
Tubing leak- Prod Csg (packer at KOP) P external: Water P internal: Leak just below surf, 8.7 ppg packer fluid			X
Collapse Design			
Full Evacuation P external: Water gradient in cement, mud above TOC P internal: none	X	X	X
Cementing- Surf, Int, Prod Csg P external: Wet cement P internal: water	X	X	X
Tension Design			
100k lb overpull	X	X	X

5. CEMENTING PROGRAM

Slurry	Type	Top	Bottom	Weight	Yield	%Excess	Sacks
<u>Surface</u>				(ppg)	(sx/cu ft)	Open Hole	
Lead	C + 4% Gel	0'	300'	13.7	1.65	250	339
Tail	Class C	300'	400'	14.8	1.33	250	213
<u>Intermediate</u>							
Lead	TXI + 5% Salt	0'	3,450'	12	1.99	250	1756
Tail	50C/50Poz +5% Salt	3,450'	3,950'	14.2	1.37	250	414
<u>Production</u>							
Lead	35/65Poz H +8% Gel	3,450'	8,409'	12.4	2.19	75	960
Tail	50/50Poz H +2% Gel	8,409'	9,167'	14.5	1.28	75	266

1. Final cement volumes will be determined by caliper.
2. Surface casing shall have at least one centralizer installed on each of the bottom three joints starting with the shoe joint.
3. Open hole packers and production casing will be left uncemented from TD of 13,536' to 9,167' and the rest of the production casing will be cemented using a Stage Tool from 9,167' to 3,450'.
4. Production casing will have one centralizer on every other joint from Stage Tool to KOP (horizontal type) and from KOP to intermediate casing (bowspring type).

6. MUD PROGRAM

From	To	Type	Weight	F. Vis	Filtrate
0'	400'	Spud Mud	8.4 - 8.7	32 - 34	NC - NC
400'	3,950'	Brine	9.5 - 10.1	28 - 29	NC - NC
3,950'	8,409'	FW/Cut Brine	8.3 - 9.5	28 - 29	NC - NC
8,409'	9,167'	Cut Brine	8.3 - 9.5	32 - 36	15 - 25
9,167'	13,536'	FW/Cut Brine	8.3 - 9.5	28 - 29	NC - NC

A closed system will be utilized consisting of above ground steel tanks. All wastes accumulated during drilling operations will be contained in a portable trash cage and removed from location and deposited

All fluids and cuttings will be disposed of in accordance with New Mexico Oil Conservation Division rules and regulations.

A mud test shall be performed every 24 hours after mudding up to determine, as applicable: density, viscosity, gel strength, filtration, and pH.

7. TESTING, LOGGING, AND CORING

The anticipated type and amount of testing, logging, and coring are as follows:

- a. Drill stem tests are not planned.
- b. The logging program will be as follows:

TYPE	Logs	Interval	Timing	Vendor
OH	Triple Combo	Base of Curve to Int	After Curve	TBD
Mudlogs	2 man mudlog	Int Csg to TD	Drillout of Int Csg	TBD
LWD	MWD Gamma	Curve and Lateral	While Drilling	Phoenix

- c. Core samples are not planned.
- d. A Directional Survey will be run.

8. ABNORMAL PRESSURES AND HYDROGEN SULFIDE

- a. No abnormal pressures or temperatures are expected. Estimated BHP is: 3928 psi
- b. Hydrogen sulfide gas is not anticipated.

Project: NM - Chaves - Wolfcamp

Site: Nereid 1 Federal 2H

Well: Well #1

Wellbore: Wellbore #1

Design: Plat 05Dec12

PROJECT DETAILS: NM - Chaves - Wolfcamp


Geodetic System: US State Plane 1927 (Exact solution)

Datum: NAD 1927 (NADCON CONUS)

Ellipsoid: Clarke 1866

Zone: New Mexico East 3001

System Datum: Ground Level

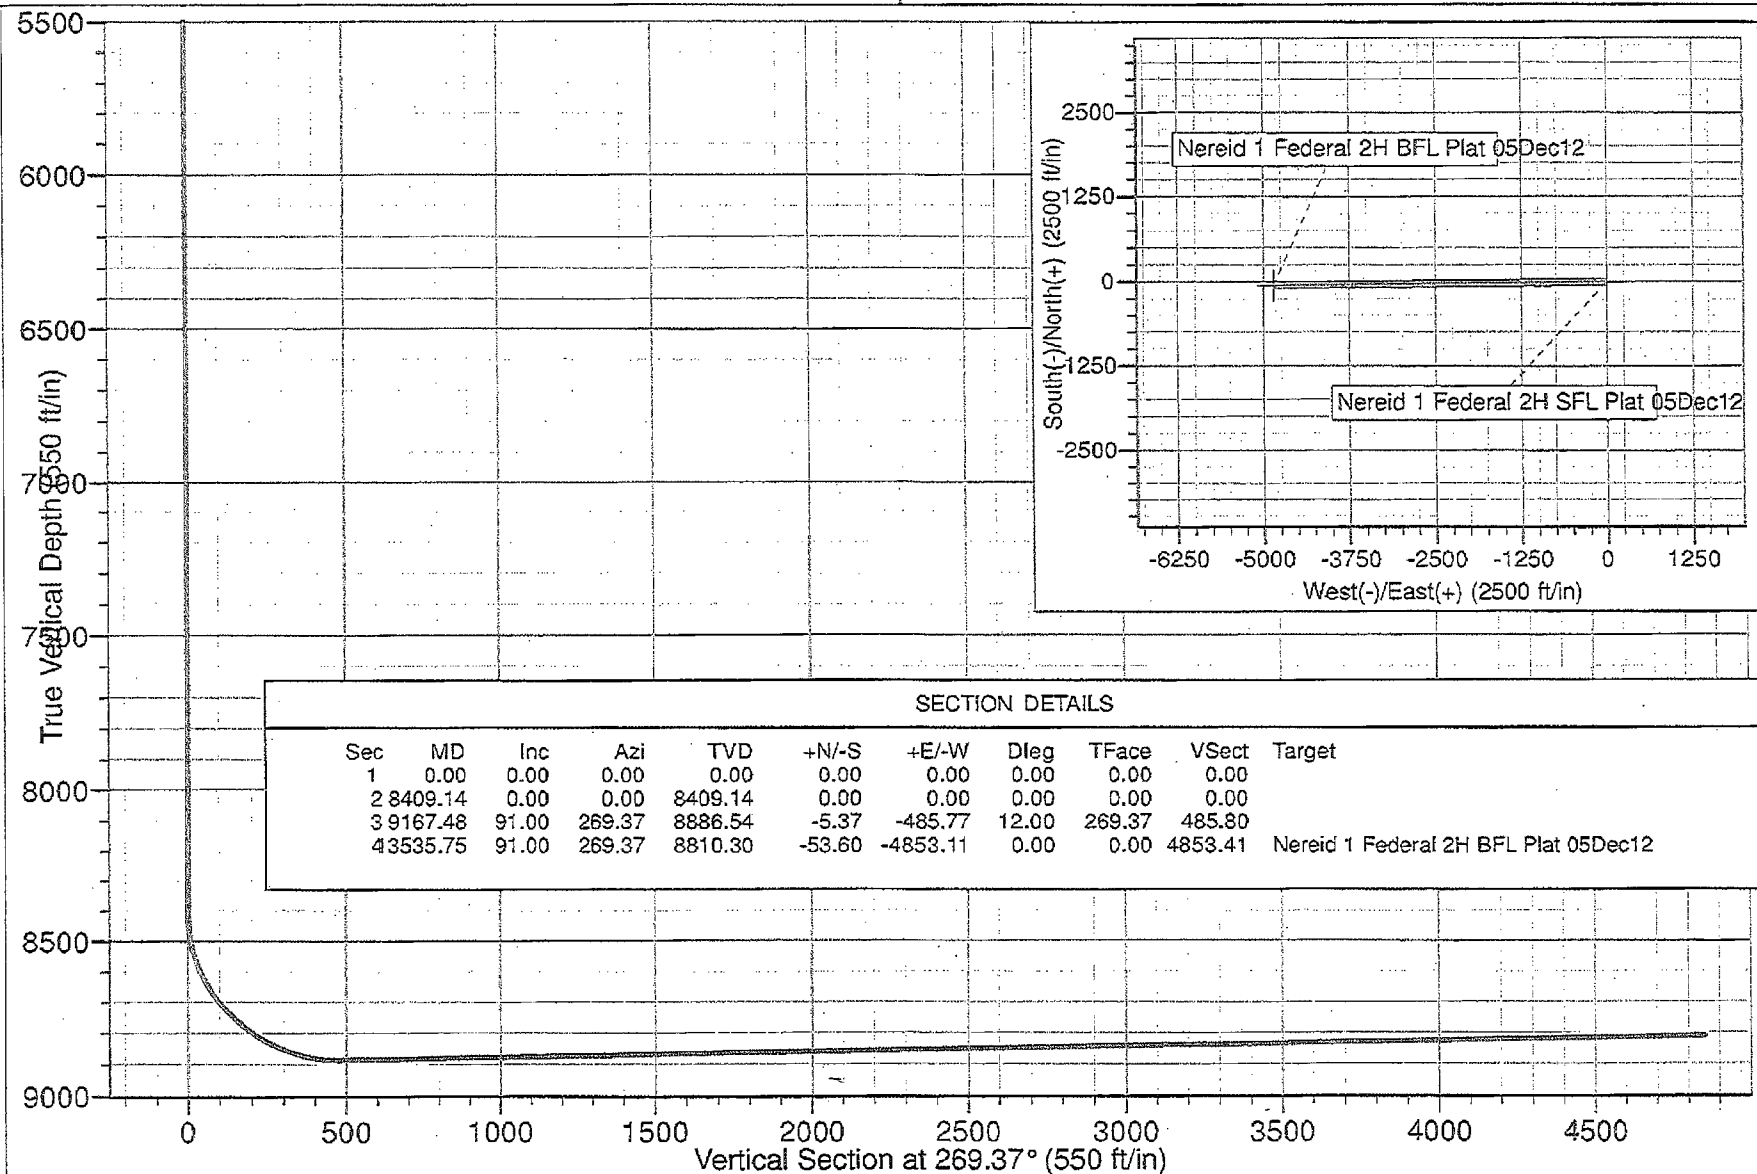

Permian District

NM - Chaves - Wolfcamp

Nereid 1 Federal 2H

Well #1

Wellbore #1

Plan: Plat 05Dec12

Standard Planning Report

18 December, 2012

Chesapeake Operating

Planning Report

Database: Drilling Database
Company: Permian District
Project: NM - Chaves - Wolfcamp
Site: Nereid 1 Federal 2H
Well: Well #1
Wellbore: Wellbore #1
Design: Plat 05Dec12

Local Co-ordinate Reference: Well Well #1
TVD Reference: WELL @ 4379.00ft (Original Well Elev)
MD Reference: WELL @ 4379.00ft (Original Well Elev)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Project	NM - Chaves - Wolfcamp		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Ground Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site	Nereid 1 Federal 2H		
Site Position:		Northing:	743,684.00 usft
From:	Map	Easting:	673,762.70 usft
Position Uncertainty:	0.00 ft	Slot Radius:	13.200 in
		Latitude:	33.043160
		Longitude:	-103.766290
		Grid Convergence:	0.31 °

Well	Well #1		
Well Position	+N/-S	0.00 ft	Northing: 743,684.00 usft
	+E/-W	0.00 ft	Easting: 673,762.70 usft
Position Uncertainty	0.00 ft	Wellhead Elevation:	4,362.00 ft
		Latitude:	33.043160
		Longitude:	-103.766290
		Ground Level:	4,362.00 ft

Wellbore	Wellbore #1		
Magnetics	Model Name	Sample Date	Declination (°)
	IGRF2010	12/18/2012	7.55
			Dip Angle (°)
			60.87
			Field Strength (nT)
			48,929

Design	Plat 05Dec12		
Audit Notes:			
Version:	Phase:	PLAN	Tie On Depth: 0.00
Vertical Section:	Depth From (TVD)	+N/-S (ft)	+E/-W (ft)
	(ft)	(ft)	(ft)
	0.00	0.00	0.00
			Direction (°)
			269.37

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
8,409.14	0.00	0.00	8,409.14	0.00	0.00	0.00	0.00	0.00	0.00	
9,167.48	91.00	269.37	8,886.54	-5.37	-485.77	12.00	12.00	0.00	269.37	
13,535.75	91.00	269.37	8,810.30	-53.60	-4,853.11	0.00	0.00	0.00	0.00	Nereid 1 Federal 2H

Chesapeake Operating Planning Report

Database: Drilling Database
Company: Permian District
Project: NM - Chaves - Wolfcamp
Site: Nereld 1 Federal 2H
Well: Well #1
Wellbore: Wellbore #1
Design: Plat 05Dec12

Local Co-ordinate Reference: Well Well #1
TVD Reference: WELL @ 4379.00ft (Original Well Elev)
MD Reference: WELL @ 4379.00ft (Original Well Elev)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,400.00	0.00	0.00	0.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00
2,600.00	0.00	0.00	2,600.00	0.00	0.00	0.00	0.00	0.00	0.00
2,700.00	0.00	0.00	2,700.00	0.00	0.00	0.00	0.00	0.00	0.00
2,800.00	0.00	0.00	2,800.00	0.00	0.00	0.00	0.00	0.00	0.00
2,900.00	0.00	0.00	2,900.00	0.00	0.00	0.00	0.00	0.00	0.00
3,000.00	0.00	0.00	3,000.00	0.00	0.00	0.00	0.00	0.00	0.00
3,100.00	0.00	0.00	3,100.00	0.00	0.00	0.00	0.00	0.00	0.00
3,200.00	0.00	0.00	3,200.00	0.00	0.00	0.00	0.00	0.00	0.00
3,300.00	0.00	0.00	3,300.00	0.00	0.00	0.00	0.00	0.00	0.00
3,400.00	0.00	0.00	3,400.00	0.00	0.00	0.00	0.00	0.00	0.00
3,500.00	0.00	0.00	3,500.00	0.00	0.00	0.00	0.00	0.00	0.00
3,600.00	0.00	0.00	3,600.00	0.00	0.00	0.00	0.00	0.00	0.00
3,700.00	0.00	0.00	3,700.00	0.00	0.00	0.00	0.00	0.00	0.00
3,800.00	0.00	0.00	3,800.00	0.00	0.00	0.00	0.00	0.00	0.00
3,900.00	0.00	0.00	3,900.00	0.00	0.00	0.00	0.00	0.00	0.00
4,000.00	0.00	0.00	4,000.00	0.00	0.00	0.00	0.00	0.00	0.00
4,100.00	0.00	0.00	4,100.00	0.00	0.00	0.00	0.00	0.00	0.00
4,200.00	0.00	0.00	4,200.00	0.00	0.00	0.00	0.00	0.00	0.00
4,300.00	0.00	0.00	4,300.00	0.00	0.00	0.00	0.00	0.00	0.00
4,400.00	0.00	0.00	4,400.00	0.00	0.00	0.00	0.00	0.00	0.00
4,500.00	0.00	0.00	4,500.00	0.00	0.00	0.00	0.00	0.00	0.00
4,600.00	0.00	0.00	4,600.00	0.00	0.00	0.00	0.00	0.00	0.00
4,700.00	0.00	0.00	4,700.00	0.00	0.00	0.00	0.00	0.00	0.00
4,800.00	0.00	0.00	4,800.00	0.00	0.00	0.00	0.00	0.00	0.00
4,900.00	0.00	0.00	4,900.00	0.00	0.00	0.00	0.00	0.00	0.00
5,000.00	0.00	0.00	5,000.00	0.00	0.00	0.00	0.00	0.00	0.00
5,100.00	0.00	0.00	5,100.00	0.00	0.00	0.00	0.00	0.00	0.00
5,200.00	0.00	0.00	5,200.00	0.00	0.00	0.00	0.00	0.00	0.00
5,300.00	0.00	0.00	5,300.00	0.00	0.00	0.00	0.00	0.00	0.00

Chesapeake Operating

Planning Report

Database: Drilling Database
Company: Permian District
Project: NM - Chaves - Wolfcamp
Site: Noreld 1 Federal 2H
Well: Well #1
Wellbore: Wellbore #1
Design: Plat 05Dec12

Local Co-ordinate Reference: Well Well #1
TVD Reference: WELL @ 4378.00ft (Original Well Elev)
MD Reference: WELL @ 4379.00ft (Original Well Elev)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,400.00	0.00	0.00	5,400.00	0.00	0.00	0.00	0.00	0.00	0.00
5,500.00	0.00	0.00	5,500.00	0.00	0.00	0.00	0.00	0.00	0.00
5,600.00	0.00	0.00	5,600.00	0.00	0.00	0.00	0.00	0.00	0.00
5,700.00	0.00	0.00	5,700.00	0.00	0.00	0.00	0.00	0.00	0.00
5,800.00	0.00	0.00	5,800.00	0.00	0.00	0.00	0.00	0.00	0.00
5,900.00	0.00	0.00	5,900.00	0.00	0.00	0.00	0.00	0.00	0.00
6,000.00	0.00	0.00	6,000.00	0.00	0.00	0.00	0.00	0.00	0.00
6,100.00	0.00	0.00	6,100.00	0.00	0.00	0.00	0.00	0.00	0.00
6,200.00	0.00	0.00	6,200.00	0.00	0.00	0.00	0.00	0.00	0.00
6,300.00	0.00	0.00	6,300.00	0.00	0.00	0.00	0.00	0.00	0.00
6,400.00	0.00	0.00	6,400.00	0.00	0.00	0.00	0.00	0.00	0.00
6,500.00	0.00	0.00	6,500.00	0.00	0.00	0.00	0.00	0.00	0.00
6,600.00	0.00	0.00	6,600.00	0.00	0.00	0.00	0.00	0.00	0.00
6,700.00	0.00	0.00	6,700.00	0.00	0.00	0.00	0.00	0.00	0.00
6,800.00	0.00	0.00	6,800.00	0.00	0.00	0.00	0.00	0.00	0.00
6,900.00	0.00	0.00	6,900.00	0.00	0.00	0.00	0.00	0.00	0.00
7,000.00	0.00	0.00	7,000.00	0.00	0.00	0.00	0.00	0.00	0.00
7,100.00	0.00	0.00	7,100.00	0.00	0.00	0.00	0.00	0.00	0.00
7,200.00	0.00	0.00	7,200.00	0.00	0.00	0.00	0.00	0.00	0.00
7,300.00	0.00	0.00	7,300.00	0.00	0.00	0.00	0.00	0.00	0.00
7,400.00	0.00	0.00	7,400.00	0.00	0.00	0.00	0.00	0.00	0.00
7,500.00	0.00	0.00	7,500.00	0.00	0.00	0.00	0.00	0.00	0.00
7,600.00	0.00	0.00	7,600.00	0.00	0.00	0.00	0.00	0.00	0.00
7,700.00	0.00	0.00	7,700.00	0.00	0.00	0.00	0.00	0.00	0.00
7,800.00	0.00	0.00	7,800.00	0.00	0.00	0.00	0.00	0.00	0.00
7,900.00	0.00	0.00	7,900.00	0.00	0.00	0.00	0.00	0.00	0.00
8,000.00	0.00	0.00	8,000.00	0.00	0.00	0.00	0.00	0.00	0.00
8,100.00	0.00	0.00	8,100.00	0.00	0.00	0.00	0.00	0.00	0.00
8,200.00	0.00	0.00	8,200.00	0.00	0.00	0.00	0.00	0.00	0.00
8,300.00	0.00	0.00	8,300.00	0.00	0.00	0.00	0.00	0.00	0.00
8,409.14	0.00	0.00	8,409.14	0.00	0.00	0.00	0.00	0.00	0.00
8,425.00	1.90	269.37	8,425.00	0.00	-0.26	0.26	12.00	12.00	0.00
8,450.00	4.90	269.37	8,449.95	-0.02	-1.75	1.75	12.00	12.00	0.00
8,475.00	7.90	269.37	8,474.79	-0.05	-4.53	4.53	12.00	12.00	0.00
8,500.00	10.90	269.37	8,499.45	-0.10	-8.62	8.62	12.00	12.00	0.00
8,525.00	13.90	269.37	8,523.87	-0.15	-13.99	13.99	12.00	12.00	0.00
8,550.00	16.90	269.37	8,547.97	-0.23	-20.63	20.63	12.00	12.00	0.00
8,575.00	19.90	269.37	8,571.68	-0.31	-28.52	28.52	12.00	12.00	0.00
8,600.00	22.90	269.37	8,594.96	-0.42	-37.64	37.64	12.00	12.00	0.00
8,625.00	25.90	269.37	8,617.72	-0.53	-47.96	47.97	12.00	12.00	0.00
8,650.00	28.90	269.37	8,639.91	-0.66	-59.47	59.47	12.00	12.00	0.00
8,675.00	31.90	269.37	8,661.47	-0.80	-72.12	72.12	12.00	12.00	0.00
8,700.00	34.90	269.37	8,682.34	-0.95	-85.88	85.88	12.00	12.00	0.00
8,725.00	37.90	269.37	8,702.46	-1.11	-100.71	100.72	12.00	12.00	0.00
8,750.00	40.90	269.37	8,721.78	-1.29	-116.58	116.59	12.00	12.00	0.00
8,775.00	43.90	269.37	8,740.24	-1.47	-133.43	133.44	12.00	12.00	0.00
8,800.00	46.90	269.37	8,757.79	-1.67	-151.23	151.24	12.00	12.00	0.00
8,825.00	49.90	269.37	8,774.38	-1.88	-169.93	169.94	12.00	12.00	0.00
8,850.00	52.90	269.37	8,789.98	-2.09	-189.46	189.47	12.00	12.00	0.00
8,875.00	55.90	269.37	8,804.53	-2.32	-209.79	209.80	12.00	12.00	0.00
8,900.00	58.90	269.37	8,817.99	-2.55	-230.84	230.86	12.00	12.00	0.00
8,925.00	61.90	269.37	8,830.34	-2.79	-252.58	252.59	12.00	12.00	0.00
8,950.00	64.90	269.37	8,841.53	-3.04	-274.93	274.94	12.00	12.00	0.00
8,975.00	67.90	269.37	8,851.54	-3.29	-297.83	297.85	12.00	12.00	0.00

Chesapeake Operating

Planning Report

Database: Drilling Database
 Company: Permian District
 Project: NM - Chaves - Wolfcamp
 Site: Nereid 1 Federal 2H
 Well: Well #1
 Wellbore: Wellbore #1
 Design: Plat 05Dec12

Local Co-ordinate Reference: Well Well #1
 TVD Reference: WELL @ 4379.00ft (Original Well Elev)
 MD Reference: WELL @ 4379.00ft (Original Well Elev)
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
9,000.00	70.90	269.37	8,860.33	-3.55	-321.23	321.25	12.00	12.00	0.00
9,025.00	73.90	269.37	8,867.89	-3.81	-345.06	345.08	12.00	12.00	0.00
9,050.00	76.90	269.37	8,874.19	-4.08	-369.25	369.27	12.00	12.00	0.00
9,075.00	79.90	269.37	8,879.21	-4.35	-393.73	393.76	12.00	12.00	0.00
9,100.00	82.90	269.37	8,882.95	-4.62	-418.45	418.47	12.00	12.00	0.00
9,125.00	85.90	269.37	8,885.39	-4.90	-443.32	443.35	12.00	12.00	0.00
9,150.00	88.90	269.37	8,886.52	-5.17	-468.29	468.32	12.00	12.00	0.00
9,167.48	91.00	269.37	8,886.54	-5.37	-485.77	485.80	12.00	12.00	0.00
9,200.00	91.00	269.37	8,885.97	-5.72	-518.28	518.32	0.00	0.00	0.00
9,300.00	91.00	269.37	8,884.22	-6.83	-618.26	618.30	0.00	0.00	0.00
9,400.00	91.00	269.37	8,882.48	-7.93	-718.24	718.28	0.00	0.00	0.00
9,500.00	91.00	269.37	8,880.73	-9.04	-818.22	818.27	0.00	0.00	0.00
9,600.00	91.00	269.37	8,878.99	-10.14	-918.20	918.25	0.00	0.00	0.00
9,700.00	91.00	269.37	8,877.24	-11.25	-1,018.18	1,018.24	0.00	0.00	0.00
9,800.00	91.00	269.37	8,875.50	-12.35	-1,118.16	1,118.22	0.00	0.00	0.00
9,900.00	91.00	269.37	8,873.75	-13.45	-1,218.13	1,218.21	0.00	0.00	0.00
10,000.00	91.00	269.37	8,872.01	-14.56	-1,318.11	1,318.19	0.00	0.00	0.00
10,100.00	91.00	269.37	8,870.26	-15.66	-1,418.09	1,418.18	0.00	0.00	0.00
10,200.00	91.00	269.37	8,868.52	-16.77	-1,518.07	1,518.16	0.00	0.00	0.00
10,300.00	91.00	269.37	8,866.77	-17.87	-1,618.05	1,618.15	0.00	0.00	0.00
10,400.00	91.00	269.37	8,865.03	-18.97	-1,718.03	1,718.13	0.00	0.00	0.00
10,500.00	91.00	269.37	8,863.28	-20.08	-1,818.01	1,818.12	0.00	0.00	0.00
10,600.00	91.00	269.37	8,861.54	-21.18	-1,917.98	1,918.10	0.00	0.00	0.00
10,700.00	91.00	269.37	8,859.79	-22.29	-2,017.96	2,018.09	0.00	0.00	0.00
10,800.00	91.00	269.37	8,858.05	-23.39	-2,117.94	2,118.07	0.00	0.00	0.00
10,900.00	91.00	269.37	8,856.30	-24.50	-2,217.92	2,218.06	0.00	0.00	0.00
11,000.00	91.00	269.37	8,854.56	-25.60	-2,317.90	2,318.04	0.00	0.00	0.00
11,100.00	91.00	269.37	8,852.81	-26.70	-2,417.88	2,418.03	0.00	0.00	0.00
11,200.00	91.00	269.37	8,851.06	-27.81	-2,517.86	2,518.01	0.00	0.00	0.00
11,300.00	91.00	269.37	8,849.32	-28.91	-2,617.84	2,618.00	0.00	0.00	0.00
11,400.00	91.00	269.37	8,847.57	-30.02	-2,717.81	2,717.98	0.00	0.00	0.00
11,500.00	91.00	269.37	8,845.83	-31.12	-2,817.79	2,817.96	0.00	0.00	0.00
11,600.00	91.00	269.37	8,844.08	-32.23	-2,917.77	2,917.95	0.00	0.00	0.00
11,700.00	91.00	269.37	8,842.34	-33.33	-3,017.75	3,017.93	0.00	0.00	0.00
11,800.00	91.00	269.37	8,840.59	-34.43	-3,117.73	3,117.92	0.00	0.00	0.00
11,900.00	91.00	269.37	8,838.85	-35.54	-3,217.71	3,217.90	0.00	0.00	0.00
12,000.00	91.00	269.37	8,837.10	-36.64	-3,317.69	3,317.89	0.00	0.00	0.00
12,100.00	91.00	269.37	8,835.36	-37.75	-3,417.67	3,417.87	0.00	0.00	0.00
12,200.00	91.00	269.37	8,833.61	-38.85	-3,517.64	3,517.86	0.00	0.00	0.00
12,300.00	91.00	269.37	8,831.87	-39.95	-3,617.62	3,617.84	0.00	0.00	0.00
12,400.00	91.00	269.37	8,830.12	-41.06	-3,717.60	3,717.83	0.00	0.00	0.00
12,500.00	91.00	269.37	8,828.38	-42.16	-3,817.58	3,817.81	0.00	0.00	0.00
12,600.00	91.00	269.37	8,826.63	-43.27	-3,917.56	3,917.80	0.00	0.00	0.00
12,700.00	91.00	269.37	8,824.89	-44.37	-4,017.54	4,017.78	0.00	0.00	0.00
12,800.00	91.00	269.37	8,823.14	-45.48	-4,117.52	4,117.77	0.00	0.00	0.00
12,900.00	91.00	269.37	8,821.40	-46.58	-4,217.49	4,217.75	0.00	0.00	0.00
13,000.00	91.00	269.37	8,819.65	-47.68	-4,317.47	4,317.74	0.00	0.00	0.00
13,100.00	91.00	269.37	8,817.91	-48.79	-4,417.45	4,417.72	0.00	0.00	0.00
13,200.00	91.00	269.37	8,816.16	-49.89	-4,517.43	4,517.71	0.00	0.00	0.00
13,300.00	91.00	269.37	8,814.41	-51.00	-4,617.41	4,617.69	0.00	0.00	0.00
13,400.00	91.00	269.37	8,812.67	-52.10	-4,717.39	4,717.68	0.00	0.00	0.00
13,500.00	91.00	269.37	8,810.92	-53.21	-4,817.37	4,817.66	0.00	0.00	0.00
13,535.75	91.00	269.37	8,810.30	-53.60	-4,853.11	4,853.41	0.00	0.00	0.00

Chesapeake Operating Planning Report

Database: Drilling Database
Company: Permian District
Project: NM - Chaves - Wolfcamp
Site: Nereid 1 Federal 2H
Well: Well #1
Wellbore: Wellbore #1
Design: Plat 05Dec12

Local Co-ordinate Reference: Well Well #1
TVD Reference: WELL @ 4379.00ft (Original Well Elev)
MD Reference: WELL @ 4379.00ft (Original Well Elev)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Design Targets

Target Name	Dip Angle	Dip Dir.	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
- hit/miss target	(°)	(°)	(ft)	(ft)	(ft)	(usft)	(usft)		
- Shape									
Nereid 1 Federal 2H E	0.00	0.00	0.00	0.00	0.00	743,684.00	673,762.70	33.043160	-103.766290
- plan hits target center									
- Point									
Nereid 1 Federal 2H E	-1.00	269.37	8,810.30	-53.60	-4,853.11	743,630.40	668,909.60	33.043084	-103.782127
- plan hits target center									
- Rectangle (sides W100.00 H4,853.40 D20.00)									

BLOWOUT PREVENTOR SCHEMATIC

CHESAPEAKE OPERATING INC

Minimum Requirements

OPERATION : Intermediate and Production Hole Sections

Minimum System Pressure Rating : 3000 PSI


SIZE	PRESSURE	DESCRIPTION
A	N/A	Well Nipple
B	13 5/8" 3,000 psi	Annular
C	13 5/8" 3,000 psi	Pipe Ram
D	13 5/8" 3,000 psi	Blind Ram
E	13 5/8" 3,000 psi	Mud Cross
F		
DSA	As required for each hole size	
C-Sec		
B-Sec	13-5/8" 3K x 11" 3K	
A-Sec	13-3/8" SOW x 13-5/8" 3K	

Kill Line

SIZE	PRESSURE	DESCRIPTION
2"	3,000 psi	Check Valve
2"	3,000 psi	Gate Valve

Choke Line

SIZE	PRESSURE	DESCRIPTION
3"	3,000 psi	Gate Valve
3"	3,000 psi	Gate Valve Or Remotely Controlled Valve

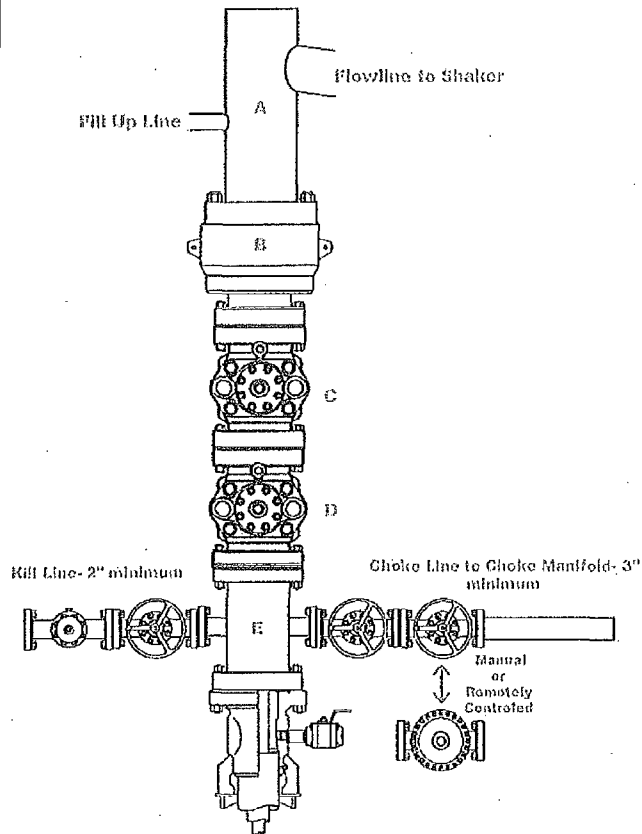

Installation Checklist

The following item must be verified and checked off prior to pressure testing of BOP equipment.

- ☐ The installed BOP equipment meets at least the minimum requirements (rating, type, size, configuration) as shown on this schematic. Components may be substituted for equivalent equipment rated to higher pressures. Additional components may be put into place as long as they meet or exceed the minimum pressure rating of the system.
- ☐ All valves on the kill line and choke line will be full opening and will allow straight through flow.
- ☐ The kill line and choke line will be straight unless turns use tee blocks or are targeted with running tool, and will be anchored to prevent whip and reduce vibration.
- ☐ Manual (hand wheels) or automatic locking devices will be installed on all ram preventers. Hand wheels will also be installed on all manual valves on the choke line and kill line.
- ☐ A valve will be installed in the closing line as close as possible to the annular preventer to act as a locking device. This valve will remain open unless accumulator is inoperative.
- ☐ Upper kelly cock valve with handle will be available on rig floor along with safety valve and subs to fit all drill string connections in use.

After Installation Checklist is complete, fill out the information below and email to Superintendent and Drilling Engineer

Wellname: _____
 CHK Representative: _____
 Date: _____

CHOKE MANIFOLD SCHEMATIC


CHESAPEAKE OPERATING INC Minimum Requirements

OPERATION : Intermediate and Production Hole Sections

Minimum System
Pressure Rating : 3000 PSI

Choke Manifold

SIZE	PRESSURE	DESCRIPTION
3"	3,000 psi	Panic Line Valves
2"	3,000 psi	Valves on Choke Lines

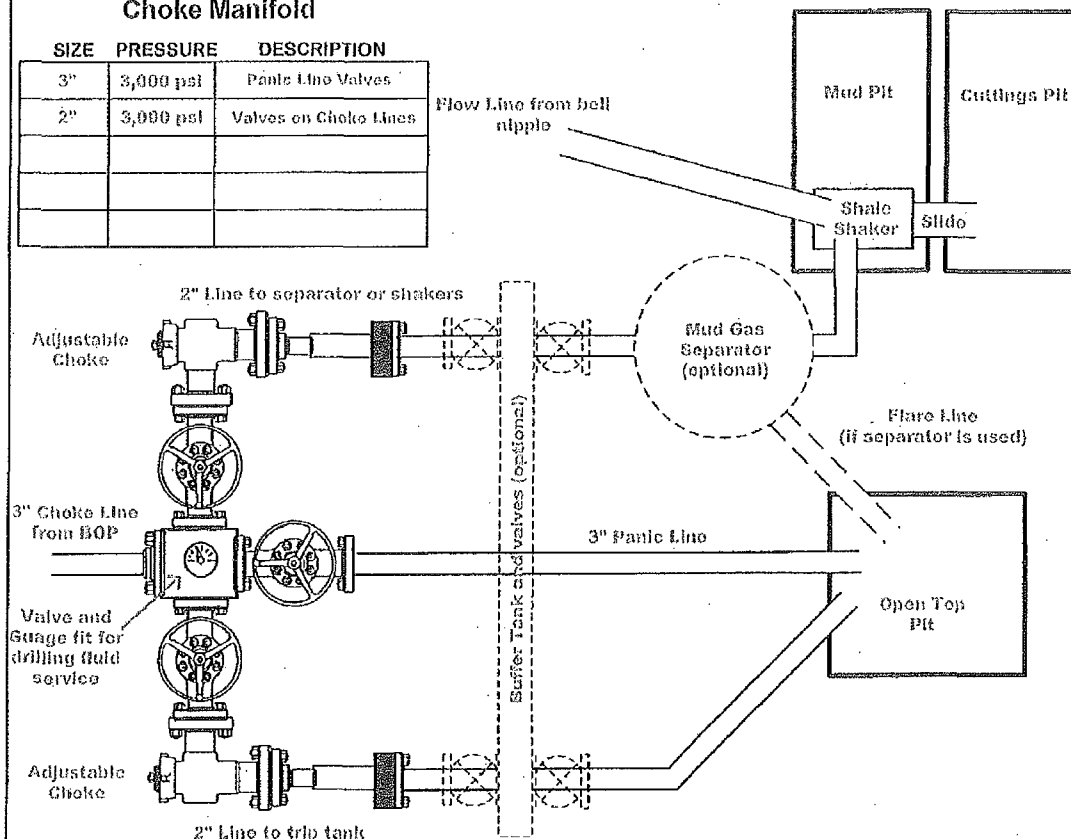

Installation Checklist

The following item must be verified and checked off prior to pressure testing of BOP equipment.

- ☐ The installed BOP equipment meets at least the minimum requirements (rating, type, size, configuration) as shown on this schematic. Components may be substituted for equivalent equipment rated to higher pressures. Additional components may be put into place as long as they meet or exceed the minimum pressure rating of the system.
- ☐ Adjustable Chokes may be Remotely Operated but will have backup hand pump for hydraulic actuation in case of loss of rig air pressure or power.
- ☐ Flare and Panic lines will terminate a minimum of 150' from the wellhead. These lines will terminate at a location as per approved APD.
- ☐ The choke line, kill line, and choke manifold lines will be straight unless turns use tee blocks or are targeted with running tool, and will be anchored to prevent whip and reduce vibration. This excludes the line between mud gas separator and shale shakers.
- ☐ All valves (except chokes) on choke line, kill line, and choke manifold will be full opening and will allow straight through flow. This excludes any valves between mud gas separator and shale shakers.
- ☐ All manual valves will have hand wheels installed.
- ☐ If used, flare system will have effective method for ignition
- ☐ All connections will be flanged, welded, or clamped (no threaded connections like hammer unions)
- ☐ If buffer tank is used, a valve will be used on all lines at any entry or exit point to or from the buffer tank.

After Installation Checklist is complete, fill out the information below and email to Superintendent and Drilling Engineer

Wellname: _____

CHK Representative: _____

Date: _____

BOPE Testing

CHESAPEAKE OPERATING INC Minimum Requirements

Closing Unit and Accumulator Checklist

The following item must be performed, verified, and checked off at least once per well prior to low/high pressure testing of BOPE equipment. This must be repeated after 6 months on the same well.

- ☐ Precharge pressure for each accumulator bottle must fall within the range below. Bottles may be further charged with nitrogen gas only. Tested precharge pressures must be recorded for each individual bottle and kept on location through the end of the well. Test will be conducted prior to connecting unit to BOP stack.

Check one that applies	Accumulator working pressure rating	Minimum acceptable operating pressure	Desired precharge pressure	Maximum acceptable precharge pressure	Minimum acceptable precharge pressure
☐	1500 psi	1500 psi	750 psi	800 psi	700 psi
☐	2000 psi	2000 psi	1000 psi	1100 psi	900 psi
☐	3000 psi	3000 psi	1000 psi	1100 psi	900 psi

- ☐ Accumulator will have sufficient capacity to open the hydraulically-controlled choke line valve (if used), close all rams, close the annular preventer, and retain a minimum of 200 psi above the maximum acceptable precharge pressure (see table above) on the closing manifold without the use of the closing pumps. This test will be performed with test pressure recorded and kept on location through the end of the well.
- ☐ Accumulator fluid reservoir will be double the usable fluid volume of the accumulator system capacity. Fluid level will be maintained at manufacturer's recommendations. Usable fluid volume will be recorded. Reservoir capacity will be recorded. Reservoir fluid level will be recorded along with manufacturer's recommendation. All will be kept on location through the end of the well.
- ☐ Closing unit system will have two independent power sources (not counting accumulator bottles) to close the preventers.
- ☐ Power for the closing unit pumps will be available to the unit at all times so that the pumps will automatically start when the closing valve manifold pressure decreases to the pre-set level. It is recommended to check that air line to accumulator pump is "ON" during each tour change.
- ☐ With accumulator bottles isolated, closing unit will be capable of opening the hydraulically-operated choke line valve (if used) plus close the annular preventer on the smallest size drill pipe within 2 minutes and obtain a minimum of 200 psi above maximum acceptable precharge pressure (see table above) on the closing manifold. Test pressure and closing time will be recorded and kept on location through the end of the well.
- ☐ Master controls for the BOPE system will be located at the accumulator and will be capable of opening and closing all preventer and the choke line valve (if used).
- ☐ Remote controls for the BOPE system will be readily accessible (clear path) to the driller and located on the rig floor (not in the dog house). Remote controls will be capable of closing all preventers.
- ☐ Record accumulator tests in drilling reports and IADC sheet

BOPE Test Checklist

The following item must be checked off prior to beginning test

- ☐ BLM will be given at least 4 hour notice prior to beginning BOPE testing
- ☐ Valve on casing head below test plug will be open
- ☐ Test will be performed using clear water.

The following item must be performed during the BOPE testing and then checked off

- ☐ BOPE will be pressure tested when initially installed, whenever any seal subject to test pressure is broken, following related repairs, and at a minimum of 30 days intervals. Test pressure and times will be recorded by a 3rd party on a test chart and kept on location through the end of the well.
- ☐ Test plug will be used
- ☐ Ram type preventer and all related well control equipment will be tested to 250 psi (low) and 3,000 psi (high).
- ☐ Annular type preventer will be tested to 250 psi (low) and 1,500 psi (high).
- ☐ Valves will be tested from the working pressure side with all down stream valves open. The check valve will be held open to test the kill line valve(s).
- ☐ Each pressure test will be held for 10 minutes with no allowable leak off.
- ☐ Master controls and remote controls to the closing unit (accumulator) must be function tested as part of the BOP testing
- ☐ Record BOP tests and pressures in drilling reports and IADC sheet

After installation Checklist is complete, fill out the information below and email to Superintendent and Drilling Engineer along with any/all BOP and accumulator test charts and reports from 3rd parties.

Wellname: _____

CHK Representative: _____

Date: _____