SUBMIT IN TRIPLICATE*

Form approved. Budget Bureau No. 42-R1425.

UNITED STATES
DEPARTMENT OF THE INTERIOR

(Other instructions on reverse side) 5. LEASE DESIGNATION AND SERIAL NO.


GEOLOGICAL SURVEY	SF 079938	
APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK	6. IF INDIAN, ALLOTTEE OR THISE NAME	
DRILL X DEEPEN DEEPEN PLUG BACK	7. UNIT AGREEMENT NAME	
b. TYPE OF WELL OIL WELL OIL WELL OTHER OTHER SINGLE MULTIPLE ZONE MULTIPLE ZONE	8. FARM OR LEASE NAME	
2. NAME OF GRERATOR	Jones 9. WELL NO.	
El Paso Natural Gas Company 3. Address of Operator	1A 2.14	
DO Boy 990 Farmington, NM 87401	Blanco Pictured Cliffs	
4. LOCATION OF WELL (Report location clearly and in accordance with any state requirements)	Blanco Mesa Verde -	
1450'S, 1740'E —	Sec. 35, T-29-N, R-8-W	
At proposed prod. zone	NMPM 12. COUNTY OR PARISH 13. STATE	
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*		
	San Juan NM OF ACRES ASSIGNED THIS WELL	
PROPERTY OR LEASE LINE, FT. 900'	E/ 320 & 160	
18. DISTANCE FROM PROPOSED LOCATION* 19. PROPOSED DEPTH 20. ROT	TARY OR CABLE TOOLS	
OR APPLIED FOR, ON THIS LEASE, FT. 2100'1 5230 1 ROLE	22. APPROX. DATE WORK WILL START*	
21. ELEVATIONS (Show whether DF, RT, GR, etc.) 5980 GL		
23. PROPOSED CASING AND CEMENTING PROGRAM	•	
SIZE OF HOLE SIZE OF CASING WEIGHT PER FOOT SETTING DEPTH	QUANTITY OF CEMENT	
	cu.ft. to circulate	
-8-3/4" $-7"$ $-20.0#$ $-2895"$ $-296-$	cu.ft.to cover Ojo Alamo cu.ft.to fill to 2745'	
6 1/4" 4 1/2"liner 10.5# 2745-5230' 433	Cu.it. to iiii to 2,13	
a la facture the M	osa Verde and	
Selectively perforate and sandwater fracture the Me Pictured Cliffs formation.	ssu verue and	
Pictured Cillis formacion.		
A 3000 psi WP and 6000 psi test double gate prevention blind and pipe rams will be used for blow out prevent	ter equipped with ention or this well.	
This gas is dedicated.	LEC 3 COLVE	
The E/2 of Section 35 is dedicated to this well. IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present p zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measurement preventer program, if any.	roductive zone and proposed new productive ared and true vertical depths. Give blowout	
24.		
SIGNED DELSES TITLE DEILLING CLE	rk DATE 12-14-77	
(This space for Federal or State office use)		
PERMIT NO APPROVAL DATE		
	7.47W	
APPROVED BY TITLE CONDITIONS OF APPROVAL, IF ANY :	DATE	
	ETA 1 H	
Older		
*See Instructions On Reverse Side	to the second of	

.

NEW MEATOU OIL CONSCITYATION COMMISSION

WELL LOCATION AND ACREAGE DEDICATION PLAT

		All distances	must be from the ou	ter boundaries of	the Section.		T
Operator El Paso I	Matural Gas C	ompany	Lease Joi	nes	(SF-0799	938)	well tio.
Unit Letter	Dection	Township	Han		County		<u></u>
J	35	29N		8W	San Jua	n	
Actual Fostage Los							
1450		outh	line and 17		ot from the Ea		line
Ground Level Elev.	l l	ormation Mesa V		Blanco Me		1 - / -	ated Acroage:
<u>5980</u>		red Cliffs			ed Cliffs Ex		
1. Outline th	e acreage dedic	ated to the su	bject well by co	Hored pencil o	or hachure mark	is on the plat	t below.
	nan one lease is nd royalty).	dedicated to	the well, outline	e each and ide	entify the owne	rship thereof	(both as to working
	an one lease of communitization,			d to the well,	have the inter	ests of all o	wners been consoli-
Yes	No If a	nswer is "yes	;" type of consol	idation			
	is "no," list the f necessary.)	owners and tr	act descriptions	which have a	ctually been co	onsolidated.	(Use reverse side of
No allowa	ble will be assign						ization, unitization, oved by the Commis-
						CER	TIFICATION
		×		1	· 🕅	I hereby certify	that the information con-
		×		1	K X		true and complete to the
	1	×		i		best of my know	ledge and belief.
	1	×		1	\boxtimes	11 9.	Duice
	1	×	Ġ	1	No.	me	A COLOR COLOR
	+			-	XX ·	Drilling	Clerk
	l .	X		1	. Po	sition	
	i	Ø			K //		Natural Gas C
	1	X	•		\bowtie	empony .	12-14-77
	i	Ø		1	Do		12 13 //
	1	\bowtie	•	1 .	X		
		Sec X		<u> </u>	NEWS (
	1		35	1			
	1			1	持 然	•	y that the well-location lat was plotted from field
	! 	₩	SF_C	1 079938	K ₹X†	•	surveys made by me or
			D.F. = (/ 323 ⁰	1.7		rision, and that the same
		X		1 1740		is true and co	rrect to the best of my
	<u> </u>	XXI	· •	T 140.		knowledge and b	pelief.
	+	· — – – — — — — — — — — — — — — — — — —		1	BX		MINISTER
	1			1	MA	ite Surveyed	
	1	¹ ₩		!		November Mistered Profes	19. 1977
`.	N'	X	8	1	1, 1	d/or Land Surve	
	N The W		17-	1		Fred 31	Leria -
			Carles and a second	langkan kan kankankan Kakilan indika kalan I	2222	Fred B. K	err ir
1200000	23	The state of the s	planare may	فسورها بناو المسلم	aparana ce	ertificate No. '.	
0 330 660	90 1320 1650 19	BO 2310 2640	2000 1500	1000	500 0	3950	<u> </u>



P. O. BOX 990 FARMINGTON, NEW MEXICO 87401

PHONE: 505-325-2841

Multi-Point Surface Use Plan Jones #1A

- 1. Existing Road Please refer to Map No. 1 which shows the existing roads. New roads which will be required have been marked on this map.

 All existing and new roads will be properly maintained during the duration of this project.
- 2. Planned Access Roads Please refer to Map No. 1. The grade of the access roads will be consistent with that of the local terrain. The road surface will not exceed twenty feet (20') in width. Upon completion of the project, the access road will be adequately drained to control soil erosion. Drainage facilities may include ditches, water bars, culverts or any other measure deemed necessary by trained Company personnel to insure proper drainage. Gates and/or cattleguards will be installed if necessary.
- 3. Location of Existing Wells Please refer to Map No. 2
- 4. Location of Tank Batteries, Production Facilities, and Production
 Gathering and Service Lines Please refer to Maps No. 1 and No. 2.

 Map No. 2 shows the existing gas gathering
 lines. Map No. 1 shows the existing roads and
 new proposed access roads. All known production
 facilities are shown on these two maps.
- 5. Location and Type of Water Supply Water for the proposed project will be obtained from a water hole located at the Grambling Water Hole.
- 6. Source of Construction Materials No additional materials will be required to build either the access road or the proposed location.

- Methods of Handling Waste Materials All garbage and trash 7. materials will be put into a burn pit shown on the attached Location Plat No. 1. When clean-up operations are begun on the proposed project, the burn pit with its refuse will be buried to a depth of at least three feet (3'). A latrine, the location of which is also shown on Plat No. 1 will be provided for human waste. If large amounts of liquids are left in the reserve pit after completion of the project, the pit will be fenced until the liquids have had adequate time to dry. The location clean-up will not take place until such time as the reserve pit can be properly covered over to prevent run-off from carrying any of these materials into the watershed. No earthen pit will be located on natural drainages; all earthen pits will be so constructed as to prevent leakage from occurring.
- 8. Ancillary Facilities No camps or airstrips will be associated with this project.
- 9. Wellsite Layout Please refer to the attached Plat No. 1.
- 10. Plans for Restoration of the Surface After completion of the proposed project, the location will be cleaned and leveled. The location will be left in such a condition that will enable reseeding operations to be carried out. Seed Mixture #1 will be used. The reseeding operation will be performed during the time period set forth by the regulatory body. The location production equipment will be painted brown (Federal Standard #595-30318).
- 11. Other Information The terrain is sandstone ledges and high bluffs covered with cedar and pinon trees. Cattle graze the proposed project site.

- 12. Operator's Representative W. D. Dawson, Post Office Box 990, Farmington, New Mexico 87401
- 13. Certification -

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route; that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and, that the work associated with the operations proposed herein will be performed by El Paso Natural Gas Company and its contractors and sub-contractors in conformity with this plan and the terms and conditions under which it is approved.

December 8, 1977

D. R. Read

Division Drilling Engineer

DRR:pb

Operations Plan Jones #1A

I. Location: 1450'S, 1740'E, Section 35, T-29-N, R-8-W, San Juan County, NM

Field: Blanco Mesa Verde
Blanco Pictured Cliffs

Elevation: 5980'GL

II. Geology:

A. Formation Tops:	Surface	San Jose	Lewis	2695'
_	Ojo Alamo	1580'	Mesa Verde	4155'
	Kirtland	1705'	Menefee	4330'
	Fruitland	2240'	Point Lookout	4780'
	Pic.Cliffs	2450'	Total Depth	5230 '

B. Logging Program: GR-Ind. and GR-Density at 2895'.

GR-Ind. and GR-Density at Total Depth.

C. Coring Program: none

D. Natural Gauges: 4145', 4320', 4770' and at Total Depth.
Also gauge any noticeable increase in gas. Record all gauges in
daily drilling report and on morning report.

III. Drilling:

A. Mud Program: mud from surface to 2895'. Gas from intermediate casing to Total Depth.

IV. Materials:

Α.	Casing Program:	Hole Size	Depth	Casing Size	Wt.&Grade
	2	13 3/4"	200'	9 5/8"	32.3# H-40
		8 3/4"	2895'	7"	20.0# K-55
		6 1/4"	2745-6230'	4 1/2"	10.5# K-55

B. Float Equipment: 9 5/8" surface casing - Larkin guide shoe (fig. 102)

7" intermediate casing - Dowell guide shoe (fig. 50101) and Dowell self-fill insert float valve (fig. 53003), 5 B&W stabilizers (Prod. No. 637085) every other joint above shoe. Run float two joints above shoe.

- 4 1/2" liner 4 1/2" liner hanger with neoprene packoff. Larkin geyser shoe (fig. 222) and Larkin flapper type float collar (fig. 404 M&F).
- C. Tubing: 5230' of 2 3/8", 4.7#, J-55 8rd EUE tubing with a common pump seating nipple above perforated pup joint with bull plugged full joint for mud anchor on bottom.

2895' of 1 1/4" tubing with a common pump seating nipple above perforated pup joint with bull plugged full joint for mud anchor on bottom. A production packer will isolate the two producing formations.

Operations Plan - Jones #1A, cont'd.


D. Wellhead Equipment: 10" 2000 x 9 5/8" casing head. 10" 2000 x 6" 2000 dual xmas tree.

V. Cementing:

- 9 5/8" surface casing use 190 sks. of Class "B" cement with 1/4# gel-flake per sack and 3% calcium chloride (224 cu.ft. of slurry, 100% excess to circulate to surface). WOC 12 hours. Test casing to 600#/30 minutes.
- 7" intermediate casing use 110 sks. of 65/35 Class "B" Poz with 6% gel and 2% calcium chloride (8.3 gallons of water per sack) followed by 100 sks. of Class "B" with 2% calcium chloride (296 cu.ft. of slurry, 50% excess to cover Ojo Alamo). Run temperature survey at 8 nours. WOC 12 hours. Test casing to 1200#/30 minutes.
- 4 1/2" liner precede cement with 20 barrels of gel water (2 sks. gel) Cement with 240sks. of Class "B" cement with 4% gel, 1/4 cu.ft. of fine gilsonite per sack and 0.6% Halad-9 (433 cu.ft. of slurry, 70% excess to circulate liner). WOC 18 hours.

12.17 136 Roserve Drow Korks Much Trank cut oft Fill 6ft From collhoad Side = 130 Bloom 200


Typical Location Plat for Missa Virale and Lakata We

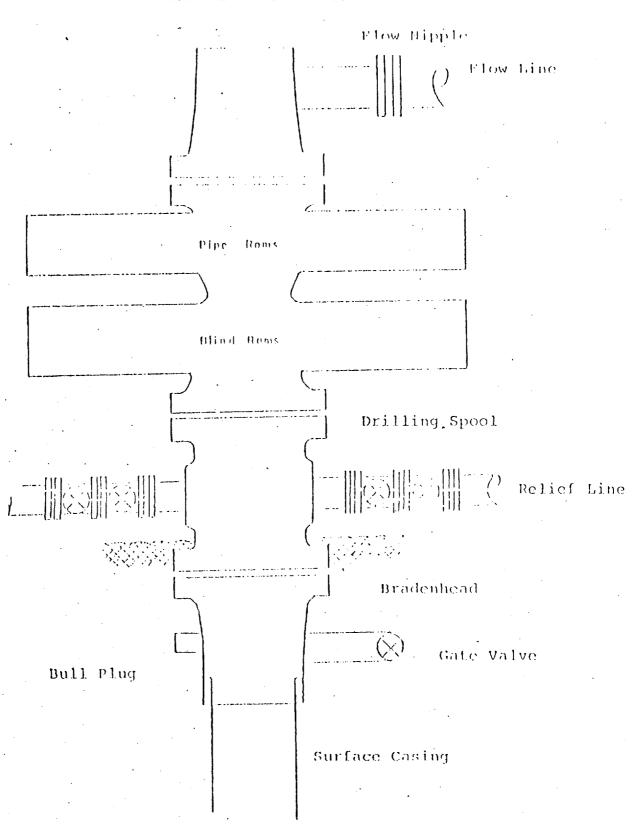

Series 900 Double Gate BOP, rated at 3000 psi Working Pressure When gas drilling operations begin a Shaffer type 50 or equivalent rotating head is installed on top of the flow nipple and the flow line is converted into a blowie line


1 1

ILLEGIBLE

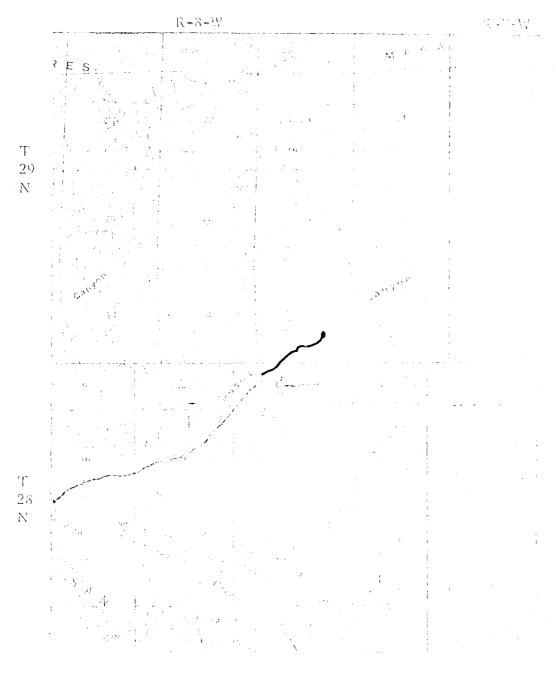

 $\mathrm{MAP} \approx 1$

1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1	\$ 10 mg 1		M
		•	L
	* * *		** * * * * * * * * * * * * * * * * * *
1001000	** *** **		
3.1 (3) (1)	$(x_1, \dots, x_n) \in \mathbb{R}_{\geq 1}$		+++
1.50	and the second		

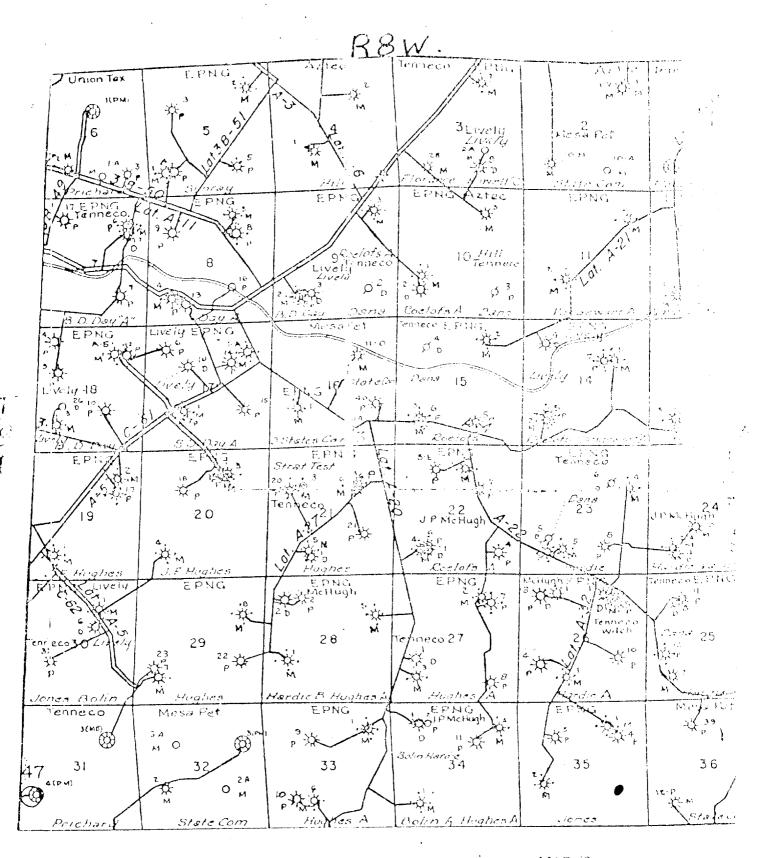

MAP #2