

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ gas ☒ other ☐
well well

2. NAME OF OPERATOR
Tenneco Oil Company

3. ADDRESS OF OPERATOR
720 S. Colorado Blvd., Denver, CO 80222

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 890'FNL, 1450'FEL, Unit B
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:


16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

SUBSEQUENT REPORT OF:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) spud, surface & production casing

☐
☐
☐
☐
☐
☐
☐
☐

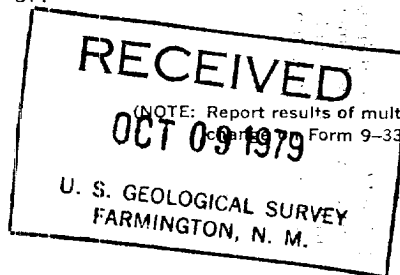

5. LEASE
USA-SF-078049

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME
Hughes A

9. WELL NO.
44

10. FIELD OR WILDCAT NAME
Basin Dakota

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 34, T29N, R8W

12. COUNTY OR PARISH
San Juan

13. STATE
New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)
6815'GL

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

9/17/79 - 9/27/79

Spudded 13 3/4" hole on 9/17/79 and drilled to 231'. Ran 5 jts. 9 5/8" 36# K-55 csg and set @ 226'. Cemented w/180Sx Class 3 cement w/2% CACL2. WOC 12 hours. Reduced hole to 8 3/4" & drilled to 3869'. Ran 99 jts. of 7" 23# K-55 csg. & set @ 3869'. Cemented w/600 Sx 50/50 poz & 4% gel followed by 150 Sx class B cement & 2% CACL2. WOC 12 hours. Reduced hole to 6 1/4" & drilled to 7950'TD on 9/27/79. Ran 104 jts. 4 1/2" 10.5# & 11.6 # K-55 csg. w/liner and set @ 7945' with top of @ 3681'. Cemented w/525 Sx 50/50 Pozmix, 4% gel. WOC 12 hours. NDBOE. NUWH. Released rig. WOCU.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Charles J. Little TITLE Admin. Supervisor DATE 10/14/79

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY: