

HOBBS OCD

UNORTHODOX
LOCATION

ATS-13-925

APR 28 2014

RECEIVED

UNITED STATES

OCD Hobbs

DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED

OMB No. 1004-0137

Expires October 31, 2014

5. Lease Serial No.

NMNM120907

6. If Indian, Allottee or Tribe Name

7. If Unit or CA Agreement, Name and No.

8. Lease Name and Well No.

Gadwall 35 Federal #2H

9. API Well No.

30-025-41813

10. Field and Pool, or Exploratory

WC-025 G-07 S-24322C; LWR

11. Sec., T.R.M. or Blk and Survey or Area

Sec. 35 - T245 - R32E

12. County or Parish

Lea

13. State

NM

1a. Type of Work: ☒ DRILL ☐ REENTER1b. Type of Well: ☒ Oil Well ☐ Gas Well ☐ Other ☐ Single Zone ☐ Multiple Zone

2. Name of Operator

COG Production LLC.

3a. Address

2208 West Main Street
Artesia, NM 88210

3b. Phone No. (include area code)

575-748-6940

4. Location of Well (Report location clearly and in accordance with any State requirements. *)

At surface 190' FNL & 1795' FEL Unit Letter O (SWSE) Sec 35-T245-R32E

At proposed prod. Zone 330' FNL & 1795' FEL Unit Letter B (NWNE) Sec 26-T245-R32E

14. Distance in miles and direction from nearest town or post office*

Approximately 17 miles from Jal

15. Distance from proposed*
location to nearest
property or lease line, ft.

(Also to nearest drig. Unit line, if any)

330'

16. No. of acres in lease

1840

17. Spacing Unit dedicated to this well

320
16018. Distance from location*
to nearest well, drilling, completed,
applied for, on this lease, ft.

SHL: 1410' (Gadwall #3H)

BHL: 2380'

19. Proposed Depth

TVD: 10,900' MD: 20,736'

20. BLM/BIA Bond No. on file

NMB000860 & NMB000845

21. Elevations (Show whether DF, KDB, RT, GL, etc.)

3534.3' GL

22. Approximate date work will start*

3/1/2014

23. Estimated duration

30 days

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

1. Well plat certified by a registered surveyor.
2. A Drilling Plan
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).

4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification
6. Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature

Mayte Reyes

Name (Printed/Typed)

Mayte Reyes

Date

10-7-2014

Title

Regulatory Analyst

Approved by (Signature)

/S/ STEPHEN J. CAFFEY

Name (Printed/Typed)

Date

APR 24 2014

Title

FIELD MANAGER

Office

CARLSBAD FIELD OFFICE

Application approval does not warrant or certify that the applicant holds legan or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

APPROVAL FOR TWO YEARS

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

Carlsbad Controlled Water Basin

*(Instructions on page 2)

Approval Subject to General Requirements
& Special Stipulations AttachedSEE ATTACHED FOR
CONDITIONS OF APPROVAL

MAY 05 2014

Surface Use Plan
COG Production LLC
Gadwall 35 Federal #2H
SHL: 190' FSL & 1795' FEL UL O
Section 35, T24S, R32E
BHL: 330' FNL & 1795' FEL UL B
Section 26, T24S, R32E
Lea County, New Mexico

HOBBS OCD

APR 28 2014

RECEIVED

OPERATOR CERTIFICATION

I hereby certify that I, or persons under my direct supervision, have inspected the drill site and access road proposed herein; that I am familiar with the conditions that presently exist; that I have full knowledge of State and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or COG Production, LLC, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements. Executed this 7th day of January, 2014.

Signed: Melanie J. Parker

Printed Name: Melanie J. Parker

Position: Regulatory Coordinator

Address: 2208 W. Main Street, Artesia, NM 88210

Telephone: (575) 748-6940

Field Representative (if not above signatory): Rand French

E-mail: mparker@concho.com

COG Production LLC
DRILLING AND OPERATIONS PROGRAM
Gadwall 35 Federal 2H
SHL: 190' FSL & 1795' FEL of section 35-T24S-R32E
BHL: 330' FNL & 1795' FEL of section 26-T24S-R32E
Lea County, New Mexico

In conjunction with Form 3160-3, Application for Permit to Drill subject well, COG Production LLC submits the following eleven items of pertinent information in accordance with BLM requirements.

1. Geological surface formation: Permian
2. The estimated tops of geologic markers & estimated depths at which anticipated water, oil or gas formations are expected to be encountered are as follows:

Fresh Water	~ 380'	
Rustler	1011'	
Top of Salt	1343'	
Fletcher Anhydrite	4681'	
Delaware	4883'	Oil
Bone Spring	8824'	Oil
3 rd BS Lime	11,007'	
TD TVD	10,900'	
TD MD	20,736'	

No other formations are expected to give up oil, gas or fresh water in measurable quantities. The surface fresh water sands will be protected by setting 13-3/8" casing at 1050' and circulating cement back to surface. All intervals will be isolated by setting 5 1/2" casing to total depth and tying back cement to a minimum of 500' into 9-5/8" csg shoe.

3. Proposed Casing Program: All casing is new and API approved

See COA

Hole Size	Depths	Section	OD Casing	New/Used	Wt	Collar	Grade	Collapse Design Factor	Burst Design Factor	Tension Design Factor
17 1/2"	0' - 1050'	Surface	13 3/8"	New	54.5#	STC	J-55	2.05	2.18	8.67
12 1/4"	0' - 4300'	Intrmd	9 5/8"	New	40#	LTC	J-55	1.149	1.91	3.57
12 1/4"	4300' - 4900'	Intrmd	9 5/8"	New	40#	LTC	N-80	1.15	2.79	4.14
8 3/4"	0' - 20,736'	Production Curve & Lateral	5 1/2"	New	17#	LTC	P-110	1.49	1.33	2.9

- While running all casing strings, the pipe will be kept a minimum of 1/3 full at all times to avoid approaching the collapse pressure of casing.

4. Proposed Cement Program

a. 13-3/8" Surface

Lead: 500 sx Class C + 4% Gel + 2% CaCl₂
(13.5 ppq, 1.75 cuft/sx, 9.2 qal/sx)

Cmt: 250 sx Class C + 2% CaCl₂

(14.8 ppq, 1.35 cuft/sx, 6.3 gal/sx)

**Calculated w/50% excess on OH volumes

b. 9 5/8" Intermediate:

Lead: 750 sx 35:65:6 C +Salt+Gilsonite+CFR-3+ HR601
(12.8 ppq, 1.89 cuft/sx, 10.6 gal/sx)

Tail: 250 sx Class C

(14.8 ppg, 1.35 cuft/sx, 6.3 gal/sx)

**Calculated w/35% excess on OH volumes

d. 5 1/2" Production

Lead: 1100 sx 50:50:10 C +Salt+Gilsonite+CFR-3+ HR601
(11.9 ppq, 2.5 cuft/sx, 14.2 gal/sx)

Tail: 2000 sx 50:50:2 H +Salt+GasStop +HR601 +CFR-3

(14.4 ppq, 1.25 cuft/sx, 5.7 gal/sx)

**Calculated w/35% excess on OH volumes

- The above cement volumes could be revised pending the caliper measurements.
- The 13-3/8" surface cement is designed to circulate to surface.
- The 9-5/8" intermediate cement is designed to circulate to surface.
- The production TOC will tie back a minimum 500' into previous shoe.

5. Minimum Specifications for Pressure Control:

A 13 5/8" 2000 psi Hydril type annular preventer with mud cross, choke manifold, chokes, kill line, Kelly cock, safety valve and subs to fit all drill strings in use as provided for in Onshore Order #2 will be nipped up on the 13 3/8" x 2000 psi SOW X 13 5/8" x 2000 psi casing head (see attached BOPE drawings). This unit will be hydraulically operated and will be tested by independent tester using test plug to 250 psig/300 psig low and 1000 psig high. Choke line valve, chokes, upper Kelly cock valve, safety valve shall also be tested to 250 psig/300 psig low and 2000 psig high by independent tester.

After setting the 9 5/8" intermediate casing the following BOPE as provided for in Onshore Order #2 will be rigged up on the 9 5/8" intermediate casing spool (13 5/8" 2000 psi x 13 5/8" 3000 psi): 13 5/8" X 3000 psi annular, 13 5/8" X 3000 psi double ram type preventer with blind rams on top and 4 1/2" drill pipe rams on the bottom, choke, mud cross, choke manifold, 4" diameter choke line, 2" kill line, kelly cock, safety valve with proper subs for all drill string connections in use (see attached BOPE drawings). The BOPE including auxiliary equipment (chokes, choke manifold etc.) will be tested by independent tester.

Test plug will be used and all BOPE tested to 250 psig/ 300 psig low pressure and 3000 psig high pressure for 10 minutes. Annular preventer will be tested to 1500 psig. BOP stack will be used continuously until total depth is reached. Pipe rams will be operationally checked each 24-hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Any time a component of the BOP stack or choke manifold is changed or installed BOPE will be re-tested as required.

All casing strings below the conductor shall be pressure tested to 0.22 psi per foot of casing string depth or 1500 psig, whichever is greater, but not to exceed 70 percent of casing's minimum internal yield. If pressure declines more than 10 percent in 30 minutes, corrective action will be taken. If H₂S is monitored with 100 ppm in the gas stream while drilling intermediate, we will shut in and install a remote operated choke.

6. Estimated BHP & BHT:

Lateral TD = 4761 psi

Lateral TD = 158°F

7. Mud Program: The applicable depths and properties of this system are as follows:

Depth	Type System	Mud Weight	Viscosity (sec)	Waterloss (cc)
0' – 1050'	Fresh Water	8.4 – 8.8	29	N.C.
1050' – 4900' ^{4850'}	Brine	9.8 – 10.1	29	N.C.
4900' – 20,736' (Lateral)	Cut Brine	8.9 – 9.2	29	N.C.

- The necessary mud products for weight addition and fluid loss control will be on location at all times.
- A visual and electronic mud monitoring system will be rigged up prior to spud to detect changes in the volume of mud system. The electronic system consists of a pit volume totalizer, stroke counter and flow sensor at flow line.
- If weight and/or viscosity are introduced to the mud system a daily mud check will be performed by mud contractor, along with tourly check by rig personnel.
- After setting intermediate casing, a third party gas unit detection system will be installed at the flow line.

8. Auxiliary Well Control and Monitoring Equipment:

- A Kelly cock will be in the drill string at all times.
- A full opening drill pipe stabbing valve having the appropriate connections will be on the rig floor at all times.
- Hydrogen Sulfide detection equipment will be in operation after drilling out the 13 3/8" casing shoe until the 5 1/2" casing is cemented. Breathing equipment will be on location upon drilling the 13 3/8" shoe until total depth is reached.

9. Testing, Logging and Coring Program:

- Drill stem tests will be based on geological sample shows.
- If open hole electrical logging is performed, the program will be:
 - Total Depth to Intermediate Casing: Dual Laterolog-Micro Laterolog and Gamma Ray. Compensated Neutron – Z Density log with Gamma Ray and Caliper.
 - Total Depth to Surface: Compensated Neutron with Gamma Ray
 - No coring program is planned
 - Additional testing will be initiated subsequent to setting the 5 1/2" production casing. Specific intervals will be targeted based on log evaluation, geological sample shows and drill stem tests.

10. Potential Hazards:

- a. No abnormal pressures or temperatures are expected. There is no known presence of H₂S in this area. If H₂S is encountered the operator will comply with the provisions of Onshore Oil and Gas Order No. 6. All personnel will be familiar with all aspects of safe operation of equipment being used to drill this well. No H₂S is anticipated to be encountered.

See
COA

11. Anticipated starting date and Duration of Operations:

- a. Road and location construction will begin after the BLM has approved the APD. Anticipated spud date will be as soon as possible after BLM approval and as soon as a rig will be available. Move in operations and drilling is expected to take 30 days.



COG Production LLC

Lea County, NM

Gadwall 35 Federal

#2H

#2H

Plan: Design #1

Standard Planning Report

22 October, 2013



Wellplanning Planning Report

Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well #2H
Company:	COG Production LLC	TVD Reference:	WELL @ 3564.3usft (Original Well Elev)
Project:	Lea County, NM	MD Reference:	WELL @ 3564.3usft (Original Well Elev)
Site:	Gadwall 35 Federal	North Reference:	Grid
Well:	#2H	Survey Calculation Method:	Minimum Curvature
Wellbore:	#2H		
Design:	Design #1		

Project	Lea County, NM		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site	Gadwall Federal		
Site Position:		Northing:	425,247.30 usft
From:	Map	Easting:	713,845.80 usft
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "
		Latitude:	32° 10' 2.043 N
		Longitude:	103° 38' 32.087 W
		Grid Convergence:	0.37 °

Well	#2H		
Well Position	+N-S	0.0 usft	Northing: 425,247.30 usft
	+E-W	0.0 usft	Easting: 713,845.80 usft
Position Uncertainty	0.0 usft	Wellhead Elevation:	Ground Level: 3,534.3 usft
			Latitude: 32° 10' 2.043 N
			Longitude: 103° 38' 32.087 W

Wellbore	#2H		
Magnetics	Model Name	Sample Date	Declination
			(°)
	IGRF2010	10/22/2013	7.33
			Dip Angle (°)
			60.06
			Field Strength (nT)
			48,338

Design	Design #1		
Audit Notes:			
Version:	Phase:	PLAN	Tie On Depth: 0.0
Vertical Section:	Depth From (TVD)	+N-S	+E-W
	(usft)	(usft)	(usft)
	0.0	0.0	0.0
			Direction (°)
			359.70

Plan Sections										
Measured	Inclination	Azimuth	Vertical	+N-S	+E-W	Dogleg	Build	Turn	TFO	Target
Depth (usft)	(°)	(°)	Depth (usft)	(usft)	(usft)	Rate (°/100usft)	Rate (°/100usft)	Rate (°/100usft)	(°)	
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
10,422.5	0.00	0.00	10,422.5	0.0	0.0	0.00	0.00	0.00	0.00	
11,172.6	90.00	359.70	10,900.0	477.5	-2.5	12.00	12.00	0.00	359.70	
20,736.3	90.00	359.70	10,900.0	10,041.1	-52.6	0.00	0.00	0.00	0.00	PBHL(Gadwall#2H)



Wellplanning Planning Report

Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well #2H
Company:	COG Production LLC	TVD Reference:	WELL @ 3564.3usft (Original Well Elev)
Project:	Lea County, NM	MD Reference:	WELL @ 3564.3usft (Original Well Elev)
Site:	Gadwall 35 Federal	North Reference:	Grid
Well:	#2H	Survey Calculation Method:	Minimum Curvature
Wellbore:	#2H		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00
1,300.0	0.00	0.00	1,300.0	0.0	0.0	0.0	0.00	0.00	0.00
1,400.0	0.00	0.00	1,400.0	0.0	0.0	0.0	0.00	0.00	0.00
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.0	0.00	0.00	0.00
1,600.0	0.00	0.00	1,600.0	0.0	0.0	0.0	0.00	0.00	0.00
1,700.0	0.00	0.00	1,700.0	0.0	0.0	0.0	0.00	0.00	0.00
1,800.0	0.00	0.00	1,800.0	0.0	0.0	0.0	0.00	0.00	0.00
1,900.0	0.00	0.00	1,900.0	0.0	0.0	0.0	0.00	0.00	0.00
2,000.0	0.00	0.00	2,000.0	0.0	0.0	0.0	0.00	0.00	0.00
2,100.0	0.00	0.00	2,100.0	0.0	0.0	0.0	0.00	0.00	0.00
2,200.0	0.00	0.00	2,200.0	0.0	0.0	0.0	0.00	0.00	0.00
2,300.0	0.00	0.00	2,300.0	0.0	0.0	0.0	0.00	0.00	0.00
2,400.0	0.00	0.00	2,400.0	0.0	0.0	0.0	0.00	0.00	0.00
2,500.0	0.00	0.00	2,500.0	0.0	0.0	0.0	0.00	0.00	0.00
2,600.0	0.00	0.00	2,600.0	0.0	0.0	0.0	0.00	0.00	0.00
2,700.0	0.00	0.00	2,700.0	0.0	0.0	0.0	0.00	0.00	0.00
2,800.0	0.00	0.00	2,800.0	0.0	0.0	0.0	0.00	0.00	0.00
2,900.0	0.00	0.00	2,900.0	0.0	0.0	0.0	0.00	0.00	0.00
3,000.0	0.00	0.00	3,000.0	0.0	0.0	0.0	0.00	0.00	0.00
3,100.0	0.00	0.00	3,100.0	0.0	0.0	0.0	0.00	0.00	0.00
3,200.0	0.00	0.00	3,200.0	0.0	0.0	0.0	0.00	0.00	0.00
3,300.0	0.00	0.00	3,300.0	0.0	0.0	0.0	0.00	0.00	0.00
3,400.0	0.00	0.00	3,400.0	0.0	0.0	0.0	0.00	0.00	0.00
3,500.0	0.00	0.00	3,500.0	0.0	0.0	0.0	0.00	0.00	0.00
3,600.0	0.00	0.00	3,600.0	0.0	0.0	0.0	0.00	0.00	0.00
3,700.0	0.00	0.00	3,700.0	0.0	0.0	0.0	0.00	0.00	0.00
3,800.0	0.00	0.00	3,800.0	0.0	0.0	0.0	0.00	0.00	0.00
3,900.0	0.00	0.00	3,900.0	0.0	0.0	0.0	0.00	0.00	0.00
4,000.0	0.00	0.00	4,000.0	0.0	0.0	0.0	0.00	0.00	0.00
4,100.0	0.00	0.00	4,100.0	0.0	0.0	0.0	0.00	0.00	0.00
4,200.0	0.00	0.00	4,200.0	0.0	0.0	0.0	0.00	0.00	0.00
4,300.0	0.00	0.00	4,300.0	0.0	0.0	0.0	0.00	0.00	0.00
4,400.0	0.00	0.00	4,400.0	0.0	0.0	0.0	0.00	0.00	0.00
4,500.0	0.00	0.00	4,500.0	0.0	0.0	0.0	0.00	0.00	0.00
4,600.0	0.00	0.00	4,600.0	0.0	0.0	0.0	0.00	0.00	0.00
4,700.0	0.00	0.00	4,700.0	0.0	0.0	0.0	0.00	0.00	0.00
4,800.0	0.00	0.00	4,800.0	0.0	0.0	0.0	0.00	0.00	0.00
4,900.0	0.00	0.00	4,900.0	0.0	0.0	0.0	0.00	0.00	0.00
5,000.0	0.00	0.00	5,000.0	0.0	0.0	0.0	0.00	0.00	0.00
5,100.0	0.00	0.00	5,100.0	0.0	0.0	0.0	0.00	0.00	0.00
5,200.0	0.00	0.00	5,200.0	0.0	0.0	0.0	0.00	0.00	0.00
5,300.0	0.00	0.00	5,300.0	0.0	0.0	0.0	0.00	0.00	0.00



Wellplanning Planning Report

Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well #2H
Company:	COG Production LLC	TVD Reference:	WELL @ 3564.3usft (Original Well Elev)
Project:	Lea County, NM	MD Reference:	WELL @ 3564.3usft (Original Well Elev)
Site:	Gadwall 35 Federal	North Reference:	Grid
Well:	#2H	Survey Calculation Method:	Minimum Curvature
Wellbore:	#2H		
Design:	Design #1		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,400.0	0.00	0.00	5,400.0	0.0	0.0	0.0	0.00	0.00	0.00
5,500.0	0.00	0.00	5,500.0	0.0	0.0	0.0	0.00	0.00	0.00
5,600.0	0.00	0.00	5,600.0	0.0	0.0	0.0	0.00	0.00	0.00
5,700.0	0.00	0.00	5,700.0	0.0	0.0	0.0	0.00	0.00	0.00
5,800.0	0.00	0.00	5,800.0	0.0	0.0	0.0	0.00	0.00	0.00
5,900.0	0.00	0.00	5,900.0	0.0	0.0	0.0	0.00	0.00	0.00
6,000.0	0.00	0.00	6,000.0	0.0	0.0	0.0	0.00	0.00	0.00
6,100.0	0.00	0.00	6,100.0	0.0	0.0	0.0	0.00	0.00	0.00
6,200.0	0.00	0.00	6,200.0	0.0	0.0	0.0	0.00	0.00	0.00
6,300.0	0.00	0.00	6,300.0	0.0	0.0	0.0	0.00	0.00	0.00
6,400.0	0.00	0.00	6,400.0	0.0	0.0	0.0	0.00	0.00	0.00
6,500.0	0.00	0.00	6,500.0	0.0	0.0	0.0	0.00	0.00	0.00
6,600.0	0.00	0.00	6,600.0	0.0	0.0	0.0	0.00	0.00	0.00
6,700.0	0.00	0.00	6,700.0	0.0	0.0	0.0	0.00	0.00	0.00
6,800.0	0.00	0.00	6,800.0	0.0	0.0	0.0	0.00	0.00	0.00
6,900.0	0.00	0.00	6,900.0	0.0	0.0	0.0	0.00	0.00	0.00
7,000.0	0.00	0.00	7,000.0	0.0	0.0	0.0	0.00	0.00	0.00
7,100.0	0.00	0.00	7,100.0	0.0	0.0	0.0	0.00	0.00	0.00
7,200.0	0.00	0.00	7,200.0	0.0	0.0	0.0	0.00	0.00	0.00
7,300.0	0.00	0.00	7,300.0	0.0	0.0	0.0	0.00	0.00	0.00
7,400.0	0.00	0.00	7,400.0	0.0	0.0	0.0	0.00	0.00	0.00
7,500.0	0.00	0.00	7,500.0	0.0	0.0	0.0	0.00	0.00	0.00
7,600.0	0.00	0.00	7,600.0	0.0	0.0	0.0	0.00	0.00	0.00
7,700.0	0.00	0.00	7,700.0	0.0	0.0	0.0	0.00	0.00	0.00
7,800.0	0.00	0.00	7,800.0	0.0	0.0	0.0	0.00	0.00	0.00
7,900.0	0.00	0.00	7,900.0	0.0	0.0	0.0	0.00	0.00	0.00
8,000.0	0.00	0.00	8,000.0	0.0	0.0	0.0	0.00	0.00	0.00
8,100.0	0.00	0.00	8,100.0	0.0	0.0	0.0	0.00	0.00	0.00
8,200.0	0.00	0.00	8,200.0	0.0	0.0	0.0	0.00	0.00	0.00
8,300.0	0.00	0.00	8,300.0	0.0	0.0	0.0	0.00	0.00	0.00
8,400.0	0.00	0.00	8,400.0	0.0	0.0	0.0	0.00	0.00	0.00
8,500.0	0.00	0.00	8,500.0	0.0	0.0	0.0	0.00	0.00	0.00
8,600.0	0.00	0.00	8,600.0	0.0	0.0	0.0	0.00	0.00	0.00
8,700.0	0.00	0.00	8,700.0	0.0	0.0	0.0	0.00	0.00	0.00
8,800.0	0.00	0.00	8,800.0	0.0	0.0	0.0	0.00	0.00	0.00
8,900.0	0.00	0.00	8,900.0	0.0	0.0	0.0	0.00	0.00	0.00
9,000.0	0.00	0.00	9,000.0	0.0	0.0	0.0	0.00	0.00	0.00
9,100.0	0.00	0.00	9,100.0	0.0	0.0	0.0	0.00	0.00	0.00
9,200.0	0.00	0.00	9,200.0	0.0	0.0	0.0	0.00	0.00	0.00
9,300.0	0.00	0.00	9,300.0	0.0	0.0	0.0	0.00	0.00	0.00
9,400.0	0.00	0.00	9,400.0	0.0	0.0	0.0	0.00	0.00	0.00
9,500.0	0.00	0.00	9,500.0	0.0	0.0	0.0	0.00	0.00	0.00
9,600.0	0.00	0.00	9,600.0	0.0	0.0	0.0	0.00	0.00	0.00
9,700.0	0.00	0.00	9,700.0	0.0	0.0	0.0	0.00	0.00	0.00
9,800.0	0.00	0.00	9,800.0	0.0	0.0	0.0	0.00	0.00	0.00
9,900.0	0.00	0.00	9,900.0	0.0	0.0	0.0	0.00	0.00	0.00
10,000.0	0.00	0.00	10,000.0	0.0	0.0	0.0	0.00	0.00	0.00
10,100.0	0.00	0.00	10,100.0	0.0	0.0	0.0	0.00	0.00	0.00
10,200.0	0.00	0.00	10,200.0	0.0	0.0	0.0	0.00	0.00	0.00
10,300.0	0.00	0.00	10,300.0	0.0	0.0	0.0	0.00	0.00	0.00
10,400.0	0.00	0.00	10,400.0	0.0	0.0	0.0	0.00	0.00	0.00
10,422.5	0.00	0.00	10,422.5	0.0	0.0	0.0	0.00	0.00	0.00

KOP - 10422.5 'MD, 0.00° INC, 0.00° AZI



Wellplanning Planning Report

Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well #2H
Company:	COG Production LLC	TVD Reference:	WELL @ 3564.3usft (Original Well Elev)
Project:	Lea County, NM	MD Reference:	WELL @ 3564.3usft (Original Well Elev)
Site:	Gadwall 35 Federal	North Reference:	Grid
Well:	#2H	Survey Calculation Method:	Minimum Curvature
Wellbore:	#2H		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
10,425.0	0.30	359.70	10,425.0	0.0	0.0	0.0	12.00	12.00	0.00
10,450.0	3.30	359.70	10,450.0	0.8	0.0	0.8	12.00	12.00	0.00
10,475.0	6.30	359.70	10,474.9	2.9	0.0	2.9	12.00	12.00	0.00
10,500.0	9.30	359.70	10,499.7	6.3	0.0	6.3	12.00	12.00	0.00
10,525.0	12.30	359.70	10,524.2	11.0	-0.1	11.0	12.00	12.00	0.00
10,550.0	15.30	359.70	10,548.5	16.9	-0.1	16.9	12.00	12.00	0.00
10,575.0	18.30	359.70	10,572.4	24.1	-0.1	24.1	12.00	12.00	0.00
10,600.0	21.30	359.70	10,595.9	32.6	-0.2	32.6	12.00	12.00	0.00
10,625.0	24.30	359.70	10,619.0	42.3	-0.2	42.3	12.00	12.00	0.00
10,650.0	27.30	359.70	10,641.5	53.2	-0.3	53.2	12.00	12.00	0.00
10,675.0	30.30	359.70	10,663.4	65.2	-0.3	65.2	12.00	12.00	0.00
10,700.0	33.30	359.70	10,684.6	78.4	-0.4	78.4	12.00	12.00	0.00
10,725.0	36.30	359.70	10,705.2	92.7	-0.5	92.7	12.00	12.00	0.00
10,750.0	39.30	359.70	10,724.9	108.0	-0.6	108.0	12.00	12.00	0.00
10,775.0	42.30	359.70	10,743.8	124.3	-0.7	124.3	12.00	12.00	0.00
10,800.0	45.30	359.70	10,761.9	141.6	-0.7	141.6	12.00	12.00	0.00
10,825.0	48.30	359.70	10,779.0	159.8	-0.8	159.8	12.00	12.00	0.00
10,850.0	51.30	359.70	10,795.1	178.9	-0.9	178.9	12.00	12.00	0.00
10,875.0	54.30	359.70	10,810.3	198.8	-1.0	198.8	12.00	12.00	0.00
10,900.0	57.30	359.70	10,824.3	219.5	-1.1	219.5	12.00	12.00	0.00
10,925.0	60.30	359.70	10,837.3	240.9	-1.3	240.9	12.00	12.00	0.00
10,950.0	63.30	359.70	10,849.1	262.9	-1.4	262.9	12.00	12.00	0.00
10,975.0	66.30	359.70	10,859.7	285.5	-1.5	285.5	12.00	12.00	0.00
11,000.0	69.29	359.70	10,869.2	308.7	-1.6	308.7	12.00	12.00	0.00
11,025.0	72.29	359.70	10,877.4	332.3	-1.7	332.3	12.00	12.00	0.00
11,050.0	75.29	359.70	10,884.4	356.3	-1.9	356.3	12.00	12.00	0.00
11,075.0	78.29	359.70	10,890.1	380.6	-2.0	380.6	12.00	12.00	0.00
11,100.0	81.29	359.70	10,894.5	405.2	-2.1	405.2	12.00	12.00	0.00
11,125.0	84.29	359.70	10,897.6	430.0	-2.3	430.0	12.00	12.00	0.00
11,150.0	87.29	359.70	10,899.5	454.9	-2.4	455.0	12.00	12.00	0.00
11,172.6	90.00	359.70	10,900.0	477.5	-2.5	477.5	12.00	12.00	0.00
EOC- 11172.6 'MD, 90.00° INC, 359.70° AZI									
11,200.0	90.00	359.70	10,900.0	504.9	-2.6	504.9	0.00	0.00	0.00
11,300.0	90.00	359.70	10,900.0	604.9	-3.2	604.9	0.00	0.00	0.00
11,400.0	90.00	359.70	10,900.0	704.9	-3.7	704.9	0.00	0.00	0.00
11,500.0	90.00	359.70	10,900.0	804.9	-4.2	804.9	0.00	0.00	0.00
11,600.0	90.00	359.70	10,900.0	904.9	-4.7	904.9	0.00	0.00	0.00
11,700.0	90.00	359.70	10,900.0	1,004.9	-5.3	1,004.9	0.00	0.00	0.00
11,800.0	90.00	359.70	10,900.0	1,104.9	-5.8	1,104.9	0.00	0.00	0.00
11,900.0	90.00	359.70	10,900.0	1,204.9	-6.3	1,204.9	0.00	0.00	0.00
12,000.0	90.00	359.70	10,900.0	1,304.9	-6.8	1,304.9	0.00	0.00	0.00
12,100.0	90.00	359.70	10,900.0	1,404.9	-7.4	1,404.9	0.00	0.00	0.00
12,200.0	90.00	359.70	10,900.0	1,504.9	-7.9	1,504.9	0.00	0.00	0.00
12,300.0	90.00	359.70	10,900.0	1,604.9	-8.4	1,604.9	0.00	0.00	0.00
12,400.0	90.00	359.70	10,900.0	1,704.9	-8.9	1,704.9	0.00	0.00	0.00
12,500.0	90.00	359.70	10,900.0	1,804.9	-9.5	1,804.9	0.00	0.00	0.00
12,600.0	90.00	359.70	10,900.0	1,904.9	-10.0	1,904.9	0.00	0.00	0.00
12,700.0	90.00	359.70	10,900.0	2,004.9	-10.5	2,004.9	0.00	0.00	0.00
12,800.0	90.00	359.70	10,900.0	2,104.9	-11.0	2,104.9	0.00	0.00	0.00
12,900.0	90.00	359.70	10,900.0	2,204.9	-11.5	2,204.9	0.00	0.00	0.00
13,000.0	90.00	359.70	10,900.0	2,304.9	-12.1	2,304.9	0.00	0.00	0.00
13,100.0	90.00	359.70	10,900.0	2,404.9	-12.6	2,404.9	0.00	0.00	0.00
13,200.0	90.00	359.70	10,900.0	2,504.9	-13.1	2,504.9	0.00	0.00	0.00
13,300.0	90.00	359.70	10,900.0	2,604.9	-13.6	2,604.9	0.00	0.00	0.00



Wellplanning Planning Report

Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well #2H
Company:	COG Production LLC	TVD Reference:	WELL @ 3564.3usft (Original Well Elev)
Project:	Lea County, NM	MD Reference:	WELL @ 3564.3usft (Original Well Elev)
Site:	Gadwall 35 Federal	North Reference:	Grid
Well:	#2H	Survey Calculation Method:	Minimum Curvature
Wellbore:	#2H		
Design:	Design #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
13,400.0	90.00	359.70	10,900.0	2,704.9	-14.2	2,704.9	0.00	0.00	0.00	
13,500.0	90.00	359.70	10,900.0	2,804.9	-14.7	2,804.9	0.00	0.00	0.00	
13,600.0	90.00	359.70	10,900.0	2,904.9	-15.2	2,904.9	0.00	0.00	0.00	
13,700.0	90.00	359.70	10,900.0	3,004.9	-15.7	3,004.9	0.00	0.00	0.00	
13,800.0	90.00	359.70	10,900.0	3,104.9	-16.3	3,104.9	0.00	0.00	0.00	
13,900.0	90.00	359.70	10,900.0	3,204.9	-16.8	3,204.9	0.00	0.00	0.00	
14,000.0	90.00	359.70	10,900.0	3,304.9	-17.3	3,304.9	0.00	0.00	0.00	
14,100.0	90.00	359.70	10,900.0	3,404.9	-17.8	3,404.9	0.00	0.00	0.00	
14,200.0	90.00	359.70	10,900.0	3,504.9	-18.4	3,504.9	0.00	0.00	0.00	
14,300.0	90.00	359.70	10,900.0	3,604.9	-18.9	3,604.9	0.00	0.00	0.00	
14,400.0	90.00	359.70	10,900.0	3,704.9	-19.4	3,704.9	0.00	0.00	0.00	
14,500.0	90.00	359.70	10,900.0	3,804.9	-19.9	3,804.9	0.00	0.00	0.00	
14,600.0	90.00	359.70	10,900.0	3,904.9	-20.4	3,904.9	0.00	0.00	0.00	
14,700.0	90.00	359.70	10,900.0	4,004.9	-21.0	4,004.9	0.00	0.00	0.00	
14,800.0	90.00	359.70	10,900.0	4,104.9	-21.5	4,104.9	0.00	0.00	0.00	
14,900.0	90.00	359.70	10,900.0	4,204.9	-22.0	4,204.9	0.00	0.00	0.00	
15,000.0	90.00	359.70	10,900.0	4,304.9	-22.5	4,304.9	0.00	0.00	0.00	
15,100.0	90.00	359.70	10,900.0	4,404.9	-23.1	4,404.9	0.00	0.00	0.00	
15,200.0	90.00	359.70	10,900.0	4,504.9	-23.6	4,504.9	0.00	0.00	0.00	
15,300.0	90.00	359.70	10,900.0	4,604.9	-24.1	4,604.9	0.00	0.00	0.00	
15,400.0	90.00	359.70	10,900.0	4,704.9	-24.6	4,704.9	0.00	0.00	0.00	
15,500.0	90.00	359.70	10,900.0	4,804.9	-25.2	4,804.9	0.00	0.00	0.00	
15,600.0	90.00	359.70	10,900.0	4,904.9	-25.7	4,904.9	0.00	0.00	0.00	
15,700.0	90.00	359.70	10,900.0	5,004.9	-26.2	5,004.9	0.00	0.00	0.00	
15,800.0	90.00	359.70	10,900.0	5,104.9	-26.7	5,104.9	0.00	0.00	0.00	
15,900.0	90.00	359.70	10,900.0	5,204.9	-27.3	5,204.9	0.00	0.00	0.00	
16,000.0	90.00	359.70	10,900.0	5,304.9	-27.8	5,304.9	0.00	0.00	0.00	
16,100.0	90.00	359.70	10,900.0	5,404.9	-28.3	5,404.9	0.00	0.00	0.00	
16,200.0	90.00	359.70	10,900.0	5,504.9	-28.8	5,504.9	0.00	0.00	0.00	
16,300.0	90.00	359.70	10,900.0	5,604.9	-29.3	5,604.9	0.00	0.00	0.00	
16,400.0	90.00	359.70	10,900.0	5,704.9	-29.9	5,704.9	0.00	0.00	0.00	
16,500.0	90.00	359.70	10,900.0	5,804.9	-30.4	5,804.9	0.00	0.00	0.00	
16,600.0	90.00	359.70	10,900.0	5,904.9	-30.9	5,904.9	0.00	0.00	0.00	
16,700.0	90.00	359.70	10,900.0	6,004.9	-31.4	6,004.9	0.00	0.00	0.00	
16,800.0	90.00	359.70	10,900.0	6,104.9	-32.0	6,104.9	0.00	0.00	0.00	
16,900.0	90.00	359.70	10,900.0	6,204.9	-32.5	6,204.9	0.00	0.00	0.00	
17,000.0	90.00	359.70	10,900.0	6,304.9	-33.0	6,304.9	0.00	0.00	0.00	
17,100.0	90.00	359.70	10,900.0	6,404.9	-33.5	6,404.9	0.00	0.00	0.00	
17,200.0	90.00	359.70	10,900.0	6,504.9	-34.1	6,504.9	0.00	0.00	0.00	
17,300.0	90.00	359.70	10,900.0	6,604.9	-34.6	6,604.9	0.00	0.00	0.00	
17,400.0	90.00	359.70	10,900.0	6,704.9	-35.1	6,704.9	0.00	0.00	0.00	
17,500.0	90.00	359.70	10,900.0	6,804.9	-35.6	6,804.9	0.00	0.00	0.00	
17,600.0	90.00	359.70	10,900.0	6,904.8	-36.2	6,904.9	0.00	0.00	0.00	
17,700.0	90.00	359.70	10,900.0	7,004.8	-36.7	7,004.9	0.00	0.00	0.00	
17,800.0	90.00	359.70	10,900.0	7,104.8	-37.2	7,104.9	0.00	0.00	0.00	
17,900.0	90.00	359.70	10,900.0	7,204.8	-37.7	7,204.9	0.00	0.00	0.00	
18,000.0	90.00	359.70	10,900.0	7,304.8	-38.2	7,304.9	0.00	0.00	0.00	
18,100.0	90.00	359.70	10,900.0	7,404.8	-38.8	7,404.9	0.00	0.00	0.00	
18,200.0	90.00	359.70	10,900.0	7,504.8	-39.3	7,504.9	0.00	0.00	0.00	
18,300.0	90.00	359.70	10,900.0	7,604.8	-39.8	7,604.9	0.00	0.00	0.00	
18,400.0	90.00	359.70	10,900.0	7,704.8	-40.3	7,704.9	0.00	0.00	0.00	
18,500.0	90.00	359.70	10,900.0	7,804.8	-40.9	7,804.9	0.00	0.00	0.00	
18,600.0	90.00	359.70	10,900.0	7,904.8	-41.4	7,904.9	0.00	0.00	0.00	
18,700.0	90.00	359.70	10,900.0	8,004.8	-41.9	8,004.9	0.00	0.00	0.00	



Wellplanning Planning Report

Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well #2H
Company:	COG Production LLC	TVD Reference:	WELL @ 3564.3usft (Original Well Elev)
Project:	Lea County, NM	MD Reference:	WELL @ 3564.3usft (Original Well Elev)
Site:	Gadwall 35 Federal	North Reference:	Grid
Well:	#2H	Survey Calculation Method:	Minimum Curvature
Wellbore:	#2H		
Design:	Design #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
18,800.0	90.00	359.70	10,900.0	8,104.8	-42.4	8,104.9	0.00	0.00	0.00	
18,900.0	90.00	359.70	10,900.0	8,204.8	-43.0	8,204.9	0.00	0.00	0.00	
19,000.0	90.00	359.70	10,900.0	8,304.8	-43.5	8,304.9	0.00	0.00	0.00	
19,100.0	90.00	359.70	10,900.0	8,404.8	-44.0	8,404.9	0.00	0.00	0.00	
19,200.0	90.00	359.70	10,900.0	8,504.8	-44.5	8,504.9	0.00	0.00	0.00	
19,300.0	90.00	359.70	10,900.0	8,604.8	-45.1	8,604.9	0.00	0.00	0.00	
19,400.0	90.00	359.70	10,900.0	8,704.8	-45.6	8,704.9	0.00	0.00	0.00	
19,500.0	90.00	359.70	10,900.0	8,804.8	-46.1	8,804.9	0.00	0.00	0.00	
19,600.0	90.00	359.70	10,900.0	8,904.8	-46.6	8,904.9	0.00	0.00	0.00	
19,700.0	90.00	359.70	10,900.0	9,004.8	-47.1	9,004.9	0.00	0.00	0.00	
19,800.0	90.00	359.70	10,900.0	9,104.8	-47.7	9,104.9	0.00	0.00	0.00	
19,900.0	90.00	359.70	10,900.0	9,204.8	-48.2	9,204.9	0.00	0.00	0.00	
20,000.0	90.00	359.70	10,900.0	9,304.8	-48.7	9,304.9	0.00	0.00	0.00	
20,100.0	90.00	359.70	10,900.0	9,404.8	-49.2	9,404.9	0.00	0.00	0.00	
20,200.0	90.00	359.70	10,900.0	9,504.8	-49.8	9,504.9	0.00	0.00	0.00	
20,300.0	90.00	359.70	10,900.0	9,604.8	-50.3	9,604.9	0.00	0.00	0.00	
20,400.0	90.00	359.70	10,900.0	9,704.8	-50.8	9,704.9	0.00	0.00	0.00	
20,500.0	90.00	359.70	10,900.0	9,804.8	-51.3	9,804.9	0.00	0.00	0.00	
20,600.0	90.00	359.70	10,900.0	9,904.8	-51.9	9,904.9	0.00	0.00	0.00	
20,700.0	90.00	359.70	10,900.0	10,004.8	-52.4	10,004.9	0.00	0.00	0.00	
20,736.3	90.00	359.70	10,900.0	10,041.1	-52.6	10,041.2	0.00	0.00	0.00	
TD at 20736.3 - PBHL(Gadwall#2H)										

Design Targets:										
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude	
- hit/miss target										
- Shape										
PBHL(Gadwall#2H)	0.00	0.00	10,900.0	10,041.1	-50.0	435,288.40	713,795.80	32° 11' 41.410 N	103° 38' 31.918 W	
- plan misses target center by 2.6usft at 20736.3usft MD (10900.0 TVD, 10041.1 N, -52.6 E)										
- Point										

Plan Annotations					
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates			
		+N/-S (usft)	+E/-W (usft)	Comment	
10,422.5	10,422.5	0.0	0.0	KOP - 10422.5 'MD, 0.00° INC, 0.00° AZI	
11,172.6	10,900.0	477.5	-2.5	EOC- 11172.6 'MD, 90.00° INC, 359.70° AZI	
20,736.3	10,900.0	10,041.1	-52.6	TD at 20736.3	



COG Production LLC
Project: Lea County, NM
Site: Gadwall 35 FEDERAL
Well: #2H
Wellbore: #2H
Plan: Design #1 (#2H/#2H)

Section Details

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0
2	10422.5	0.00	0.00	10422.5	0.0	0.0	0.00	0.00	0.0
3	11172.6	90.00	359.70	10900.0	477.5	-2.5	12.00	359.70	477.5
4	20736.3	90.00	359.70	10900.0	10041.1	-52.6	0.00	0.00	10041.2

PBHL(Gadwall#2H)

WELL DETAILS: #2H

Ground Elevation:: 3534.3
RKB Elevation: WELL @ 3564.3usft (Original Well Elev)
Rig Name: Original Well Elev


Northing 425247.30 Easting 713845.80 Latitude 32° 10' 2.043 N Longitude 103° 38' 32.087 W




Azimuths to Grid North
True North: -0.37°
Magnetic North: 6.96°

Magnetic Field
Strength: 48338.1snT
Dip Angle: 60.06°
Date: 10/22/2013
Model: IGRF2010

West(-)/East(+) (50 usft/in)

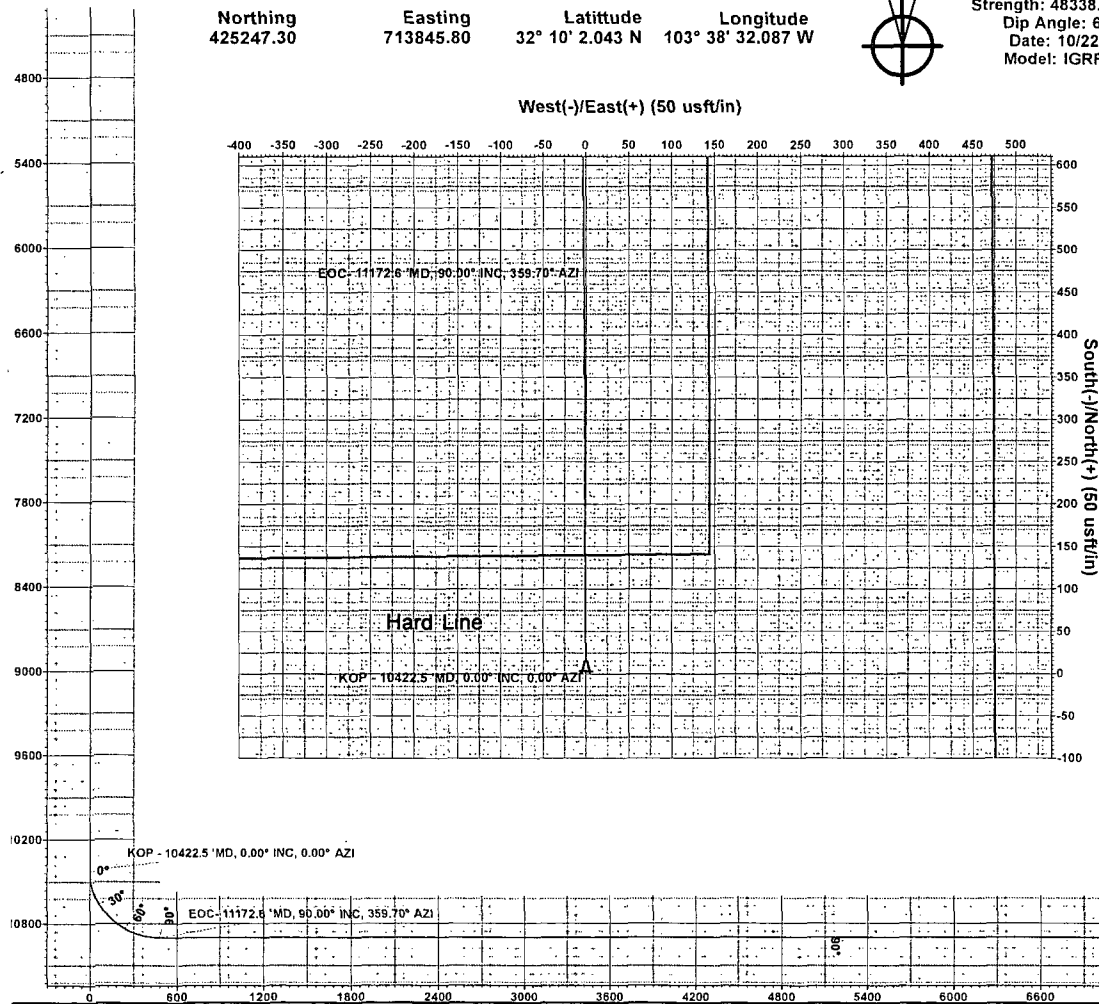

West(-)/East(+) (400 usft/in)

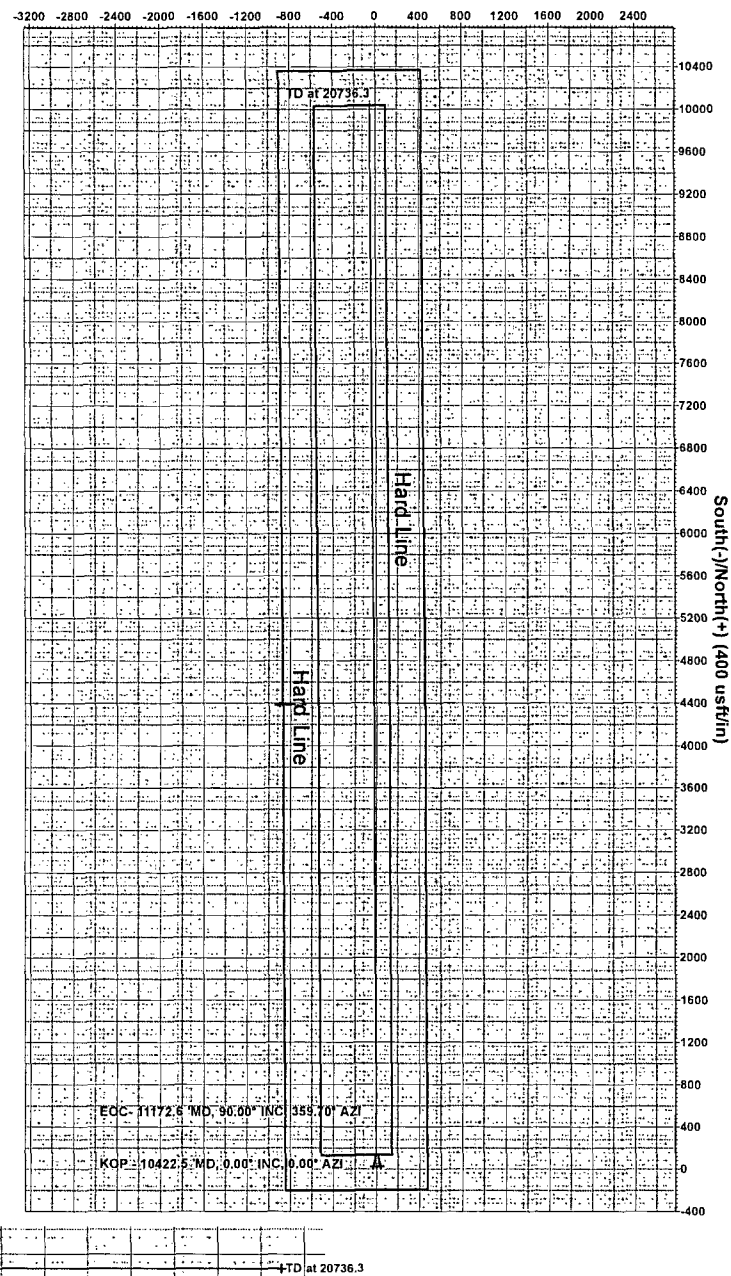

Plan: Design #1 (#2H/#2H)
Created By: Well Planner Date: 14:33, October 22 2013

Vertical Section at 359.70° (300 usft/in)
Terra Directional Services
322 Spring Hill Drive, Suite A100, Spring, Texas 77386
432.425.7532

PROJECT DETAILS: Lea County, NM
Geodetic System: US State Plane 1927 (Exact solution)
Datum: NAD 1927 (NADCON CONUS)
Ellipsoid: Clarke 1866
Zone: New Mexico East 3001
System Datum: Mean Sea Level
Local North: Grid



New Mexico Office of the State Engineer
Water Column/Average Depth to Water

No records found.

PLSS Search:

Section(s): 35

Township: 24S

Range: 32E



New Mexico Office of the State Engineer

Water Column/Average Depth to Water

(A CLW##### in the
POD suffix indicates the
POD has been replaced
& no longer serves a
water right file.)

(R=POD has
been replaced,
O=orphaned,

C=the file is
closed)

(quarters are 1=NW 2=NE 3=SW 4=SE)

(quarters are smallest to largest) (NAD83 UTM in meters)

(In feet)

POD Number	POD Sub-Code	basin	County	Q 64	Q 16	Q 4	Sec	Tws	Rng	X	Y	Depth Well	Depth Water	Water Column
C 01932	C	ED		3	1	12	24S	32E		628633	3567188*	492		
C 02350		ED		4	3	10	24S	32E		625826	3566333*	60		
C 03527 POD1	C	LE		1	2	3	03	24S	32E	625770	3568487	500		
C 03528 POD1	C	LE		1	1	2	15	24S	32E	626040	3566129	541		
C 03530 POD1	C	LE		3	4	3	07	24S	32E	620886	3566156	550		
C 03555 POD1	C	LE		2	2	1	05	24S	32E	622709	3569231	600	380	220

Average Depth to Water: **380 feet**

Minimum Depth: **380 feet**

Maximum Depth: **380 feet**

Record Count: 6

PLSS Search:


Township: 24S

Range: 32E


*UTM location was derived from PLSS - see Help

The data is furnished by the NMOSE/ISC and is accepted by the recipient with the expressed understanding that the OSE/ISC make no warranties, expressed or implied, concerning the accuracy, completeness, reliability, usability, or suitability for any particular purpose of the data.


2,000 psi BOP Schematic

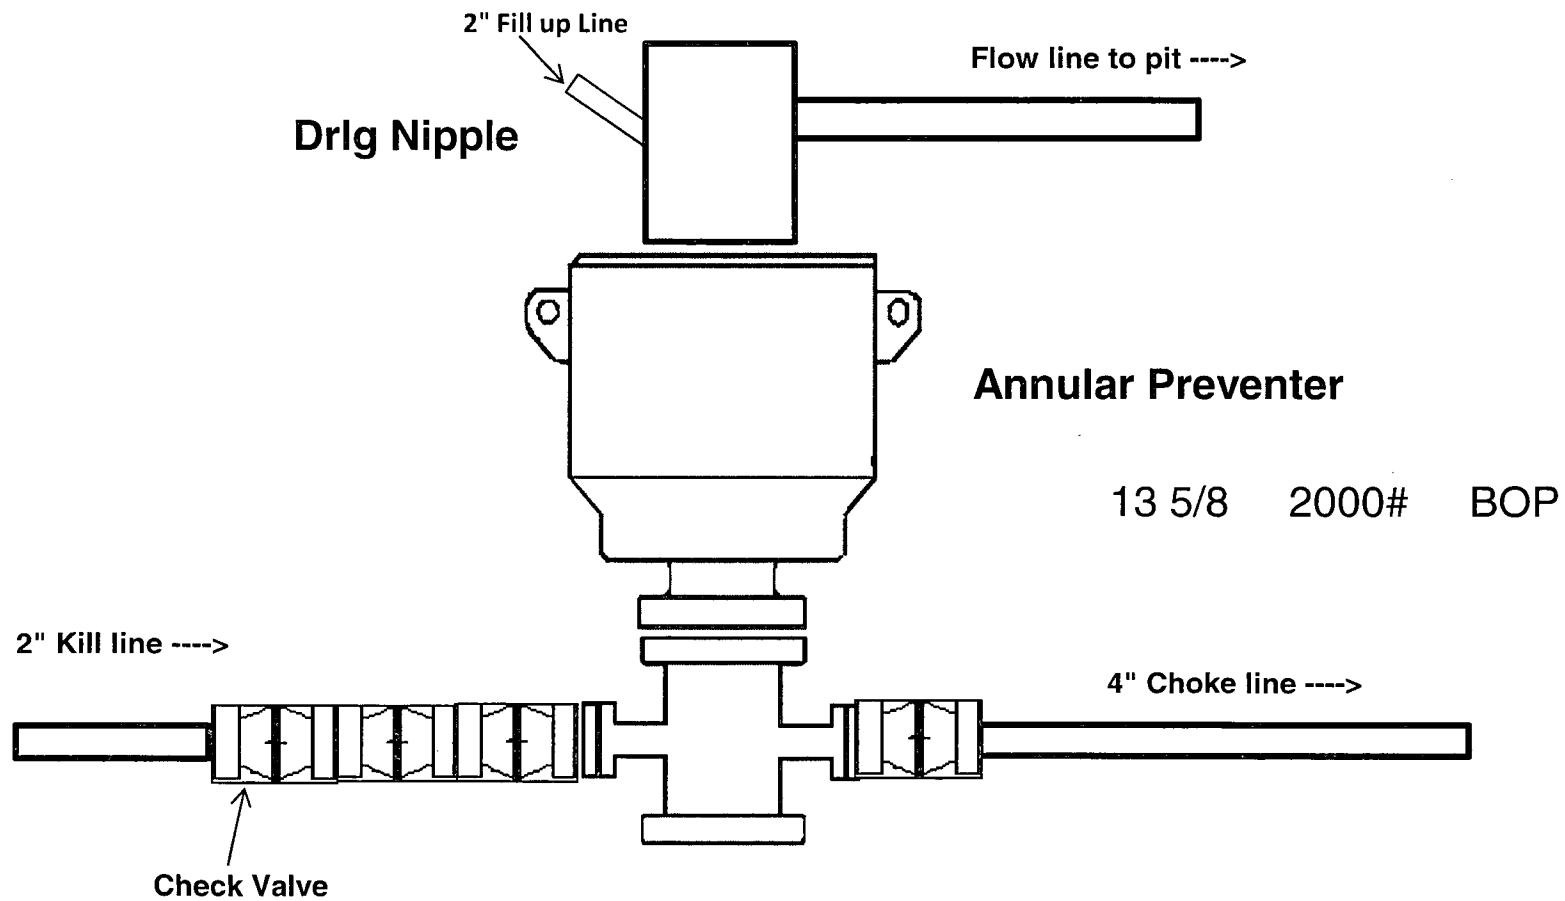


3,000 psi BOP Schematic

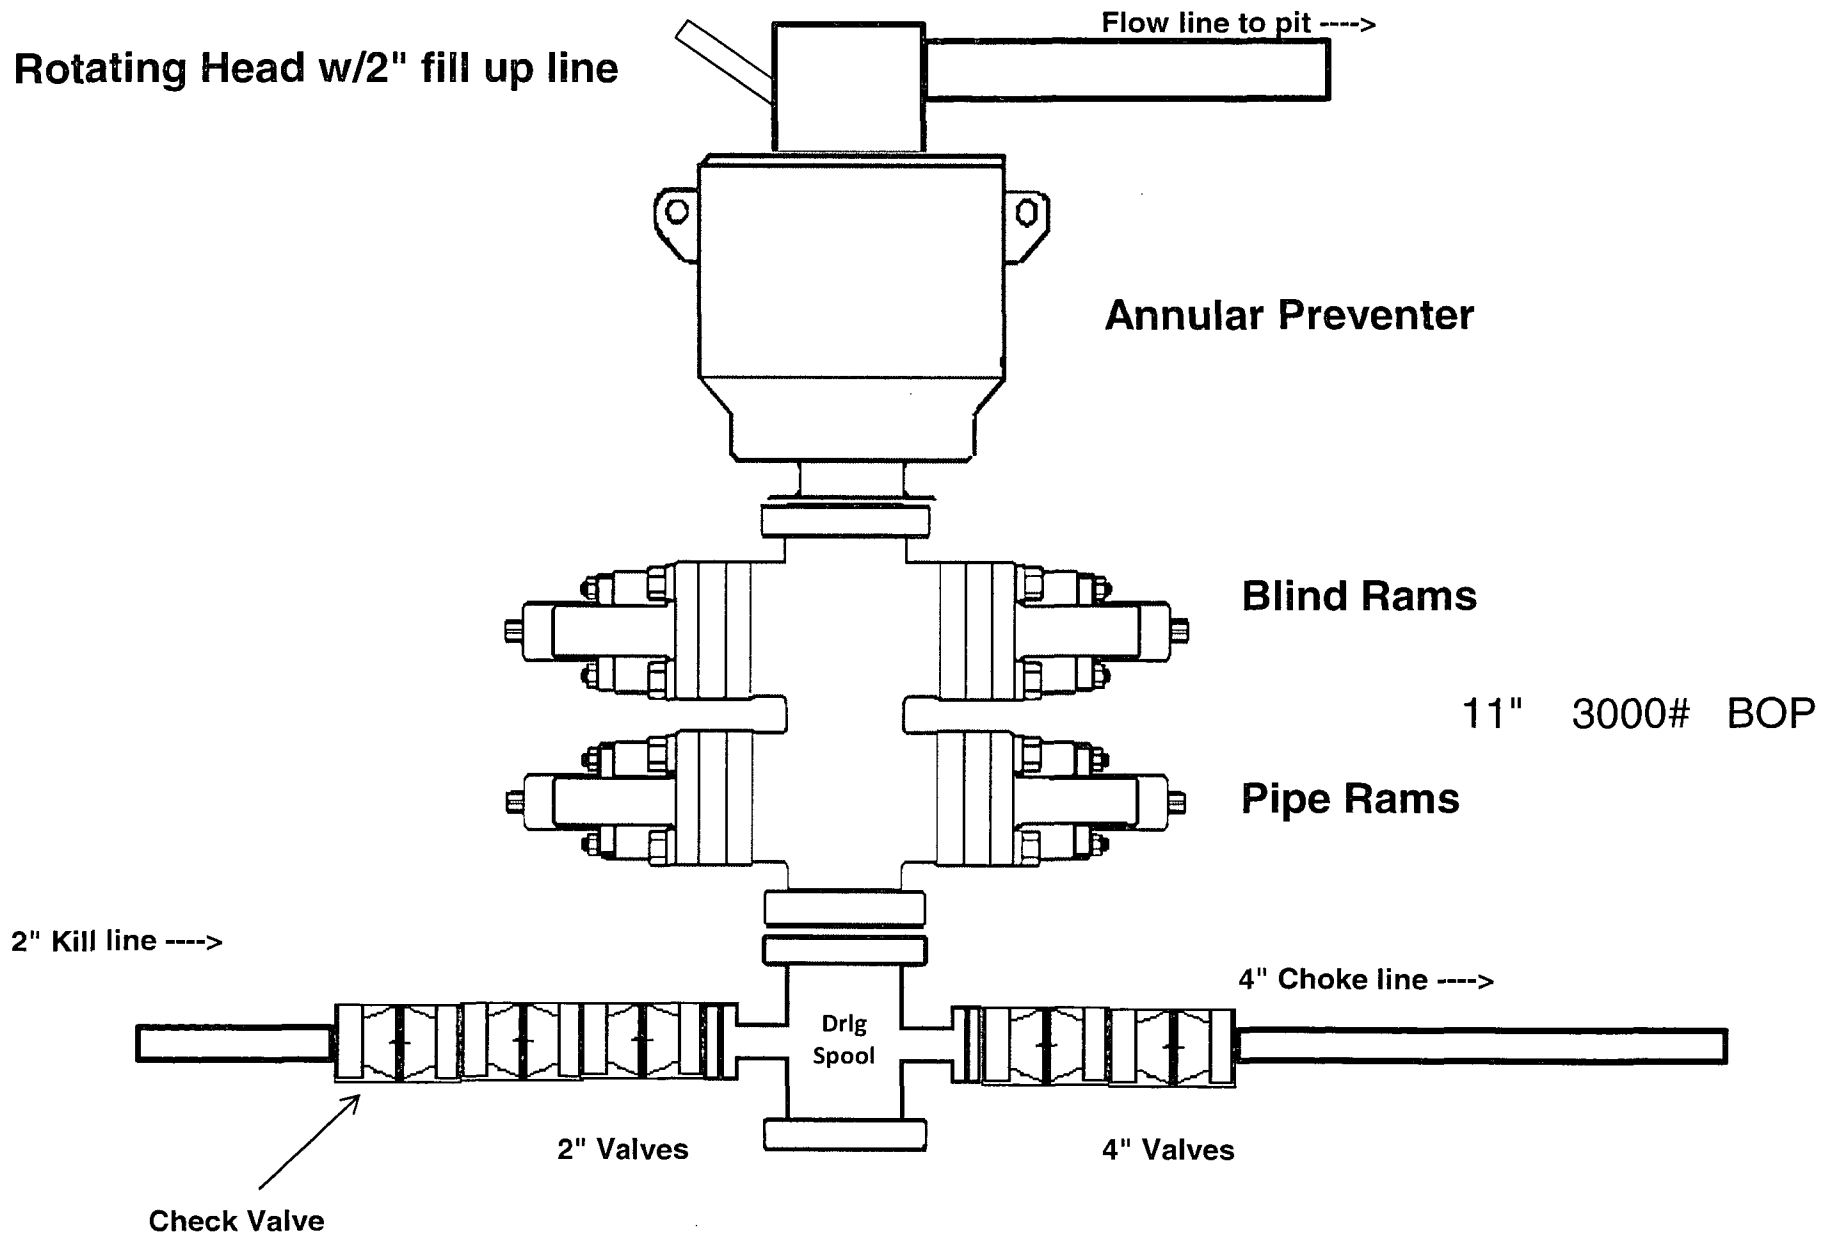

2M Choke Manifold Equipment

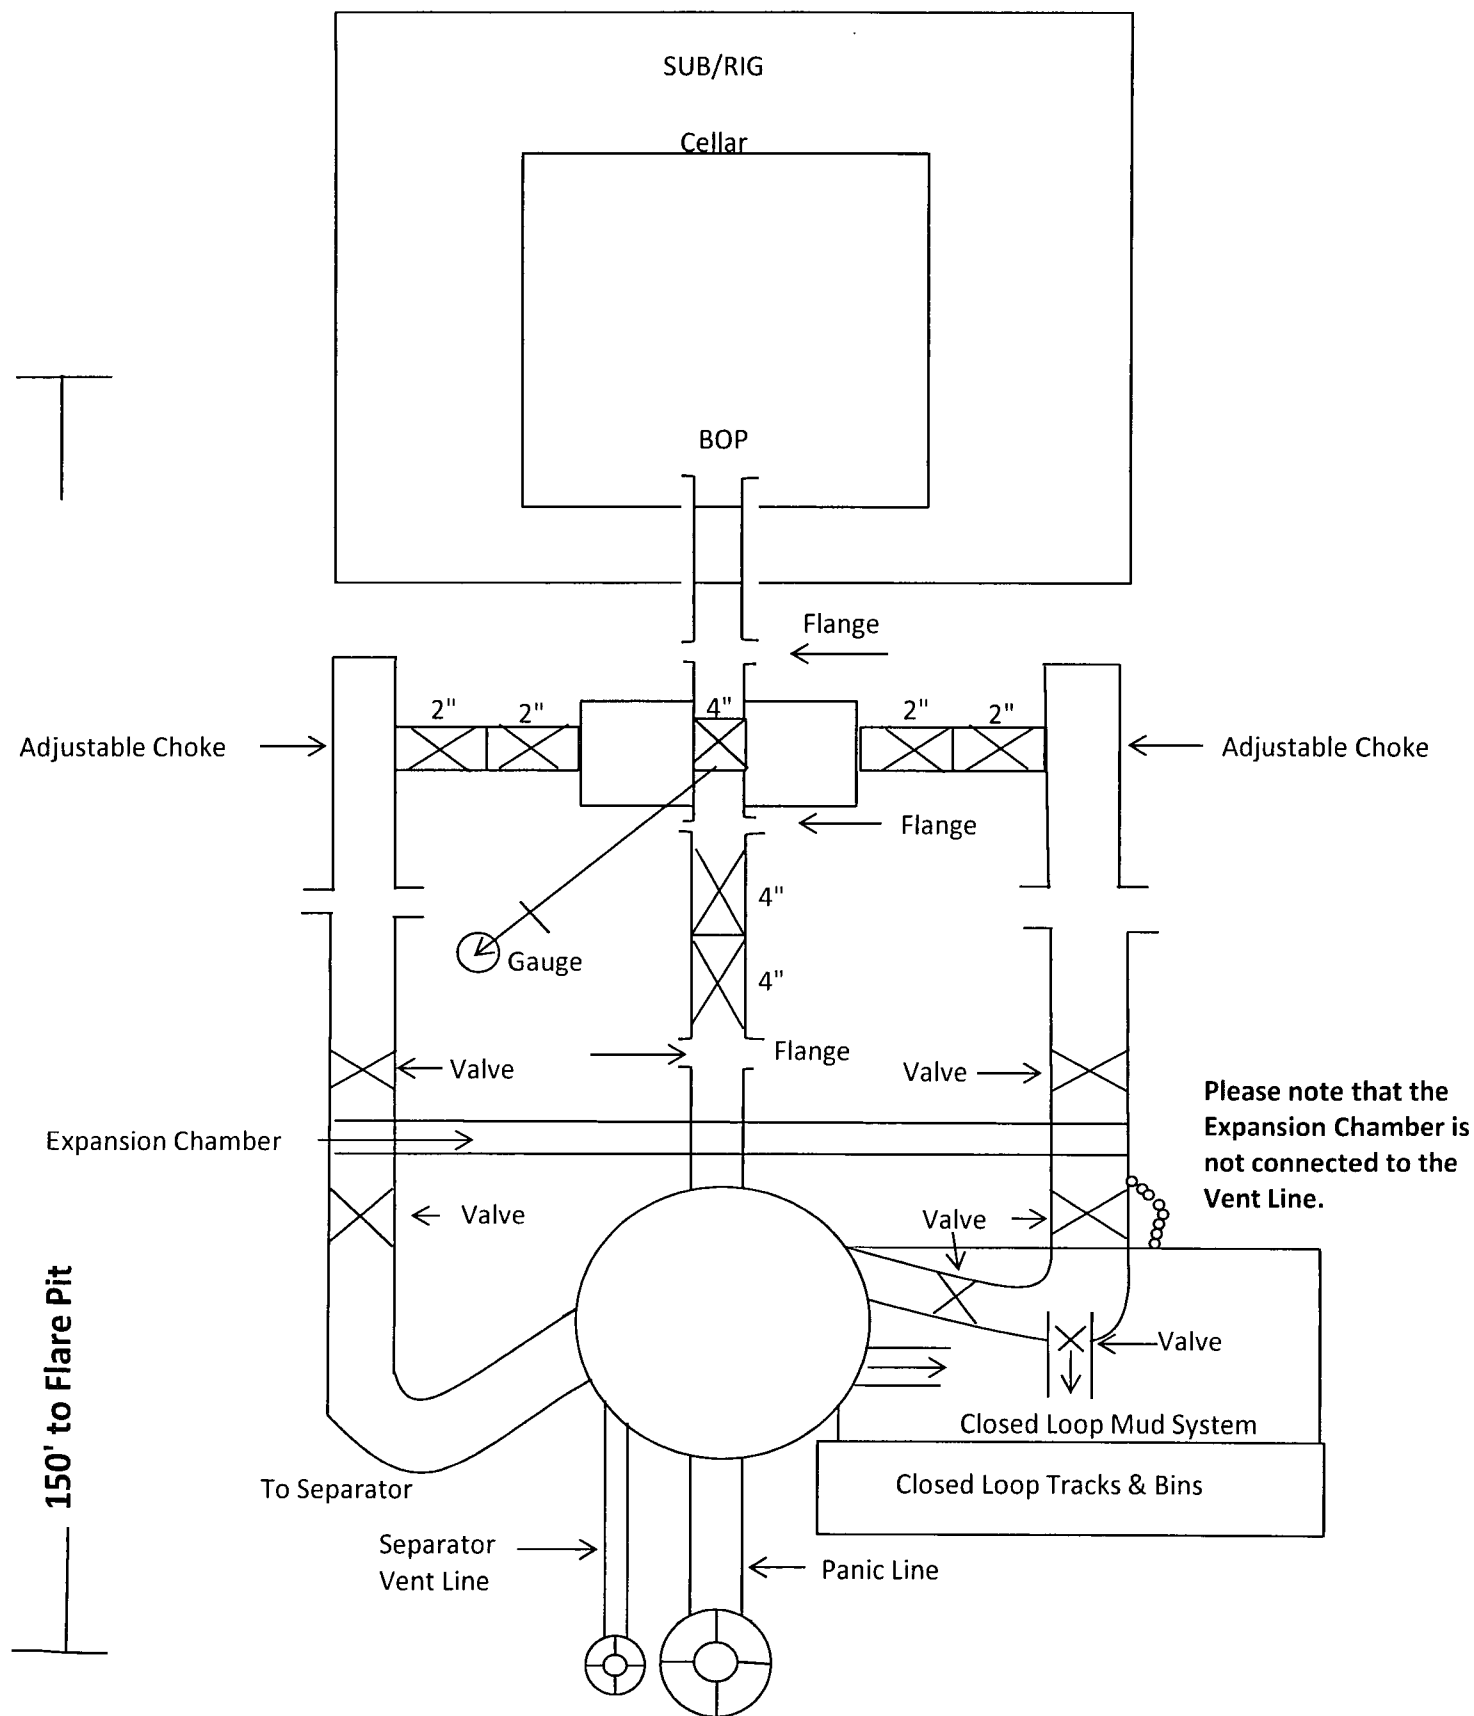

3M Choke Manifold Equipment

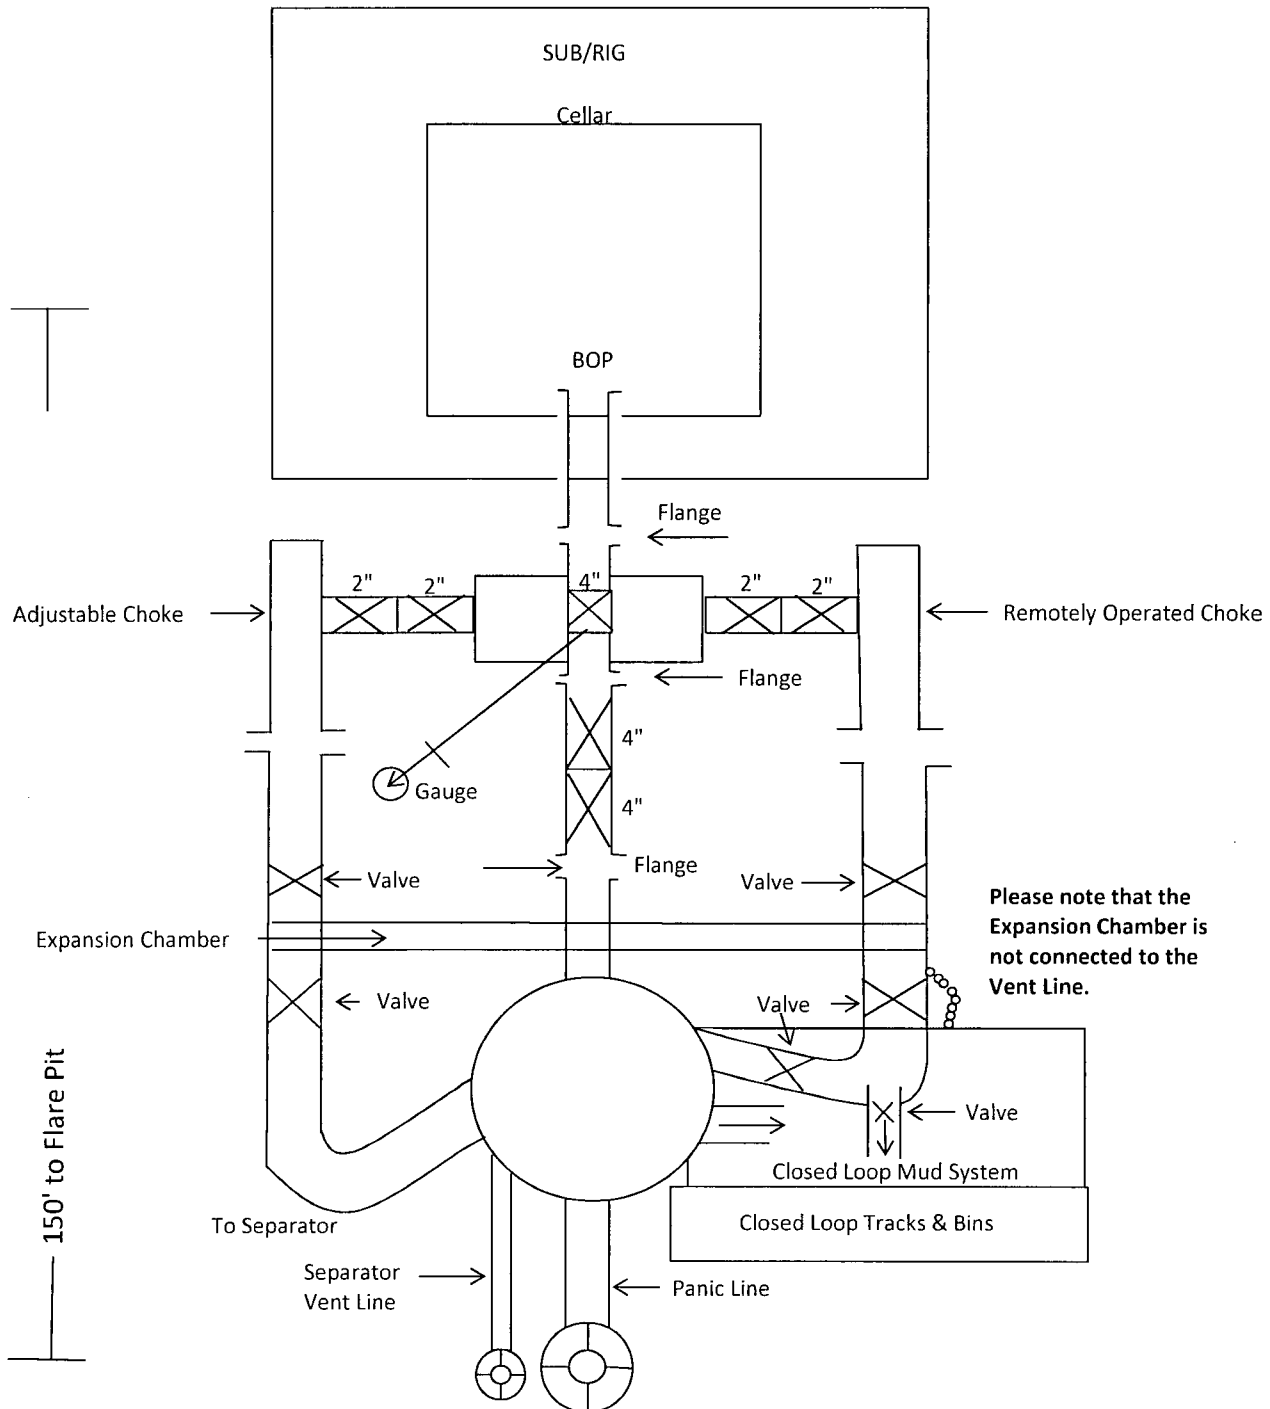

COG Production LLC

Rig Plat & Closed Loop Equipment Diagram

Well pad will be 340' X 340'
with cellar in center of pad

200'

Flare Lines will be from both Choke
Manifold & Separator to edge of
location which is +/- 170'

Fluid
Storage
Tanks

Roll Off Cutting
Containers on
Tracks

Centrifuge or
Solids Sep.

Transfer Pump

Shakers

Drig Separator

Steel pits

Flow line

Choke
Manifold

Mud Pumps

200'

200'

Cellar

Pipe
Racks

Water Tanks

200'

Trailer

Exhibit 1

"I further certify that COG will comply with Rule 19.15.17
NMAC by using a Closed Loop System."

