

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

HOBBS OCD

JUL 16 2014

RECEIVED

1a. Type of work: ☒ DRILL ☐ REENTER		5. Lease Serial No. NMNM121489
1b. Type of Well: ☒ Oil Well ☐ Gas Well ☐ Other ☒ Single Zone ☐ Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator Devon Energy Production Company, L.P. (6137)		7. If Unit or CA Agreement, Name and No.
3a. Address 333 W. Sheridan Ave. Oklahoma City, OK 73102	3b. Phone No. (include area code) 405-552-7848	8. Lease Name and Well No. (313495) HOGNOSE VIPER 23 FED 2H
4. Location of Well (Report location clearly and in accordance with any State requirements.) At surface 200 FSL & 900 FWL Unit M PP: 200 FSL & 900 FWL At proposed prod. zone 330 FNL & 1980 FWL Unit C		9. API Well No. 70-025-41976 (5150)
10. Field and Pool, or Exploratory BELL LAKE, BONE SPRING, NORTH		11. Sec., T. R. M. or Blk. and Survey or Area 23-23S-33E
12. Distance in miles and direction from nearest town or post office* Approximately 24 miles NW of Jal, NM		12. County or Parish Lea County
13. State NM		
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 200'	16. No. of acres in lease 640 acres	17. Spacing Unit dedicated to this well 160 acres
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. See attached map	19. Proposed Depth TVD: 11,088' MD: 15,942'	20. BLM/BIA Bond No. on file CO-1104 & NMB-000801
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3,682.1' GL	22. Approximate date work will start* 07/01/2014	23. Estimated duration 25 days

24. Attachments To Be Pad Drilled w/ Hognose Viper 23 Fed 1H

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, must be attached to this form:

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the BLM. |

25. Signature 	Name (Printed/Typed) David H. Cook	Date 02/24/2014
-------------------	---------------------------------------	--------------------

Title
Regulatory Specialist

Approved by (Signature) 	Name (Printed/Typed) IS/STEPHEN J. CAFFEY	Date 7-11-14
Title FIELD MANAGER	Office CARLSBAD FIELD OFFICE	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)

CARLSBAD CONTROLLED WATER BASIN

K2
07/16/14

JUL 16 2014

SEE ATTACHED FOR
CONDITIONS OF APPROVAL

Approval Subject to General Requirements
& Special Stipulations Attached


Certification

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access road proposed herein; that I am familiar with the conditions that presently exist; that I have full knowledge of State and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or Devon Energy Production Company, L.P. am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

I hereby also certify that I, or Devon Energy Production Company, L.P. have made a good faith effort to provide the surface owner with a copy of the Surface Use Plan of Operations and any Conditions of Approval that are attached to the APD.

Executed this 26th day of February, 2014.

Printed Name: David H. Cook

Signed Name: 

Position Title: Regulatory Specialist

Address: 333 W. Sheridan, OKC OK 73102

Telephone: (405)-552-7848

DRILLING PROGRAM

Devon Energy Production Company, L.P.
Hognose Viper 23 Fed 2H

1. **Geologic Name of Surface Formation:** Quaternary

2. **Estimated Tops of Geological Markers & Depths of Anticipated FW, Oil, or Gas:**

a. Fresh Water	250'	
b. Rustler	1290'	Barren
c. Top Salt	1770'	Barren
d. Base Salt	5090'	Barren
e. Delaware	5190'	Oil/Gas
f. Cherry Canyon	6060'	Oil/Gas
g. Brushy Canyon	7640'	Oil/Gas
h. Bone Spring Lime	9070'	Oil/Gas
i. 1 st Bone Spring SS	10065'	Oil/Gas
j. 2 nd Bone Spring SS	10800'	Oil/Gas
Total Depth	11088' TVD	15942' MD

3. Pressure Control Equipment:

Devon proposes using a multi-bowl wellhead assembly (FMC Uni-head). This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be 5000 (5M) psi.

- Wellhead will be installed by FMC's representatives
- If the welding is performed by a third party, the FMC's representative will monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
- FMC representative will install the test plug for the initial BOP test.
- FMC will install a solid steel body pack-off to completely isolate the lower head after cementing intermediate casing. After installation of the pack-off, the pack-off and the lower flange will be tested to 5M, as shown on the attached schematic. Everything above the pack-off will not have been altered whatsoever from the initial nipple up. Therefore the BOP components will not be retested at that time.
- If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head will be cut and top out operations will be conducted.
- Devon will pressure test all seals above and below the mandrel (but still above the casing) to full working pressure rating.
- Devon will test the casing to 70% of burst or 1500 psi, whichever is greater, as per Onshore Order #2.

After running the 13-3/8" surface casing, a 13-5/8" BOP/BOPE system with a minimum rating of 5M will be installed on the FMC Uni-head wellhead system and will undergo a 250 psi low pressure test followed by a 5,000 psi high pressure test. The 5,000 psi high and 250 psi low test will cover testing requirements a maximum of 30 days, as per Onshore Order #2. If the well is not complete within 30 days of this BOP test, another full BOP test will be conducted, as per Onshore Order #2.

After running the 9-5/8" intermediate casing with a mandrel hanger, the 13-5/8" BOP/BOPE system with a minimum rating of 5M will already be installed on the FMC Uni-head. Please find attached the wellhead schematic.

The pipe rams will be operated and checked as per Onshore Order 2. A 2" kill line and 3" choke line will be incorporated into the drilling spool below the ram BOP. In addition to the rams and annular preventer, additional BOP accessories include a kelly cock, floor safety valve, choke lines, and choke manifold rated at **5,000 psi WP**.

Devon requests a variance to use a flexible line with flanged ends between the BOP and the choke manifold (choke line). The line will be kept as straight as possible with minimal turns.

Auxiliary Well Control and Monitoring Equipment:

- a. A Kelly cock will be in the drill string at all times.
- b. A full opening drill pipe stabbing valve having the appropriate connections will be on the rig floor at all times.

4. Casing Program:

See COA

Hole Size	Hole Interval	Casing OD	Casing Interval	Weight (lb/ft)	Collar	Grade	Collapse Design Factor	Burst Design Factor	Tension Design Factor
17-1/2"	0 - 1315'	13-3/8"	0 - 1315'	48	STC	H-40	1.25	2.81	8.57
12-1/4"	1315-5190'	9-5/8"	0-5190'	40	BTC	HCK-55	1.57	1.46	4.46
8-3/4"	5190-15942'	5-1/2"	0-15942'	17	BTC	P-110	1.54	1.91	2.07

Casing Notes:

- All casing is new and API approved

Maximum Lateral TVD: 11140'

5. Proposed mud Circulations System:

See COA

Depth	Mud Weight	Viscosity	Fluid Loss	Type System
0-1315'	8.4-9.0	30-34	N/C	FW
1315-5190'	9.8-10.0	28-32	N/C	Brine
5190-15942'	8.6-9.6	28-32	N/C	FW

The necessary mud products for weight addition and fluid loss control will be on location at all times. Visual mud monitoring equipment will be in place to detect volume changes indicating loss or gain of circulating fluid volume. If abnormal pressures are encountered, electronic/mechanical mud monitoring equipment will be installed.

6. Cementing Table:

String	Number of sx	Weight lbs/gal	Water Volume g/sx	Yield cf/sx	Stage; Lead/Tail	Slurry Description
13-3/8" Surface	660	13.5	9.07	1.72	Lead	Class C Cement + 0.125 lbs/sack Poly-E-Flake + 4% bwoc Bentonite + 70.8% Fresh Water
	560	14.8	6.32	1.33	Tail	Class C Cement + 63.5% Fresh Water
9-5/8" Intermediate	1120	12.9	9.81	1.85	Lead	(65:35) Class C Cement: Poz (Fly Ash): 6% BWOC Bentonite + 5% BWOW Sodium Chloride + 0.125 lbs/sack Poly-E-Flake + 70.9 % Fresh Water
	430	14.8	6.32	1.33	Tail	Class C Cement + 63.5% Fresh Water
5-1/2" Production Casing	550	11.9	12.89	2.26	Lead	(50:50) Class H Cement: Poz (Fly Ash) + 10% BWOC Bentonite + 1 lb/sk of Kol-Seal + 0.3% BWOC HR-601 + 0.5lb/sk D-Air 5000 + 76.4% Fresh Water
	330	12.5	10.86	1.96	Lead	(65:35) Class H Cement: Poz (Fly Ash) + 6% BWOC Bentonite + 0.25% BWOC HR-601 + 0.125 lbs/sack Poly-E-Flake + 74.1 % Fresh Water
	1440	14.5	5.38	1.22	Tail	(50:50) Class H Cement: Poz (Fly Ash) + 1 lb/sk Sodium Chloride + 0.5% bwoc HALAD-344 + 0.4% bwoc CFR-3 + 0.2% bwoc HR-601 + 2% bwoc Bentonite + 58.8% Fresh Water

TOC for all Strings:

Surface @ 0'
Intermediate @ 0'
Production @ 4690'

Notes:

- Cement volumes Surface 100%, Intermediate 75%, Production based on at least 25% excess
- Actual cement volumes will be adjusted based on fluid caliper and caliper log data

7. Logging, Coring, and Testing Program:

- Drill stem tests will be based on geological sample shows.
- If a drill stem test is anticipated, a procedure, equipment to be used, and safety measures will be provided via sundry notice to the BLM.
- No logs are planned.
- No coring program is planned
- Additional Testing will be initiated subsequent to setting the 5-1/2" production casing. Specific intervals will be targeted based on log evaluation, geological sample shows, and drill stem tests.

See
GPA

8. Potential Hazards:

- a. No abnormal pressures or temperatures are expected. There is no known presence of H₂S in this area, and none is anticipated to be encountered. If H₂S is encountered the operator will comply with the provisions of Onshore Oil and Gas Order No. 6. No lost circulation is expected to occur. All personnel will be familiar with all aspects of safe operation being used to drill this well. Estimated BHP: 5000 psi, and estimated BHT: 165 F degrees.
- b. Hydrogen Sulfide detection equipment will be in operation after drilling out the surface casing shoe until the production string is cemented. Breathing equipment will be on location upon drilling the surface casing shoe until total depth is reached.

9. Anticipated Starting Date and Duration of Operations:

- a. Road and location construction will begin after the BLM has approved the APD. Anticipated spud date will be as soon after BLM approval and as soon as a rig will be available. Move in operations and drilling is expected to take 32 days. If production casing is run then an additional 30 days will be needed to complete well and construct surface facilities and/or lay flow lines in order to place well on production.

HOBBS OCD

JUL 16 2014

5D Plan Report

RECEIVED

Devon Energy

Field Name: *Lea Co, NM Nad 83 NM*

Site Name: *Hognose Viper 23 Fed 1,2H Pad*

Well Name: *Hognose Viper 23 Fed 2H*

Plan: *P1:V2*

07 April 2014





Weatherford®



Hognose Viper 23 Fed 2H
Lea Co, NM



KB-3707
GL-3682

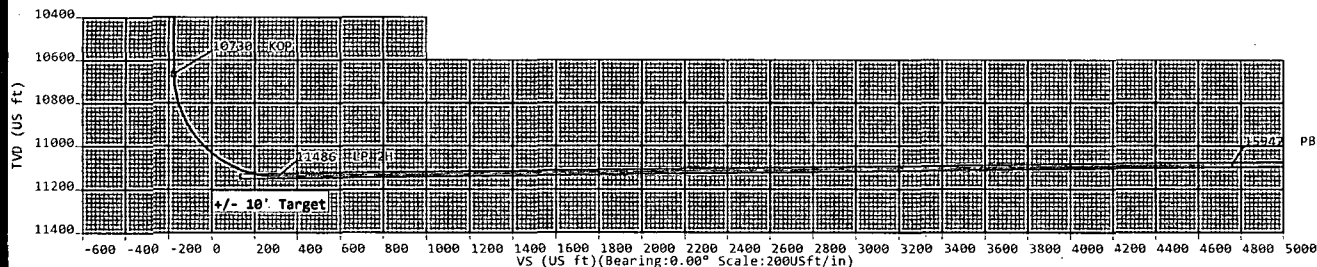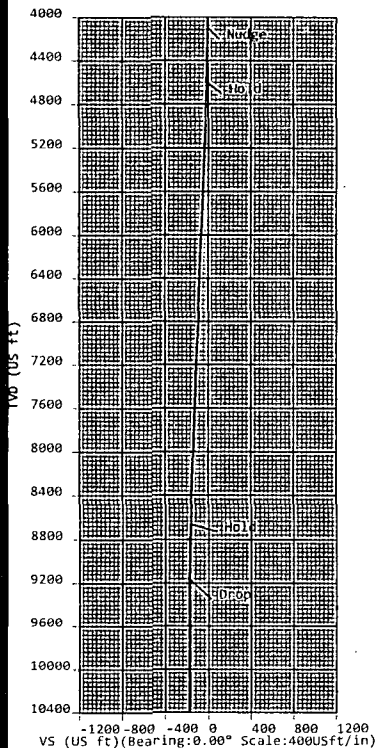

Plan Data for Hognose Viper 23 Fed 2H

Plan Point Information:									
DogLeg Severity Unit: °/100.00ft									
MD	Inc	Az	TVD	+N/-S	+E/-W	Northing	Easting	VSec	DLS
(USft)	(°)	(°)	(USft)	(USft)	(USft)	(USft)	(USft)	(USft)	(DLSU)
0.00	0.00	0.00	0.00	0.00	0.00	467746.14	783798.28	0.00	0.00
4100.00	0.00	0.00	4100.00	0.00	0.00	467746.14	783798.28	0.00	0.00
4600.00	10.00	102.60	4597.47	-9.49	42.47	467736.65	783840.75	-9.49	2.00
8730.50	10.00	102.60	8665.21	-165.96	742.45	467580.18	784540.73	-165.96	0.00
9230.50	0.00	0.00	9162.68	-175.45	784.93	467570.69	784583.21	-175.45	2.00
10730.50	0.00	0.00	10662.68	-175.45	784.93	467570.69	784583.21	-175.45	0.00
11486.00	90.67	3.00	11140.11	306.93	810.24	468053.07	784608.52	306.93	12.00
15942.19	90.67	3.00	11088.00	4756.61	1043.72	472502.75	784842.00	4756.61	0.00



Plan Data for Hognose Viper 23 Fed 2H

Target Set Information:									
Name: Hognose Viper 23 Fed 2H									
Position offsets from Slot centre									
Name	TVD	+N/-S	+E/-W	Northing	Easting	Shape	Comment		
	(USft)	(USft)	(USft)	(USft)	(USft)				
S Tgt	10666.57	-174.66	1043.72	467571.48	784842.00	Cuboid			
LP Tgt	11142.00	135.36	1043.72	467881.50	784842.00	Cuboid			
PBHL 2H	11088.00	4756.61	1043.72	472502.75	784842.00	Cuboid			

Plan Data for Hognose Viper 23 Fed 2H

Slot: Hognose Viper 23 Fed 2H			
Position:			
Offset is from Site centre			
+N/-S: 0.23USft	Northing: 467746.14USft	Latitude: 32°17'0.5"	
+E/-W: 49.93USft	Easting: 783798.28USft	Longitude: -103°32'55.5"	
Elevation Above VRD: 3682.00USft			

Hognose Viper 23 Fed 2H
Lat Hognose Viper 23 Fed 1H
Pilot Hognose Viper 23 Fed 1H

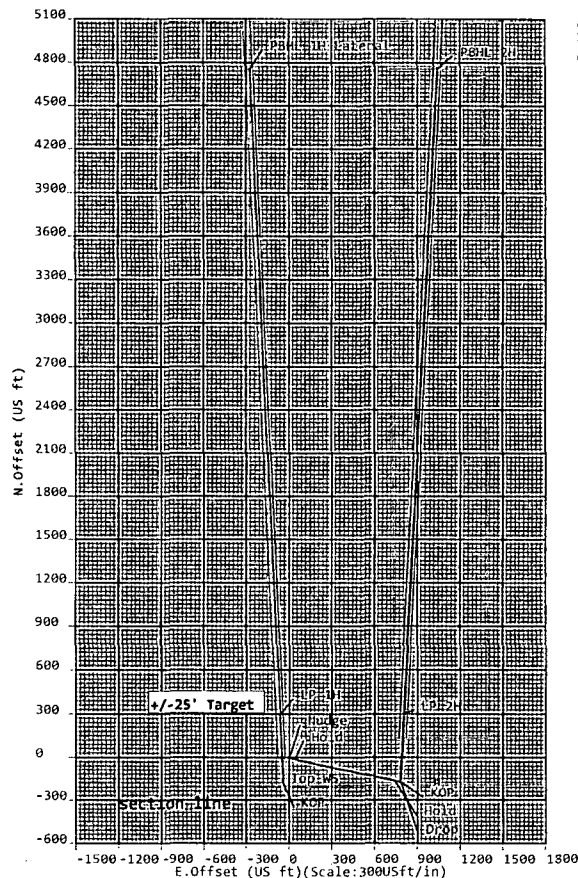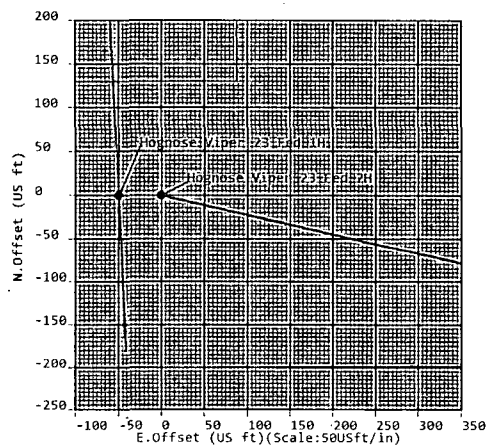

Sign Off: Russell Joyner

Hognose Viper 23 Fed 2H

Field Name Lea Co. NM Nad 83 NM	Map Units : US ft		Company Name : Devon Energy	
	Vertical Reference Datum (VRD) : Mean Sea Level			
Projected Coordinate System : NAD83 / New Mexico East (ftUS)				
Comment :				
Site Name Hognose Viper 23 Fed 1-2H Pad	Units : US ft	North Reference : Grid	Convergence Angle : 0.42	
	Position		Northing : 467745.91 US ft	Latitude : 32° 17' 0.50"
		Easting : 783748.35 US ft	Longitude : -103° 32' 56.11"	
Elevation above Mean Sea Level: 3682.00 US ft				
Comment :				
Slot Name Hognose Viper 23 Fed 2H	Position (Offsets relative to Site Centre)			
	+N / -S : 0.23 US ft	Northing : 467746.14 US ft	Latitude : 32° 17' 0.49"	
+E / -W : 49.93 US ft		Easting : 783798.28 US ft	Longitude : -103° 32' 55.53"	
Slot TVD Reference : Ground Elevation				
Elevation above Mean Sea Level : 3682.00 US ft				
Comment :				
Well Name Hognose Viper 23 Fed 2H	Type : Main well		UWI :	Plan : P1:V2
	Rig Height Drill Floor : 25.00 US ft		Comment :	
Relative to Mean Sea Level: 3707.00 US ft				
Closure Distance : 4869.77 US ft		Closure Azimuth : 12.376°		
Vertical Section (Position of Origin Relative to Slot)				
+N / -S : 0.00 US ft		+E / -W : 0.00 US ft	Az : 3.00°	
Magnetic Parameters				
Model : BGGM	Field Strength : 48356.3nT	Dec : 7.33°	Dip : 60.16°	Date : 17/Jun/2014

Target Set	
Name : Hognose Viper 23	Number of Targets : 3
Fed 2H	

Comment :

Target Name S Tgt	Position (Relative to Slot centre)			
	+N / -S : -174.66US ft	Northing : 467571.48 US ft	Latitude : 32° 16' 58.69"	
	+E / -W : 1043.72 US ft	Easting : 784842.00US ft	Longitude : -103° 32' 43.39"	
Shape Cuboid	TVD (Drill Floor) : 10666.57 US ft			
Orientation Azimuth : 0.00°		Inclination : 0.00°		
Dimensions Length : 20.00 US ft		Breadth : 20.00 US ft	Height : 20.00 US ft	

5D Plan Report

Target Name: LP Tgt Shape: Cuboid	Position (Relative to Slot centre)		
	+N / -S : 135.36US ft	Northing : 467881.50 US ft	Latitude : 32°17'1.76"
	+E / -W : 1043.72 US ft	Easting : 784842.00US ft	Longitude : -103°32'43.36"
	TVD (Drill Floor) : 11142.00 US ft		
Target Name: PBHL 2H Shape: Cuboid	Position (Relative to Slot centre)		
	+N / -S : 4756.61US ft	Northing : 472502.75 US ft	Latitude : 32°17'47.49"
	+E / -W : 1043.72 US ft	Easting : 784842.00US ft	Longitude : -103°32'42.97"
	TVD (Drill Floor) : 11088.00 US ft		
	Orientation Azimuth : 0.00°	Inclination : 0.00°	
	Dimensions Length : 0.00 US ft	Breadth : 0.00 US ft	Height : 0.00 US ft
	Orientation Azimuth : 3.00°	Inclination : 0.67°	
	Dimensions Length : 9256.00 US ft	Breadth : 50.00 US ft	Height : 20.00 US ft

Well path created using minimum curvature.

Salient Points (Relative to Slot centre - TVD relative to Drill Floor)											
MD (US ft)	Inc (°)	Az (°)	TVD (US ft)	N. Offset (US ft)	E. Offset (US ft)	DLS (°/100 US ft)	VS (US ft)	B. Rate (°/100 US ft)	T. Rate (°/100 US ft)	T. Face (°)	Comment
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
4100.00	0.00	0.00	4100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	Nudge
4600.00	10.00	102.60	4597.47	-9.49	42.47	2.00	-7.26	2.00	0.00	102.60	Hold
8730.50	10.00	102.60	8665.21	-165.96	742.45	0.00	-126.87	0.00	0.00	0.00	Hold
9230.50	0.00	0.00	9162.68	-175.45	784.93	2.00	-134.13	-2.00	0.00	180.00	Drop
10730.50	0.00	0.00	10662.68	-175.45	784.93	0.00	-134.13	0.00	0.00	0.00	KOP
11486.08	90.67	3.00	11140.11	306.93	810.24	12.00	348.92	12.00	0.00	3.00	LP 2H
15942.19	90.67	3.00	11088.00	4756.61	1043.72	0.00	4804.72	0.00	0.00	0.00	PBHL 2H

Interpolated Points (Relative to Slot centre - TVD relative to Drill Floor)										
MD (US ft)	Inc (°)	Az (°)	TVD (US ft)	N. Offset (US ft)	E. Offset (US ft)	VS (US ft)	DLS (%/100 US ft)	Northing (US ft)	Easting (US ft)	Comment
4100.00	0.00	0.00	4100.00	0.00	0.00	0.00	0.00	467746.14	783798.28	Nudge
4200.00	2.00	102.60	4199.98	-0.38	1.70	-0.29	2.00	467745.76	783799.98	
4300.00	4.00	102.60	4299.84	-1.52	6.81	-1.16	2.00	467744.62	783805.09	
4400.00	6.00	102.60	4399.45	-3.42	15.32	-2.62	2.00	467742.72	783813.60	
4500.00	8.00	102.60	4498.70	-6.08	27.21	-4.65	2.00	467740.06	783825.49	
4600.00	10.00	102.60	4597.47	-9.49	42.47	-7.26	2.00	467736.65	783840.75	Hold
4700.00	10.00	102.60	4695.95	-13.28	59.42	-10.15	0.00	467732.86	783857.70	
4800.00	10.00	102.60	4794.43	-17.07	76.37	-13.05	0.00	467729.07	783874.65	
4900.00	10.00	102.60	4892.91	-20.86	93.31	-15.95	0.00	467725.28	783891.59	
5000.00	10.00	102.60	4991.39	-24.65	110.26	-18.84	0.00	467721.49	783908.54	
5100.00	10.00	102.60	5089.87	-28.43	127.21	-21.74	0.00	467717.71	783925.49	
5200.00	10.00	102.60	5188.35	-32.22	144.15	-24.63	0.00	467713.92	783942.43	
5300.00	10.00	102.60	5286.83	-36.01	161.10	-27.53	0.00	467710.13	783959.38	
5400.00	10.00	102.60	5385.31	-39.80	178.05	-30.43	0.00	467706.34	783976.33	
5500.00	10.00	102.60	5483.79	-43.59	194.99	-33.32	0.00	467702.55	783993.27	
5600.00	10.00	102.60	5582.27	-47.37	211.94	-36.22	0.00	467698.77	784010.22	
5700.00	10.00	102.60	5680.75	-51.16	228.89	-39.11	0.00	467694.98	784027.17	
5800.00	10.00	102.60	5779.23	-54.95	245.83	-42.01	0.00	467691.19	784044.11	
5900.00	10.00	102.60	5877.72	-58.74	262.78	-44.91	0.00	467687.40	784061.06	
6000.00	10.00	102.60	5976.20	-62.53	279.73	-47.80	0.00	467683.61	784078.01	
6100.00	10.00	102.60	6074.68	-66.31	296.67	-50.70	0.00	467679.83	784094.95	

5D Plan Report

Interpolated Points (Relative to Slot centre TVD relative to Drill Floor)										
MD (US ft)	Inc (°)	Az (°)	TVD (US ft)	N. Offset (US ft)	E. Offset (US ft)	VS (US ft)	DLS (°/100 US ft)	Northing (US ft)	Easting (US ft)	Comment
6200.00	10.00	102.60	6173.16	-70.10	313.62	-53.59	0.00	467676.04	784111.90	
6300.00	10.00	102.60	6271.64	-73.89	330.57	-56.49	0.00	467672.25	784128.85	
6400.00	10.00	102.60	6370.12	-77.68	347.51	-59.38	0.00	467668.46	784145.79	
6500.00	10.00	102.60	6468.60	-81.47	364.46	-62.28	0.00	467664.67	784162.74	
6600.00	10.00	102.60	6567.08	-85.25	381.41	-65.18	0.00	467660.89	784179.69	
6700.00	10.00	102.60	6665.56	-89.04	398.35	-68.07	0.00	467657.10	784196.63	
6800.00	10.00	102.60	6764.04	-92.83	415.30	-70.97	0.00	467653.31	784213.58	
6900.00	10.00	102.60	6862.52	-96.62	432.25	-73.86	0.00	467649.52	784230.53	
7000.00	10.00	102.60	6961.00	-100.41	449.19	-76.76	0.00	467645.73	784247.47	
7100.00	10.00	102.60	7059.48	-104.19	466.14	-79.66	0.00	467641.95	784264.42	
7200.00	10.00	102.60	7157.97	-107.98	483.09	-82.55	0.00	467638.16	784281.37	
7300.00	10.00	102.60	7256.45	-111.77	500.03	-85.45	0.00	467634.37	784298.31	
7400.00	10.00	102.60	7354.93	-115.56	516.98	-88.34	0.00	467630.58	784315.26	
7500.00	10.00	102.60	7453.41	-119.35	533.93	-91.24	0.00	467626.79	784332.21	
7600.00	10.00	102.60	7551.89	-123.13	550.87	-94.14	0.00	467623.01	784349.15	
7700.00	10.00	102.60	7650.37	-126.92	567.82	-97.03	0.00	467619.22	784366.10	
7800.00	10.00	102.60	7748.85	-130.71	584.77	-99.93	0.00	467615.43	784383.05	
7900.00	10.00	102.60	7847.33	-134.50	601.71	-102.82	0.00	467611.64	784399.99	
8000.00	10.00	102.60	7945.81	-138.29	618.66	-105.72	0.00	467607.85	784416.94	
8100.00	10.00	102.60	8044.29	-142.07	635.61	-108.62	0.00	467604.07	784433.89	
8200.00	10.00	102.60	8142.77	-145.86	652.55	-111.51	0.00	467600.28	784450.83	
8300.00	10.00	102.60	8241.25	-149.65	669.50	-114.41	0.00	467596.49	784467.78	
8400.00	10.00	102.60	8339.73	-153.44	686.45	-117.30	0.00	467592.70	784484.73	
8500.00	10.00	102.60	8438.22	-157.23	703.39	-120.20	0.00	467588.91	784501.67	
8600.00	10.00	102.60	8536.70	-161.01	720.34	-123.09	0.00	467585.13	784518.62	
8700.00	10.00	102.60	8635.18	-164.80	737.29	-125.99	0.00	467581.34	784535.57	
8730.50	10.00	102.60	8665.21	-165.96	742.45	-126.87	0.00	467580.18	784540.73	Hold
8800.00	8.61	102.60	8733.80	-168.41	753.42	-128.75	2.00	467577.73	784551.70	
8900.00	6.61	102.60	8832.91	-171.30	766.34	-130.96	2.00	467574.84	784564.62	
9000.00	4.61	102.60	8932.43	-173.43	775.88	-132.59	2.00	467572.71	784574.16	
9100.00	2.61	102.60	9032.22	-174.80	782.03	-133.64	2.00	467571.34	784580.31	
9200.00	0.61	102.60	9132.18	-175.42	784.77	-134.10	2.00	467570.72	784583.05	
9230.50	0.00	0.00	9162.68	-175.45	784.93	-134.13	2.00	467570.69	784583.21	Drop
9300.00	0.00	0.00	9232.18	-175.45	784.93	-134.13	0.00	467570.69	784583.21	
9400.00	0.00	0.00	9332.18	-175.45	784.93	-134.13	0.00	467570.69	784583.21	
9500.00	0.00	0.00	9432.18	-175.45	784.93	-134.13	0.00	467570.69	784583.21	
9600.00	0.00	0.00	9532.18	-175.45	784.93	-134.13	0.00	467570.69	784583.21	
9700.00	0.00	0.00	9632.18	-175.45	784.93	-134.13	0.00	467570.69	784583.21	
9800.00	0.00	0.00	9732.18	-175.45	784.93	-134.13	0.00	467570.69	784583.21	
9900.00	0.00	0.00	9832.18	-175.45	784.93	-134.13	0.00	467570.69	784583.21	
10000.00	0.00	0.00	9932.18	-175.45	784.93	-134.13	0.00	467570.69	784583.21	
10100.00	0.00	0.00	10032.18	-175.45	784.93	-134.13	0.00	467570.69	784583.21	
10200.00	0.00	0.00	10132.18	-175.45	784.93	-134.13	0.00	467570.69	784583.21	
10300.00	0.00	0.00	10232.18	-175.45	784.93	-134.13	0.00	467570.69	784583.21	
10400.00	0.00	0.00	10332.18	-175.45	784.93	-134.13	0.00	467570.69	784583.21	
10500.00	0.00	0.00	10432.18	-175.45	784.93	-134.13	0.00	467570.69	784583.21	
10600.00	0.00	0.00	10532.18	-175.45	784.93	-134.13	0.00	467570.69	784583.21	
10700.00	0.00	0.00	10632.18	-175.45	784.93	-134.13	0.00	467570.69	784583.21	
10730.50	0.00	0.00	10662.68	-175.45	784.93	-134.13	0.00	467570.69	784583.21	KOP
10800.00	8.34	3.00	10731.93	-170.41	785.19	-129.08	12.00	467575.73	784583.47	
10900.00	20.34	3.00	10828.64	-145.72	786.49	-104.36	12.00	467600.42	784584.77	
11000.00	32.34	3.00	10918.10	-101.49	788.81	-60.07	12.00	467644.65	784587.09	
11100.00	44.34	3.00	10996.39	-39.66	792.05	1.85	12.00	467706.48	784590.33	
11200.00	56.34	3.00	11060.09	37.08	796.08	78.69	12.00	467783.22	784594.36	
11300.00	68.34	3.00	11106.43	125.37	800.71	167.10	12.00	467871.51	784598.99	
11400.00	80.34	3.00	11133.37	221.35	805.75	263.21	12.00	467967.49	784604.03	
11486.08	90.67	3.00	11140.11	306.93	810.24	348.92	12.00	468053.07	784608.52	LP 2H
11500.00	90.67	3.00	11139.95	320.83	810.97	362.83	0.00	468066.97	784609.25	
11600.00	90.67	3.00	11138.78	420.68	816.21	462.82	0.00	468166.82	784614.49	

SD Plan Report

Interpolated Points (Relative to Slot centre TVD relative to Drill Floor)										
MD (US ft)	Inc (°)	Az (°)	TVD (US ft)	N. Offset (US ft)	E. Offset (US ft)	VS (US ft)	DLS (°/100 US ft)	Northing (US ft)	Easting (US ft)	Comment
11700.00	90.67	3.00	11137.61	520.54	821.45	562.82	0.00	468266.68	784619.73	
11800.00	90.67	3.00	11136.44	620.40	826.69	662.81	0.00	468366.54	784624.97	
11900.00	90.67	3.00	11135.27	720.25	831.93	762.80	0.00	468466.39	784630.21	
12000.00	90.67	3.00	11134.10	820.11	837.17	862.80	0.00	468566.25	784635.45	
12100.00	90.67	3.00	11132.93	919.96	842.41	962.79	0.00	468666.10	784640.69	
12200.00	90.67	3.00	11131.76	1019.82	847.65	1062.78	0.00	468765.96	784645.93	
12300.00	90.67	3.00	11130.59	1119.67	852.89	1162.78	0.00	468865.81	784651.17	
12400.00	90.67	3.00	11129.42	1219.53	858.13	1262.77	0.00	468965.67	784656.41	
12500.00	90.67	3.00	11128.25	1319.39	863.36	1362.76	0.00	469065.53	784661.64	
12600.00	90.67	3.00	11127.08	1419.24	868.60	1462.76	0.00	469165.38	784666.88	
12700.00	90.67	3.00	11125.92	1519.10	873.84	1562.75	0.00	469265.24	784672.12	
12800.00	90.67	3.00	11124.75	1618.95	879.08	1662.74	0.00	469365.09	784677.36	
12900.00	90.67	3.00	11123.58	1718.81	884.32	1762.74	0.00	469464.95	784682.60	
13000.00	90.67	3.00	11122.41	1818.67	889.56	1862.73	0.00	469564.81	784687.84	
13100.00	90.67	3.00	11121.24	1918.52	894.80	1962.72	0.00	469664.66	784693.08	
13200.00	90.67	3.00	11120.07	2018.38	900.04	2062.72	0.00	469764.52	784698.32	
13300.00	90.67	3.00	11118.90	2118.23	905.28	2162.71	0.00	469864.37	784703.56	
13400.00	90.67	3.00	11117.73	2218.09	910.52	2262.70	0.00	469964.23	784708.80	
13500.00	90.67	3.00	11116.56	2317.94	915.76	2362.70	0.00	470064.08	784714.04	
13600.00	90.67	3.00	11115.39	2417.80	921.00	2462.69	0.00	470163.94	784719.28	
13700.00	90.67	3.00	11114.22	2517.66	926.24	2562.68	0.00	470263.80	784724.52	
13800.00	90.67	3.00	11113.05	2617.51	931.48	2662.67	0.00	470363.65	784729.76	
13900.00	90.67	3.00	11111.88	2717.37	936.72	2762.67	0.00	470463.51	784735.00	
14000.00	90.67	3.00	11110.71	2817.22	941.96	2862.66	0.00	470563.36	784740.24	
14100.00	90.67	3.00	11109.54	2917.08	947.20	2962.65	0.00	470663.22	784745.48	
14200.00	90.67	3.00	11108.37	3016.94	952.44	3062.65	0.00	470763.08	784750.72	
14300.00	90.67	3.00	11107.20	3116.79	957.68	3162.64	0.00	470862.93	784755.96	
14400.00	90.67	3.00	11106.03	3216.65	962.92	3262.63	0.00	470962.79	784761.20	
14500.00	90.67	3.00	11104.87	3316.50	968.16	3362.63	0.00	471062.64	784766.44	
14600.00	90.67	3.00	11103.70	3416.36	973.40	3462.62	0.00	471162.50	784771.68	
14700.00	90.67	3.00	11102.53	3516.21	978.63	3562.61	0.00	471262.35	784776.91	
14800.00	90.67	3.00	11101.36	3616.07	983.87	3662.61	0.00	471362.21	784782.15	
14900.00	90.67	3.00	11100.19	3715.93	989.11	3762.60	0.00	471462.07	784787.39	
15000.00	90.67	3.00	11099.02	3815.78	994.35	3862.59	0.00	471561.92	784792.63	
15100.00	90.67	3.00	11097.85	3915.64	999.59	3962.59	0.00	471661.78	784797.87	
15200.00	90.67	3.00	11096.68	4015.49	1004.83	4062.58	0.00	471761.63	784803.11	
15300.00	90.67	3.00	11095.51	4115.35	1010.07	4162.57	0.00	471861.49	784808.35	
15400.00	90.67	3.00	11094.34	4215.20	1015.31	4262.57	0.00	471961.34	784813.59	
15500.00	90.67	3.00	11093.17	4315.06	1020.55	4362.56	0.00	472061.20	784818.83	
15600.00	90.67	3.00	11092.00	4414.92	1025.79	4462.55	0.00	472161.06	784824.07	
15700.00	90.67	3.00	11090.83	4514.77	1031.03	4562.54	0.00	472260.91	784829.31	
15800.00	90.67	3.00	11089.66	4614.63	1036.27	4662.54	0.00	472360.77	784834.55	
15900.00	90.67	3.00	11088.49	4714.48	1041.51	4762.53	0.00	472460.62	784839.79	
15942.19	90.67	3.00	11088.00	4756.61	1043.72	4804.72	0.00	472502.75	784842.00	PBHL 2H

JUL 16 2014

RECEIVED

5D Anti-Collision Report

Devon Energy

Field Name: *Lea Co, NM Nad 83 NM*

Site Name: *Hognose Viper 23 Fed 1,2H Pad*

Well Name: *Hognose Viper 23 Fed 2H*

07 April 2014



Weatherford®


Weatherford

Hognose Viper 23 Fed 2H


Map Units : US ft

Company Name : Devon Energy

Vertical Reference Datum (VRD) : Mean Sea Level

Projected Coordinate System : NAD83 / New Mexico East (ftUS)

Comment :

Units : US ft

North Reference : Grid

Convergence Angle : 0.42

Position	Northing : 467745.91 US ft	Latitude : 32° 17' 0.50"
	Easting : 783748.35 US ft	Longitude : -103° 32' 56.11"

Elevation above Mean Sea Level: 3682.00 US ft

Comment :

Position (Offsets relative to Site Centre)

Slot Name	+N / -S : 0.23 US ft	Northing : 467746.14 US ft	Latitude : 32°17'0.49"
	+E / -W : 49.93 US ft	Easting : 783798.28 US ft	Longitude : -103°32'55.53"

Slot TVD Reference : Ground Elevation

Elevation above Mean Sea Level : 3682.00 US ft

Comment :

Type : Main well

UWI :

Plan : Working Plan

Rig Height **Drill Floor** : 25.00 US ft
Relative to Mean Sea Level: 3707.00 US ft

Comment :

Closure Distance : 4869.77 US ft **Closure Azimuth** : 12.376°

Vertical Section (Position of Origin Relative to Slot)

+N / -S : 0.00 US ft	+E / -W : 0.00 US ft	Az : 3.00°
-----------------------------	-----------------------------	-------------------

Magnetic Parameters

Model : BGGM	Field Strength : 48356.3nT	Dec : 7.33°	Dip : 60.16°	Date : 17/Jun/2014
---------------------	-----------------------------------	--------------------	---------------------	---------------------------

Collision / Uncertainty Analysis				
Primary Well	Start MD (US ft)	End MD (US ft)	Collision Risk Interval	No. of Std Deviations in Error Computation
Hognose Viper 23 Fed 2H (p)	0.00	15942.19	100.00	2

Secondary Well Names
Lat Hognose Viper 23 Fed 1H (p)
Pilot Hognose Viper 23 Fed 1H (p)

Anti-Collision Report Terminology
S.Minor, S.Major : Radii of the ellipse of uncertainty at the current location as seen in the along hole direction.
PHI : Angle between high-side vector and semi-minor axis
TVD Spread : Total TVD range of the ellipsoid of uncertainty at the current location
ES : Distance between the extremities of the primary and secondary uncertainty ellipsoids in the direction Cr-Cr
T.Face to Sec : Angle between the Hi-Side vector of the primary well at the current location and line of closest approach between the two wells

Separation factors calculated using Pedal Curve (Independent Uncertainty). Well path created using minimum curvature.

SD Anti-Collision Report

Anti-Collision Proximity Summary (TVD relative to)

Secondary Well Name	Pri MD (US ft)	Sec MD (US ft)	TVD (US ft)	CC (US ft)	ES (US ft)	SF	Risk
Pilot Hognose Viper 23 Fed 1H (p)	4100.00	4100.00	4100.00	49.93	31.01	2.64	
Lat Hognose Viper 23 Fed 1H (p)	15942.19	15833.49	11088.00	1319.90	1139.65	7.32	

Secondary Well: Lat Hognose Viper 23 Fed 1H (p) (TVD Relative to Drill Floor (Primary)) All Azimuth Relative to GRID NORTH									
Pri MD (US ft)	TVD (US ft)	Sec MD (US ft)	T.Face to Sec (°)	S.Major (US ft)	S.Minor (US ft)	CC (US ft)	ES (US ft)	SF	Risk
0.00	10669.20	10678.09	192.93	23.16	23.02	10670.80	10652.58	585.52	
100.00	10669.20	10678.09	192.93	23.16	23.02	10570.82	10550.30	515.09	
200.00	10669.20	10678.09	192.93	23.16	23.02	10470.83	10450.30	509.97	
300.00	10669.20	10678.09	192.93	23.16	23.02	10370.85	10350.30	504.70	
400.00	10669.20	10678.09	192.93	23.16	23.02	10270.86	10250.29	499.30	
500.00	10669.20	10678.09	192.93	23.16	23.02	10170.88	10150.28	493.77	
600.00	10669.20	10678.09	192.93	23.16	23.02	10070.90	10050.27	488.13	
700.00	10669.20	10678.09	192.93	23.16	23.02	9970.91	9950.24	482.39	
800.00	10669.20	10678.09	192.93	23.16	23.02	9870.93	9850.22	476.57	
900.00	10669.20	10678.09	192.93	23.16	23.02	9770.95	9750.19	470.68	
1000.00	10669.20	10678.09	192.93	23.16	23.02	9670.97	9650.16	464.72	
1100.00	10669.20	10678.09	192.93	23.16	23.02	9570.99	9550.12	458.72	
1200.00	10669.20	10678.09	192.93	23.16	23.02	9471.01	9450.08	452.68	
1300.00	10669.20	10678.09	192.93	23.16	23.02	9371.02	9350.04	446.61	
1400.00	10669.20	10678.09	192.93	23.16	23.02	9271.04	9250.00	440.52	
1500.00	10669.20	10678.09	192.93	23.16	23.02	9171.06	9149.95	434.41	
1600.00	10669.20	10678.09	192.93	23.16	23.02	9071.08	9049.91	428.30	
1700.00	10669.20	10678.09	192.93	23.16	23.02	8971.11	8949.86	422.18	
1800.00	10669.20	10678.09	192.93	23.16	23.02	8871.13	8849.81	416.06	
1900.00	10669.20	10678.09	192.93	23.16	23.02	8771.15	8749.75	409.95	
2000.00	10669.20	10678.09	192.93	23.16	23.02	8671.17	8649.70	403.85	
2100.00	10669.20	10678.09	192.93	23.16	23.02	8571.19	8549.65	397.77	
2200.00	10669.20	10678.09	192.93	23.16	23.02	8471.22	8449.59	391.70	
2300.00	10669.20	10678.09	192.93	23.16	23.02	8371.24	8349.54	385.65	
2400.00	10669.20	10678.09	192.93	23.16	23.02	8271.27	8249.48	379.62	
2500.00	10669.20	10678.09	192.93	23.16	23.02	8171.29	8149.42	373.61	
2600.00	10669.20	10678.09	192.93	23.16	23.02	8071.32	8049.36	367.63	
2700.00	10669.20	10678.09	192.93	23.16	23.02	7971.34	7949.30	361.67	
2800.00	10669.20	10678.09	192.93	23.16	23.02	7871.37	7849.25	355.74	
2900.00	10669.20	10678.09	192.93	23.16	23.02	7771.40	7749.19	349.84	
3000.00	10669.20	10678.09	192.93	23.16	23.02	7671.43	7649.13	343.97	
3100.00	10669.20	10678.09	192.93	23.16	23.02	7571.46	7549.07	338.12	
3200.00	10669.20	10678.09	192.93	23.16	23.02	7471.49	7449.00	332.31	
3300.00	10669.20	10678.09	192.93	23.16	23.02	7371.52	7348.94	326.52	
3400.00	10669.20	10678.09	192.93	23.16	23.02	7271.55	7248.88	320.77	
3500.00	10669.20	10678.09	192.93	23.16	23.02	7171.58	7148.82	315.05	
3600.00	10669.20	10678.09	192.93	23.16	23.02	7071.62	7048.76	309.35	
3700.00	10669.20	10678.09	192.93	23.16	23.02	6971.65	6948.70	303.69	
3800.00	10669.20	10678.09	192.93	23.16	23.02	6871.69	6848.63	298.06	
3900.00	10669.20	10678.09	192.93	23.16	23.02	6771.72	6748.57	292.46	
4000.00	10669.20	10678.09	192.93	23.16	23.02	6671.76	6648.51	286.89	
4100.00	10669.20	10678.09	192.93	23.16	23.02	6571.80	6548.44	281.36	
4200.00	10669.20	10678.09	141.03	23.16	23.02	6471.86	6448.40	275.85	
4300.00	10669.20	10678.09	157.77	23.16	23.02	6372.05	6348.49	270.40	
4400.00	10669.20	10678.09	164.62	23.16	23.02	6272.50	6248.83	265.01	
4500.00	10669.20	10678.09	168.23	23.16	23.02	6173.34	6149.56	259.68	
4600.00	10669.20	10678.09	170.44	23.16	23.02	6074.71	6050.84	254.43	
4700.00	10669.20	10678.09	170.44	23.16	23.02	5976.44	5952.45	249.18	
4800.00	10669.20	10678.09	170.44	23.16	23.02	5878.22	5854.12	243.96	
4900.00	10669.20	10678.09	170.44	23.16	23.02	5780.06	5755.85	238.77	

SD Anti-Collision Report

Secondary Well: Lac Hognose Viper 23 Fed 1H (p) (TVD Relative to Drill Floor (Primary)) (All Azimuth Relative to GRID NORTH)									
Pri MD (US ft)	TVD (US ft)	Sec MD (US ft)	T.Face to Sec (°)	S.Major (US ft)	S.Minor (US ft)	CC (US ft)	ES (US ft)	SF	Risk
5000.00	10669.20	10678.09	170.44	23.16	23.02	5681.97	5657.64	233.62	
5100.00	10669.20	10678.09	170.44	23.16	23.02	5583.94	5559.50	228.45	
5200.00	10669.20	10678.09	170.44	23.16	23.02	5485.99	5461.41	223.27	
5300.00	10669.20	10678.09	170.44	23.16	23.02	5388.11	5363.41	218.14	
5400.00	10669.20	10678.09	170.44	23.16	23.02	5290.31	5265.47	213.05	
5500.00	10669.20	10678.09	170.44	23.16	23.02	5192.59	5167.63	208.00	
5600.00	10669.20	10678.09	170.44	23.16	23.02	5094.96	5069.86	202.99	
5700.00	10669.20	10678.09	170.44	23.16	23.02	4997.43	4972.19	198.02	
5800.00	10669.20	10678.09	170.44	23.16	23.02	4899.99	4874.62	193.10	
5900.00	10669.20	10678.09	170.44	23.16	23.02	4802.66	4777.13	188.11	
6000.00	10669.20	10678.09	170.44	23.16	23.02	4705.45	4679.76	183.15	
6100.00	10669.20	10678.09	170.44	23.16	23.02	4608.35	4582.49	178.24	
6200.00	10669.20	10678.09	170.44	23.16	23.02	4511.38	4485.36	173.38	
6300.00	10669.20	10678.09	170.44	23.16	23.02	4414.54	4388.35	168.56	
6400.00	10669.20	10678.09	170.44	23.16	23.02	4317.85	4291.49	163.80	
6500.00	10669.20	10678.09	170.44	23.16	23.02	4221.31	4194.78	159.10	
6600.00	10669.20	10678.09	170.44	23.16	23.02	4124.94	4098.22	154.35	
6700.00	10669.20	10678.09	170.44	23.16	23.02	4028.75	4001.82	149.63	
6800.00	10669.20	10678.09	170.44	23.16	23.02	3932.74	3905.61	144.98	
6900.00	10669.20	10678.09	170.44	23.16	23.02	3836.94	3809.60	140.38	
7000.00	10669.20	10678.09	170.44	23.16	23.02	3741.36	3713.81	135.84	
7100.00	10669.20	10678.09	170.44	23.16	23.02	3646.01	3618.26	131.37	
7200.00	10669.20	10678.09	170.44	23.16	23.02	3550.92	3522.95	126.95	
7300.00	10669.20	10678.09	170.44	23.16	23.02	3456.11	3427.92	122.60	
7400.00	10669.20	10678.09	170.44	23.16	23.02	3361.60	3333.19	118.32	
7500.00	10669.20	10678.09	170.44	23.16	23.02	3267.41	3238.78	114.10	
7600.00	10669.20	10678.09	170.44	23.16	23.02	3173.58	3144.72	109.96	
7700.00	10669.20	10678.09	170.44	23.16	23.02	3080.14	3051.00	105.70	
7800.00	10669.20	10678.09	170.44	23.16	23.02	2987.13	2957.67	101.41	
7900.00	10669.20	10678.09	170.44	23.16	23.02	2894.58	2864.80	97.21	
8000.00	10669.20	10678.09	170.44	23.16	23.02	2802.54	2772.44	93.10	
8100.00	10669.20	10678.09	170.44	23.16	23.02	2711.07	2680.63	89.07	
8200.00	10669.20	10678.09	170.44	23.16	23.02	2620.22	2589.44	85.13	
8300.00	10669.20	10678.09	170.44	23.16	23.02	2530.06	2498.93	81.29	
8400.00	10669.20	10678.09	170.44	23.16	23.02	2440.66	2409.19	77.54	
8500.00	10669.20	10678.09	170.44	23.16	23.02	2352.12	2320.29	73.89	
8600.00	10669.20	10678.09	170.44	23.16	23.02	2264.54	2232.21	70.05	
8700.00	10669.20	10678.09	170.44	23.16	23.02	2178.02	2145.19	66.33	
8800.00	10669.20	10678.09	170.05	23.16	23.02	2092.28	2058.93	62.74	
8900.00	10669.20	10678.09	169.45	23.16	23.02	2006.10	1972.26	59.27	
9000.00	10669.20	10678.09	168.79	23.16	23.02	1919.46	1885.13	55.91	
9100.00	10669.20	10678.09	168.08	23.16	23.02	1832.40	1797.60	52.65	
9200.00	10669.20	10678.09	167.32	23.16	23.02	1744.98	1709.58	49.29	
9300.00	10669.20	10678.09	269.67	23.16	23.02	1657.66	1621.62	46.00	
9400.00	10669.20	10678.09	269.67	23.16	23.02	1571.76	1535.07	42.85	
9500.00	10669.20	10678.09	269.67	23.16	23.02	1487.62	1450.27	39.83	
9600.00	10669.20	10678.09	269.67	23.16	23.02	1405.56	1367.52	36.95	
9700.00	10669.20	10678.09	269.67	23.16	23.02	1325.97	1287.11	34.12	
9800.00	10669.20	10678.09	269.67	23.16	23.02	1249.32	1209.50	31.37	
9900.00	10669.20	10678.09	269.67	23.16	23.02	1176.18	1135.42	28.85	
10000.00	10669.20	10678.09	269.67	23.16	23.02	1107.25	1065.44	26.49	
10100.00	10669.20	10678.09	269.67	23.16	23.02	1043.35	1000.45	24.32	
10200.00	10669.20	10678.09	269.67	23.16	23.02	985.49	941.48	22.39	
10300.00	10669.20	10678.09	269.67	23.16	23.02	934.76	889.58	20.69	
10400.00	10669.20	10678.09	269.67	23.16	23.02	892.40	846.18	19.31	
10500.00	10669.20	10678.09	269.67	23.16	23.02	859.63	812.45	18.22	
10600.00	10669.20	10678.09	269.67	23.16	23.02	837.60	789.78	17.52	
10700.00	10669.20	10678.09	269.67	23.16	23.02	827.14	778.87	17.14	

5D Anti-Collision Report

Secondary Well #: Last Hognose Viper 23 Fed 1 H (p) (TVD Relative to Drill Floor (Primary) All Azimuth Relative to GRID NORTH)									
Pri MD (US ft)	TVD (US ft)	Sec MD (US ft)	T.Face to Sec (°)	S.Major (US ft)	S.Minor (US ft)	CC (US ft)	ES (US ft)	SF	Risk
10800.00	10728.08	10737.10	266.63	23.28	22.98	826.76	778.22	17.03	
10900.00	10819.51	10830.83	266.68	23.44	22.75	829.09	780.27	16.98	
11000.00	10905.85	10925.20	266.88	23.57	22.10	833.36	784.18	16.95	
11100.00	10983.74	11020.40	267.22	23.68	21.12	839.38	789.98	16.99	
11200.00	11049.92	11116.62	267.69	23.81	19.96	846.93	797.32	17.07	
11300.00	11101.38	11214.07	268.26	23.96	18.92	855.67	805.67	17.12	
11400.00	11135.37	11312.94	268.90	24.24	18.12	865.24	814.71	17.12	
11500.00	11149.66	11413.41	269.43	24.62	17.88	875.24	824.02	17.09	
11600.00	11150.00	11513.27	269.34	25.09	18.00	885.23	833.15	17.00	
11700.00	11150.00	11612.77	269.27	25.67	18.14	895.22	841.96	16.81	
11800.00	11150.00	11712.26	269.20	26.37	18.31	905.22	850.55	16.56	
11900.00	11150.00	11811.75	269.14	27.18	18.49	915.21	859.05	16.29	
12000.00	11150.00	11911.25	269.08	28.09	18.74	925.21	867.19	15.95	
12100.00	11150.00	12010.74	269.02	29.08	19.02	935.21	875.33	15.62	
12200.00	11150.00	12110.24	268.96	30.15	19.32	945.21	883.14	15.23	
12300.00	11150.00	12209.73	268.90	31.29	19.64	955.21	890.89	14.85	
12400.00	11150.00	12309.23	268.84	32.50	19.98	965.21	898.59	14.49	
12500.00	11150.00	12408.72	268.78	33.76	20.32	975.21	906.10	14.11	
12600.00	11150.00	12508.21	268.73	35.07	20.66	985.21	913.46	13.73	
12700.00	11150.00	12607.71	268.67	36.43	21.02	995.21	920.77	13.37	
12800.00	11150.00	12707.20	268.62	37.83	21.48	1005.22	928.03	13.02	
12900.00	11150.00	12806.70	268.57	39.26	21.91	1015.22	935.24	12.69	
13000.00	11150.00	12906.19	268.52	40.73	22.27	1025.23	942.40	12.38	
13100.00	11150.00	13005.68	268.47	42.22	22.81	1035.24	949.51	12.08	
13200.00	11150.00	13105.18	268.42	43.74	23.20	1045.24	956.46	11.77	
13300.00	11150.00	13204.67	268.37	45.28	23.75	1055.25	963.39	11.49	
13400.00	11150.00	13304.17	268.32	46.85	24.24	1065.26	970.30	11.22	
13500.00	11150.00	13403.66	268.28	48.43	24.70	1075.27	977.28	10.97	
13600.00	11150.00	13503.15	268.23	50.03	25.28	1085.28	984.08	10.72	
13700.00	11150.00	13602.65	268.19	51.65	25.75	1095.29	990.96	10.50	
13800.00	11150.00	13702.14	268.14	53.28	26.31	1105.30	997.69	10.27	
13900.00	11150.00	13801.64	268.10	54.92	26.89	1115.32	1004.44	10.06	
14000.00	11150.00	13901.13	268.06	56.58	27.41	1125.33	1011.18	9.86	
14100.00	11150.00	14000.62	268.01	58.24	27.92	1135.34	1017.90	9.67	
14200.00	11150.00	14100.12	267.97	59.92	28.50	1145.36	1024.62	9.49	
14300.00	11150.00	14199.61	267.93	61.60	29.12	1155.37	1031.31	9.31	
14400.00	11150.00	14299.11	267.89	63.29	29.72	1165.39	1038.00	9.15	
14500.00	11150.00	14398.60	267.86	65.00	30.32	1175.40	1044.67	8.99	
14600.00	11150.00	14498.09	267.82	66.70	30.92	1185.42	1051.33	8.84	
14700.00	11150.00	14597.59	267.78	68.42	31.52	1195.43	1057.98	8.70	
14800.00	11150.00	14697.08	267.74	70.14	32.12	1205.45	1064.62	8.56	
14900.00	11150.00	14796.58	267.71	71.86	32.72	1215.47	1071.25	8.43	
15000.00	11150.00	14896.07	267.67	73.59	33.32	1225.49	1077.87	8.30	
15100.00	11150.00	14995.56	267.64	75.33	33.93	1235.51	1084.48	8.18	
15200.00	11150.00	15095.06	267.60	77.07	34.54	1245.52	1091.08	8.06	
15300.00	11150.00	15194.55	267.57	78.81	35.15	1255.54	1097.68	7.95	
15400.00	11150.00	15294.05	267.53	80.56	35.77	1265.56	1104.23	7.84	
15500.00	11150.00	15393.54	267.50	82.31	36.39	1275.58	1110.78	7.74	
15600.00	11150.00	15493.03	267.47	84.07	37.02	1285.61	1117.31	7.64	
15700.00	11150.00	15592.53	267.44	85.83	37.64	1295.63	1123.85	7.54	
15800.00	11150.00	15692.02	267.41	87.59	38.30	1305.65	1130.37	7.45	
15900.00	11150.00	15791.52	267.37	89.36	38.96	1315.67	1136.90	7.36	
15942.19	11150.00	15833.49	267.36	90.10	39.24	1319.90	1139.65	7.32	

Secondary Well #: Pilot Hognose Viper 23 Fed 1 H (p) (TVD Relative to Drill Floor (Primary) All Azimuth Relative to GRID NORTH)									
Pri MD (US ft)	TVD (US ft)	Sec MD (US ft)	T.Face to Sec (°)	S.Major (US ft)	S.Minor (US ft)	CC (US ft)	ES (US ft)	SF	Risk
0.00	0.00	0.00	269.74	0.00	0.00	49.93	49.22	70.08	
100.00	100.00	100.00	269.74	0.12	0.12	49.93	48.99	52.93	

5D Anti-Collision Report

Secondary Wellbore Pilot Hognose Viper 23 Feb 14 (b) (TVD Relative to Drill Floor (Primary)) (All Azimuth Relative to GRID NORTH)									
Pri MD (US ft)	TVD (US ft)	Sec MD (US ft)	T.Face to Sec (°)	S.Major (US ft)	S.Minor (US ft)	CC (US ft)	ES (US ft)	SF	Risk
200.00	200.00	200.00	269.74	0.34	0.34	49.93	48.54	35.90	
300.00	300.00	300.00	269.74	0.57	0.57	49.93	48.09	27.14	
400.00	400.00	400.00	269.74	0.79	0.79	49.93	47.64	21.81	
500.00	500.00	500.00	269.74	1.02	1.02	49.93	47.19	18.23	
600.00	600.00	600.00	269.74	1.24	1.24	49.93	46.74	15.66	
700.00	700.00	700.00	269.74	1.46	1.46	49.93	46.29	13.73	
800.00	800.00	800.00	269.74	1.69	1.69	49.93	45.84	12.22	
900.00	900.00	900.00	269.74	1.91	1.91	49.93	45.39	11.01	
1000.00	1000.00	1000.00	269.74	2.14	2.14	49.93	44.94	10.01	
1100.00	1100.00	1100.00	269.74	2.36	2.36	49.93	44.49	9.19	
1200.00	1200.00	1200.00	269.74	2.59	2.59	49.93	44.05	8.48	
1300.00	1300.00	1300.00	269.74	2.81	2.81	49.93	43.60	7.88	
1400.00	1400.00	1400.00	269.74	3.04	3.04	49.93	43.15	7.36	
1500.00	1500.00	1500.00	269.74	3.26	3.26	49.93	42.70	6.90	
1600.00	1600.00	1600.00	269.74	3.49	3.49	49.93	42.25	6.50	
1700.00	1700.00	1700.00	269.74	3.71	3.71	49.93	41.80	6.14	
1800.00	1800.00	1800.00	269.74	3.94	3.94	49.93	41.35	5.82	
1900.00	1900.00	1900.00	269.74	4.16	4.16	49.93	40.90	5.53	
2000.00	2000.00	2000.00	269.74	4.39	4.39	49.93	40.45	5.27	
2100.00	2100.00	2100.00	269.74	4.61	4.61	49.93	40.00	5.03	
2200.00	2200.00	2200.00	269.74	4.84	4.84	49.93	39.55	4.81	
2300.00	2300.00	2300.00	269.74	5.06	5.06	49.93	39.10	4.61	
2400.00	2400.00	2400.00	269.74	5.29	5.29	49.93	38.65	4.43	
2500.00	2500.00	2500.00	269.74	5.51	5.51	49.93	38.20	4.26	
2600.00	2600.00	2600.00	269.74	5.74	5.74	49.93	37.75	4.10	
2700.00	2700.00	2700.00	269.74	5.96	5.96	49.93	37.30	3.95	
2800.00	2800.00	2800.00	269.74	6.18	6.18	49.93	36.85	3.82	
2900.00	2900.00	2900.00	269.74	6.41	6.41	49.93	36.40	3.69	
3000.00	3000.00	3000.00	269.74	6.63	6.63	49.93	35.95	3.57	
3100.00	3100.00	3100.00	269.74	6.86	6.86	49.93	35.50	3.46	
3200.00	3200.00	3200.00	269.74	7.08	7.08	49.93	35.05	3.36	
3300.00	3300.00	3300.00	269.74	7.31	7.31	49.93	34.61	3.26	
3400.00	3400.00	3400.00	269.74	7.53	7.53	49.93	34.16	3.17	
3500.00	3500.00	3500.00	269.74	7.76	7.76	49.93	33.71	3.08	
3600.00	3600.00	3600.00	269.74	7.98	7.98	49.93	33.26	2.99	
3700.00	3700.00	3700.00	269.74	8.21	8.21	49.93	32.81	2.92	
3800.00	3800.00	3800.00	269.74	8.43	8.43	49.93	32.36	2.84	
3900.00	3900.00	3900.00	269.74	8.66	8.66	49.93	31.91	2.77	
4000.00	4000.00	4000.00	269.74	8.88	8.88	49.93	31.46	2.70	
4100.00	4100.00	4100.00	269.74	9.11	9.11	49.93	31.01	2.64	
4200.00	4199.98	4199.98	167.56	9.33	9.33	51.63	32.30	2.67	
4300.00	4299.84	4299.84	168.68	9.56	9.56	56.76	37.02	2.88	
4400.00	4399.45	4399.45	170.15	9.78	9.78	65.32	45.19	3.24	
4500.00	4498.70	4498.70	171.66	10.00	10.00	77.36	56.83	3.77	
4600.00	4597.47	4597.47	173.02	10.22	10.22	92.87	71.91	4.43	
4700.00	4695.95	4695.95	174.12	10.45	10.45	110.13	88.74	5.15	
4800.00	4794.43	4794.43	174.92	10.67	10.67	127.42	105.60	5.84	
4900.00	4892.91	4892.91	175.53	10.89	10.89	144.72	122.48	6.51	
5000.00	4991.39	4991.39	176.01	11.11	11.11	162.04	139.38	7.15	
5100.00	5089.87	5089.87	176.39	11.33	11.33	179.37	156.28	7.77	
5200.00	5188.35	5188.35	176.71	11.55	11.55	196.70	173.18	8.36	
5300.00	5286.83	5286.83	176.98	11.77	11.77	214.04	190.09	8.94	
5400.00	5385.31	5385.31	177.20	12.00	12.00	231.39	207.00	9.49	
5500.00	5483.79	5483.79	177.40	12.22	12.22	248.73	223.91	10.02	
5600.00	5582.27	5582.27	177.57	12.44	12.44	266.08	240.83	10.54	
5700.00	5680.75	5680.75	177.72	12.66	12.66	283.43	257.74	11.03	
5800.00	5779.23	5779.23	177.85	12.88	12.88	300.78	274.66	11.51	
5900.00	5877.72	5877.72	177.97	13.10	13.10	318.14	291.57	11.98	

SD Anti-Collision Report

Secondary Well	Pilot Hognose Viper 23 Fed 4H (P)	TVD Relative to Drill Floor (Primary)	All Azimuth Relative to GRID NORTH						
Pri MD (US ft)	TVD (US ft)	Sec MD (US ft)	T.Face to Sec (°)	S.Major (US ft)	S.Minor (US ft)	CC (US ft)	ES (US ft)	SF	Risk
6000.00	5976.20	5976.20	178.07	13.32	13.32	335.49	308.49	12.42	
6100.00	6074.68	6074.68	178.17	13.55	13.55	352.85	325.40	12.86	
6200.00	6173.16	6173.16	178.25	13.77	13.77	370.20	342.32	13.28	
6300.00	6271.64	6271.64	178.33	13.99	13.99	387.56	359.23	13.68	
6400.00	6370.12	6370.12	178.40	14.21	14.21	404.92	376.15	14.07	
6500.00	6468.60	6468.60	178.47	14.43	14.43	422.28	393.06	14.45	
6600.00	6567.08	6567.08	178.53	14.65	14.65	439.64	409.97	14.82	
6700.00	6665.56	6665.56	178.58	14.87	14.87	457.00	426.88	15.18	
6800.00	6764.04	6764.04	178.64	15.10	15.10	474.36	443.80	15.52	
6900.00	6862.52	6862.52	178.68	15.32	15.32	491.72	460.71	15.86	
7000.00	6961.00	6961.00	178.73	15.54	15.54	509.08	477.62	16.18	
7100.00	7059.48	7059.48	178.77	15.76	15.76	526.44	494.53	16.50	
7200.00	7157.97	7157.97	178.81	15.98	15.98	543.80	511.44	16.80	
7300.00	7261.05	7261.07	178.68	16.16	16.15	560.78	528.01	17.11	
7400.00	7364.40	7364.57	178.20	16.33	16.29	576.92	543.75	17.40	
7500.00	7467.13	7467.70	177.39	16.50	16.42	592.29	558.77	17.67	
7600.00	7565.01	7566.12	176.51	16.67	16.58	607.42	573.44	17.87	
7700.00	7662.90	7664.54	175.67	16.84	16.75	622.69	588.29	18.10	
7800.00	7760.78	7762.96	174.87	17.01	16.92	638.08	603.26	18.33	
7900.00	7858.66	7861.39	174.11	17.19	17.09	653.59	618.36	18.55	
8000.00	7956.55	7959.81	173.38	17.37	17.26	669.21	633.52	18.75	
8100.00	8054.43	8058.23	172.68	17.55	17.44	684.93	648.80	18.96	
8200.00	8152.31	8156.65	172.02	17.73	17.61	700.74	664.21	19.18	
8300.00	8250.19	8255.07	171.39	17.92	17.79	716.64	679.64	19.37	
8400.00	8348.08	8353.49	170.78	18.11	17.97	732.63	695.17	19.56	
8500.00	8445.96	8451.91	170.20	18.31	18.15	748.69	710.80	19.76	
8600.00	8543.84	8550.33	169.64	18.50	18.33	764.82	726.50	19.96	
8700.00	8641.72	8648.76	169.11	18.70	18.51	781.02	742.27	20.16	
8800.00	8739.72	8747.29	168.62	18.90	18.69	796.47	757.30	20.33	
8900.00	8838.12	8846.23	168.12	19.11	18.88	808.76	769.16	20.42	
9000.00	8936.04	8944.64	167.61	19.32	19.10	817.76	777.71	20.42	
9100.00	9034.12	9042.95	167.27	19.55	19.36	823.58	783.07	20.33	
9200.00	9132.75	9141.63	167.09	19.78	19.60	826.17	785.24	20.18	
9300.00	9232.18	9241.07	269.67	20.00	19.82	826.31	784.97	19.98	
9400.00	9332.18	9341.07	269.67	20.22	20.04	826.31	784.55	19.78	
9500.00	9432.18	9441.07	269.67	20.44	20.27	826.31	784.12	19.59	
9600.00	9532.18	9541.07	269.67	20.66	20.49	826.31	783.70	19.39	
9700.00	9632.18	9641.07	269.67	20.88	20.71	826.31	783.28	19.20	
9800.00	9732.18	9741.07	269.67	21.10	20.93	826.31	782.86	19.02	
9900.00	9832.18	9841.07	269.67	21.32	21.16	826.31	782.44	18.83	
10000.00	9932.18	9941.07	269.67	21.54	21.38	826.31	782.02	18.65	
10100.00	10032.18	10041.07	269.67	21.76	21.60	826.31	781.59	18.48	
10200.00	10132.18	10141.07	269.67	21.98	21.82	826.31	781.17	18.30	
10300.00	10232.18	10241.07	269.67	22.20	22.05	826.31	780.74	18.13	
10400.00	10332.18	10341.07	269.67	22.42	22.27	826.31	780.32	17.97	
10500.00	10432.18	10441.07	269.67	22.64	22.49	826.31	779.90	17.80	
10600.00	10532.18	10541.07	269.67	22.86	22.72	826.31	779.47	17.64	
10700.00	10632.18	10641.07	269.67	23.08	22.94	826.31	779.05	17.48	
10800.00	10731.93	10740.82	266.36	23.30	23.16	826.62	778.93	17.33	
10900.00	10828.64	10837.53	264.95	23.52	23.38	828.58	780.41	17.20	
11000.00	10918.10	10926.98	262.87	23.71	23.58	833.90	785.31	17.16	
11100.00	10996.39	11005.28	260.94	23.89	23.75	845.19	796.29	17.28	
11200.00	11060.09	11068.98	260.06	24.03	23.89	865.18	815.86	17.54	
11300.00	11106.43	11115.32	261.12	24.13	24.00	895.81	846.32	18.10	
11400.00	11133.37	11142.26	264.82	24.19	24.06	937.47	887.73	18.85	
11500.00	11139.95	11148.84	270.44	24.21	24.07	988.69	938.99	19.89	
11600.00	11138.78	11147.67	270.52	24.20	24.07	1047.14	997.23	20.98	
11700.00	11137.61	11146.50	270.61	24.20	24.07	1111.53	1061.63	22.28	

SD Anti-Collision Report

Secondary Well - Pilot Hognose Viper 23 Feb 14 (p) (TVD Relative to Drill Floor (Primary) Fall Azimuth Relative to GRID NORTH)									
Pri MD (US ft)	TVD (US ft)	Sec MD (US ft)	T.Face to Sec (°)	S.Major (US ft)	S.Minor (US ft)	CC (US ft)	ES (US ft)	SF	Risk
11800.00	11136.44	11145.33	270.69	24.20	24.06	1180.88	1130.95	23.65	
11900.00	11135.27	11144.16	270.77	24.19	24.06	1254.38	1204.40	25.10	
12000.00	11134.10	11142.99	270.85	24.19	24.06	1331.33	1281.32	26.62	
12100.00	11132.93	11141.82	270.93	24.19	24.06	1411.18	1361.12	28.19	
12200.00	11131.76	11140.65	271.01	24.19	24.05	1493.45	1443.31	29.79	
12300.00	11130.59	11139.48	271.09	24.18	24.05	1577.77	1527.60	31.45	
12400.00	11129.42	11138.31	271.17	24.18	24.05	1663.83	1613.65	33.16	
12500.00	11128.25	11137.14	271.25	24.18	24.04	1751.37	1701.21	34.91	
12600.00	11127.08	11135.97	271.34	24.18	24.04	1840.18	1790.02	36.69	
12700.00	11125.92	11134.81	271.42	24.17	24.04	1930.08	1879.87	38.43	
12800.00	11124.75	11133.64	271.50	24.17	24.04	2020.94	1970.67	40.21	
12900.00	11123.58	11132.47	271.58	24.17	24.03	2112.61	2062.32	42.00	
13000.00	11122.41	11131.30	271.66	24.17	24.03	2205.02	2154.69	43.82	
13100.00	11121.24	11130.13	271.74	24.16	24.03	2298.05	2247.72	45.66	
13200.00	11120.07	11128.96	271.82	24.16	24.03	2391.65	2341.34	47.54	
13300.00	11118.90	11127.79	271.90	24.16	24.02	2485.75	2435.45	49.42	
13400.00	11117.73	11126.62	271.99	24.16	24.02	2580.29	2530.00	51.32	
13500.00	11116.56	11125.45	272.07	24.15	24.02	2675.22	2624.91	53.17	
13600.00	11115.39	11124.28	272.15	24.15	24.02	2770.52	2720.15	55.01	
13700.00	11114.22	11123.11	272.23	24.15	24.01	2866.13	2815.71	56.85	
13800.00	11113.05	11121.94	272.31	24.15	24.01	2962.03	2911.62	58.76	
13900.00	11111.88	11120.77	272.39	24.14	24.01	3058.19	3007.76	60.63	
14000.00	11110.71	11119.60	272.47	24.14	24.01	3154.60	3104.08	62.45	
14100.00	11109.54	11118.43	272.55	24.14	24.00	3251.21	3200.65	64.30	
14200.00	11108.37	11117.26	272.63	24.14	24.00	3348.03	3297.42	66.16	
14300.00	11107.20	11116.09	272.71	24.13	24.00	3445.03	3394.39	68.03	
14400.00	11106.03	11114.92	272.80	24.13	24.00	3542.20	3491.52	69.90	
14500.00	11104.87	11113.76	272.88	24.13	23.99	3639.51	3588.81	71.77	
14600.00	11103.70	11112.59	272.96	24.12	23.99	3736.97	3686.23	73.65	
14700.00	11102.53	11111.42	273.04	24.12	23.99	3834.56	3783.79	75.53	
14800.00	11101.36	11110.25	273.12	24.12	23.98	3932.27	3881.47	77.40	
14900.00	11100.19	11109.08	273.20	24.12	23.98	4030.10	3979.26	79.28	
15000.00	11099.02	11107.91	273.28	24.11	23.98	4128.02	4077.16	81.16	
15100.00	11097.85	11106.74	273.36	24.11	23.98	4226.05	4175.15	83.03	
15200.00	11096.68	11105.57	273.44	24.11	23.97	4324.16	4273.23	84.90	
15300.00	11095.51	11104.40	273.52	24.11	23.97	4422.36	4371.40	86.77	
15400.00	11094.34	11103.23	273.61	24.10	23.97	4520.64	4469.64	88.64	
15500.00	11093.17	11102.06	273.69	24.10	23.97	4618.99	4567.95	90.51	
15600.00	11092.00	11100.89	273.77	24.10	23.96	4717.41	4666.34	92.38	
15700.00	11090.83	11099.72	273.85	24.10	23.96	4815.89	4764.79	94.24	
15800.00	11089.66	11098.55	273.93	24.09	23.96	4914.43	4863.30	96.10	
15900.00	11088.49	11097.38	274.01	24.09	23.96	5013.04	4961.86	97.96	
15942.19	11088.00	11096.89	274.04	24.09	23.95	5054.65	5003.46	98.74	

**Weatherford®****Weatherford Drilling Services**

GeoDec v5.03

Report Date: February 04, 2014
Job Number: _____
Customer: Devon Energy
Well Name: Hognose Viper 23 Fed 2H
API Number: _____
Rig Name: _____
Location: Lea County, NM
Block: _____
Engineer: RWJ


US State Plane 1983	Geodetic Latitude / Longitude
System: New Mexico Eastern Zone	System: Latitude / Longitude
Projection: Transverse Mercator/Gauss Kruger	Projection: Geodetic Latitude and Longitude
Datum: North American Datum 1983	Datum: North American Datum 1983
Ellipsoid: GRS 1980	Ellipsoid: GRS 1980
North/South 467746.140 USFT	Latitude 32.2834708 DEG
East/West 783798.280 USFT	Longitude -103.5487588 DEG
Grid Convergence: .42°	
Total Correction: +6.90°	


Geodetic Location WGS84	Elevation =	0.0 Meters
Latitude =	32.28347° N	32° 17 min .495 sec
Longitude =	103.54876° W	103° 32 min 55.532 sec

Magnetic Declination =	7.32°	[True North Offset]
Local Gravity =	.9988 g	Checksum = 6571
Local Field Strength =	48354 nT	Magnetic VectorX = 23867 nT
Magnetic Dip =	60.15°	Magnetic VectorY = 3067 nT
Magnetic Model =	bggm2013	Magnetic VectorZ = 41941 nT
Spud Date =	Jun 25, 2014	Magnetic VectorH = 24064 nT

Signed: _____ Date: _____

13-5/8" 5M BOPE & Closed Loop Equipment Schematic

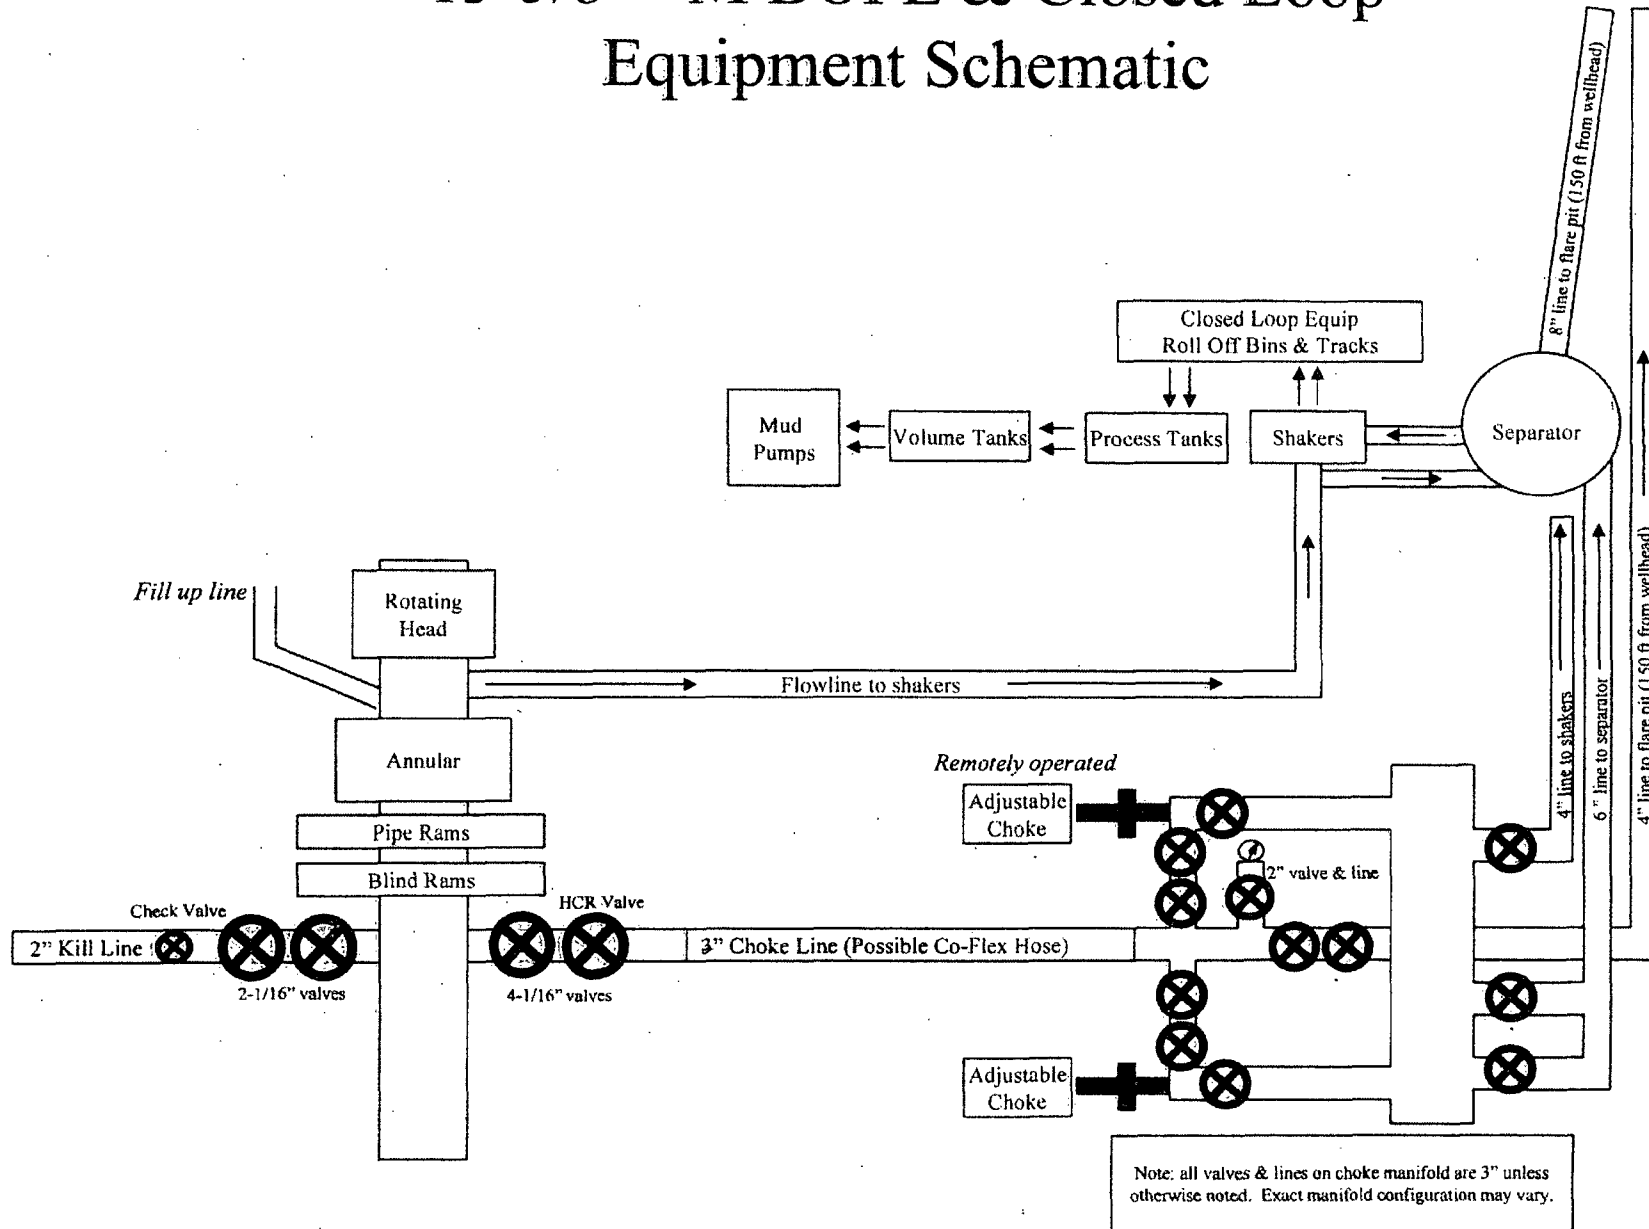

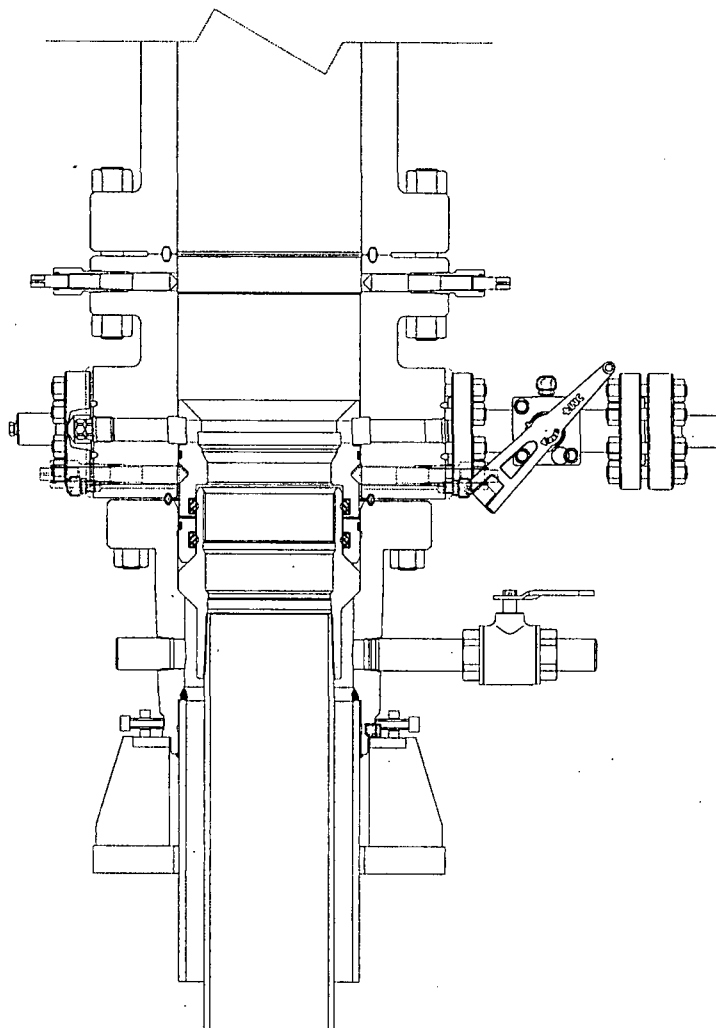

PRIMARY MODE

DEVON ENERGY

ARTESIA
S.E.N.M

13 3/8 X 9 5/8

QUOTE LAYOUT
F18648
REF: DM100161737
DM100151315

PRIVATE AND CONFIDENTIAL

THIS DOCUMENT AND ALL THE INFORMATION CONTAINED HEREIN ARE THE CONFIDENTIAL AND EXCLUSIVE PROPERTY OF FMC TECHNOLOGIES AND MAY NOT BE REPRODUCED, USED, DISCLOSED OR MADE PUBLIC IN ANY MANNER PRIOR TO EXPRESS WRITTEN AUTHORIZATION BY FMC TECHNOLOGIES. THIS DOCUMENT IS ACCEPTED BY RECIPIENT PURSUANT TO AGREEMENT TO THE FOREGOING, AND MUST BE RETURNED UPON DEMAND.

MANUFACTURER AGREES THAT ARTICLES MADE IN ACCORDANCE WITH THIS DOCUMENT SHALL BE CONSIDERED FMC TECHNOLOGIES' DESIGN AND THAT IDENTICAL ARTICLES OR PARTS THEREOF SHALL NOT BE MANUFACTURED FOR THE USE OR SALE BY MANUFACTURER OR ANY OTHER PERSON WITHOUT THE PRIOR EXPRESS WRITTEN AUTHORIZATION BY FMC TECHNOLOGIES

REVISIONS

A	05-08-13
B	1-22-14
C	5-13-14

DESCRIPTION


SURFACE WELLHEAD LAYOUT
UNIHEAD, UH-1, SOW,
DEVON ENERGY, ODESSA

DRAWN BY	
K. VU	05-08-13
DRAFTING REVIEW	
Z. MARQUEZ	05-08-13
DESIGN REVIEW	
K. TAHA	05-08-13
APPROVED BY	
R. HAMILTON	05-08-13

FMC Technologies

DRAWING NUMBER

DM100161771-2A

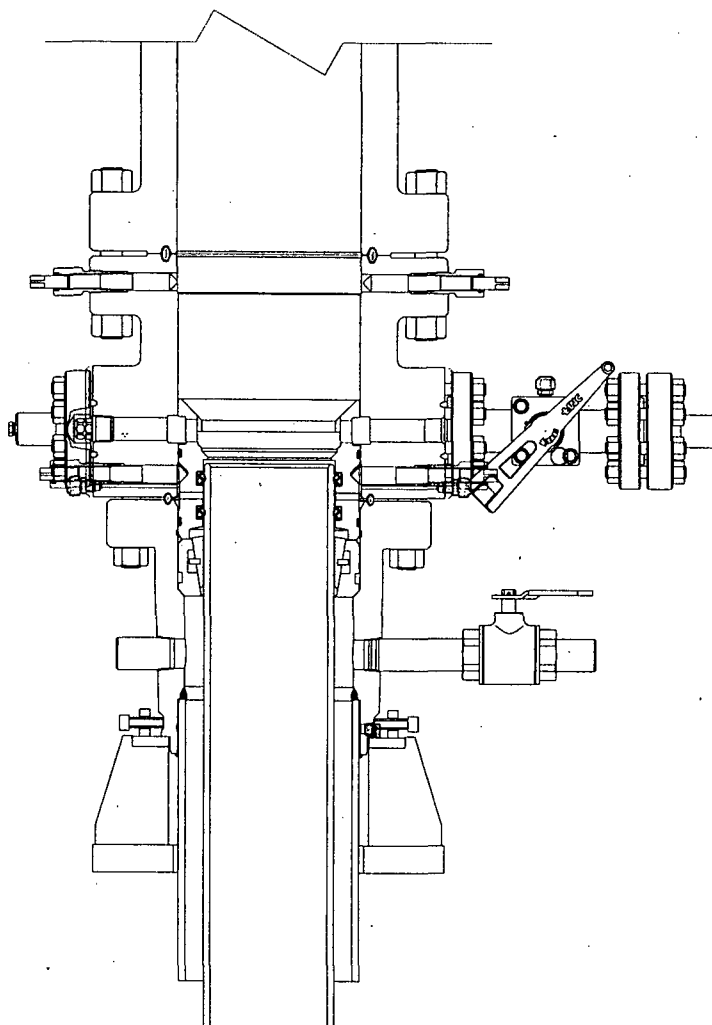

CONTINGENCY MODE

DEVON ENERGY

ARTESIA

S.E.N.M

13 3/8 X 9 5/8

QUOTE LAYOUT
F18648
REF: DM100161737
DM100151315

PRIVATE AND CONFIDENTIAL		REVISIONS		DESCRIPTION				DM100161771-2B
THIS DOCUMENT AND ALL THE INFORMATION CONTAINED HEREIN ARE THE CONFIDENTIAL AND EXCLUSIVE PROPERTY OF FMC TECHNOLOGIES AND MAY NOT BE REPRODUCED, USED, DISCLOSED, OR MADE PUBLIC IN ANY MANNER PRIOR TO EXPRESS WRITTEN AUTHORIZATION BY FMC TECHNOLOGIES. THIS DOCUMENT IS ACCEPTED BY RECIPIENT PURSUANT TO AGREEMENT TO THE FOREGOING, AND MUST BE RETURNED UPON DEMAND.	A	05-08-13						
	B	1-22-14						
	C	5-13-14						
MANUFACTURER AGREES THAT ARTICLES MADE IN ACCORDANCE WITH THIS DOCUMENT SHALL BE CONSIDERED FMC TECHNOLOGIES DESIGN AND THAT IDENTICAL ARTICLES OR PARTS THEREOF SHALL NOT BE MANUFACTURED FOR THE USE OR SALE BY MANUFACTURER OR ANY OTHER PERSON WITHOUT THE PRIOR EXPRESS WRITTEN AUTHORIZATION BY FMC TECHNOLOGIES				SURFACE WELLHEAD LAYOUT UNIHEAD, UH-1, SOW, DEVON ENERGY, ODESSA				
					DRAWN BY			 DRAWING NUMBER DM100161771-2B
					K. VU	05-08-13		
					DRAWING REVIEW			
					Z. MARQUEZ	05-08-13		
					DESIGN REVIEW			
					K. TAHA	05-08-13		
					APPROVED BY			
					R. HAMILTON	05-08-13		

HOBBS OCD

JUL 16 2014



RECEIVED

NOTES REGARDING BLOWOUT PREVENTERS


Devon Energy Production Company, L.P.

Hognose Viper 23 Fed 2H

1. Drilling Nipple will be constructed so it can be removed mechanically without the aid of a welder. The minimum internal diameter will equal BOP bore.
2. Wear ring will be properly installed in head.
3. Blowout preventer and all associated filings will be in operable condition to withstand a minimum of 5000psi working pressure.
4. All fittings will be flanged.
5. A fill bore safety valve tested to a minimum of 5000psi WP with proper thread connections will be available on the rotary rig floor at all times.
6. All choke lines will be anchored to prevent movement.
7. All BOP equipment will be equal to or larger in bore than the internal diameter of the last casing string.
8. Will maintain a kelly cock attached to the kelly.
9. Hand wheels and wrenches will be properly installed and tested for safe operation.
10. Hydraulic floor control for blowout preventer will be located as near in proximity to driller's controls as possible.
11. All BOP equipment will meet API standards and include a minimum 40 gallon accumulator having two independent means of power to initiate closing operation.

QUALITY CONTROL INSPECTION AND TEST CERTIFICATE				CERT. N°: 1713	
PURCHASER: ContiTech Beattie Co.				P.O. N°: 002808	
CONTITECH ORDER N°: 426127		HOSE TYPE: 3" ID Choke and Kill Hose			
HOSE SERIAL N°: 53622		NOMINAL / ACTUAL LENGTH: 10,67 m			
W.P. 68,96 MPa 10000 psi		T.P. 103,4 MPa 15000 psi		Duration: 60 min.	
Pressure test with water at ambient temperature See attachment. (1 page) ↑ 10 mm = 10 Mln. → 10 mm = 25 MPa					
COUPLINGS Type		Serial N°		Quality	
3" coupling with 4 1/16" Flange end		5503 2029		AISI 4130 AISI 4130	
				Heat N° N1590P 27566	
INFOCHIP INSTALLED				API Spec 16 C Temperature rate: "B"	
All metal parts are flawless				Hose conform to NACE MR 01-75	
WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER INSPECTED AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT.					
STATEMENT OF CONFORMITY: We hereby certify that the above items/equipment supplied by us are in conformity with the terms, conditions and specifications of the above Purchaser Order and that these items/equipment were fabricated inspected and tested in accordance with the referenced standards, codes and specifications and meet the relevant acceptance criteria and design requirements.					
COUNTRY OF ORIGIN HUNGARY/EU					
Date: 25. August. 2008		Inspector		Quality Control ContiTech Rubber Industrial Kft. Quality Control Dept.  	

HARTMANN &

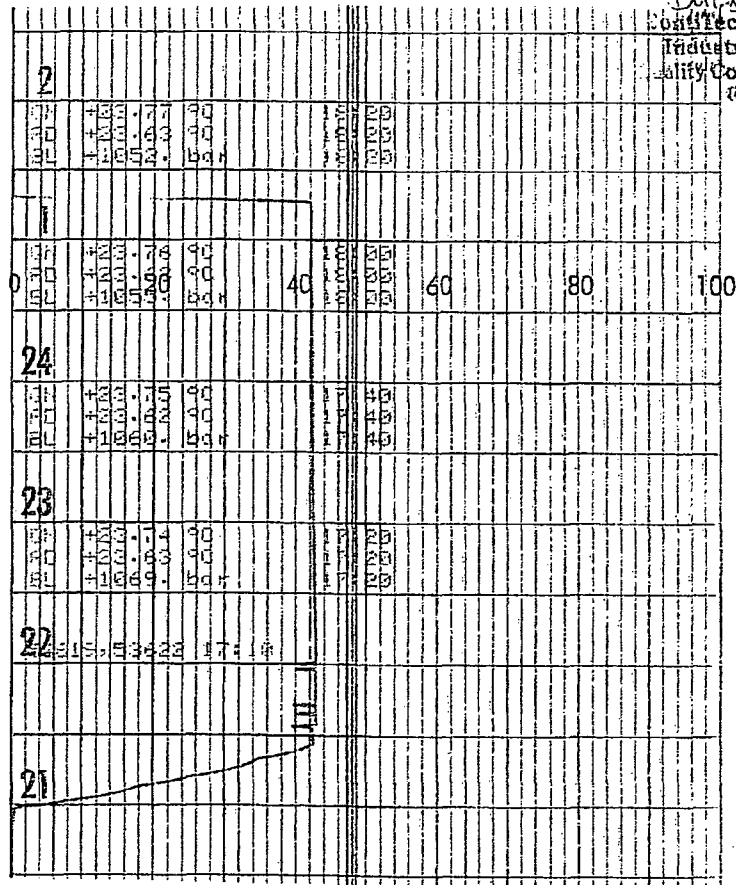

ContiTech Rubber
Industrial Kft.
Quality Control Dept.
(2)



Fluid Technology

ContiTech Beattie Corp.
Website: www.contitechbeattie.com

Monday, June 14, 2010

RE: Drilling & Production Hoses
Lifting & Safety Equipment

To Helmerich & Payne,

A Continental ContiTech hose assembly can perform as intended and suitable for the application regardless of whether the hose is secured or unsecured in its configuration. As a manufacturer of High Pressure Hose Assemblies for use in Drilling & Production, we do offer the corresponding lifting and safety equipment, this has the added benefit of easing the lifting and handling of each hose assembly whilst affording hose longevity by ensuring correct handling methods and procedures as well as securing the hose in the unlikely event of a failure; but in no way does the lifting and safety equipment affect the performance of the hoses providing the hoses have been handled and installed correctly. It is good practice to use lifting & safety equipment but not mandatory.

Should you have any questions or require any additional information/clarifications then please do not hesitate to contact us.

ContiTech Beattie is part of the Continental AG Corporation and can offer the full support resources associated with a global organization.

Best regards,

Robin Hodgson
Sales Manager
ContiTech Beattie Corp

ContiTech Beattie Corp,
11535 Brittmoore Park Drive,
Houston, TX 77041
Phone: +1 (832) 327-0141
Fax: +1 (832) 327-0148
www.contitechbeattie.com






HOBBS OCD

JUL 16 2014

Committed Runs Deep
RECEIVED

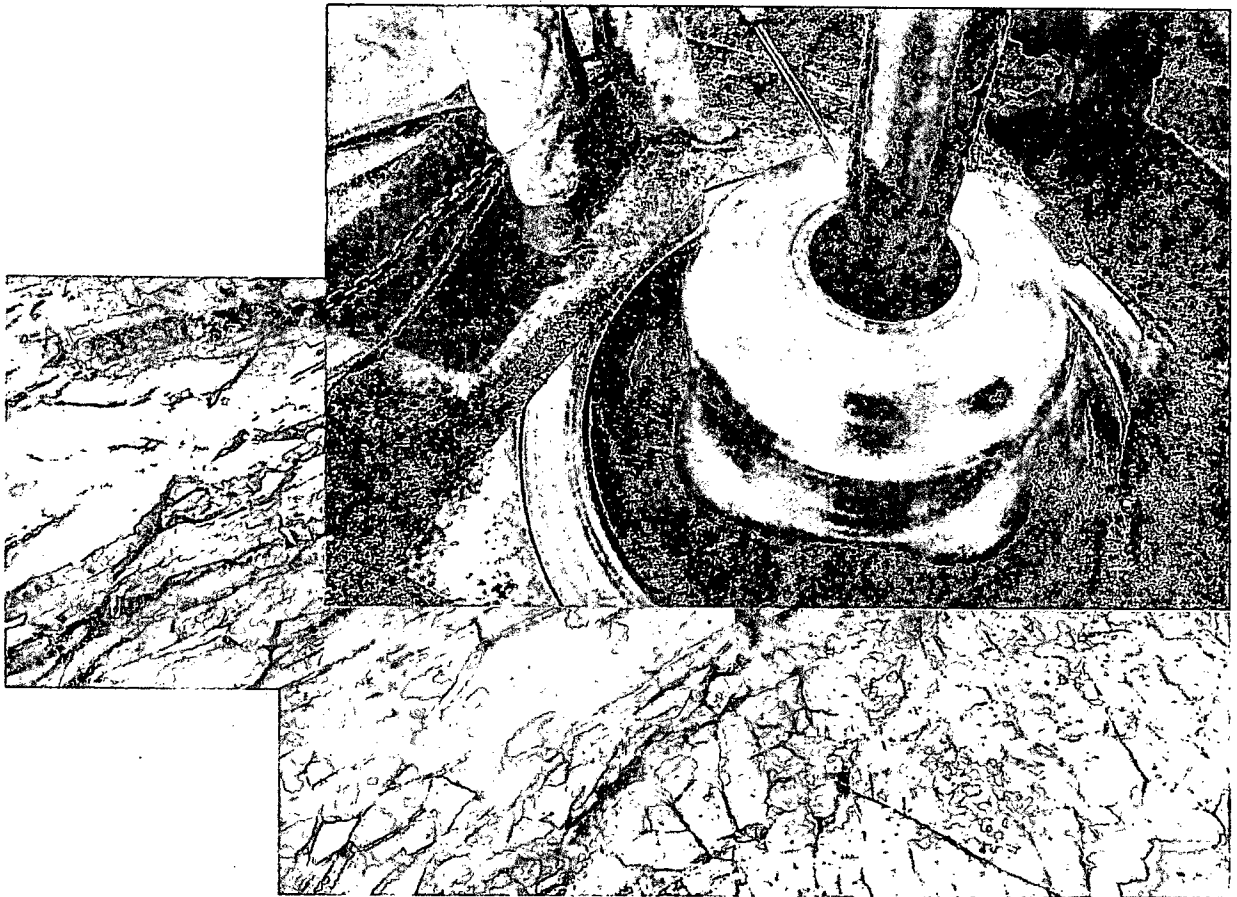

Design Plan
Operation and Maintenance Plan
Closure Plan

SENM - Closed Loop Systems
November 2013

I. Design Plan

Devon uses MI SWACO closed loop system (CLS). The MI SWACO CLS is designed to maintain drill solids at or below 5%. The equipment is arranged to progressively remove solids from the largest to the smallest size. Drilling fluids can thus be reused and savings is realized on mud and disposal costs. Dewatering may be required with the centrifuges to insure removal of ultra fine solids.

The drilling location is constructed to allow storm water to flow to a central sump normally the cellar. This insures no contamination leaves the drilling pad in the event of a spill. Storm water is reused in the mud system or stored in a reserve fluid tank farm until it can be reused. All lubricants, oils, or chemicals are removed immediately from the ground to prevent the contamination of storm water. An oil trap is normally installed on the sump if an oil spill occurs during a storm.

A tank farm is utilized to store drilling fluids including fresh water and brine fluids. The tank farm is constructed on a 20 ml plastic lined, bermed pad to prevent the contamination of the drilling site during a spill. Fluids from other sites may be stored in these tanks for processing by the solids control equipment and reused in the mud system. At the end of the well the fluids are transported from the tank farm to an adjoining well or to the next well for the rig.

Prior to installing a closed-loop system on site, the topsoil, if present, will be stripped and stockpiled for use as the final cover or fill at the time of closure.

Signs will be posted on the fence surrounding the closed-loop system unless the closed-loop system is located on a site where there is an existing well, that is operated by Devon.


II. Operations and Maintenance Plan

Primary Shakers: The primary shakers make the first removal of drill solids from the drilling mud as it leaves the well bore. The shakers are sized to handle maximum drilling rate at optimal screen size. The shakers normally remove solids down to 74 microns.

Mud Cleaner: The Mud Cleaner cleans the fluid after it leaves the shakers. A set of hydrocyclones are sized to handle 1.25 to 1.5 times the maximum circulating rate. This ensures all the fluid is being processed to an average cut point of 25 microns. The wet discharged is dewatered on a shaker equipped with ultra fine mesh screens and generally cut at 40 microns.



Closed Loop Schematic

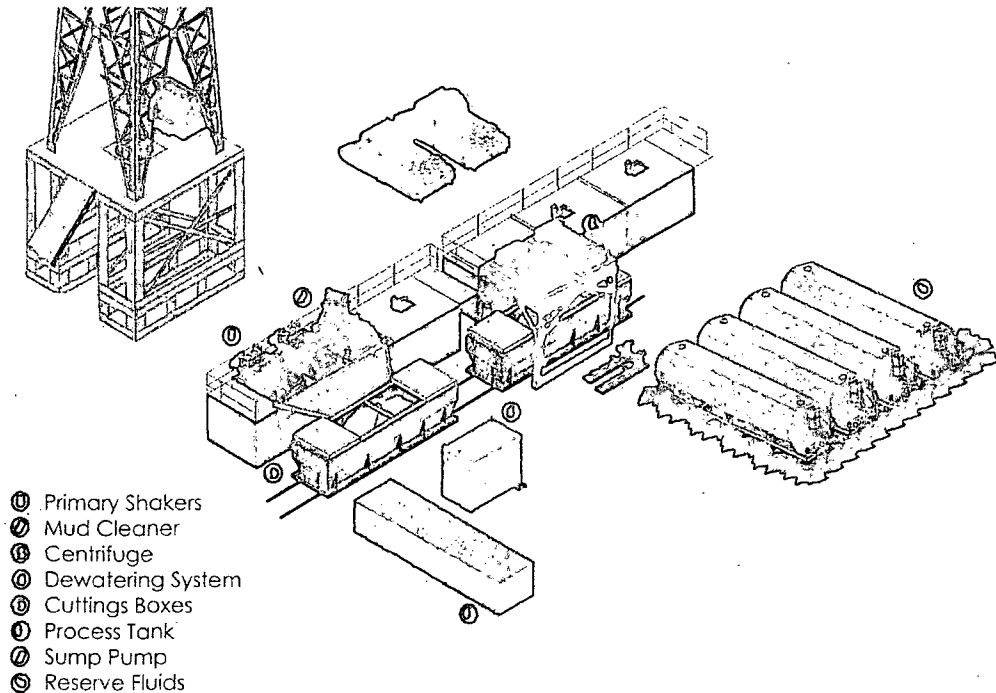

Centrifuges: The centrifuges can be one or two in number depending on the well geometry or depth of well. The centrifuges are sized to maintain low gravity solids at 5% or below. They may or may not need a dewatering system to enhance the removal rates. The centrifuges can make a cut point of 8-10 microns depending on bowl speed, feed rate, solids loading and other factors.

The centrifuge system is designed to work on the active system and be flexible to process incoming fluids from other locations. This set-up is also dependant on well factors.

Dewatering System: The dewatering system is a chemical mixing and dosing system designed to enhance the solids removal of the centrifuge. Not commonly used in shallow wells. It may contain pH adjustment, coagulant mixing and dosing, and polymer mixing and dosing. Chemical flocculation binds ultra fine solids into a mass that is within the centrifuge operating design. The

dewatering system improves the centrifuge cut point to infinity or allows for the return of clear water or brine fluid. This ability allows for the ultimate control of low gravity solids.

Cuttings Boxes: Cuttings boxes are utilized to capture drill solids that are discarded from the solids control equipment. These boxes are set upon a rail system that allows for the removal and replacement of a full box of cuttings with an empty one. They are equipped with a cover that insures no product is spilled into the environment during the transportation phase.

Process Tank: (Optional) The process tank allows for the holding and process of fluids that are being transferred into the mud system. Additionally, during times of lost circulation the process tank may hold active fluids that are removed for additional treatment. It can further be used as a mixing tank during well control conditions.

Sump and Sump Pump: The sump is used to collect storm water and the pump is used to transfer this fluid to the active system or to the tank for to hold in reserve. It can also be used to collect fluids that may escape during spills. The location contains drainage ditches that allow the location fluids to drain to the sump.

Reserve Fluids (Tank Farm): A series of frac tanks are used to replace the reserve pit. These are steel tanks that are equipped with a manifold system and a transfer pump. These tanks can contain any number of fluids used during the drilling process. These can include fresh water, cut brine, and saturated salt fluid. The fluid can be from the active well or reclaimed fluid from other locations. A 20 ml liner and berm system is employed to ensure the fluids do not migrate to the environment during a spill.

If a leak develops, the appropriate division district office will be notified within 48 hours of the discovery and the leak will be addressed. Spill prevention is accomplished by maintaining pump packing, hoses, and pipe fittings to insure no leaks are occurring. During an upset condition the source of the spill is isolated and repaired as soon as it is discovered. Free liquid is removed by a diaphragm pump and returned to the mud system. Loose topsoil may be used to stabilize the spill and the contaminated soil is excavated and placed in the cuttings boxes. After the well is finished and the rig has moved, the entire location is scrapped and testing will be performed to determine if a release has occurred.

All trash is kept in a wire mesh enclosure and removed to an approved landfill when full. All spent motor oils are kept in separate containers and they are removed and sent to an approved recycling center. Any spilled lubricants, pipe

dope, or regulated chemicals are removed from soil and sent to landfills approved for these products.

These operations are monitored by Mi Swaco service technicians. Daily logs are maintained to ensure optimal equipment operation and maintenance. Screen and chemical use is logged to maintain inventory control. Fluid properties are monitored and recorded and drilling mud volumes are accounted for in the mud storage farm. This data is kept for end of well review to insure performance goals are met. Lessons learned are logged and used to help with continuous improvement.

A MI SWACO field supervisor manages from 3-5 wells. They are responsible for training personnel, supervising installations, and inspecting sites for compliance of MI SWACO safety and operational policy.

III. Closure Plan

A maximum 340' X 340' caliche pad is built per well. All of the trucks and steel tanks fit on this pad. All fluid cuttings go to the steel tanks to be hauled by various trucking companies to an agency approved disposal.

H&P Flex Rig Location Layout

2 Well Pad

