

30-025-42455

MAR 02 2015

1. Geologic Formations

TVD of target	11,758'	Pilot hole depth	N/A
MD at TD:	16,110'	Deepest expected fresh water:	

RECEIVED

Basin

Formation	Depth (TVD) from KB	Water/Mineral Bearing/ Target Zone?	Hazards*
Rustler	1,845	Barren	
Top of Salt	1,663	Barren	
Base of Salt		Barren	
Yates	3,816	Oil	
Cherry Canyon	5,788	Oil	
Brushy Canyon	7,056	Oil	
Lower Brushy	8,375	Oil	
1 st Bone Spring Lime	9,203	Oil	
2 nd Bone Spring Lime	10,138	Oil	
2 nd Bone Spring Sand	10,493	Oil	
3 rd Bone Spring Lime	10,919	Oil	
3rd Bone Spring Sand	11,423	Oil	
Wolfcamp	11,793	Oil	

*H2S, water flows, loss of circulation, abnormal pressures, etc.

Devon Energy, Chiles 28 State 1H

2. Casing Program

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn .	SF Collapse	SF Burst	SF Tension
	From	To							
17.5"	0	1,945'	13.375"	54.5	J-55	BTC	1.40	3.40	9.90
12.25"	0	3,800'	9.625"	40	J-55	BTC	1.40	1.90	3.30
8.75"	0	11,800'	7"	29	P-110	BTC	1.80	2.20	3.10
6.125"	11,100'	16,110'	4.5"	13.5	P-110	BTC	2.10	1.40	2.00
BLM Minimum Safety Factor							1.125	1.00	1.6 Dry 1.8 Wet

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

Must have table for contingency casing

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Does casing meet API specifications? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

Devon Energy, Chiles 28 State 1H

3. Cementing Program

Casing	# Sk	Wt. lb/ gal	H ₂ O gal/sk	Yld ft ³ / sack	500# Comp. Strength (hours)	Slurry Description
13-3/8" Surface	1170	13.5	9.07	1.72	12	Lead: Class C Cement + 4% Bentonite Gel + 0.125 lbs/sack Poly-E-Flake
	550	14.8	6.32	1.33	6	Tail: Class C Cement + 0.125 lbs/sack Poly-E-Flake
9-5/8" Inter.	610	12.9	9.81	1.85	17	Lead: (65:35) Class C Cement: Poz (Fly Ash): 6% BWOC Bentonite + 5% BWOW Sodium Chloride + 0.125 lbs/sack Poly-E-Flake
	430	14.8	6.32	1.33	6	Tail: Class C Cement + 0.125 lbs/sack Poly-E-Flake
7" Int	440	11	14.81	2.55	14	Lead: Tuned Light® Cement + 0.125 lb/sk Pol-E-Flake
	400	14.5	5.31	1.2	25	Tail: (50:50) Class H Cement: Poz (Fly Ash) + 0.5% bwoc HALAD-344 + 0.4% bwoc CFR-3 + 0.2% BWOC HR-601 + 2% bwoc Bentonite
7" Int Two Stage Option	490	11.9	12.89	2.31	n/a	Lead: (50:50) Class H Cement: Poz (Fly Ash) + 10% BWOC Bentonite + 1 lb/sk of Kol-Seal + 0.3% BWOC HR-601 + 0.5lb/sk D-Air 5000
	320	14.5	5.31	1.2	25	Tail: (50:50) Class H Cement: Poz (Fly Ash) + 0.5% bwoc HALAD-344 + 0.4% bwoc CFR-3 + 0.2% BWOC HR-601 + 2% bwoc Bentonite
	DV Tool = 3850ft					
	70	14.8	6.32	1.33	6	Tail: Class C Cement + 0.125 lbs/sack Poly-E-Flake
4-1/2" Liner	610	14.5	5.31	1.2	25	Tail: (50:50) Class H Cement: Poz (Fly Ash) + 0.5% bwoc HALAD-344 + 0.4% bwoc CFR-3 + 0.2% BWOC HR-601 + 2% bwoc Bentonite

DV tool depth(s) will be adjusted based on hole conditions and cement volumes will be adjusted proportionally. DV tool will be set a minimum of 50 feet below previous casing and a minimum of 200 feet above current shoe. Lab reports with the 500 psi compressive strength time for the cement will be onsite for review.

Casing String	TOC	% Excess
13-3/8" Surface	0'	100%
9-5/8" Intermediate	0'	75%
7" Intermediate	3300'	25%
7" Intermediate – Two Stage Option	1 st Stage = 3850' / 2 nd Stage = 3300'	25%
4-1/2" Production Liner	11,100'	25%

4. Pressure Control Equipment

N	A variance is requested for the use of a diverter on the surface casing. See attached for schematic.
---	--

BOP installed and tested before drilling which hole?	Size?	Min. Required WP	Type	✓	Tested to:
12-1/4"	13-5/8"	5M	Annular	x	50% of working pressure
			Blind Ram		5M
			Pipe Ram		
			Double Ram	x	
			Other*		
8-3/4"	13-5/8"	5M	Annular	x	50% testing pressure
			Blind Ram		5M
			Pipe Ram		
			Double Ram	x	
			Other *		
6-1/8"	13-5/8"	5M	Annular	x	50% testing pressure
			Blind Ram		5M
			Pipe Ram		
			Double Ram	x	
			Other *		

*Specify if additional ram is utilized.

BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. See attached schematics.

Y	Formation integrity test will be performed per Onshore Order #2. On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.i.
---	---

Devon Energy, Chiles 28 State 1H

Y	A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart.
Y	Are anchors required by manufacturer?
Y	A multibowl wellhead is being used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested. Devon proposes using a multi-bowl wellhead assembly (FMC Uni-head). This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be 5000 (5M) psi. - Wellhead will be installed by FMC's representatives. - If the welding is performed by a third party, the FMC's representative will monitor the temperature to verify that it does not exceed the maximum temperature of the seal. - FMC representative will install the test plug for the initial BOP test. - FMC will install a solid steel body pack-off to completely isolate the lower head after cementing intermediate casing. After installation of the pack-off, the pack-off and the lower flange will be tested to 5M, as shown on the attached schematic. Everything above the pack-off will not have been altered whatsoever from the initial nipple up. Therefore the BOP components will not be retested at that time. - If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head will be cut and top out operations will be conducted. - Devon will pressure test all seals above and below the mandrel (but still above the casing) to full working pressure rating. - Devon will test the casing to 0.22 psi/ft or 1500 psi, whichever is greater, as per Onshore Order #2. After running the 13-3/8" surface casing, a 13-5/8" BOP/BOPE system with a minimum rating of 5M will be installed on the FMC Uni-head wellhead system and will undergo a 250 psi low pressure test followed by a 5,000 psi high pressure test. The 5,000 psi high and 250 psi low test will cover testing requirements a maximum of 30 days, as per Onshore Order #2. If the well is not complete within 30 days of this BOP test, another full BOP test will be conducted, as per Onshore Order #2. After running the 9-5/8" intermediate casing with a mandrel hanger, the 13-5/8" BOP/BOPE system with a minimum rating of 5M will already be installed on the FMC Uni-head. The pipe rams will be operated and checked each 24 hour period and each time the drill pipe is out of the hole. These tests will be logged in the daily driller's log. A 2" kill line and 3" choke line will be incorporated into the drilling spool below the ram BOP. In addition to the rams and annular preventer, additional BOP accessories include a kelly cock, floor safety valve, choke lines, and choke manifold rated at 5,000 psi WP.

Devon Energy, Chiles 28 State 1H

	Devon requests a variance to use a flexible line with flanged ends between the BOP and the choke manifold (choke line). The line will be kept as straight as possible with minimal turns
	See attached schematic.

5. Mud Program

Depth		Type	Weight (ppg)	Viscosity	Water Loss
From	To				
0	1,945'	FW Gel	8.6-8.8	28-34	N/C
1,945'	3,800'	Saturated Brine	10.0-10.2	28-34	N/C
3,800'	11,800'	Cut Brine	8.5-9.3	28-34	N/C
3,800'	16,110'	FW	9.3-10.5	28-34	N/C

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

What will be used to monitor the loss or gain of fluid?	PVT/Pason/Visual Monitoring
---	-----------------------------

6. Logging and Testing Procedures

Logging, Coring and Testing.	
x	Will run GR/CNL from TD to surface (horizontal well – vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.
	No Logs are planned based on well control or offset log information.
	Drill stem test? If yes, explain
	Coring? If yes, explain

Additional logs planned		Interval
	Resistivity	Int. shoe to KOP
	Density	Int. shoe to KOP
X	CBL	Production casing
X	Mud log	Intermediate shoe to TD
	PEX	

7. Drilling Conditions

Condition	Specify what type and where?
BH Pressure at deepest TVD	3099 psi
Abnormal Temperature	No

Mitigation measure for abnormal conditions. Describe. Lost circulation material/sweeps/mud scavengers.

Hydrogen Sulfide (H₂S) monitors will be installed prior to drilling out the surface shoe. If H₂S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.

N H₂S is present

Y H₂S Plan attached

8. Other facets of operation

Is this a walking operation? No.

Will be pre-setting casing? No.

Attachments

☒ Directional Plan

☐ Other, describe

DEVON ENERGY

Project: Lea County, NM (NAD-83)
Site: Chiles 28 State
Well: 1H
Wellbore: OH
Design: Plan #1




Azimuths to Grid North
True North: -0.46°
Magnetic North: 6.83°

Magnetic Field
Strength: 48350.9nT
Dip Angle: 60.32°
Date: 2/9/2015
Model: BGGM2014

PROJECT DETAILS: Lea County, NM (NAD-83)
Geodetic System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: New Mexico Eastern Zone

devon

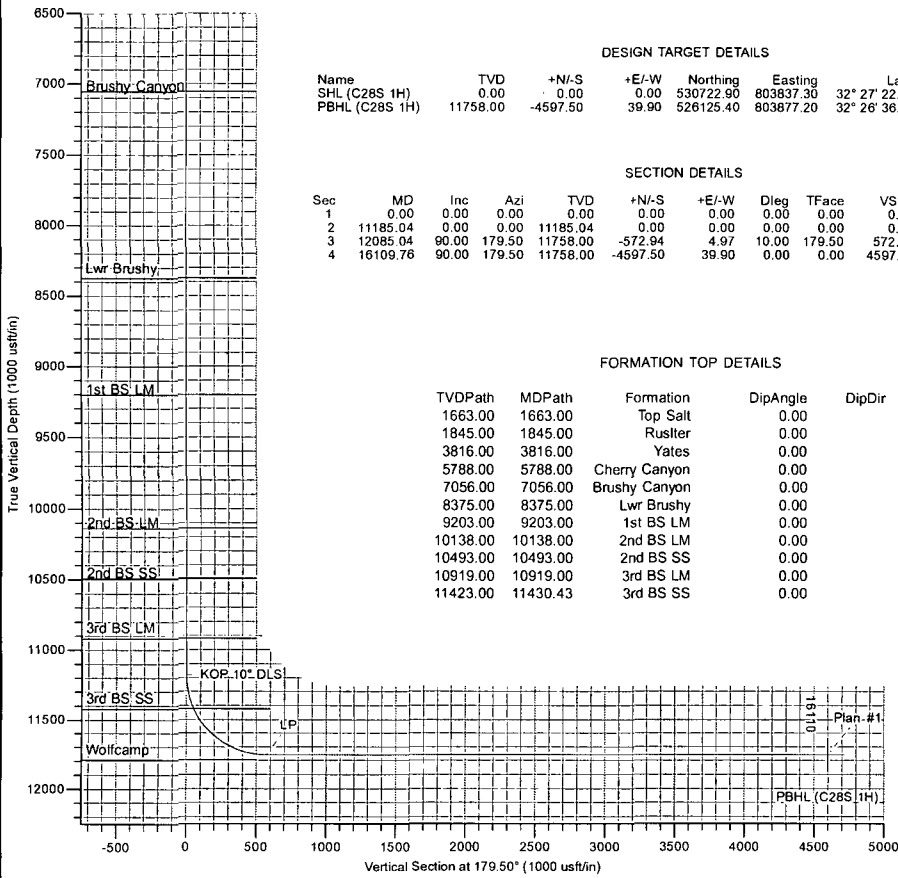

DESIGN TARGET DETAILS


Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
SHL (C28S 1H)	0.00	0.00	0.00	530722.90	803837.30	32° 27' 22.123 N	103° 28' 56.281 W
PBHL (C28S 1H)	11758.00	-4597.50	39.90	526125.40	803877.20	32° 26' 36.630 N	103° 28' 56.243 W

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSecl	Annotation
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2	11185.04	0.00	0.00	11185.04	0.00	0.00	0.00	0.00	0.00	KOP 10° DLS
3	12085.04	90.00	179.50	11758.00	-572.94	4.97	10.00	179.50	572.96	LP
4	16109.76	90.00	179.50	11758.00	-4597.50	39.90	0.00	0.00	4597.67	TD


FORMATION TOP DETAILS

TVDPPath	MDPath	Formation	DipAngle	DipDir
1663.00	1663.00	Top Salt	0.00	
1845.00	1845.00	Rusler	0.00	
3816.00	3816.00	Yates	0.00	
5788.00	5788.00	Cherry Canyon	0.00	
7056.00	7056.00	Brushy Canyon	0.00	
8375.00	8375.00	Lwr Brushy	0.00	
9203.00	9203.00	1st BS LM	0.00	
10138.00	10138.00	2nd BS LM	0.00	
10493.00	10493.00	2nd BS SS	0.00	
10919.00	10919.00	3rd BS LM	0.00	
11423.00	11430.43	3rd BS SS	0.00	

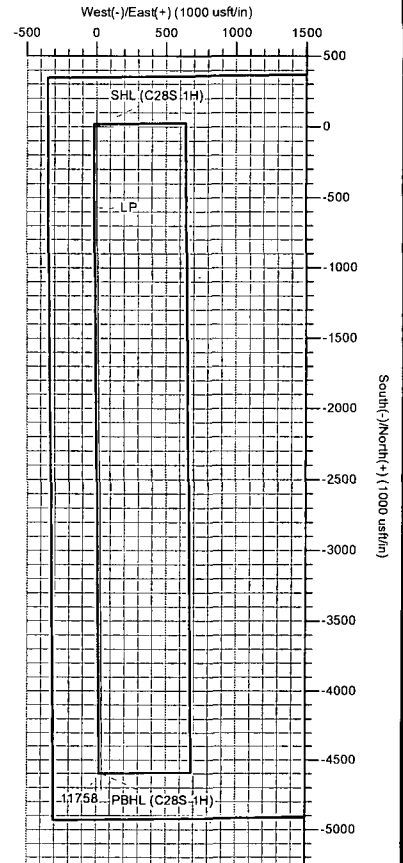

LEAM DRILLING SYSTEMS LLC
2010 East Davis, Conroe, Texas 77301
Phone: 936/756-7577, Fax 936/756-7595

Plan: Plan #1 (1H/OH)
Chiles 28 State
Created By: Brady Desver
Date: 9:40, February 09 2015
Approved: _____ Date: _____



LEAM
Drilling Systems, Inc.

DEVON ENERGY

Lea County, NM (NAD-83)

Chiles 28 State

1H

OH

Plan: Plan #1

Standard Planning Report

09 February, 2015


devon

Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well 1H
Company:	DEVON ENERGY	TVD Reference:	3712' GL + 25' RKB @ 3737.00usft
Project:	Lea County, NM (NAD-83)	MD Reference:	3712' GL + 25' RKB @ 3737.00usft
Site:	Chiles 28 State	North Reference:	Grid
Well:	1H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Project	Lea County, NM (NAD-83)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Chiles 28 State				
Site Position:		Northing:	530,722.90 usft	Latitude:	32° 27' 22.123 N
From:	Map	Easting:	803,837.30 usft	Longitude:	103° 28' 56.281 W
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "	Grid Convergence:	0.46 °

Well	1H, 3rd BS SS					
Well Position	+N/-S	0.00 usft	Northing:	530,722.90 usft	Latitude:	32° 27' 22.123 N
	+E/-W	0.00 usft	Easting:	803,837.30 usft	Longitude:	103° 28' 56.281 W
Position Uncertainty	0.00 usft	Wellhead Elevation:	3,737.00 usft	Ground Level:	3,712.00 usft	

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	BGGM2014	2/9/2015	7.28	60.32	48,351

Design	Plan #1			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.00	0.00	0.00	179.50

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
11,185.04	0.00	0.00	11,185.04	0.00	0.00	0.00	0.00	0.00	0.00	
12,085.04	90.00	179.50	11,758.00	-572.94	4.97	10.00	10.00	0.00	179.50	
16,109.76	90.00	179.50	11,758.00	-4,597.50	39.90	0.00	0.00	0.00	0.00	PBHL (C28S 1H)

Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well 1H
Company:	DEVON ENERGY	TVD Reference:	3712' GL + 25' RKB @ 3737.00usft
Project:	Lea County, NM (NAD-83)	MD Reference:	3712' GL + 25' RKB @ 3737.00usft
Site:	Chiles 28 State	North Reference:	Grid
Well:	1H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
SHL (C28S 1H)									
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,663.00	0.00	0.00	1,663.00	0.00	0.00	0.00	0.00	0.00	0.00
Top Salt									
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,845.00	0.00	0.00	1,845.00	0.00	0.00	0.00	0.00	0.00	0.00
Ruslter									
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,400.00	0.00	0.00	0.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00
2,600.00	0.00	0.00	2,600.00	0.00	0.00	0.00	0.00	0.00	0.00
2,700.00	0.00	0.00	2,700.00	0.00	0.00	0.00	0.00	0.00	0.00
2,800.00	0.00	0.00	2,800.00	0.00	0.00	0.00	0.00	0.00	0.00
2,900.00	0.00	0.00	2,900.00	0.00	0.00	0.00	0.00	0.00	0.00
3,000.00	0.00	0.00	3,000.00	0.00	0.00	0.00	0.00	0.00	0.00
3,100.00	0.00	0.00	3,100.00	0.00	0.00	0.00	0.00	0.00	0.00
3,200.00	0.00	0.00	3,200.00	0.00	0.00	0.00	0.00	0.00	0.00
3,300.00	0.00	0.00	3,300.00	0.00	0.00	0.00	0.00	0.00	0.00
3,400.00	0.00	0.00	3,400.00	0.00	0.00	0.00	0.00	0.00	0.00
3,500.00	0.00	0.00	3,500.00	0.00	0.00	0.00	0.00	0.00	0.00
3,600.00	0.00	0.00	3,600.00	0.00	0.00	0.00	0.00	0.00	0.00
3,700.00	0.00	0.00	3,700.00	0.00	0.00	0.00	0.00	0.00	0.00
3,800.00	0.00	0.00	3,800.00	0.00	0.00	0.00	0.00	0.00	0.00
3,816.00	0.00	0.00	3,816.00	0.00	0.00	0.00	0.00	0.00	0.00
Yates									
3,900.00	0.00	0.00	3,900.00	0.00	0.00	0.00	0.00	0.00	0.00
4,000.00	0.00	0.00	4,000.00	0.00	0.00	0.00	0.00	0.00	0.00
4,100.00	0.00	0.00	4,100.00	0.00	0.00	0.00	0.00	0.00	0.00
4,200.00	0.00	0.00	4,200.00	0.00	0.00	0.00	0.00	0.00	0.00
4,300.00	0.00	0.00	4,300.00	0.00	0.00	0.00	0.00	0.00	0.00
4,400.00	0.00	0.00	4,400.00	0.00	0.00	0.00	0.00	0.00	0.00
4,500.00	0.00	0.00	4,500.00	0.00	0.00	0.00	0.00	0.00	0.00
4,600.00	0.00	0.00	4,600.00	0.00	0.00	0.00	0.00	0.00	0.00

Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well 1H
Company:	DEVON ENERGY	TVD Reference:	3712' GL + 25' RKB @ 3737.00usft
Project:	Lea County, NM (NAD-83)	MD Reference:	3712' GL + 25' RKB @ 3737.00usft
Site:	Chiles 28 State	North Reference:	Grid
Well:	1H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,700.00	0.00	0.00	4,700.00	0.00	0.00	0.00	0.00	0.00	0.00
4,800.00	0.00	0.00	4,800.00	0.00	0.00	0.00	0.00	0.00	0.00
4,900.00	0.00	0.00	4,900.00	0.00	0.00	0.00	0.00	0.00	0.00
5,000.00	0.00	0.00	5,000.00	0.00	0.00	0.00	0.00	0.00	0.00
5,100.00	0.00	0.00	5,100.00	0.00	0.00	0.00	0.00	0.00	0.00
5,200.00	0.00	0.00	5,200.00	0.00	0.00	0.00	0.00	0.00	0.00
5,300.00	0.00	0.00	5,300.00	0.00	0.00	0.00	0.00	0.00	0.00
5,400.00	0.00	0.00	5,400.00	0.00	0.00	0.00	0.00	0.00	0.00
5,500.00	0.00	0.00	5,500.00	0.00	0.00	0.00	0.00	0.00	0.00
5,600.00	0.00	0.00	5,600.00	0.00	0.00	0.00	0.00	0.00	0.00
5,700.00	0.00	0.00	5,700.00	0.00	0.00	0.00	0.00	0.00	0.00
5,788.00	0.00	0.00	5,788.00	0.00	0.00	0.00	0.00	0.00	0.00
Cherry Canyon									
5,800.00	0.00	0.00	5,800.00	0.00	0.00	0.00	0.00	0.00	0.00
5,900.00	0.00	0.00	5,900.00	0.00	0.00	0.00	0.00	0.00	0.00
6,000.00	0.00	0.00	6,000.00	0.00	0.00	0.00	0.00	0.00	0.00
6,100.00	0.00	0.00	6,100.00	0.00	0.00	0.00	0.00	0.00	0.00
6,200.00	0.00	0.00	6,200.00	0.00	0.00	0.00	0.00	0.00	0.00
6,300.00	0.00	0.00	6,300.00	0.00	0.00	0.00	0.00	0.00	0.00
6,400.00	0.00	0.00	6,400.00	0.00	0.00	0.00	0.00	0.00	0.00
6,500.00	0.00	0.00	6,500.00	0.00	0.00	0.00	0.00	0.00	0.00
6,600.00	0.00	0.00	6,600.00	0.00	0.00	0.00	0.00	0.00	0.00
6,700.00	0.00	0.00	6,700.00	0.00	0.00	0.00	0.00	0.00	0.00
6,800.00	0.00	0.00	6,800.00	0.00	0.00	0.00	0.00	0.00	0.00
6,900.00	0.00	0.00	6,900.00	0.00	0.00	0.00	0.00	0.00	0.00
7,000.00	0.00	0.00	7,000.00	0.00	0.00	0.00	0.00	0.00	0.00
7,056.00	0.00	0.00	7,056.00	0.00	0.00	0.00	0.00	0.00	0.00
Brushy Canyon									
7,100.00	0.00	0.00	7,100.00	0.00	0.00	0.00	0.00	0.00	0.00
7,200.00	0.00	0.00	7,200.00	0.00	0.00	0.00	0.00	0.00	0.00
7,300.00	0.00	0.00	7,300.00	0.00	0.00	0.00	0.00	0.00	0.00
7,400.00	0.00	0.00	7,400.00	0.00	0.00	0.00	0.00	0.00	0.00
7,500.00	0.00	0.00	7,500.00	0.00	0.00	0.00	0.00	0.00	0.00
7,600.00	0.00	0.00	7,600.00	0.00	0.00	0.00	0.00	0.00	0.00
7,700.00	0.00	0.00	7,700.00	0.00	0.00	0.00	0.00	0.00	0.00
7,800.00	0.00	0.00	7,800.00	0.00	0.00	0.00	0.00	0.00	0.00
7,900.00	0.00	0.00	7,900.00	0.00	0.00	0.00	0.00	0.00	0.00
8,000.00	0.00	0.00	8,000.00	0.00	0.00	0.00	0.00	0.00	0.00
8,100.00	0.00	0.00	8,100.00	0.00	0.00	0.00	0.00	0.00	0.00
8,200.00	0.00	0.00	8,200.00	0.00	0.00	0.00	0.00	0.00	0.00
8,300.00	0.00	0.00	8,300.00	0.00	0.00	0.00	0.00	0.00	0.00
8,375.00	0.00	0.00	8,375.00	0.00	0.00	0.00	0.00	0.00	0.00
Lwr Brushy									
8,400.00	0.00	0.00	8,400.00	0.00	0.00	0.00	0.00	0.00	0.00
8,500.00	0.00	0.00	8,500.00	0.00	0.00	0.00	0.00	0.00	0.00
8,600.00	0.00	0.00	8,600.00	0.00	0.00	0.00	0.00	0.00	0.00
8,700.00	0.00	0.00	8,700.00	0.00	0.00	0.00	0.00	0.00	0.00
8,800.00	0.00	0.00	8,800.00	0.00	0.00	0.00	0.00	0.00	0.00
8,900.00	0.00	0.00	8,900.00	0.00	0.00	0.00	0.00	0.00	0.00
9,000.00	0.00	0.00	9,000.00	0.00	0.00	0.00	0.00	0.00	0.00
9,100.00	0.00	0.00	9,100.00	0.00	0.00	0.00	0.00	0.00	0.00
9,200.00	0.00	0.00	9,200.00	0.00	0.00	0.00	0.00	0.00	0.00
9,203.00	0.00	0.00	9,203.00	0.00	0.00	0.00	0.00	0.00	0.00

Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well 1H
Company:	DEVON ENERGY	TVD Reference:	3712' GL + 25' RKB @ 3737.00usft
Project:	Lea County, NM (NAD-83)	MD Reference:	3712' GL + 25' RKB @ 3737.00usft
Site:	Chiles 28 State	North Reference:	Grid
Well:	1H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
1st BS LM									
9,300.00	0.00	0.00	9,300.00	0.00	0.00	0.00	0.00	0.00	0.00
9,400.00	0.00	0.00	9,400.00	0.00	0.00	0.00	0.00	0.00	0.00
9,500.00	0.00	0.00	9,500.00	0.00	0.00	0.00	0.00	0.00	0.00
9,600.00	0.00	0.00	9,600.00	0.00	0.00	0.00	0.00	0.00	0.00
9,700.00	0.00	0.00	9,700.00	0.00	0.00	0.00	0.00	0.00	0.00
9,800.00	0.00	0.00	9,800.00	0.00	0.00	0.00	0.00	0.00	0.00
9,900.00	0.00	0.00	9,900.00	0.00	0.00	0.00	0.00	0.00	0.00
10,000.00	0.00	0.00	10,000.00	0.00	0.00	0.00	0.00	0.00	0.00
10,100.00	0.00	0.00	10,100.00	0.00	0.00	0.00	0.00	0.00	0.00
10,138.00	0.00	0.00	10,138.00	0.00	0.00	0.00	0.00	0.00	0.00
2nd BS LM									
10,200.00	0.00	0.00	10,200.00	0.00	0.00	0.00	0.00	0.00	0.00
10,300.00	0.00	0.00	10,300.00	0.00	0.00	0.00	0.00	0.00	0.00
10,400.00	0.00	0.00	10,400.00	0.00	0.00	0.00	0.00	0.00	0.00
10,493.00	0.00	0.00	10,493.00	0.00	0.00	0.00	0.00	0.00	0.00
2nd BS SS									
10,500.00	0.00	0.00	10,500.00	0.00	0.00	0.00	0.00	0.00	0.00
10,600.00	0.00	0.00	10,600.00	0.00	0.00	0.00	0.00	0.00	0.00
10,700.00	0.00	0.00	10,700.00	0.00	0.00	0.00	0.00	0.00	0.00
10,800.00	0.00	0.00	10,800.00	0.00	0.00	0.00	0.00	0.00	0.00
10,900.00	0.00	0.00	10,900.00	0.00	0.00	0.00	0.00	0.00	0.00
10,919.00	0.00	0.00	10,919.00	0.00	0.00	0.00	0.00	0.00	0.00
3rd BS LM									
11,000.00	0.00	0.00	11,000.00	0.00	0.00	0.00	0.00	0.00	0.00
11,100.00	0.00	0.00	11,100.00	0.00	0.00	0.00	0.00	0.00	0.00
11,185.04	0.00	0.00	11,185.04	0.00	0.00	0.00	0.00	0.00	0.00
KOP 10° DLS									
11,200.00	1.50	179.50	11,200.00	-0.20	0.00	0.20	10.00	10.00	0.00
11,250.00	6.50	179.50	11,249.86	-3.68	0.03	3.68	10.00	10.00	0.00
11,300.00	11.50	179.50	11,299.23	-11.49	0.10	11.49	10.00	10.00	0.00
11,350.00	16.50	179.50	11,347.73	-23.58	0.20	23.58	10.00	10.00	0.00
11,400.00	21.50	179.50	11,394.99	-39.85	0.35	39.85	10.00	10.00	0.00
11,430.43	24.54	179.50	11,423.00	-51.75	0.45	51.75	10.00	10.00	0.00
3rd BS SS									
11,450.00	26.50	179.50	11,440.66	-60.18	0.52	60.18	10.00	10.00	0.00
11,500.00	31.50	179.50	11,484.38	-84.41	0.73	84.41	10.00	10.00	0.00
11,550.00	36.50	179.50	11,525.82	-112.35	0.98	112.36	10.00	10.00	0.00
11,600.00	41.50	179.50	11,564.66	-143.80	1.25	143.81	10.00	10.00	0.00
11,650.00	46.50	179.50	11,600.62	-178.52	1.55	178.53	10.00	10.00	0.00
11,700.00	51.50	179.50	11,633.42	-216.24	1.88	216.25	10.00	10.00	0.00
11,750.00	56.50	179.50	11,662.80	-256.68	2.23	256.69	10.00	10.00	0.00
11,800.00	61.50	179.50	11,688.55	-299.52	2.60	299.53	10.00	10.00	0.00
11,850.00	66.50	179.50	11,710.46	-344.44	2.99	344.45	10.00	10.00	0.00
11,900.00	71.50	179.50	11,728.38	-391.10	3.39	391.12	10.00	10.00	0.00
11,950.00	76.50	179.50	11,742.16	-439.15	3.81	439.16	10.00	10.00	0.00
12,000.00	81.50	179.50	11,751.70	-488.21	4.24	488.23	10.00	10.00	0.00
12,050.00	86.50	179.50	11,756.93	-537.92	4.67	537.94	10.00	10.00	0.00
12,085.04	90.00	179.50	11,758.00	-572.94	4.97	572.96	10.00	10.00	0.00
LP									
12,100.00	90.00	179.50	11,758.00	-587.89	5.10	587.92	0.00	0.00	0.00
12,200.00	90.00	179.50	11,758.00	-687.89	5.97	687.92	0.00	0.00	0.00
12,300.00	90.00	179.50	11,758.00	-787.89	6.84	787.92	0.00	0.00	0.00

Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well 1H
Company:	DEVON ENERGY	TVD Reference:	3712' GL + 25' RKB @ 3737.00usft
Project:	Lea County, NM (NAD-83)	MD Reference:	3712' GL + 25' RKB @ 3737.00usft
Site:	Chiles 28 State	North Reference:	Grid
Well:	1H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
12,400.00	90.00	179.50	11,758.00	-887.88	7.71	887.92	0.00	0.00	0.00
12,500.00	90.00	179.50	11,758.00	-987.88	8.57	987.92	0.00	0.00	0.00
12,600.00	90.00	179.50	11,758.00	-1,087.87	9.44	1,087.92	0.00	0.00	0.00
12,700.00	90.00	179.50	11,758.00	-1,187.87	10.31	1,187.92	0.00	0.00	0.00
12,800.00	90.00	179.50	11,758.00	-1,287.87	11.18	1,287.92	0.00	0.00	0.00
12,900.00	90.00	179.50	11,758.00	-1,387.86	12.04	1,387.92	0.00	0.00	0.00
13,000.00	90.00	179.50	11,758.00	-1,487.86	12.91	1,487.92	0.00	0.00	0.00
13,100.00	90.00	179.50	11,758.00	-1,587.86	13.78	1,587.92	0.00	0.00	0.00
13,200.00	90.00	179.50	11,758.00	-1,687.85	14.65	1,687.92	0.00	0.00	0.00
13,300.00	90.00	179.50	11,758.00	-1,787.85	15.52	1,787.92	0.00	0.00	0.00
13,400.00	90.00	179.50	11,758.00	-1,887.84	16.38	1,887.92	0.00	0.00	0.00
13,500.00	90.00	179.50	11,758.00	-1,987.84	17.25	1,987.92	0.00	0.00	0.00
13,600.00	90.00	179.50	11,758.00	-2,087.84	18.12	2,087.92	0.00	0.00	0.00
13,700.00	90.00	179.50	11,758.00	-2,187.83	18.99	2,187.92	0.00	0.00	0.00
13,800.00	90.00	179.50	11,758.00	-2,287.83	19.86	2,287.92	0.00	0.00	0.00
13,900.00	90.00	179.50	11,758.00	-2,387.83	20.72	2,387.92	0.00	0.00	0.00
14,000.00	90.00	179.50	11,758.00	-2,487.82	21.59	2,487.92	0.00	0.00	0.00
14,100.00	90.00	179.50	11,758.00	-2,587.82	22.46	2,587.92	0.00	0.00	0.00
14,200.00	90.00	179.50	11,758.00	-2,687.81	23.33	2,687.92	0.00	0.00	0.00
14,300.00	90.00	179.50	11,758.00	-2,787.81	24.19	2,787.92	0.00	0.00	0.00
14,400.00	90.00	179.50	11,758.00	-2,887.81	25.06	2,887.92	0.00	0.00	0.00
14,500.00	90.00	179.50	11,758.00	-2,987.80	25.93	2,987.92	0.00	0.00	0.00
14,600.00	90.00	179.50	11,758.00	-3,087.80	26.80	3,087.92	0.00	0.00	0.00
14,700.00	90.00	179.50	11,758.00	-3,187.80	27.67	3,187.92	0.00	0.00	0.00
14,800.00	90.00	179.50	11,758.00	-3,287.79	28.53	3,287.92	0.00	0.00	0.00
14,900.00	90.00	179.50	11,758.00	-3,387.79	29.40	3,387.92	0.00	0.00	0.00
15,000.00	90.00	179.50	11,758.00	-3,487.78	30.27	3,487.92	0.00	0.00	0.00
15,100.00	90.00	179.50	11,758.00	-3,587.78	31.14	3,587.92	0.00	0.00	0.00
15,200.00	90.00	179.50	11,758.00	-3,687.78	32.00	3,687.92	0.00	0.00	0.00
15,300.00	90.00	179.50	11,758.00	-3,787.77	32.87	3,787.92	0.00	0.00	0.00
15,400.00	90.00	179.50	11,758.00	-3,887.77	33.74	3,887.92	0.00	0.00	0.00
15,500.00	90.00	179.50	11,758.00	-3,987.77	34.61	3,987.92	0.00	0.00	0.00
15,600.00	90.00	179.50	11,758.00	-4,087.76	35.48	4,087.92	0.00	0.00	0.00
15,700.00	90.00	179.50	11,758.00	-4,187.76	36.34	4,187.92	0.00	0.00	0.00
15,800.00	90.00	179.50	11,758.00	-4,287.75	37.21	4,287.92	0.00	0.00	0.00
15,900.00	90.00	179.50	11,758.00	-4,387.75	38.08	4,387.92	0.00	0.00	0.00
16,000.00	90.00	179.50	11,758.00	-4,487.75	38.95	4,487.92	0.00	0.00	0.00
16,109.76	90.00	179.50	11,758.00	-4,597.50	39.90	4,597.67	0.00	0.00	0.00

TD - PBHL (C28S 1H)

Design Targets

Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
SHL (C28S 1H) - plan hits target center - Point	0.00	0.00	0.00	0.00	0.00	530,722.90	803,837.30	32° 27' 22.123 N	103° 28' 56.281 W
PBHL (C28S 1H) - plan hits target center - Point	0.00	0.00	11,758.00	-4,597.50	39.90	526,125.40	803,877.20	32° 26' 36.630 N	103° 28' 56.243 W

Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well 1H
Company:	DEVON ENERGY	TVD Reference:	3712' GL + 25' RKB @ 3737.00usft
Project:	Lea County, NM (NAD-83)	MD Reference:	3712' GL + 25' RKB @ 3737.00usft
Site:	Chiles 28 State	North Reference:	Grid
Well:	1H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
1,663.00	1,663.00	Top Salt		0.00		
1,845.00	1,845.00	Ruslter		0.00		
3,816.00	3,816.00	Yates		0.00		
5,788.00	5,788.00	Cherry Canyon		0.00		
7,056.00	7,056.00	Brushy Canyon		0.00		
8,375.00	8,375.00	Lwr Brushy		0.00		
9,203.00	9,203.00	1st BS LM		0.00		
10,138.00	10,138.00	2nd BS LM		0.00		
10,493.00	10,493.00	2nd BS SS		0.00		
10,919.00	10,919.00	3rd BS LM		0.00		
11,430.43	11,423.00	3rd BS SS		0.00		

Plan Annotations					
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates			
		+N/-S (usft)	+E/-W (usft)	Comment	
11,185.04	11,185.04	0.00	0.00	KOP 10° DLS	
12,085.04	11,758.00	-572.94	4.97	LP	
16,109.76	11,758.00	-4,597.50	39.90	TD	