

## 1. Geologic Formations

TVD of target	11,325'	Pilot hole depth	N/A
MD at TD:	15,698'	Deepest expected fresh water:	85'

## Basin

Formation	Depth (TVD) from KB	Water/Mineral Bearing/ Target Zone?	Hazards*
Rustler	1,380	Barren	
Top of Salt	1,652	Barren	
Base of Salt	5,030	Barren	
Delaware	5,290	Oil	
Cherry Canyon	6,265	Oil	
Brushy Canyon	7,575	Oil	
Lower Brushy	9,003	Oil	
1 <sup>st</sup> Bone Spring Lime	9,175	Oil	
2 <sup>nd</sup> Bone Spring Lime	10,530	Oil	
3 <sup>rd</sup> Bone Spring Lime	11,500	Oil	

\*H2S, water flows, loss of circulation, abnormal pressures, etc.

# Devon Energy, Thistle Unit 72H

## 2. Casing Program

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Tension
	From	To							
17.5"	0	1,405'	13.375"	48	H-40	STC	1.15	2.57	8.02
12.25"	0	5,250'	9.625"	40	HCK-55	BTC	1.14	1.06	4.41
8.75"	0	11,657'	7"	29	HCP-110	BTC	1.38	1.68	2.83
6.125"	10,752'	15,698'	4.5"	13.5	P-110	BTC	1.52	1.76	6.63
BLM Minimum Safety Factor						1.125	1.00	1.6 Dry 1.8 Wet	

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

Must have table for contingency casing

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Does casing meet API specifications? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 <sup>rd</sup> string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 <sup>nd</sup> string set 100' to 600' below the base of salt?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

## Devon Energy, Thistle Unit 72H

### 3. Cementing Program

Casing	# Skns	Wt. lb/ gal	H <sub>2</sub> O gal/sk	Yld ft <sup>3</sup> / sack	500# Comp. Strength (hours)	Slurry Description
13-3/8" Surface	680	12.9	9.81	1.85	14	Lead: (65:35) Class C Cement: Poz (Fly Ash): 6% BWOC Bentonite + 5% BWOW Sodium Chloride + 0.125 lbs/sack Poly-E-Flake
	550	14.8	6.32	1.33	6	Tail: Class C Cement + 0.125 lbs/sack Poly-E-Flake
9-5/8" Inter.	1100	12.9	9.81	1.85	14	Lead: (65:35) Class C Cement: Poz (Fly Ash): 6% BWOC Bentonite + 5% BWOW Sodium Chloride + 0.125 lbs/sack Poly-E-Flake
	430	14.8	6.32	1.33	6	Tail: Class C Cement + 0.125 lbs/sack Poly-E-Flake
7" Inter. Two Stage	360	11.9	12.89	2.31	n/a	Lead: (50:50) Class H Cement: Poz (Fly Ash) + 10% BWOC Bentonite + 1 lb/sk of Kol-Seal + 0.3% BWOC HR-601 + 0.5lb/sk D-Air 5000
	320	14.5	5.31	1.2	25	Tail: (50:50) Class H Cement: Poz (Fly Ash) + 0.5% bwoc HALAD-344 + 0.4% bwoc CFR-3 + 0.2% BWOC HR-601 + 2% bwoc Bentonite
	130	14.8	6.32	1.33	6	DV Tool = 5300ft Tail: Class C Cement + 0.125 lbs/sack Poly-E-Flake
4-1/2" Liner	660	14.5	5.31	1.2	25	Tail: (50:50) Class H Cement: Poz (Fly Ash) + 0.5% bwoc HALAD-344 + 0.4% bwoc CFR-3 + 0.2% BWOC HR-601 + 2% bwoc Bentonite

DV tool depth(s) will be adjusted based on hole conditions and cement volumes will be adjusted proportionally. DV tool will be set a minimum of 50 feet below previous casing and a minimum of 200 feet above current shoe. Lab reports with the 500 psi compressive strength time for the cement will be onsite for review.

Casing String	TOC	% Excess
13-3/8" Surface	0'	100%
9-5/8" Intermediate	0'	75%
7" Intermediate	1 <sup>st</sup> Stage = 5300' / 2 <sup>nd</sup> Stage = 4750'	25%
4-1/2" Production Liner	10752'	25%

## Devon Energy, Thistle Unit 72H

### 4. Pressure Control Equipment

N	A variance is requested for the use of a diverter on the surface casing.
---	--

BOP installed and tested before drilling which hole?	Size?	Min. Required WP	Type	✓	Tested to:
12-1/4"	13-5/8"	5M	Annular	x	50% of working pressure
			Blind Ram		5M
			Pipe Ram		
			Double Ram	x	
			Other*		
8-3/4"	13-5/8"	5M	Annular	x	50% testing pressure
			Blind Ram		5M
			Pipe Ram		
			Double Ram	x	
			Other *		
6-1/8"	13-5/8"	5M	Annular	x	50% testing pressure
			Blind Ram		5M
			Pipe Ram		
			Double Ram	x	
			Other *		

\*Specify if additional ram is utilized.

BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold.

Y	Formation integrity test will be performed per Onshore Order #2. On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.i.
Y	A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart.

## Devon Energy, Thistle Unit 72H

	Y	Are anchors required by manufacturer?
Y		<p>A multibowl wellhead is being used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested.</p> <p>Devon proposes using a multi-bowl wellhead assembly (FMC Uni-head). This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be 5000 (5M) psi.</p> <ul style="list-style-type: none"> <li>• Wellhead will be installed by FMC's representatives.</li> <li>• If the welding is performed by a third party, the FMC's representative will monitor the temperature to verify that it does not exceed the maximum temperature of the seal.</li> <li>• FMC representative will install the test plug for the initial BOP test.</li> <li>• FMC will install a solid steel body pack-off to completely isolate the lower head after cementing intermediate casing. After installation of the pack-off, the pack-off and the lower flange will be tested to 5M, as shown on the attached schematic. Everything above the pack-off will not have been altered whatsoever from the initial nipple up. Therefore the BOP components will not be retested at that time.</li> <li>• If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head will be cut and top out operations will be conducted.</li> <li>• Devon will pressure test all seals above and below the mandrel (but still above the casing) to full working pressure rating.</li> <li>• Devon will test the casing to 0.22 psi/ft or 1500 psi, whichever is greater, as per Onshore Order #2.</li> </ul> <p>After running the 13-3/8" surface casing, a 13-5/8" BOP/BOPE system with a minimum rating of 5M will be installed on the FMC Uni-head wellhead system and will undergo a 250 psi low pressure test followed by a 5,000 psi high pressure test. The 5,000 psi high and 250 psi low test will cover testing requirements a maximum of 30 days, as per Onshore Order #2. If the well is not complete within 30 days of this BOP test, another full BOP test will be conducted, as per Onshore Order #2.</p> <p>After running the 9-5/8' intermediate casing with a mandrel hanger, the 13-5/8" BOP/BOPE system with a minimum rating of 5M will already be installed on the FMC Uni-head.</p> <p>The pipe rams will be operated and checked each 24 hour period and each time the drill pipe is out of the hole. These tests will be logged in the daily driller's log. A 2" kill line and 3" choke line will be incorporated into the drilling spool below the ram BOP. In addition to the rams and annular preventer, additional BOP accessories include a kelly cock, floor safety valve, choke lines, and choke manifold rated at 5,000 psi WP.</p> <p>Devon requests a variance to use a flexible line with flanged ends between the BOP and the choke manifold (choke line). The line will be kept as straight as possible with minimal turns</p>

## Devon Energy, Thistle Unit 72H

--	--

### 5. Mud Program

Depth		Type	Weight (ppg)	Viscosity	Water Loss
From	To				
0	1,405'	FW Gel	8.6-8.8	28-34	N/C
1,405'	4,230'	Saturated Brine	10.0-10.2	28-34	N/C
4,230'	15,698'	Cut Brine	8.5-9.3	28-34	N/C

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

What will be used to monitor the loss or gain of fluid?	PVT/Pason/Visual Monitoring
---	-----------------------------

### 6. Logging and Testing Procedures

Logging, Coring and Testing.	
x	Will run GR/CNL from TD to surface (horizontal well – vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.
	No Logs are planned based on well control or offset log information.
	Drill stem test? If yes, explain
	Coring? If yes, explain

Additional logs planned	Interval
Resistivity	Int. shoe to KOP
Density	Int. shoe to KOP
X CBL	Production casing
X Mud log	Intermediate shoe to TD
PEX	

## Devon Energy, Thistle Unit 72H

### 7. Drilling Conditions

Condition	Specify what type and where?
BH Pressure at deepest TVD	2985 psi
Abnormal Temperature	No

Mitigation measure for abnormal conditions. Describe. Lost circulation material/sweeps/mud scavengers.

Hydrogen Sulfide (H2S) monitors will be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.	
N	H2S is present
Y	H2S Plan attached

### 8. Other facets of operation


Is this a walking operation? No.

Will be pre-setting casing? No.

Attachments

Directional Plan

Other, describe

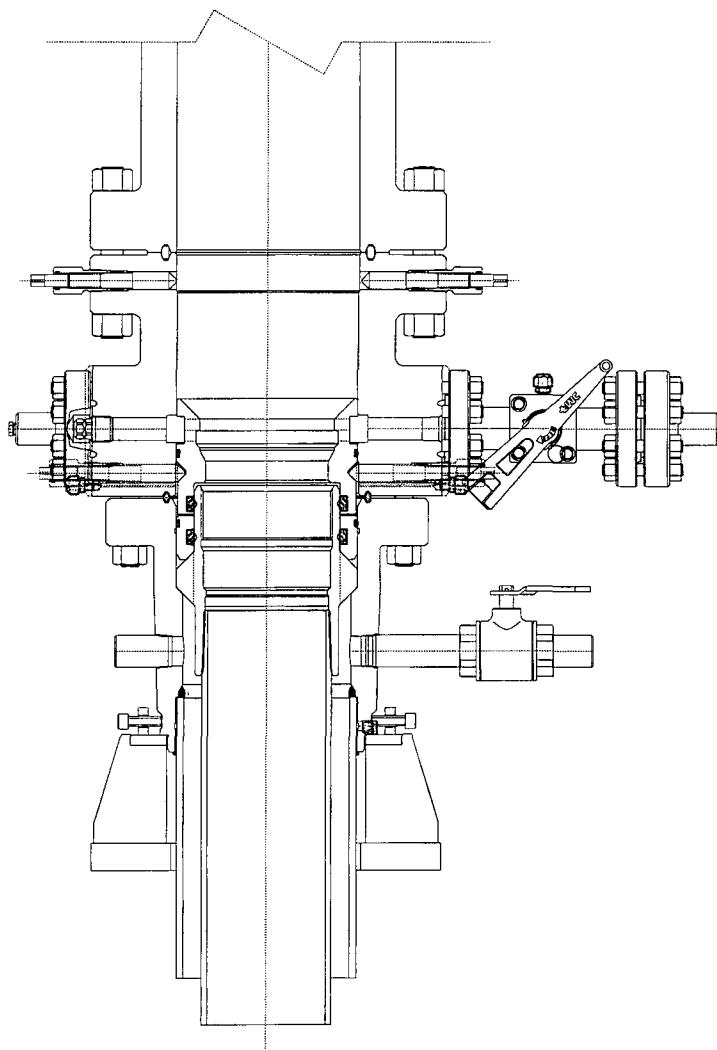

PRIMARY MODE

DEVON ENERGY  
ARTESIA  
S.E.N.M  
13 3/8 X 9 5/8

QUOTE LAYOUT  
F18648  
REF: DM100161737  
DM100151315

PRIVATE AND CONFIDENTIAL  
THIS DOCUMENT AND ALL THE INFORMATION CONTAINED HEREIN ARE THE  
CONFIDENTIAL AND EXCLUSIVE PROPERTY OF FMC TECHNOLOGIES AND MAY NOT  
BE REPRODUCED, USED, DISCLOSED, OR MADE PUBLIC IN ANY MANNER PRIOR TO  
EXPRESS WRITTEN AUTHORIZATION BY FMC TECHNOLOGIES. THIS DOCUMENT IS  
ACCEPTED BY RECIPIENT PURSUANT TO AGREEMENT TO THE FOREGOING, AND  
MUST BE RETURNED UPON DEMAND.

MANUFACTURER AGREES THAT ARTICLES MADE IN ACCORDANCE WITH THIS  
DOCUMENT SHALL BE CONSIDERED FMC TECHNOLOGIES' DESIGN AND THAT  
IDENTICAL ARTICLES OR PARTS THEREOF SHALL NOT BE MANUFACTURED  
FOR THE USE OR SALE BY MANUFACTURER OR ANY OTHER PERSON  
WITHOUT THE PRIOR EXPRESS WRITTEN AUTHORIZATION BY FMC TECHNOLOGIES


REVISIONS	DESCRIPTION
A 05-08-13	
B 1-22-14	
C 5-13-14	

SURFACE WELLHEAD LAYOUT  
UNIHEAD, UH-1, SOW,  
DEVON ENERGY, ODESSA

DRAWN BY K. VU	05-08-13
DRAFTING REVIEW Z. MARQUEZ	05-08-13
DESIGN REVIEW K. TAHAN	05-08-13
APPROVED BY R. HAMILTON	05-08-13

DRAWING NUMBER DM100161771-2A
----------------------------------

**FMC Technologies**

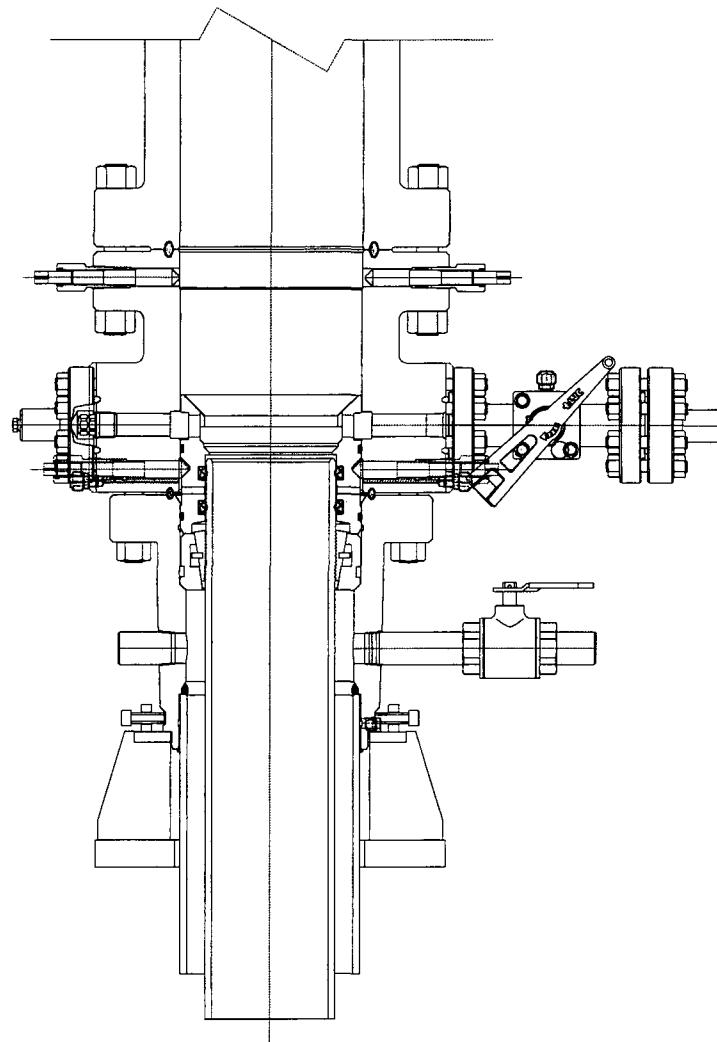

**CONTINGENCY MODE**

**DEVON ENERGY**  
ARTESIA  
S.E.N.M  
13 3/8 X 9 5/8

QUOTE LAYOUT  
F18648  
REF: DM100161737  
DM100151315

PRIVATE AND CONFIDENTIAL		REVISIONS	DESCRIPTION	DRAWN BY		DRAWING NUMBER
A	05-08-13			K. VU	05-08-13	
B	1-22-14			Z. MARQUEZ	05-08-13	
C	5-13-14			DESIGN REVIEW		
				K. TAHA	05-08-13	
				APPROVED BY		
				R. HAMILTON	05-08-13	DM100161771-2B

THIS DOCUMENT AND ALL THE INFORMATION CONTAINED HEREIN ARE THE CONFIDENTIAL AND EXCLUSIVE PROPERTY OF FMC TECHNOLOGIES AND MAY NOT BE REPRODUCED, USED, DISCLOSED, OR MADE PUBLIC IN ANY MANNER PRIOR TO EXPRESS WRITTEN AUTHORIZATION BY FMC TECHNOLOGIES. THIS DOCUMENT IS ACCEPTED BY RECIPIENT PURSUANT TO AGREEMENT TO THE FOREGOING, AND MUST BE RETURNED UPON DEMAND.

MANUFACTURER AGREES THAT ARTICLES MADE IN ACCORDANCE WITH THIS DOCUMENT SHALL BE CONSIDERED FMC TECHNOLOGIES DESIGN AND THAT IDENTICAL ARTICLES OR PARTS THEREOF SHALL NOT BE MANUFACTURED FOR THE USE OR SALE BY MANUFACTURER OR ANY OTHER PERSON WITHOUT THE PRIOR EXPRESS WRITTEN AUTHORIZATION BY FMC TECHNOLOGIES.

**FMC Technologies**

# DEVON ENERGY



Project: Lea County, NM (NAD-83)  
 Site: Thistle Unit  
 Well: 72H  
 Wellbore: OH  
 Design: Plan #1



Azimuths to Grid North  
 True North: -0.41°  
 Magnetic North: 6.88°  
 Magnetic Field  
 Strength: 48216.3snT  
 Dip Angle: 60.13°  
 Date: 3/19/2015  
 Model: BGGM2014

PROJECT DETAILS: Lea County, NM (NAD-83)  
 Geodetic System: US State Plane 1983  
 Datum: North American Datum 1983  
 Ellipsoid: GRS 1980  
 Zone: New Mexico Eastern Zone

**devon**

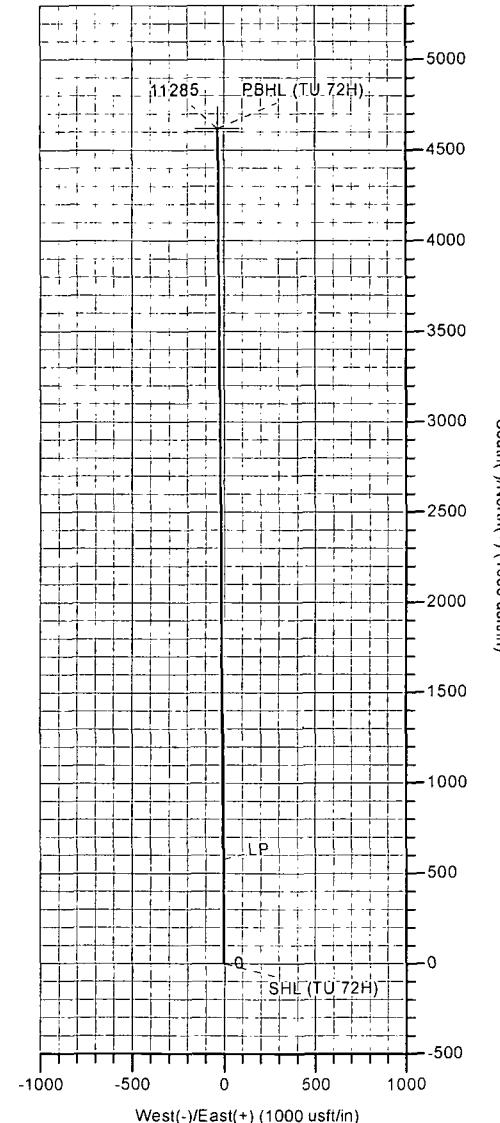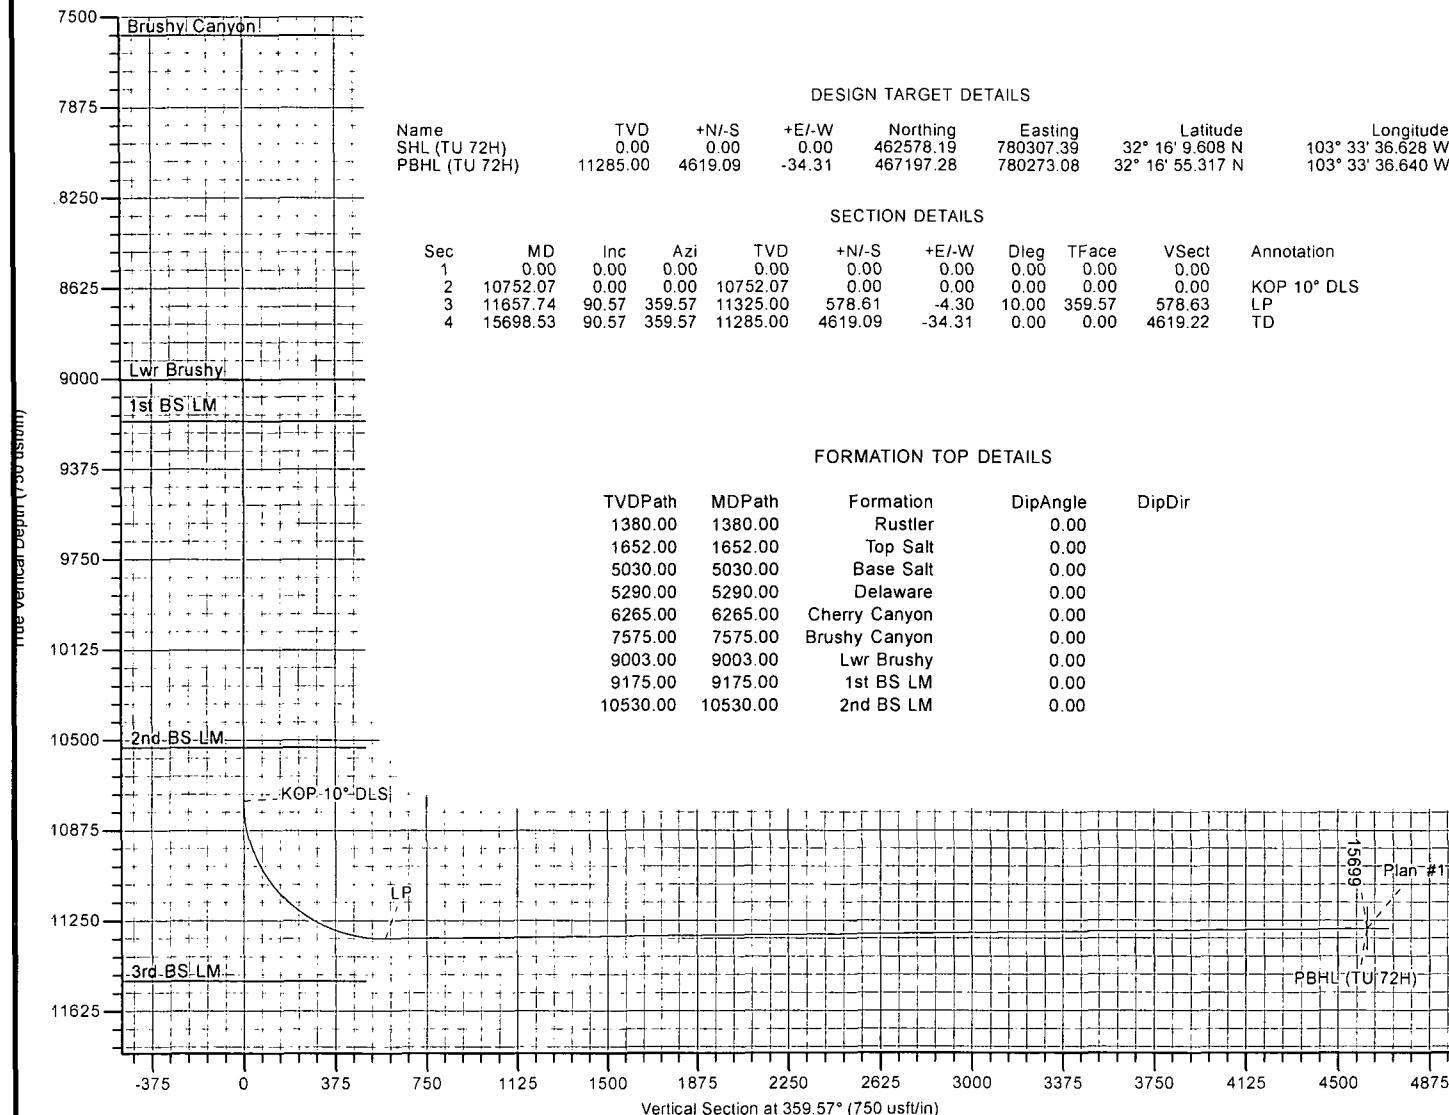

HOBBS OCD

MAR 25 2015

RECEIVED



## DEVON ENERGY

Lea County, NM (NAD-83)

Thistle Unit

72H

OH

Plan: Plan #1

## Standard Planning Report

19 March, 2015

devon



## LEAM Drilling Systems LLC

## Planning Report



<b>Database:</b>	EDM 5000.1 Single User Db	<b>Local Co-ordinate Reference:</b>	Well 72H							
<b>Company:</b>	DEVON ENERGY	<b>TVD Reference:</b>	3667.3' GL + 25' RKB @ 3692.30usft (Original Well Elev)							
<b>Project:</b>	Lea County, NM (NAD-83)	<b>MD Reference:</b>	3667.3' GL + 25' RKB @ 3692.30usft (Original Well Elev)							
<b>Site:</b>	Thistle Unit	<b>North Reference:</b>	Grid							
<b>Well:</b>	72H	<b>Survey Calculation Method:</b>	Minimum Curvature							
<b>Wellbore:</b>	OH									
<b>Design:</b>	Plan #1									
<b>Project</b>	Lea County, NM (NAD-83)									
<b>Map System:</b>	US State Plane 1983	<b>System Datum:</b>	Mean Sea Level							
<b>Geo Datum:</b>	North American Datum 1983									
<b>Map Zone:</b>	New Mexico Eastern Zone									
<b>Site</b>	Thistle Unit									
<b>Site Position:</b>	Map	<b>Northing:</b> <b>Easting:</b>	468,026.90 usft      Latitude: 32° 17' 3.494 N 780,722.56 usft      Longitude: 103° 33' 31.335 W							
<b>Position Uncertainty:</b>	0.00 usft	<b>Slot Radius:</b>	13-3/16 "      Grid Convergence: 0.41 °							
<b>Well</b>	72H, 2nd BS SS									
<b>Well Position</b>	+N/S -5,448.71 usft +E/W -415.17 usft	<b>Northing:</b> 462,578.19 usft <b>Easting:</b> 780,307.39 usft	Latitude: 32° 16' 9.608 N Longitude: 103° 33' 36.628 W							
<b>Position Uncertainty</b>	0.00 usft	<b>Wellhead Elevation:</b> 3,692.30 usft	<b>Ground Level:</b> 3,667.30 usft							
<b>Wellbore</b>	OH									
<b>Magnetics</b>	<b>Model Name</b>	<b>Sample Date</b>	<b>Declination</b> (°)	<b>Dip Angle</b> (°)	<b>Field Strength</b> (nT)					
	BGGM2014	3/19/2015	7.30	60.13	48,216					
<b>Design</b>	Plan #1									
<b>Audit Notes:</b>										
<b>Version:</b>		<b>Phase:</b> PLAN	<b>Tie On Depth:</b>	0.00						
<b>Vertical Section:</b>		<b>Depth From (TVD)</b> (usft)	<b>+N/S</b> (usft)	<b>+E/W</b> (usft)	<b>Direction</b> (°)					
		0.00	0.00	0.00	359.57					
<b>Plan Sections</b>										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/S (usft)	+E/W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10,752.07	0.00	0.00	10,752.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00
11,657.74	90.57	359.57	11,325.00	578.61	-4.30	10.00	10.00	-0.05	359.57	
15,698.53	90.57	359.57	11,285.00	4,619.09	-34.31	0.00	0.00	0.00	0.00	PBHL (TU 72H)



# LEAM Drilling Systems LLC

## Planning Report



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well 72H
Company:	DEVON ENERGY	TVD Reference:	3667.3' GL + 25' RKB @ 3692.30usft (Original Well Elev)
Project:	Lea County, NM (NAD-83)	MD Reference:	3667.3' GL + 25' RKB @ 3692.30usft (Original Well Elev)
Site:	Thistle Unit	North Reference:	Grid
Well:	72H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

### Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N-S (usft)	+E-W (usft)	Vertical Section (usft)	Dogleg Rate (/100usft)	Build Rate (/100usft)	Turn Rate (/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>SHL (TU 72H)</b>									
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,380.00	0.00	0.00	1,380.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Rustler</b>									
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,652.00	0.00	0.00	1,652.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Top Salt</b>									
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,400.00	0.00	0.00	0.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00
2,600.00	0.00	0.00	2,600.00	0.00	0.00	0.00	0.00	0.00	0.00
2,700.00	0.00	0.00	2,700.00	0.00	0.00	0.00	0.00	0.00	0.00
2,800.00	0.00	0.00	2,800.00	0.00	0.00	0.00	0.00	0.00	0.00
2,900.00	0.00	0.00	2,900.00	0.00	0.00	0.00	0.00	0.00	0.00
3,000.00	0.00	0.00	3,000.00	0.00	0.00	0.00	0.00	0.00	0.00
3,100.00	0.00	0.00	3,100.00	0.00	0.00	0.00	0.00	0.00	0.00
3,200.00	0.00	0.00	3,200.00	0.00	0.00	0.00	0.00	0.00	0.00
3,300.00	0.00	0.00	3,300.00	0.00	0.00	0.00	0.00	0.00	0.00
3,400.00	0.00	0.00	3,400.00	0.00	0.00	0.00	0.00	0.00	0.00
3,500.00	0.00	0.00	3,500.00	0.00	0.00	0.00	0.00	0.00	0.00
3,600.00	0.00	0.00	3,600.00	0.00	0.00	0.00	0.00	0.00	0.00
3,700.00	0.00	0.00	3,700.00	0.00	0.00	0.00	0.00	0.00	0.00
3,800.00	0.00	0.00	3,800.00	0.00	0.00	0.00	0.00	0.00	0.00
3,900.00	0.00	0.00	3,900.00	0.00	0.00	0.00	0.00	0.00	0.00
4,000.00	0.00	0.00	4,000.00	0.00	0.00	0.00	0.00	0.00	0.00
4,100.00	0.00	0.00	4,100.00	0.00	0.00	0.00	0.00	0.00	0.00
4,200.00	0.00	0.00	4,200.00	0.00	0.00	0.00	0.00	0.00	0.00
4,300.00	0.00	0.00	4,300.00	0.00	0.00	0.00	0.00	0.00	0.00
4,400.00	0.00	0.00	4,400.00	0.00	0.00	0.00	0.00	0.00	0.00
4,500.00	0.00	0.00	4,500.00	0.00	0.00	0.00	0.00	0.00	0.00
4,600.00	0.00	0.00	4,600.00	0.00	0.00	0.00	0.00	0.00	0.00



## LEAM Drilling Systems LLC

## Planning Report



<b>Database:</b>	EDM 5000.1 Single User Db	<b>Local Co-ordinate Reference:</b>	Well 72H
<b>Company:</b>	DEVON ENERGY	<b>TVD Reference:</b>	3667.3' GL + 25' RKB @ 3692.30usft (Original Well Elev)
<b>Project:</b>	Lea County, NM (NAD-83)	<b>MD Reference:</b>	3667.3' GL + 25' RKB @ 3692.30usft (Original Well Elev)
<b>Site:</b>	Thistle Unit	<b>North Reference:</b>	Grid
<b>Well:</b>	72H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	OH		
<b>Design:</b>	Plan #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N-S (usft)	+E-W (usft)	Vertical Section (usft)	Dogleg Rate (/100usft)	Build Rate (/100usft)	Turn Rate (/100usft)	
4,700.00	0.00	0.00	4,700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,800.00	0.00	0.00	4,800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,900.00	0.00	0.00	4,900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,000.00	0.00	0.00	5,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,030.00	0.00	0.00	5,030.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Base Salt</b>										
5,100.00	0.00	0.00	5,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,200.00	0.00	0.00	5,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,290.00	0.00	0.00	5,290.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Delaware</b>										
5,300.00	0.00	0.00	5,300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,400.00	0.00	0.00	5,400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,500.00	0.00	0.00	5,500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,600.00	0.00	0.00	5,600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,700.00	0.00	0.00	5,700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,800.00	0.00	0.00	5,800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,900.00	0.00	0.00	5,900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6,000.00	0.00	0.00	6,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6,100.00	0.00	0.00	6,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6,200.00	0.00	0.00	6,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6,265.00	0.00	0.00	6,265.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Cherry Canyon</b>										
6,300.00	0.00	0.00	6,300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6,400.00	0.00	0.00	6,400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6,500.00	0.00	0.00	6,500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6,600.00	0.00	0.00	6,600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6,700.00	0.00	0.00	6,700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6,800.00	0.00	0.00	6,800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6,900.00	0.00	0.00	6,900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
7,000.00	0.00	0.00	7,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
7,100.00	0.00	0.00	7,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
7,200.00	0.00	0.00	7,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
7,300.00	0.00	0.00	7,300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
7,400.00	0.00	0.00	7,400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
7,500.00	0.00	0.00	7,500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
7,575.00	0.00	0.00	7,575.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Brushy Canyon</b>										
7,600.00	0.00	0.00	7,600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
7,700.00	0.00	0.00	7,700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
7,800.00	0.00	0.00	7,800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
7,900.00	0.00	0.00	7,900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8,000.00	0.00	0.00	8,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8,100.00	0.00	0.00	8,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8,200.00	0.00	0.00	8,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8,300.00	0.00	0.00	8,300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8,400.00	0.00	0.00	8,400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8,500.00	0.00	0.00	8,500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8,600.00	0.00	0.00	8,600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8,700.00	0.00	0.00	8,700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8,800.00	0.00	0.00	8,800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8,900.00	0.00	0.00	8,900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00



## LEAM Drilling Systems LLC

## Planning Report



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well 72H
Company:	DEVON ENERGY	TVD Reference:	3667.3' GL + 25' RKB @ 3692.30usft (Original Well Elev)
Project:	Lea County, NM (NAD-83)	MD Reference:	3667.3' GL + 25' RKB @ 3692.30usft (Original Well Elev)
Site:	Thistle Unit	North Reference:	Grid
Well:	72H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N-S (usft)	+E-W (usft)	Vertical Section (usft)	Dogleg Rate (/100usft)	Build Rate (/100usft)	Turn Rate (/100usft)
9,000.00	0.00	0.00	9,000.00	0.00	0.00	0.00	0.00	0.00	0.00
9,003.00	0.00	0.00	9,003.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Lwr Brushy</b>									
9,100.00	0.00	0.00	9,100.00	0.00	0.00	0.00	0.00	0.00	0.00
9,175.00	0.00	0.00	9,175.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>1st BS LM</b>									
9,200.00	0.00	0.00	9,200.00	0.00	0.00	0.00	0.00	0.00	0.00
9,300.00	0.00	0.00	9,300.00	0.00	0.00	0.00	0.00	0.00	0.00
9,400.00	0.00	0.00	9,400.00	0.00	0.00	0.00	0.00	0.00	0.00
9,500.00	0.00	0.00	9,500.00	0.00	0.00	0.00	0.00	0.00	0.00
9,600.00	0.00	0.00	9,600.00	0.00	0.00	0.00	0.00	0.00	0.00
9,700.00	0.00	0.00	9,700.00	0.00	0.00	0.00	0.00	0.00	0.00
9,800.00	0.00	0.00	9,800.00	0.00	0.00	0.00	0.00	0.00	0.00
9,900.00	0.00	0.00	9,900.00	0.00	0.00	0.00	0.00	0.00	0.00
10,000.00	0.00	0.00	10,000.00	0.00	0.00	0.00	0.00	0.00	0.00
10,100.00	0.00	0.00	10,100.00	0.00	0.00	0.00	0.00	0.00	0.00
10,200.00	0.00	0.00	10,200.00	0.00	0.00	0.00	0.00	0.00	0.00
10,300.00	0.00	0.00	10,300.00	0.00	0.00	0.00	0.00	0.00	0.00
10,400.00	0.00	0.00	10,400.00	0.00	0.00	0.00	0.00	0.00	0.00
10,500.00	0.00	0.00	10,500.00	0.00	0.00	0.00	0.00	0.00	0.00
10,530.00	0.00	0.00	10,530.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>2nd BS LM</b>									
10,600.00	0.00	0.00	10,600.00	0.00	0.00	0.00	0.00	0.00	0.00
10,700.00	0.00	0.00	10,700.00	0.00	0.00	0.00	0.00	0.00	0.00
10,752.07	0.00	0.00	10,752.07	0.00	0.00	0.00	0.00	0.00	0.00
<b>KOP 10° DLS</b>									
10,800.00	4.79	359.57	10,799.94	2.00	-0.01	2.00	10.00	10.00	0.00
10,850.00	9.79	359.57	10,849.52	8.35	-0.06	8.35	10.00	10.00	0.00
10,900.00	14.79	359.57	10,898.36	18.99	-0.14	18.99	10.00	10.00	0.00
10,950.00	19.79	359.57	10,946.09	33.85	-0.25	33.85	10.00	10.00	0.00
11,000.00	24.79	359.57	10,992.34	52.81	-0.39	52.81	10.00	10.00	0.00
11,050.00	29.79	359.57	11,036.75	75.73	-0.56	75.73	10.00	10.00	0.00
11,100.00	34.79	359.57	11,079.01	102.43	-0.76	102.43	10.00	10.00	0.00
11,150.00	39.79	359.57	11,118.77	132.72	-0.99	132.72	10.00	10.00	0.00
11,200.00	44.79	359.57	11,155.75	166.35	-1.24	166.35	10.00	10.00	0.00
11,250.00	49.79	359.57	11,189.65	203.08	-1.51	203.08	10.00	10.00	0.00
11,300.00	54.79	359.57	11,220.22	242.62	-1.80	242.63	10.00	10.00	0.00
11,350.00	59.79	359.57	11,247.23	284.68	-2.11	284.69	10.00	10.00	0.00
11,400.00	64.79	359.57	11,270.47	328.93	-2.44	328.94	10.00	10.00	0.00
11,450.00	69.79	359.57	11,289.76	375.04	-2.79	375.05	10.00	10.00	0.00
11,500.00	74.79	359.57	11,304.97	422.66	-3.14	422.67	10.00	10.00	0.00
11,550.00	79.79	359.57	11,315.96	471.41	-3.50	471.43	10.00	10.00	0.00
11,600.00	84.79	359.57	11,322.66	520.95	-3.87	520.96	10.00	10.00	0.00
11,650.00	89.79	359.57	11,325.02	570.87	-4.24	570.89	10.00	10.00	0.00
11,657.74	90.57	359.57	11,325.00	578.61	-4.30	578.63	10.00	10.00	0.00
<b>LP</b>									
11,700.00	90.57	359.57	11,324.58	620.87	-4.61	620.89	0.00	0.00	0.00
11,800.00	90.57	359.57	11,323.59	720.86	-5.35	720.88	0.00	0.00	0.00
11,900.00	90.57	359.57	11,322.60	820.85	-6.10	820.88	0.00	0.00	0.00
12,000.00	90.57	359.57	11,321.61	920.85	-6.84	920.87	0.00	0.00	0.00
12,100.00	90.57	359.57	11,320.62	1,020.84	-7.58	1,020.87	0.00	0.00	0.00



# LEAM Drilling Systems LLC

## Planning Report



<b>Database:</b>	EDM 5000.1 Single User Db	<b>Local Co-ordinate Reference:</b>	Well 72H
<b>Company:</b>	DEVON ENERGY	<b>TVD Reference:</b>	3667.3' GL + 25' RKB @ 3692.30usft (Original Well Elev)
<b>Project:</b>	Lea County, NM (NAD-83)	<b>MD Reference:</b>	3667.3' GL + 25' RKB @ 3692.30usft (Original Well Elev)
<b>Site:</b>	Thistle Unit	<b>North Reference:</b>	Grid
<b>Well:</b>	72H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	OH		
<b>Design:</b>	Plan #1		

### Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N-S (usft)	+E-W (usft)	Vertical Section (usft)	Dogleg Rate (/100usft)	Build Rate (/100usft)	Turn Rate (/100usft)
12,200.00	90.57	359.57	11,319.63	1,120.83	-8.33	1,120.86	0.00	0.00	0.00
12,300.00	90.57	359.57	11,318.64	1,220.82	-9.07	1,220.86	0.00	0.00	0.00
12,400.00	90.57	359.57	11,317.65	1,320.81	-9.81	1,320.85	0.00	0.00	0.00
12,500.00	90.57	359.57	11,316.66	1,420.81	-10.55	1,420.85	0.00	0.00	0.00
12,600.00	90.57	359.57	11,315.67	1,520.80	-11.30	1,520.84	0.00	0.00	0.00
12,700.00	90.57	359.57	11,314.68	1,620.79	-12.04	1,620.84	0.00	0.00	0.00
12,800.00	90.57	359.57	11,313.69	1,720.78	-12.78	1,720.83	0.00	0.00	0.00
12,900.00	90.57	359.57	11,312.70	1,820.78	-13.52	1,820.83	0.00	0.00	0.00
13,000.00	90.57	359.57	11,311.71	1,920.77	-14.27	1,920.82	0.00	0.00	0.00
13,100.00	90.57	359.57	11,310.72	2,020.76	-15.01	2,020.82	0.00	0.00	0.00
13,200.00	90.57	359.57	11,309.73	2,120.75	-15.75	2,120.81	0.00	0.00	0.00
13,300.00	90.57	359.57	11,308.74	2,220.75	-16.50	2,220.81	0.00	0.00	0.00
13,400.00	90.57	359.57	11,307.75	2,320.74	-17.24	2,320.80	0.00	0.00	0.00
13,500.00	90.57	359.57	11,306.76	2,420.73	-17.98	2,420.80	0.00	0.00	0.00
13,600.00	90.57	359.57	11,305.77	2,520.72	-18.72	2,520.79	0.00	0.00	0.00
13,700.00	90.57	359.57	11,304.78	2,620.72	-19.47	2,620.79	0.00	0.00	0.00
13,800.00	90.57	359.57	11,303.79	2,720.71	-20.21	2,720.78	0.00	0.00	0.00
13,900.00	90.57	359.57	11,302.80	2,820.70	-20.95	2,820.78	0.00	0.00	0.00
14,000.00	90.57	359.57	11,301.81	2,920.69	-21.69	2,920.77	0.00	0.00	0.00
14,100.00	90.57	359.57	11,300.82	3,020.68	-22.44	3,020.77	0.00	0.00	0.00
14,200.00	90.57	359.57	11,299.83	3,120.68	-23.18	3,120.76	0.00	0.00	0.00
14,300.00	90.57	359.57	11,298.84	3,220.67	-23.92	3,220.76	0.00	0.00	0.00
14,400.00	90.57	359.57	11,297.85	3,320.66	-24.67	3,320.75	0.00	0.00	0.00
14,500.00	90.57	359.57	11,296.86	3,420.65	-25.41	3,420.75	0.00	0.00	0.00
14,600.00	90.57	359.57	11,295.87	3,520.65	-26.15	3,520.74	0.00	0.00	0.00
14,700.00	90.57	359.57	11,294.88	3,620.64	-26.89	3,620.74	0.00	0.00	0.00
14,800.00	90.57	359.57	11,293.89	3,720.63	-27.64	3,720.73	0.00	0.00	0.00
14,900.00	90.57	359.57	11,292.90	3,820.62	-28.38	3,820.73	0.00	0.00	0.00
15,000.00	90.57	359.57	11,291.91	3,920.62	-29.12	3,920.72	0.00	0.00	0.00
15,100.00	90.57	359.57	11,290.93	4,020.61	-29.86	4,020.72	0.00	0.00	0.00
15,200.00	90.57	359.57	11,289.94	4,120.60	-30.61	4,120.71	0.00	0.00	0.00
15,300.00	90.57	359.57	11,288.95	4,220.59	-31.35	4,220.71	0.00	0.00	0.00
15,400.00	90.57	359.57	11,287.96	4,320.59	-32.09	4,320.70	0.00	0.00	0.00
15,500.00	90.57	359.57	11,286.97	4,420.58	-32.84	4,420.70	0.00	0.00	0.00
15,600.00	90.57	359.57	11,285.98	4,520.57	-33.58	4,520.69	0.00	0.00	0.00
15,698.53	90.57	359.57	11,285.00	4,619.09	-34.31	4,619.22	0.00	0.00	0.00

TD - PBHL (TU 72H)

Design Targets									
Target Name	Dip Angle	Dip Dir.	TVD (usft)	+N-S (usft)	+E-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
SHL (TU 72H) - hit/miss target - Shape	0.00	0.00	0.00	0.00	0.00	462,578.19	780,307.39	32° 16' 9.608 N	103° 33' 36.628 W
PBHL (TU 72H) - plan hits target center - Point	0.00	0.00	11,285.00	4,619.09	-34.31	467,197.28	780,273.08	32° 16' 55.317 N	103° 33' 36.640 W



## LEAM Drilling Systems LLC

## Planning Report



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well 72H
Company:	DEVON ENERGY	TVD Reference:	3667.3' GL + 25' RKB @ 3692.30usft (Original Well Elev)
Project:	Lea County, NM (NAD-83)	MD Reference:	3667.3' GL + 25' RKB @ 3692.30usft (Original Well Elev)
Site:	Thistle Unit	North Reference:	Grid
Well:	72H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Formations	Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
	1,380.00	1,380.00	Rustler		0.00	
	1,652.00	1,652.00	Top Salt		0.00	
	5,030.00	5,030.00	Base Salt		0.00	
	5,290.00	5,290.00	Delaware		0.00	
	6,265.00	6,265.00	Cherry Canyon		0.00	
	7,575.00	7,575.00	Brushy Canyon		0.00	
	9,003.00	9,003.00	Lwr Brushy		0.00	
	9,175.00	9,175.00	1st BS LM		0.00	
	10,530.00	10,530.00	2nd BS LM		0.00	

Plan Annotations	Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
			+N/S (usft)	+E/W (usft)	
	10,752.07	10,752.07	0.00	0.00	KOP 10° DLS
	11,657.74	11,325.00	578.61	-4.30	LP
	15,698.53	11,285.00	4,619.09	-34.31	TD