

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APR 13 2015

APPLICATION FOR PERMIT TO DRILL OR REENTER


RECEIVED

1a. Type of work: ☒ DRILL ☐ REENTER		7. If Unit or CA Agreement, Name and No. N/A	
1b. Type of Well: ☒ Oil Well ☐ Gas Well ☐ Other ☒ Single Zone ☐ Multiple Zone		8. Lease Name and Well No. Ivar the Boneless Federal #1H (314751)	
2. Name of Operator COG Operating LLC (229137)		9. API Well No. 30-025- 42514	
3a. Address One Concho Center, 600 W. Illinois Ave Midland, TX 79701		3b. Phone No. (include area code) 432-685-4385	
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface SHL: 75' FNL & 330' FWL, Unit D, Sec 22 At proposed prod. zone BHL: 330' FNL & 330' FWL, Unit D, Sec 15		10. Field and Pool, or Exploratory Maljamar; Yeso, West	
14. Distance in miles and direction from nearest town or post office* 2 miles from Loco Hills, NM		11. Sec., T. R. M. or Blk. and Survey or Area Sec 22 & 15, T17S, R32E	
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 75'		16. No. of acres in lease SHL: 640.01 BHL: 400	
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 259.6		17. Spacing Unit dedicated to this well 160	
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 4016' GL		19. Proposed Depth TVD: 5672' MD: 10553' EOC: 5750' TVD	
22. Approximate date work will start* 07/30/2015		20. BLM/BIA Bond No. on file NMB000740; NMB000215	
23. Estimated duration 90 Days		12. County or Parish LEA	
13. State NM			

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office).
4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification
6. Such other site specific information and/or plans as may be required by the BLM.

25. Signature 	Name (Printed/Typed) Robyn M. Odom	Date 02/03/2015
Title Regulatory Analyst		
Approved by (Signature) 	Name (Printed/Typed) Steve Caffey	Date APR 8 2015
Title FIELD MANAGER		
Office CARLSBAD FIELD OFFICE		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

APPROVAL FOR TWO YEARS

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)

Roswell Controlled Water Basin

KZ
04/17/15 PMApproval Subject to General Requirements
& Special Stipulations AttachedSEE ATTACHED FOR
CONDITIONS OF APPROVAL

APR 14 2015

COG Operating LLC
Ivar the Boneless Federal #11H

HOBBSOCD

APR 13 2015

1. Geologic Formations

TVD of target	5672'	Pilot hole depth	NA	RECEIVED
MD at TD:	10553'	Deepest expected fresh water:	132'	

Back Reef

Formation	Depth (TVD) from KB	Water/Mineral Bearing/Target Zone?	Hazards*
Quaternary Fill	Surface	Fresh Water	
Rustler	935'	Brackish Water	
Top of Salt	1130'	Salt	
Tansill	2150'	Barren	
Yates	2250'	Oil/Gas	
Seven Rivers	2600'	Oil/Gas	
Queen	3220'	Oil/Gas	
Grayburg	3650'	Oil/Gas	
San Andres	3986'	Oil/Gas	
Glorieta	5470'	Oil/Gas	
Paddock	5525'	Target	
Blinberry	6015'	Will not penetrate	

*H₂S, water flows, loss of circulation, abnormal pressures, etc.

2. Casing Program

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Tension
	From	To							
17.5"	0	960'	13.375"	48	H40	STC	1.68	1.53	6.99
12.25"	0	2170'	9.625"	40	J55	STC	2.28	1.52	5.99
8.75"	0	6056'	5.5"	17	L80	LTC	2.41	1.43	1.88
7.875"	6056'	10553'	5.5"	17	L80	LTC	2.41	1.43	1.88
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h
 BLM standard formulas where used on all SF calculations

COG Operating LLC
Ivar the Boneless Federal #11H

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Is casing API approved? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	N
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 nd string set 100' to 600' below the base of salt?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	N
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	NA
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	N

3. Cementing Program

Casing	# Sks	Wt. lb/ Gal	Yld ft3/ sack	H ₂ O gal/s k	500# Comp. Strength (hours)	Slurry/Description
Surf.	500	13.5	1.75	9.2	13	Lead: Class C + 4% gel+ 2% CaCl ₂ + 0.25 pps CF
Surf.	400	14.8	1.32	6.3	6	Tail: Class C + 2% CaCl ₂ + 0.25 pps CelloFlake
Inter.	425	11.8	2.45	14.4	72	Lead: 50:50:10 C PozGel w/5% Salt+ 5 pps LCM+ 0.25 pps CelloFlake
	375	14.8	1.32	6.3	6	Tail: Class C + 2% Ca Cl ₂
	Multi-stage Contingency DV/ECP Tool +/-1010'					
	125	11.8	2.45	14.4	72	1 st stage Lead: 50:50:10 C: PozGel w/5% Salt+ 5 pps LCM+ 0.25% CelloFlake
	375	14.8	1.32	6.3	6	1 st stage Tail: Class C + 2% CaCl ₂
	300	11.8	2.45	14.4	72	2 nd Stage: 50:50:10 C:Poz Gel w/5% salt + 5 pps LCM+ 0.25% CF

**COG Operating LLC
Ivar the Boneless Federal #11H**

Prod.	675	12.5	2.01	11.4	22	Lead: 35:65:6 C:Poz Gel w/5% salt+5 pps LCM+0.2% SMS + 1% FL-25+1% BA-58+0.3% FL-52A+ 0.125 pps CF
	925	14.0	1.37	6.4	10	Tail: 50:50:2 C:Poz Gel w/5% salt+ 3ppsLCM+0.6% SMS + 0.3% FL-52A+0.125 pps CF+ 1% FL-25+1% BA-58
	Multi-stage Contingency DV/ECP Tool +/-4036'					
	300	12.5	2.01	11.4	22	1st stage Lead: 35:65:6 C:Poz Gel w/5% salt + 5 pps LCM + 0.2% SMS + 1% FL-25 + 1% Ba-58+0.3% FL-52A + 0.125 pps CF
	925	14.0	1.37	6.4	10	1st stage Tail: 50:50:2 C:Pox Gel w/5% salt+5 pps LCM + 0.2% SMS + 1% FL-25+1% Ba-58 + 0.3% FL-52A + 0.125 pps CF
	600	12.5	2.01	11.4	22	2 nd Stage Lead: 35:65:6 C:Poz Gel w/5% salt+5 pps LCM+0.2% SMS + 1% FL-25+1% BA-58+0.3% FL-52A+ 0.125 pps CF
	150	16.8	1.02	5.8	6	2 nd Stage Tail: Class "C" w/ 0.3% R-3 + 1.5% CD-32

Casing String	TOC	% Excess
Surface	0'	100%
Intermediate	0'	100%
Production	0'	35%

4. Pressure Control Equipment * See attachment for further details*****

No	A variance is requested for the use of a diverter on the surface casing. See attached for schematic.
----	--

BOP installed and tested before drilling which hole?	Size?	Min Required WP	Type	✓	Tested to:
12-1/4"	13-5/8"	2M	Annular	X	2000 psi
			Blind Ram		2000 psi
			Pipe Ram		
			Double Ram	X	
			Other*		
8-3/4" & 7 7/8"	13-5/8"	2M	Annular	X	2000 psi
			Blind Ram		2000 psi
			Pipe Ram		
			Double Ram	X	
			Other*		
			Annular		
			Blind Ram		
			Pipe Ram		
			Double Ram		
			Other*		

See COA

COG Operating LLC
Ivar the Boneless Federal #11H

*Specify if additional ram is utilized.

BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. See attached schematics.

NA	Formation integrity test will be performed per Onshore Order #2. On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.i.	
NA	A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart.	
	NA	Are anchors required by manufacturer?
NA	A multibowl wellhead is being used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested. Provide description here See attached schematic.	

5. Mud Program

Depth		Type	Weight (ppg)	Viscosity	Water Loss
From	To				
0	Surf. shoe	FW Gel	8.6-8.8	28-34	N/C
Surf shoe	Int shoe	Saturated Brine	10.0-10.2	28-34	N/C
Int shoe	TD	FW-Cut Brine	8.5-9.2	28-34	N/C

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

What will be used to monitor the loss or gain of fluid?	PVT/Pason/Visual Monitoring
---	-----------------------------

COG Operating LLC
Ivar the Boneless Federal #11H

6. Logging and Testing Procedures

Logging, Coring and Testing.	
X	Will run Cased hole GR/CNL from KOP to surface. Stated logs run will be in the Completion Report and submitted to the BLM.
X	Open hole logs are planned as described below.
No	Drill stem test? If yes, explain
No	Coring? If yes, explain

Additional logs planned	Interval
Resistivity	Int. shoe to KOP
Density	Int. shoe to KOP
CBL	Production casing
X Mud log	Intermediate shoe to TD
X PEX/HRLA, HNGS	Intermediate shoe to KOP

7. Drilling Conditions

Condition	Specify what type and where?
BH Pressure at deepest TVD	2530 psi
Abnormal Temperature	No

Mitigation measure for abnormal conditions.

Hydrogen Sulfide (H2S) monitors will be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.	
NO	H2S is present
Yes	H2S Plan attached

8. Other facets of operation

Is this a walking operation? No.

Will be pre-setting casing? No

Attachments:

Directional Plan

Multi-stage Cement deatils

GEG:2/18/15

COG Operating LLC
Ivar the Boneless Federal #11H

Multi-stage Cement details:

Discussion of DV Tool cement options:

9 5/8" DV tool cement option is proposed for approval. This may become necessary if lost circulation occurs while drilling the 12 1/4" intermediate hole. DV tool depth will be based on hole conditions. Cement volumes will be adjusted proportionally. DV Tool will be set a minimum of 50 feet below previous casing and a minimum of 200 feet above current shoe.

7" DV tool cement option is proposed for approval. This may become necessary if water flows in the San Andres are encountered. These water flows normally occur in areas where produced water disposal is happening. This dense cement is used to combat water flows. This cement recipe also has a right angle set time and is mixed a little under saturated so the water flow will be absorbed by cement. DV tool depth will be based on hole conditions. Cement volumes will be adjusted proportionally. DV tool will be set a minimum of 50 feet below previous casing and a minimum of 200 feet above current shoe.

Discussion of Pressure Control Equipment:

See COA
A 13 5/8" 3000 psi Double ram BOP or 13 5/8" 3000 psi Hydril type annular preventor will be used depending on the rig selected.

sundry needed if hole sizes are changed.
The majority of the rigs currently in use have 13 5/8" 3000 psi BOPs (double ram or hydril type) but due to the vagaries of rig scheduling one of the few rigs with 11" BOPs might be used if the intermediate hole size is 11". Therefore; COG Operating LLC requests variance to the requirement of 13 5/8" BOPs on 13 3/8" casing. When this circumstance is encountered the special flange will be utilized to allow testing the entire BOP with a test plug, without subjecting the casing to test pressure. The special flange also allows return to full-open capability if desired.

In every case COG Operating LLC will use BOP equipment which will meet or exceed Well Control requirements of Onshore Oil and Gas Order No. 2.

GEG 1/28/15

COG OPERATING, LLC

Lea County, NM

Ivar the Boneless Fed 11H

11H

Lateral

Plan: Plan #1

Standard Planning Report

03 February, 2015

Section Distances

Sec22,T17S,R32E

SHL - Unit D

75'FNL, 330'FWL

Sec15,T17S,R32E

PP - Unit M

330'FSL, 330'FWL

PBHL - Unit D

330'FNL, 330'FWL

COG OPERATING, LLC

Field: Lea County, NM
Site: Ivar the Boneless Fed 11H
Well: 11H
Wellbore: Lateral
Plan: Plan #1

TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
Ivar The Boneless Federal #11H SHL	0.00	0.00	0.00	665061.60	675728.90	32° 49' 37.32 N	103° 45' 40.56 W
Ivar The Boneless Federal #11H PBHL	5671.52	5025.70	-30.50	670087.30	675698.40	32° 50' 27.05 N	103° 45' 40.60 W
Ivar The Boneless Federal #11H PP	5737.04	405.07	-2.46	665466.67	675726.44	32° 49' 41.33 N	103° 45' 40.56 W




Section Distances

Sec22, T17S, R32E
SHL - Unit D
75°FNL, 330°FWL
Sec15, T17S, R32E
PP - Unit M
330°FSL, 330°FWL
PBHL - Unit D
330°FNL, 330°FWL



SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VFace	Target
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2	5229.20	0.00	0.00	5229.20	0.00	0.00	0.00	0.00	0.00	
3	6056.48	91.00	359.65	5750.00	529.95	-3.22	11.00	359.65	529.96	
4	10552.99	91.00	359.65	5671.52	5025.70	-30.50	0.00	0.00	5025.79	Ivar The Boneless Federal #11H PBHL

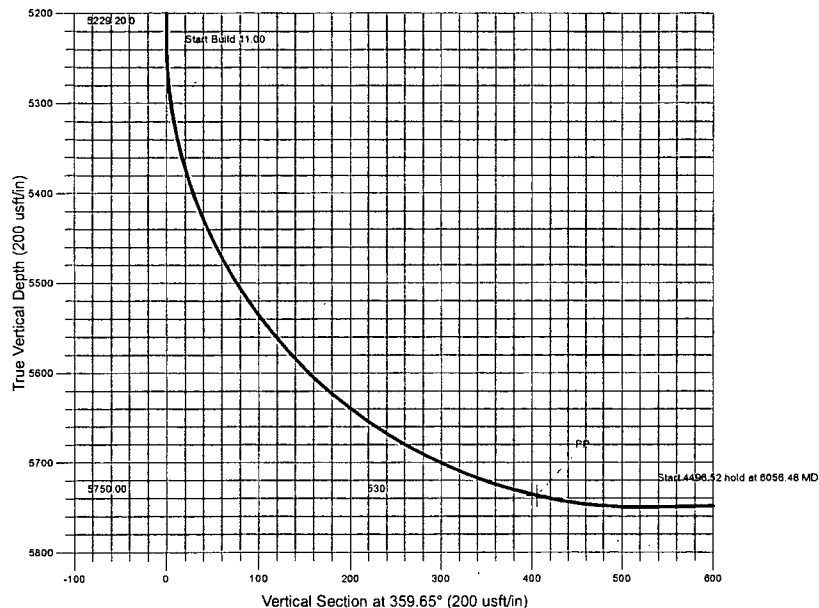

Azimuths to Grid North
True North: -0.31°
Magnetic North: 7.07°

Magnetic Field
Strength: 48660.7nT
Dip Angle: 60.88°
Date: 1/23/2015
Model: HDGM

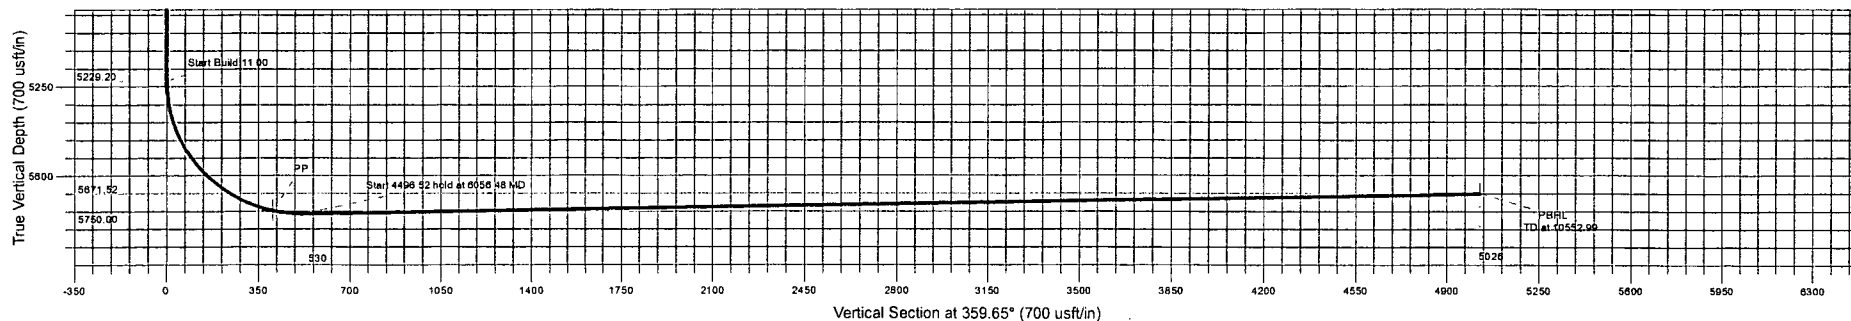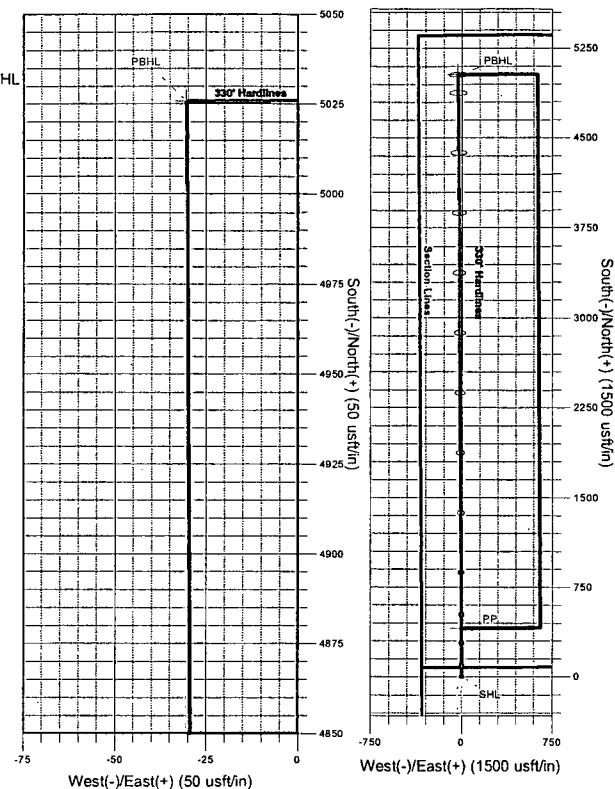

Archer

ARCHER DIRECTIONAL DRILLING SERVICES
12101 Cutten Rd. Houston, Texas 77066
Phone: 281-301-2600 Fax: 281-301-2795

Design: Plan #1 (11H/Lateral)
Created By: Keith Noack
Date: 7:08, February 03 2015

Archer Planning Report

Database:	EDM R5000.1 MULTI	Local Co-ordinate Reference:	Well 11H
Company:	COG OPERATING, LLC	TVD Reference:	4016' GL + 19' RKB @ 4035.00usft (McVay 6)
Project:	Lea County, NM	MD Reference:	4016' GL + 19' RKB @ 4035.00usft (McVay 6)
Site:	Ivar the Boneless Fed 11H	North Reference:	Grid
Well:	11H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Lateral		
Design:	Plan #1		

Project:	Lea County, NM		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site:	Ivar the Boneless Fed 11H		
Site Position:		Northing:	665,061.60 usft
From:	Map	Easting:	675,728.90 usft
Position Uncertainty:	0.00 usft	Slot Radius:	13.200 in
		Latitude:	32° 49' 37.32 N
		Longitude:	103° 45' 40.56 W
		Grid Convergence:	0.31 °

Well	11H					
Well Position	+N-S	0.00 usft	Northing:	665,061.60 usft	Latitude:	32° 49' 37.32 N
	+E-W	0.00 usft	Easting:	675,728.90 usft	Longitude:	103° 45' 40.56 W
Position Uncertainty		0.00 usft	Wellhead Elevation:	0.00 usft	Ground Level:	4,016.00 usft

Wellbore	Lateral				
Magnetics	Model Name	Sample Date	Declination	Dip Angle	Field Strength
			(°)	(°)	(nT)
	HDGM	1/23/2015	7.38	60.88	48,661

Design	Plan #1			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W	Direction
	(usft)	(usft)	(usft)	(°)
	0.00	0.00	0.00	359.65

Plan Sections										
Measured	Inclination	Azimuth	Vertical	+N/-S	+E/-W	Dogleg	Build	Turn	TFO	Target
Depth	(°)	(°)	Depth	(usft)	(usft)	Rate	Rate	Rate	(°)	
(usft)			(usft)			(°/100usft)	(°/100usft)	(°/100usft)		
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
5,229.20	0.00	0.00	5,229.20	0.00	0.00	0.00	0.00	0.00	0.00	
6,056.48	91.00	359.65	5,750.00	529.95	-3.22	11.00	11.00	0.00	359.65	
10,552.99	91.00	359.65	5,671.52	5,025.70	-30.50	0.00	0.00	0.00	0.00	Ivar The Boneless Fed

Archer Planning Report

Database:	EDM R5000.1 MULTI	Local Co-ordinate Reference:	Well 11H
Company:	COG OPERATING, LLC	TVD Reference:	4016' GL + 19' RKB @ 4035.00usft (McVay 6)
Project:	Lea County, NM	MD Reference:	4016' GL + 19' RKB @ 4035.00usft (McVay 6)
Site:	Ivar the Boneless Fed 11H	North Reference:	Grid
Well:	11H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Lateral		
Design:	Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,400.00	0.00	0.00	0.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00
2,600.00	0.00	0.00	2,600.00	0.00	0.00	0.00	0.00	0.00	0.00
2,700.00	0.00	0.00	2,700.00	0.00	0.00	0.00	0.00	0.00	0.00
2,800.00	0.00	0.00	2,800.00	0.00	0.00	0.00	0.00	0.00	0.00
2,900.00	0.00	0.00	2,900.00	0.00	0.00	0.00	0.00	0.00	0.00
3,000.00	0.00	0.00	3,000.00	0.00	0.00	0.00	0.00	0.00	0.00
3,100.00	0.00	0.00	3,100.00	0.00	0.00	0.00	0.00	0.00	0.00
3,200.00	0.00	0.00	3,200.00	0.00	0.00	0.00	0.00	0.00	0.00
3,300.00	0.00	0.00	3,300.00	0.00	0.00	0.00	0.00	0.00	0.00
3,400.00	0.00	0.00	3,400.00	0.00	0.00	0.00	0.00	0.00	0.00
3,500.00	0.00	0.00	3,500.00	0.00	0.00	0.00	0.00	0.00	0.00
3,600.00	0.00	0.00	3,600.00	0.00	0.00	0.00	0.00	0.00	0.00
3,700.00	0.00	0.00	3,700.00	0.00	0.00	0.00	0.00	0.00	0.00
3,800.00	0.00	0.00	3,800.00	0.00	0.00	0.00	0.00	0.00	0.00
3,900.00	0.00	0.00	3,900.00	0.00	0.00	0.00	0.00	0.00	0.00
4,000.00	0.00	0.00	4,000.00	0.00	0.00	0.00	0.00	0.00	0.00
4,100.00	0.00	0.00	4,100.00	0.00	0.00	0.00	0.00	0.00	0.00
4,200.00	0.00	0.00	4,200.00	0.00	0.00	0.00	0.00	0.00	0.00
4,300.00	0.00	0.00	4,300.00	0.00	0.00	0.00	0.00	0.00	0.00
4,400.00	0.00	0.00	4,400.00	0.00	0.00	0.00	0.00	0.00	0.00
4,500.00	0.00	0.00	4,500.00	0.00	0.00	0.00	0.00	0.00	0.00
4,600.00	0.00	0.00	4,600.00	0.00	0.00	0.00	0.00	0.00	0.00
4,700.00	0.00	0.00	4,700.00	0.00	0.00	0.00	0.00	0.00	0.00
4,800.00	0.00	0.00	4,800.00	0.00	0.00	0.00	0.00	0.00	0.00
4,900.00	0.00	0.00	4,900.00	0.00	0.00	0.00	0.00	0.00	0.00
5,000.00	0.00	0.00	5,000.00	0.00	0.00	0.00	0.00	0.00	0.00
5,100.00	0.00	0.00	5,100.00	0.00	0.00	0.00	0.00	0.00	0.00
5,200.00	0.00	0.00	5,200.00	0.00	0.00	0.00	0.00	0.00	0.00
5,229.20	0.00	0.00	5,229.20	0.00	0.00	0.00	0.00	0.00	0.00

Archer Planning Report

Database:	EDM R5000.1 MULTI	Local Co-ordinate Reference:	Well 11H
Company:	COG OPERATING, LLC	TVD Reference:	4016' GL + 19' RKB @ 4035.00usft (McVay 6)
Project:	Lea County, NM	MD Reference:	4016' GL + 19' RKB @ 4035.00usft (McVay 6)
Site:	Ivar the Boneless Fed 11H	North Reference:	Grid
Well:	11H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Lateral		
Design:	Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
Start Build 11.00									
5,250.00	2.29	359.65	5,249.99	0.42	0.00	0.42	11.00	11.00	0.00
5,300.00	7.79	359.65	5,299.78	4.80	-0.03	4.80	11.00	11.00	0.00
5,350.00	13.29	359.65	5,348.92	13.94	-0.08	13.94	11.00	11.00	0.00
5,400.00	18.79	359.65	5,396.96	27.75	-0.17	27.75	11.00	11.00	0.00
5,450.00	24.29	359.65	5,443.45	46.10	-0.28	46.10	11.00	11.00	0.00
5,500.00	29.79	359.65	5,487.97	68.82	-0.42	68.82	11.00	11.00	0.00
5,550.00	35.29	359.65	5,530.10	95.70	-0.58	95.70	11.00	11.00	0.00
5,600.00	40.79	359.65	5,569.47	126.50	-0.77	126.50	11.00	11.00	0.00
5,650.00	46.29	359.65	5,605.70	160.93	-0.98	160.93	11.00	11.00	0.00
5,700.00	51.79	359.65	5,638.46	198.67	-1.21	198.67	11.00	11.00	0.00
5,750.00	57.29	359.65	5,667.46	239.38	-1.45	239.38	11.00	11.00	0.00
5,800.00	62.79	359.65	5,692.42	282.68	-1.72	282.68	11.00	11.00	0.00
5,850.00	68.29	359.65	5,713.12	328.17	-1.99	328.18	11.00	11.00	0.00
5,900.00	73.79	359.65	5,729.36	375.44	-2.28	375.44	11.00	11.00	0.00
5,950.00	79.29	359.65	5,741.00	424.04	-2.57	424.05	11.00	11.00	0.00
6,000.00	84.79	359.65	5,747.92	473.54	-2.87	473.55	11.00	11.00	0.00
6,050.00	90.29	359.65	5,750.07	523.48	-3.18	523.49	11.00	11.00	0.00
6,056.48	91.00	359.65	5,750.00	529.95	-3.22	529.96	11.00	11.00	0.00
Start 4496.52 hold at 6056.48 MD									
6,100.00	91.00	359.65	5,749.24	573.47	-3.48	573.48	0.00	0.00	0.00
6,200.00	91.00	359.65	5,747.49	673.45	-4.09	673.46	0.00	0.00	0.00
6,300.00	91.00	359.65	5,745.75	773.43	-4.69	773.45	0.00	0.00	0.00
6,400.00	91.00	359.65	5,744.00	873.42	-5.30	873.43	0.00	0.00	0.00
6,500.00	91.00	359.65	5,742.25	973.40	-5.91	973.42	0.00	0.00	0.00
6,600.00	91.00	359.65	5,740.51	1,073.38	-6.51	1,073.40	0.00	0.00	0.00
6,700.00	91.00	359.65	5,738.76	1,173.37	-7.12	1,173.39	0.00	0.00	0.00
6,800.00	91.00	359.65	5,737.02	1,273.35	-7.73	1,273.37	0.00	0.00	0.00
6,900.00	91.00	359.65	5,735.27	1,373.33	-8.33	1,373.36	0.00	0.00	0.00
7,000.00	91.00	359.65	5,733.53	1,473.31	-8.94	1,473.34	0.00	0.00	0.00
7,100.00	91.00	359.65	5,731.78	1,573.30	-9.55	1,573.33	0.00	0.00	0.00
7,200.00	91.00	359.65	5,730.04	1,673.28	-10.15	1,673.31	0.00	0.00	0.00
7,300.00	91.00	359.65	5,728.29	1,773.26	-10.76	1,773.30	0.00	0.00	0.00
7,400.00	91.00	359.65	5,726.55	1,873.25	-11.37	1,873.28	0.00	0.00	0.00
7,500.00	91.00	359.65	5,724.80	1,973.23	-11.98	1,973.26	0.00	0.00	0.00
7,600.00	91.00	359.65	5,723.06	2,073.21	-12.58	2,073.25	0.00	0.00	0.00
7,700.00	91.00	359.65	5,721.31	2,173.19	-13.19	2,173.23	0.00	0.00	0.00
7,800.00	91.00	359.65	5,719.57	2,273.18	-13.80	2,273.22	0.00	0.00	0.00
7,900.00	91.00	359.65	5,717.82	2,373.16	-14.40	2,373.20	0.00	0.00	0.00
8,000.00	91.00	359.65	5,716.08	2,473.14	-15.01	2,473.19	0.00	0.00	0.00
8,100.00	91.00	359.65	5,714.33	2,573.13	-15.62	2,573.17	0.00	0.00	0.00
8,200.00	91.00	359.65	5,712.59	2,673.11	-16.22	2,673.16	0.00	0.00	0.00
8,300.00	91.00	359.65	5,710.84	2,773.09	-16.83	2,773.14	0.00	0.00	0.00
8,400.00	91.00	359.65	5,709.10	2,873.08	-17.44	2,873.13	0.00	0.00	0.00
8,500.00	91.00	359.65	5,707.35	2,973.06	-18.04	2,973.11	0.00	0.00	0.00
8,600.00	91.00	359.65	5,705.60	3,073.04	-18.65	3,073.10	0.00	0.00	0.00
8,700.00	91.00	359.65	5,703.86	3,173.02	-19.26	3,173.08	0.00	0.00	0.00
8,800.00	91.00	359.65	5,702.11	3,273.01	-19.86	3,273.07	0.00	0.00	0.00
8,900.00	91.00	359.65	5,700.37	3,372.99	-20.47	3,373.05	0.00	0.00	0.00
9,000.00	91.00	359.65	5,698.62	3,472.97	-21.08	3,473.04	0.00	0.00	0.00
9,100.00	91.00	359.65	5,696.88	3,572.96	-21.68	3,573.02	0.00	0.00	0.00
9,200.00	91.00	359.65	5,695.13	3,672.94	-22.29	3,673.01	0.00	0.00	0.00
9,300.00	91.00	359.65	5,693.39	3,772.92	-22.90	3,772.99	0.00	0.00	0.00

Archer Planning Report

Database:	EDM R5000.1 MULTI	Local Co-ordinate Reference:	Well 11H
Company:	COG OPERATING, LLC	TVD Reference:	4016' GL + 19' RKB @ 4035.00usft (McVay 6)
Project:	Lea County, NM	MD Reference:	4016' GL + 19' RKB @ 4035.00usft (McVay 6)
Site:	Ivar the Boneless Fed 11H	North Reference:	Grid
Well:	11H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Lateral		
Design:	Plan #1		


Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
9,400.00	91.00	359.65	5,691.64	3,872.90	-23.50	3,872.98	0.00	0.00	0.00
9,500.00	91.00	359.65	5,689.90	3,972.89	-24.11	3,972.96	0.00	0.00	0.00
9,600.00	91.00	359.65	5,688.15	4,072.87	-24.72	4,072.95	0.00	0.00	0.00
9,700.00	91.00	359.65	5,686.41	4,172.85	-25.32	4,172.93	0.00	0.00	0.00
9,800.00	91.00	359.65	5,684.66	4,272.84	-25.93	4,272.91	0.00	0.00	0.00
9,900.00	91.00	359.65	5,682.92	4,372.82	-26.54	4,372.90	0.00	0.00	0.00
10,000.00	91.00	359.65	5,681.17	4,472.80	-27.14	4,472.88	0.00	0.00	0.00
10,100.00	91.00	359.65	5,679.43	4,572.78	-27.75	4,572.87	0.00	0.00	0.00
10,200.00	91.00	359.65	5,677.68	4,672.77	-28.36	4,672.85	0.00	0.00	0.00
10,300.00	91.00	359.65	5,675.94	4,772.75	-28.96	4,772.84	0.00	0.00	0.00
10,400.00	91.00	359.65	5,674.19	4,872.73	-29.57	4,872.82	0.00	0.00	0.00
10,500.00	91.00	359.65	5,672.44	4,972.72	-30.18	4,972.81	0.00	0.00	0.00
10,552.99	91.00	359.65	5,671.52	5,025.70	-30.50	5,025.79	0.00	0.00	0.00
TD at 10552.99									

Design Targets									
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
hit/miss target									
Shape									
Ivar The Boneless Feder - plan hits target center - Point	0.00	0.00	0.00	0.00	0.00	665,061.60	675,728.90	32° 49' 37.32 N	103° 45' 40.56 W
Ivar The Boneless Feder - plan hits target center - Point	0.00	0.00	5,671.52	5,025.70	-30.50	670,087.30	675,698.40	32° 50' 27.05 N	103° 45' 40.60 W
Ivar The Boneless Feder - plan hits target center - Point	0.00	0.00	5,737.04	405.07	-2.46	665,466.68	675,726.44	32° 49' 41.33 N	103° 45' 40.56 W

Plan Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
5,229.20	5,229.20	0.00	0.00	Start Build 11.00
6,056.48	5,750.00	529.95	-3.22	Start 4496.52 hold at 6056.48 MD
10,552.99	5,671.52	5,025.70	-30.50	TD at 10552.99

Exhibit #10


(Choke Manifold Schematic same as Exhibit #9)

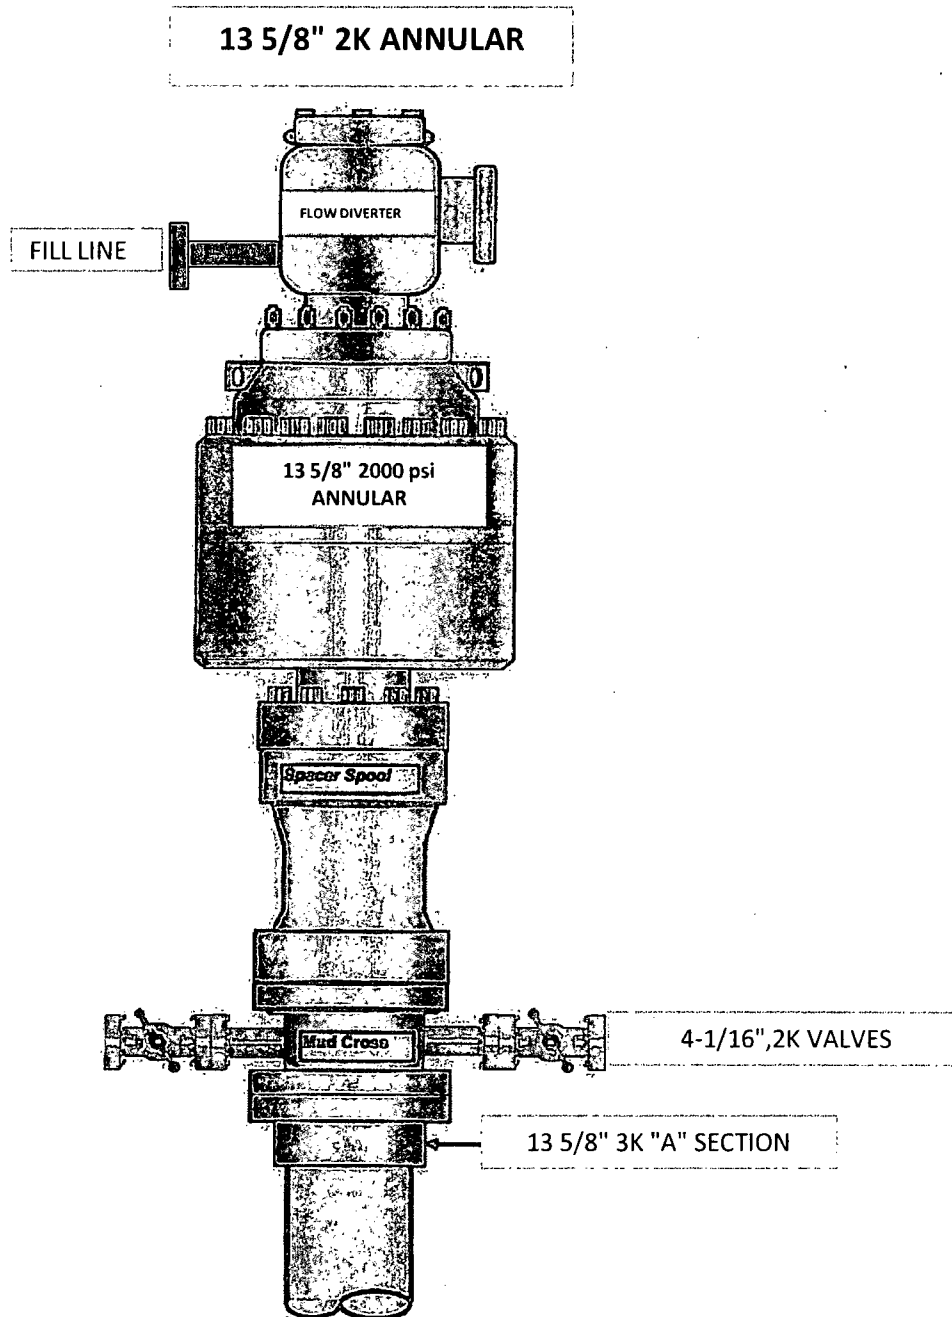


COG Operating LLC

Exhibit #9

BOPE and Choke Schematic

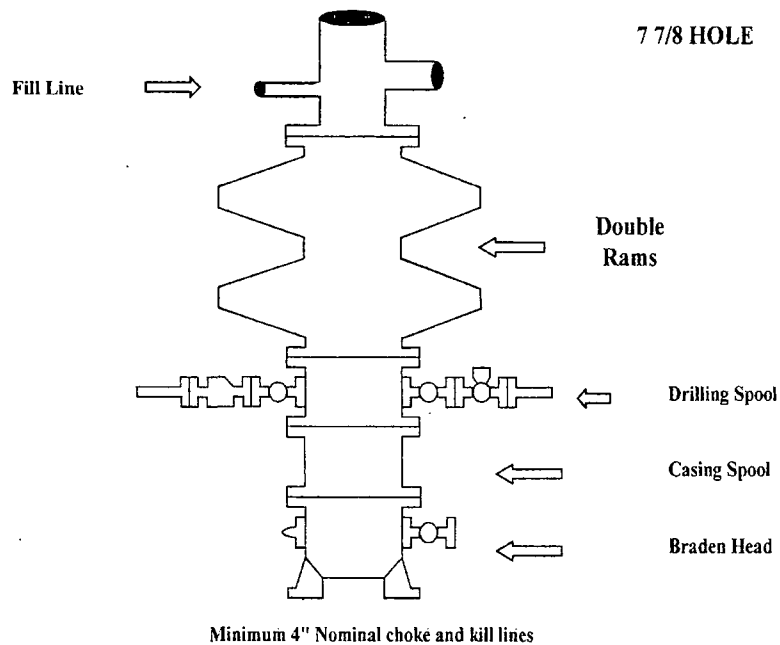

Choke Manifold Requirement (2000 psi WP)
No Annular Required

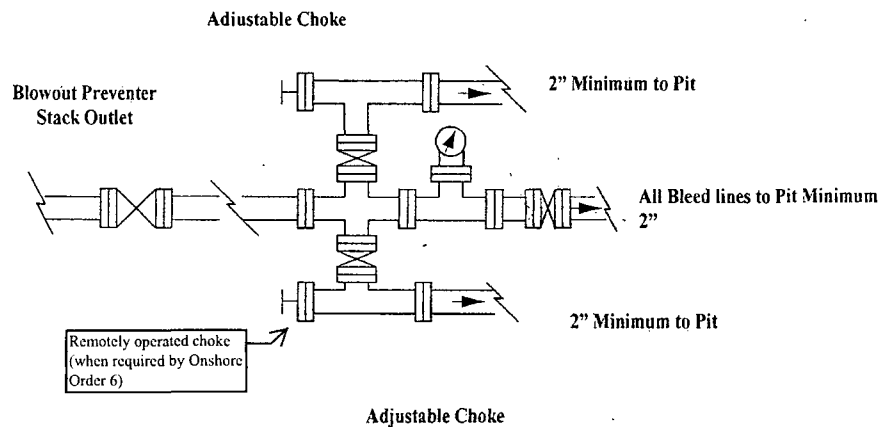

NOTES REGARDING THE BLOWOUT PREVENTERS

**Master Drilling Plan
Eddy County, New Mexico**

1. Drilling nipple to be so constructed that it can be removed without use of a welder through rotary table opening, with minimum I.D. equal to preventer bore.
2. Wear ring to be properly installed in head.
3. Blow out preventer and all fittings must be in good condition, 2000 psi WP minimum.
4. All fittings to be flanged.
5. Safety valve must be available on rig floor at all times with proper connections, valve to be full 2000 psi WP minimum.
6. All choke and fill lines to be securely anchored especially ends of choke lines.
7. Equipment through which bit must pass shall be at least as large as the diameter of the casing being drilled through.
8. Kelly cock on Kelly.
9. Extension wrenches and hands wheels to be properly installed.
10. Blow out preventer control to be located as close to driller's position as feasible.
11. Blow out preventer closing equipment to include minimum 40-gallon accumulator, two independent sources of pump power on each closing unit installation all API specifications.

Closed Loop Operation & Maintenance Procedure

All drilling fluid circulated over shaker(s) with cuttings discharged into roll off container.

Fluid and fines below shaker(s) are circulated with transfer pump through centrifuge(s) or solids separator with cuttings and fines discharged into roll off container.

Fluid is continuously re-circulated through equipment with polymer added to aid separation of cutting fines.

Roll off containers are lined and de-watered with fluids re-circulated into system.

Additional tank is used to capture unused drilling fluid or cement returns from casing jobs.

This equipment will be maintained 24 hrs./day by solids control personnel and or rig crews that stay on location.

Cuttings will be hauled to either:

CRI (permit number R9166)


or

GMI (permit number 711-019-001)

dependent upon which rig is available to drill this well.

COG Operating LLC

Closed Loop Equipment Diagram

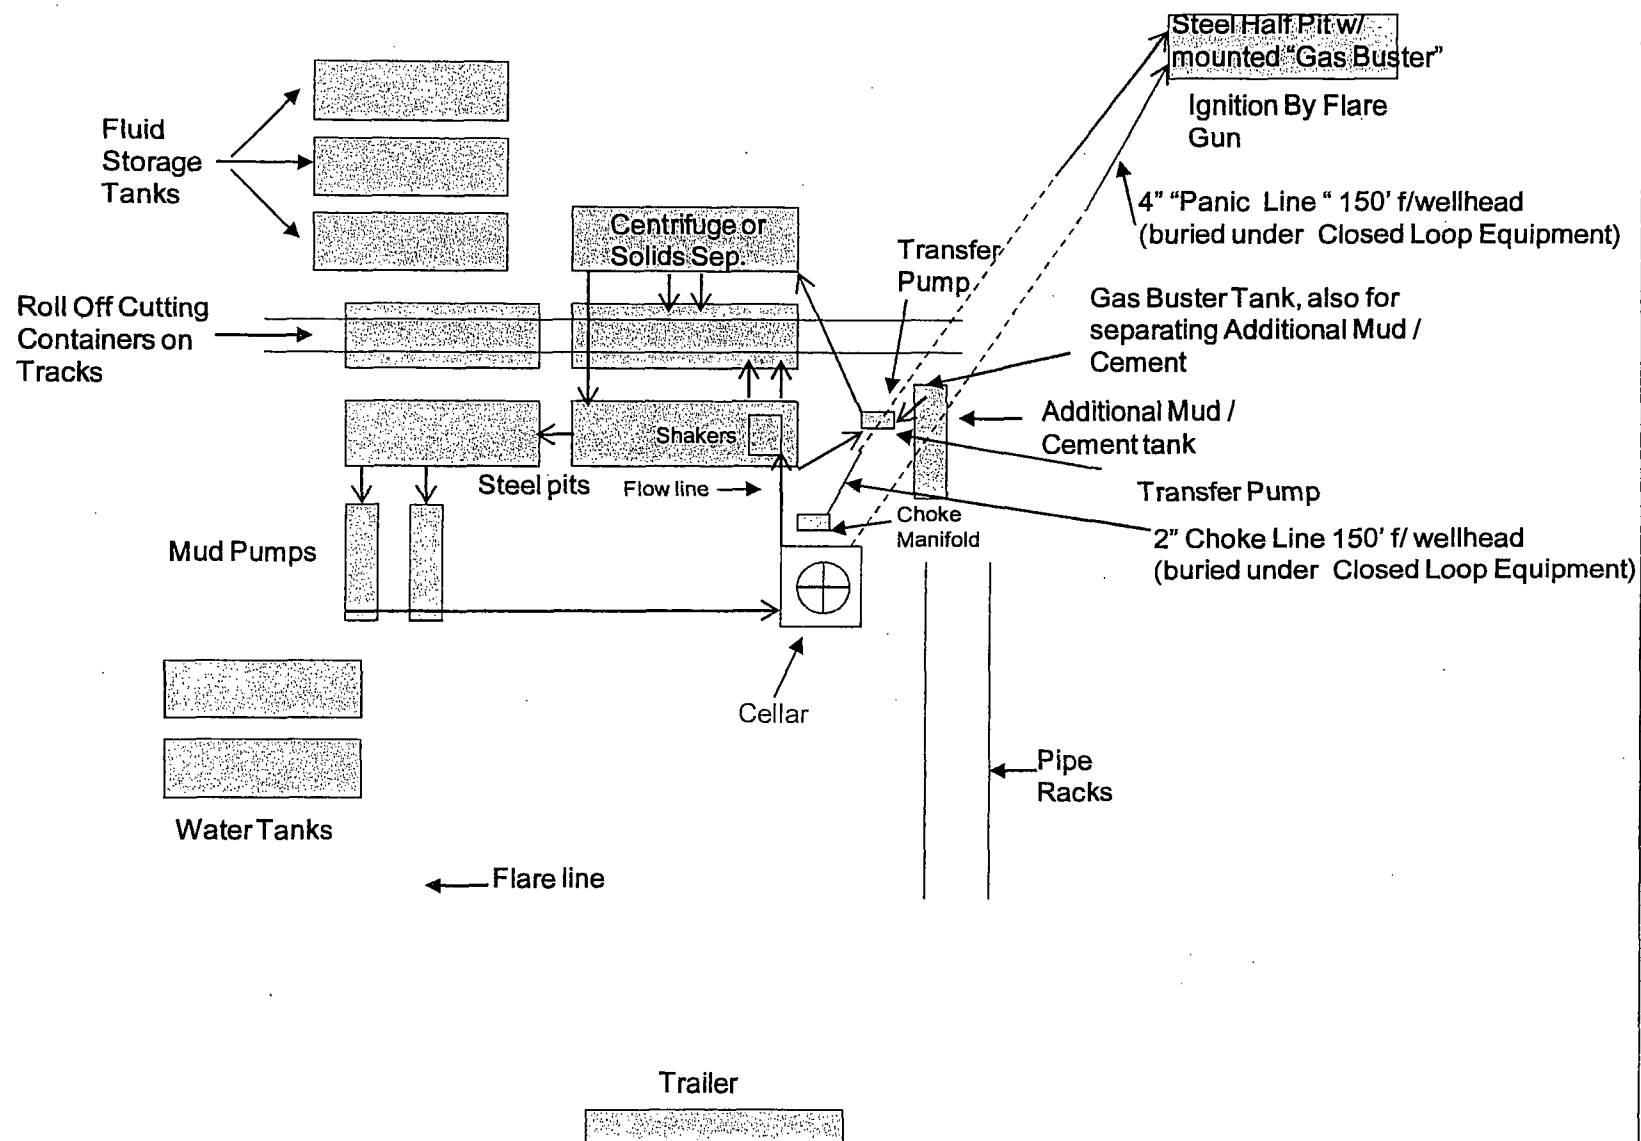

COG OPERATING, LLC

Lea County, NM

Ivar The Boneless Fed 1H

1H

Original Hole

Plan: Plan #1

Standard Planning Report

05 August, 2014

Section Distances

Sec10,T17S,R32E

SHL - Unit M

Sec15,T17S,R32E

370'FSL, 380'FWL

PP

330'FNL, 374'FWL

PBHL - Unit M

330'FSL, 330'FWL

Archer

Planning Report

Database: EDM R5000.1 MULTI
Company: COG OPERATING, LLC
Project: Lea County, NM
Site: Ivar The Boneless Fed 1H
Well: 1H
Wellbore: Original Hole
Design: Plan #1

Local Co-ordinate Reference: Well 1H
TVD Reference: 4099'GL @ 4099.00usft (Planning)
MD Reference: 4099'GL @ 4099.00usft (Planning)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Project	Lea County, NM		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site	Ivar The Boneless Fed 1H		
Site Position:		Northing:	670,787.50 usft
From:	Map	Easting:	675,744.40 usft
Position Uncertainty:	0.00 usft	Slot Radius:	13.200 in
		Latitude:	32° 50' 33.98 N
		Longitude:	103° 45' 40.01 W
		Grid Convergence:	0.31 °

Well	1H		
Well Position	+N/-S	0.00 usft	Northing: 670,787.50 usft
	+E/-W	0.00 usft	Easting: 675,744.40 usft
Position Uncertainty	0.00 usft	Wellhead Elevation:	Latitude: 32° 50' 33.98 N
			Longitude: 103° 45' 40.01 W
			Ground Level: 4,099.00 usft

Wellbore	Original Hole		
Magnetics	Model Name	Sample Date	Declination
	IGRF2010	8/5/2014	(°)
			7.33
			Dip Angle
			(°)
			60.65
			Field Strength
			(nT)
			48,648

Design	Plan #1		
Audit Notes:			
Version:	Phase:	PROTOTYPE	Tie On Depth: 0.00
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W
	(usft)	(usft)	(usft)
	0.00	0.00	0.00
			Direction
			(°)
			180.20

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
5,229.21	0.00	0.00	5,229.21	0.00	0.00	0.00	0.00	0.00	0.00	
6,056.48	91.00	180.20	5,750.00	-529.96	-1.81	11.00	11.00	0.00	180.20	
10,848.18	91.00	180.20	5,666.37	-5,320.90	-18.20	0.00	0.00	0.00	0.00	Ivar 1H PBHL

Archer

Planning Report

Database: EDM R5000.1 MULTI
Company: COG OPERATING, LLC
Project: Lea County, NM
Site: Ivar The Boneless Fed 1H
Well: 1H
Wellbore: Original Hole
Design: Plan #1

Local Co-ordinate Reference: Well 1H
TVD Reference: 4099'GL @ 4099.00usft (Planning)
MD Reference: 4099'GL @ 4099.00usft (Planning)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,400.00	0.00	0.00	0.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00
2,600.00	0.00	0.00	2,600.00	0.00	0.00	0.00	0.00	0.00	0.00
2,700.00	0.00	0.00	2,700.00	0.00	0.00	0.00	0.00	0.00	0.00
2,800.00	0.00	0.00	2,800.00	0.00	0.00	0.00	0.00	0.00	0.00
2,900.00	0.00	0.00	2,900.00	0.00	0.00	0.00	0.00	0.00	0.00
3,000.00	0.00	0.00	3,000.00	0.00	0.00	0.00	0.00	0.00	0.00
3,100.00	0.00	0.00	3,100.00	0.00	0.00	0.00	0.00	0.00	0.00
3,200.00	0.00	0.00	3,200.00	0.00	0.00	0.00	0.00	0.00	0.00
3,300.00	0.00	0.00	3,300.00	0.00	0.00	0.00	0.00	0.00	0.00
3,400.00	0.00	0.00	3,400.00	0.00	0.00	0.00	0.00	0.00	0.00
3,500.00	0.00	0.00	3,500.00	0.00	0.00	0.00	0.00	0.00	0.00
3,600.00	0.00	0.00	3,600.00	0.00	0.00	0.00	0.00	0.00	0.00
3,700.00	0.00	0.00	3,700.00	0.00	0.00	0.00	0.00	0.00	0.00
3,800.00	0.00	0.00	3,800.00	0.00	0.00	0.00	0.00	0.00	0.00
3,900.00	0.00	0.00	3,900.00	0.00	0.00	0.00	0.00	0.00	0.00
4,000.00	0.00	0.00	4,000.00	0.00	0.00	0.00	0.00	0.00	0.00
4,100.00	0.00	0.00	4,100.00	0.00	0.00	0.00	0.00	0.00	0.00
4,200.00	0.00	0.00	4,200.00	0.00	0.00	0.00	0.00	0.00	0.00
4,300.00	0.00	0.00	4,300.00	0.00	0.00	0.00	0.00	0.00	0.00
4,400.00	0.00	0.00	4,400.00	0.00	0.00	0.00	0.00	0.00	0.00
4,500.00	0.00	0.00	4,500.00	0.00	0.00	0.00	0.00	0.00	0.00
4,600.00	0.00	0.00	4,600.00	0.00	0.00	0.00	0.00	0.00	0.00
4,700.00	0.00	0.00	4,700.00	0.00	0.00	0.00	0.00	0.00	0.00
4,800.00	0.00	0.00	4,800.00	0.00	0.00	0.00	0.00	0.00	0.00
4,900.00	0.00	0.00	4,900.00	0.00	0.00	0.00	0.00	0.00	0.00
5,000.00	0.00	0.00	5,000.00	0.00	0.00	0.00	0.00	0.00	0.00
5,100.00	0.00	0.00	5,100.00	0.00	0.00	0.00	0.00	0.00	0.00
5,200.00	0.00	0.00	5,200.00	0.00	0.00	0.00	0.00	0.00	0.00
5,229.21	0.00	0.00	5,229.21	0.00	0.00	0.00	0.00	0.00	0.00

Archer

Planning Report

Database: EDM R5000.1 MULTI
Company: COG OPERATING, LLC
Project: Lea County, NM
Site: Ivar The Boneless Fed 1H
Well: 1H
Wellbore: Original Hole
Design: Plan #1

Local Co-ordinate Reference: Well 1H
TVD Reference: 4099'GL @ 4099.00usft (Planning)
MD Reference: 4099'GL @ 4099.00usft (Planning)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
Start Build 11.00									
5,250.00	2.29	180.20	5,249.99	-0.42	0.00	0.42	11.00	11.00	0.00
5,300.00	7.79	180.20	5,299.78	-4.80	-0.02	4.80	11.00	11.00	0.00
5,350.00	13.29	180.20	5,348.92	-13.94	-0.05	13.94	11.00	11.00	0.00
5,400.00	18.79	180.20	5,396.96	-27.75	-0.09	27.75	11.00	11.00	0.00
5,450.00	24.29	180.20	5,443.45	-46.10	-0.16	46.10	11.00	11.00	0.00
5,500.00	29.79	180.20	5,487.97	-68.82	-0.24	68.82	11.00	11.00	0.00
5,550.00	35.29	180.20	5,530.10	-95.70	-0.33	95.70	11.00	11.00	0.00
5,600.00	40.79	180.20	5,569.47	-126.50	-0.43	126.50	11.00	11.00	0.00
5,650.00	46.29	180.20	5,605.70	-160.93	-0.55	160.93	11.00	11.00	0.00
5,700.00	51.79	180.20	5,638.46	-198.67	-0.68	198.67	11.00	11.00	0.00
5,750.00	57.29	180.20	5,667.46	-239.38	-0.82	239.38	11.00	11.00	0.00
5,800.00	62.79	180.20	5,692.42	-282.68	-0.97	282.68	11.00	11.00	0.00
5,850.00	68.29	180.20	5,713.12	-328.17	-1.12	328.17	11.00	11.00	0.00
5,900.00	73.79	180.20	5,729.36	-375.44	-1.28	375.44	11.00	11.00	0.00
5,950.00	79.29	180.20	5,741.00	-424.05	-1.45	424.05	11.00	11.00	0.00
6,000.00	84.79	180.20	5,747.92	-473.55	-1.62	473.55	11.00	11.00	0.00
6,050.00	90.29	180.20	5,750.07	-523.48	-1.79	523.48	11.00	11.00	0.00
6,056.48	91.00	180.20	5,750.00	-529.96	-1.81	529.96	11.00	11.00	0.00
Start 4791.70 hold at 6056.48 MD									
6,100.00	91.00	180.20	5,749.24	-573.47	-1.96	573.48	0.00	0.00	0.00
6,200.00	91.00	180.20	5,747.49	-673.46	-2.30	673.46	0.00	0.00	0.00
6,300.00	91.00	180.20	5,745.75	-773.44	-2.65	773.45	0.00	0.00	0.00
6,400.00	91.00	180.20	5,744.00	-873.43	-2.99	873.43	0.00	0.00	0.00
6,500.00	91.00	180.20	5,742.26	-973.41	-3.33	973.42	0.00	0.00	0.00
6,600.00	91.00	180.20	5,740.51	-1,073.39	-3.67	1,073.40	0.00	0.00	0.00
6,700.00	91.00	180.20	5,738.77	-1,173.38	-4.01	1,173.39	0.00	0.00	0.00
6,800.00	91.00	180.20	5,737.02	-1,273.36	-4.36	1,273.37	0.00	0.00	0.00
6,900.00	91.00	180.20	5,735.28	-1,373.35	-4.70	1,373.35	0.00	0.00	0.00
7,000.00	91.00	180.20	5,733.53	-1,473.33	-5.04	1,473.34	0.00	0.00	0.00
7,100.00	91.00	180.20	5,731.78	-1,573.32	-5.38	1,573.32	0.00	0.00	0.00
7,200.00	91.00	180.20	5,730.04	-1,673.30	-5.72	1,673.31	0.00	0.00	0.00
7,300.00	91.00	180.20	5,728.29	-1,773.28	-6.07	1,773.29	0.00	0.00	0.00
7,400.00	91.00	180.20	5,726.55	-1,873.27	-6.41	1,873.28	0.00	0.00	0.00
7,500.00	91.00	180.20	5,724.80	-1,973.25	-6.75	1,973.26	0.00	0.00	0.00
7,600.00	91.00	180.20	5,723.06	-2,073.24	-7.09	2,073.25	0.00	0.00	0.00
7,700.00	91.00	180.20	5,721.31	-2,173.22	-7.43	2,173.23	0.00	0.00	0.00
7,800.00	91.00	180.20	5,719.57	-2,273.20	-7.78	2,273.22	0.00	0.00	0.00
7,900.00	91.00	180.20	5,717.82	-2,373.19	-8.12	2,373.20	0.00	0.00	0.00
8,000.00	91.00	180.20	5,716.08	-2,473.17	-8.46	2,473.19	0.00	0.00	0.00
8,100.00	91.00	180.20	5,714.33	-2,573.16	-8.80	2,573.17	0.00	0.00	0.00
8,200.00	91.00	180.20	5,712.59	-2,673.14	-9.14	2,673.16	0.00	0.00	0.00
8,300.00	91.00	180.20	5,710.84	-2,773.13	-9.49	2,773.14	0.00	0.00	0.00
8,400.00	91.00	180.20	5,709.10	-2,873.11	-9.83	2,873.13	0.00	0.00	0.00
8,500.00	91.00	180.20	5,707.35	-2,973.09	-10.17	2,973.11	0.00	0.00	0.00
8,600.00	91.00	180.20	5,705.61	-3,073.08	-10.51	3,073.10	0.00	0.00	0.00
8,700.00	91.00	180.20	5,703.86	-3,173.06	-10.85	3,173.08	0.00	0.00	0.00
8,800.00	91.00	180.20	5,702.12	-3,273.05	-11.20	3,273.07	0.00	0.00	0.00
8,900.00	91.00	180.20	5,700.37	-3,373.03	-11.54	3,373.05	0.00	0.00	0.00
9,000.00	91.00	180.20	5,698.63	-3,473.01	-11.88	3,473.03	0.00	0.00	0.00
9,100.00	91.00	180.20	5,696.88	-3,573.00	-12.22	3,573.02	0.00	0.00	0.00
9,200.00	91.00	180.20	5,695.13	-3,672.98	-12.56	3,673.00	0.00	0.00	0.00
9,300.00	91.00	180.20	5,693.39	-3,772.97	-12.91	3,772.99	0.00	0.00	0.00

Archer

Planning Report

Database: EDM R5000.1 MULTI
Company: COG OPERATING, LLC
Project: Lea County, NM
Site: Ivar The Boneless Fed 1H
Well: 1H
Wellbore: Original Hole
Design: Plan #1

Local Co-ordinate Reference: Well 1H
TVD Reference: 4099'GL @ 4099.00usft (Planning)
MD Reference: 4099'GL @ 4099.00usft (Planning)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
9,400.00	91.00	180.20	5,691.64	-3,872.95	-13.25	3,872.97	0.00	0.00	0.00
9,500.00	91.00	180.20	5,689.90	-3,972.94	-13.59	3,972.96	0.00	0.00	0.00
9,600.00	91.00	180.20	5,688.15	-4,072.92	-13.93	4,072.94	0.00	0.00	0.00
9,700.00	91.00	180.20	5,686.41	-4,172.90	-14.27	4,172.93	0.00	0.00	0.00
9,800.00	91.00	180.20	5,684.66	-4,272.89	-14.62	4,272.91	0.00	0.00	0.00
9,900.00	91.00	180.20	5,682.92	-4,372.87	-14.96	4,372.90	0.00	0.00	0.00
10,000.00	91.00	180.20	5,681.17	-4,472.86	-15.30	4,472.88	0.00	0.00	0.00
10,100.00	91.00	180.20	5,679.43	-4,572.84	-15.64	4,572.87	0.00	0.00	0.00
10,200.00	91.00	180.20	5,677.68	-4,672.82	-15.98	4,672.85	0.00	0.00	0.00
10,300.00	91.00	180.20	5,675.94	-4,772.81	-16.33	4,772.84	0.00	0.00	0.00
10,400.00	91.00	180.20	5,674.19	-4,872.79	-16.67	4,872.82	0.00	0.00	0.00
10,500.00	91.00	180.20	5,672.45	-4,972.78	-17.01	4,972.81	0.00	0.00	0.00
10,600.00	91.00	180.20	5,670.70	-5,072.76	-17.35	5,072.79	0.00	0.00	0.00
10,700.00	91.00	180.20	5,668.96	-5,172.75	-17.69	5,172.78	0.00	0.00	0.00
10,800.00	91.00	180.20	5,667.21	-5,272.73	-18.04	5,272.76	0.00	0.00	0.00
10,848.18	91.00	180.20	5,666.37	-5,320.90	-18.20	5,320.93	0.00	0.00	0.00

TD at 10848.18

Design Targets

Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
- hit/miss target									
- Shape									
Ivar 1H PP	0.00	0.00	0.00	-699.94	-2.39	670,087.56	675,742.00	32° 50' 27.05 N	103° 45' 40.08 W
- plan misses target center by 699.95usft at 0.00usft MD (0.00 TVD, 0.00 N, 0.00 E)									
- Point									
Ivar 1H Surface	0.00	0.00	0.00	0.00	0.00	670,787.50	675,744.40	32° 50' 33.98 N	103° 45' 40.01 W
- plan hits target center									
- Point									
Ivar 1H PBHL	0.00	0.00	5,666.37	-5,320.90	-18.20	665,466.60	675,726.20	32° 49' 41.33 N	103° 45' 40.56 W
- plan hits target center									
- Point									

Plan Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates +N/-S (usft)	+E/-W (usft)	Comment
5,229.21	5,229.21	0.00	0.00	Start Build 11.00
6,056.48	5,750.00	-529.96	-1.81	Start 4791.70 hold at 6056.48 MD
10,848.18	5,666.37	-5,320.90	-18.20	TD at 10848.18

COG OPERATING, LLC

Field: Lea County, NM
Site: Ivar The Boneless Fed 1H
Well: 1H
Wellbore: Lateral
Plan: Plan #1




SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSec	Target
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2	5229.21	0.00	0.00	5229.21	0.00	0.00	0.00	0.00	0.00	
3	6056.48	91.00	180.20	5750.00	-529.96	-1.81	11.00	180.20	529.96	Ivar 1H PBHL
4	10848.18	91.00	180.20	5666.37	-5320.90	-18.20	0.00	0.00	5320.93	Ivar 1H PBHL

TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Shape
Ivar 1H PP	0.00	-699.94	-2.39	670087.56	675742.01	32° 50' 27.05 N	103° 45' 40.08 W	Point
Ivar 1H Surface	0.00	0.00	0.00	670787.50	675744.40	32° 50' 33.98 N	103° 45' 40.01 W	Point
Ivar 1H PBHL	5666.37	-5320.90	-18.20	665466.60	675726.20	32° 49' 41.33 N	103° 45' 40.56 W	Point

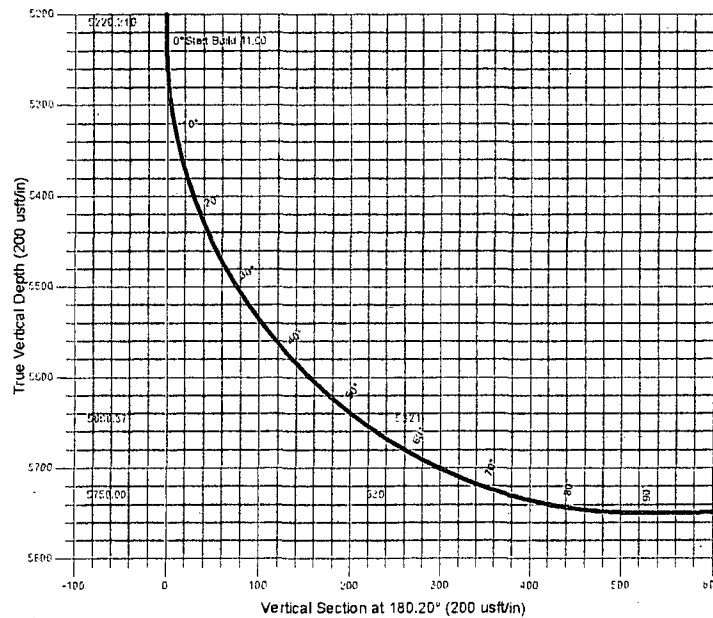

Azimuths to Grid North
True North: -0.31°
Magnetic North: 7.02°




Magnetic Field
Strength: 48648.0nT
Dip Angle: 60.65°
Date: 8/5/2014
Model: IGRF2010

Section Distances

Sec 10, T17S, R32E
SHL - Unit M

Sec 15, T17S, R32E
370° FSL, 380° FWL
PP

330° FNL, 374° FWL
PBHL - Unit M
330° FSL, 330° FWL

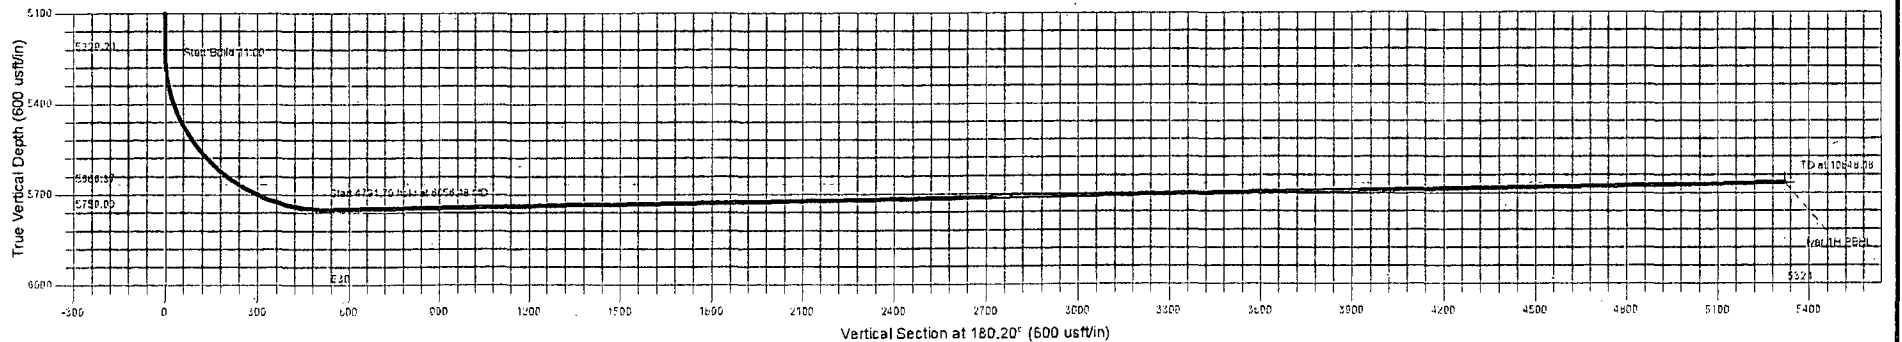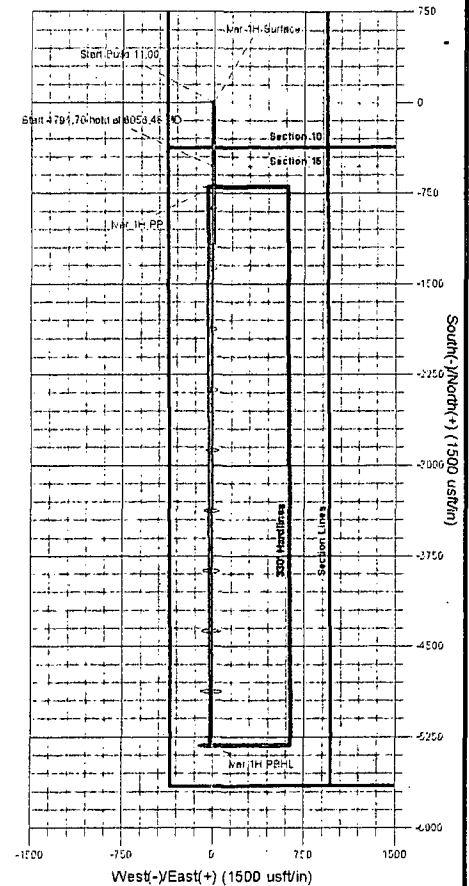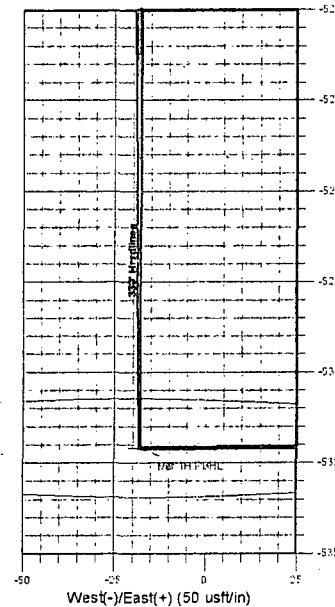


Archer

ARCHER DIRECTIONAL DRILLING SERVICES
12101 Cutten Rd. Houston, Texas 77066
Phone: 281-301-2600 Fax: 281-301-2795

Design: Plan #1 (1H/Lateral)
Created By: Ivonne Gonzalez
Date: 10:42, August 05 2014

Exhibit #10


(Choke Manifold Schematic same as Exhibit #9)

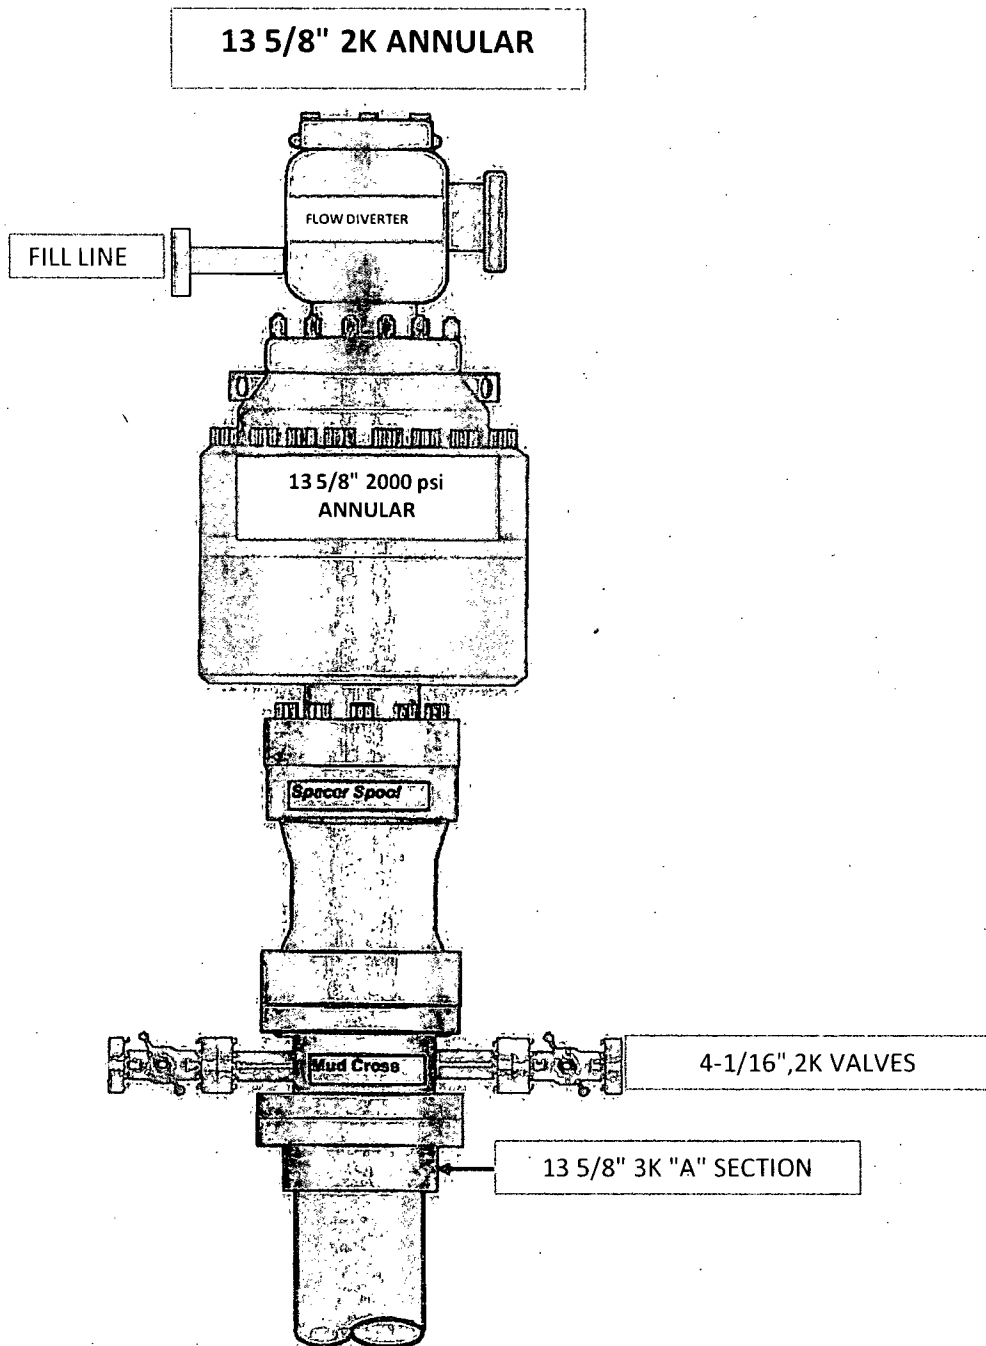


COG Operating LLC

Exhibit #9

BOPE and Choke Schematic

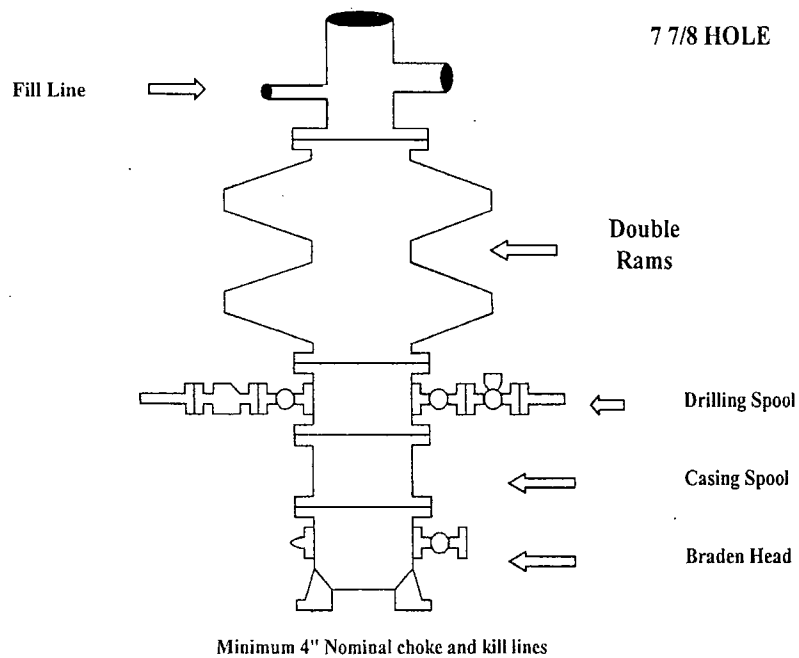

Choke Manifold Requirement (2000 psi WP)
No Annular Required

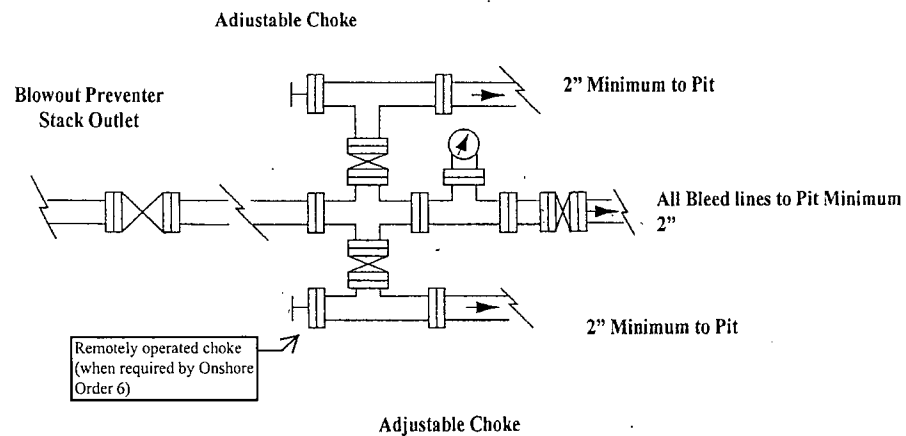

NOTES REGARDING THE BLOWOUT PREVENTERS
Master Drilling Plan
Eddy County, New Mexico

1. Drilling nipple to be so constructed that it can be removed without use of a welder through rotary table opening, with minimum I.D. equal to preventer bore.
2. Wear ring to be properly installed in head.
3. Blow out preventer and all fittings must be in good condition, 2000 psi WP minimum.
4. All fittings to be flanged.
5. Safety valve must be available on rig floor at all times with proper connections, valve to be full 2000 psi WP minimum.
6. All choke and fill lines to be securely anchored especially ends of choke lines.
7. Equipment through which bit must pass shall be at least as large as the diameter of the casing being drilled through.
8. Kelly cock on Kelly.
9. Extension wrenches and hands wheels to be properly installed.
10. Blow out preventer control to be located as close to driller's position as feasible.
11. Blow out preventer closing equipment to include minimum 40-gallon accumulator, two independent sources of pump power on each closing unit installation all API specifications.

Closed Loop Operation & Maintenance Procedure

All drilling fluid circulated over shaker(s) with cuttings discharged into roll off container.

Fluid and fines below shaker(s) are circulated with transfer pump through centrifuge(s) or solids separator with cuttings and fines discharged into roll off container.

Fluid is continuously re-circulated through equipment with polymer added to aid separation of cutting fines.

Roll off containers are lined and de-watered with fluids re-circulated into system.

Additional tank is used to capture unused drilling fluid or cement returns from casing jobs.

This equipment will be maintained 24 hrs./day by solids control personnel and or rig crews that stay on location.

Cuttings will be hauled to either:

CRI (permit number R9166)

or

GMI (permit number 711-019-001)

dependent upon which rig is available to drill this well.

COG Operating LLC

Closed Loop Equipment Diagram

