


Form 9-281a
(Feb. 1941)

U.S.G.S. - 4
BTVL - 1
REGION - 1
FILE - 2 (SUBMIT IN TRIPLICATE)

Revised Bureau 40-2228-2
Approval expires 12-31-42.

Lead Office Santa Fe
Lease No. 078740
Unit San Juan Unit 30-5



UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

JUN 22 1953

NOTICE OF INTENTION TO DRILL.....	<input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF WATER SHUT-OFF.....
NOTICE OF INTENTION TO CHANGE PLANS.....	<input type="checkbox"/>	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	<input type="checkbox"/>	SUBSEQUENT REPORT OF ALTERING CASING.....
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	<input type="checkbox"/>	SUBSEQUENT REPORT OF REPAIRING OR REPAIRING MEXICO.....
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	<input type="checkbox"/>	SUBSEQUENT REPORT OF ABANDONMENT.....
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	<input type="checkbox"/>	SUPPLEMENTARY WELL HISTORY.....
NOTICE OF INTENTION TO ABANDON WELL.....	<input type="checkbox"/>	

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

June 15, 1953

30-5 Dakota
Well No. 6-19 is located 660 ft. from XXX line and 660 ft. from E line of sec. 19

SW/4 Sec. 19 30N 5W N.M.P.M.
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)
Wildcat Rio Arriba New Mexico
(Field) (County or Subdivision) (State or Territory)

The elevation of the ~~derrick floor~~ ^{ground} above sea level is 6286 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Propose to drill to approximately 5800' using mud. Set 8-5/8" casing approximately 10' above the top of the Point Lookout. Drill with gas thru the Dakota. Rotary tools will be used to TD.

Proposed Casing:

Set 13-3/8" casing at approximately 300' cement with approximately 200 sax.
Set 8-5/8" casing at approximately 5800' cement with approximately 200 sax.
Set 5-1/2" casing thru Dakota cement with approximately 200 sax.

Location Plat Attached.

I understand that this plan of work must receive approval in writing by the Geological Survey before operation may be commenced.


Company Phillips Petroleum Company

Address P.O. Box 939

Aztec, New Mexico

By Earl Stum

Title District Superintendent



Company Phillips Petroleum Company


Lease Unit 30-5 Dakota Well No. 6-19

Sec. 19, T. 30 N., R. 5 W., N.M.P.M.

Location 660' from the South line and 660' from the West line.

Elevation 6286 Ungraded ground.


Rio Arriba County New Mexico

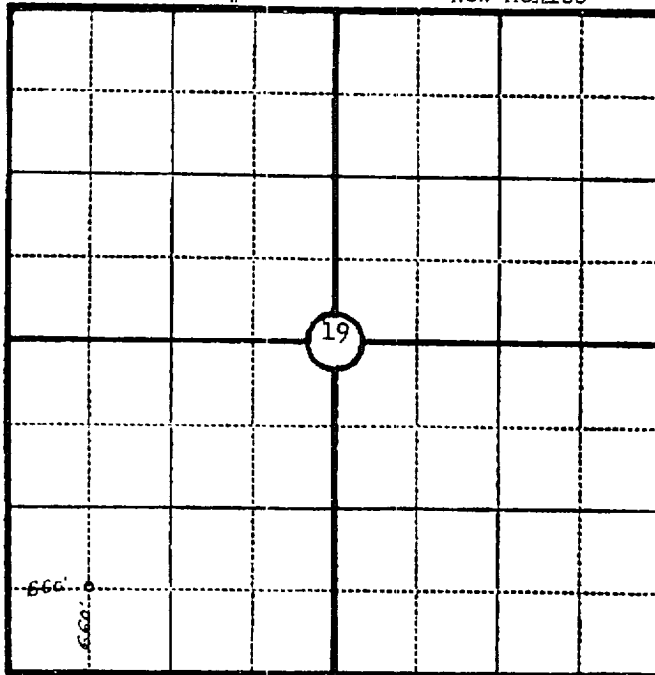

Scale—4 inches equal 1 mile.

This is to certify that the above plat was prepared from field notes of actual surveys made by me or under my supervision and that the same are true and correct to the best of my knowledge and belief.

Seal:



James P. Leese
Registered Professional
Engineer and Land Surveyor.

James P. Leese
N. Mex. Reg. No. 1463

Surveyed June 12, 1953

