

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Sundry Notices and Reports on Wells

1. Type of Well
GAS

2. Name of Operator

**BURLINGTON
RESOURCES**

OIL & GAS COMPANY

3. Address & Phone No. of Operator

PO Box 4289, Farmington, NM 87499 (505) 326-9700

4. Location of Well, Footage, Sec., T, R, M

960' FSL, 1000' FWL, Sec. 22, T-30-N, R-7-W, NMPM

5. Lease Number
NM-013706

6. If Indian, All. or
Tribe Name

7. Unit Agreement Name

8. San Juan 30-6 Unit
Well Name & Number

San Juan 30-6 U #73

9. API Well No.
30-039-07788

10. Field and Pool
Blanco Mesaverde

11. County and State
Rio Arriba Co, NM



12. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OTHER DATA

Type of Submission

☒ Notice of Intent

☐ Subsequent Report

☐ Final Abandonment

Type of Action

☐ Abandonment

☐ Recompletion

☐ Plugging Back

☐ Casing Repair

☒ Altering Casing

☐ Other -

☐ Change of Plans

☐ New Construction

☐ Non-Routine Fracturing

☐ Water Shut off

☐ Conversion to Injection

13. Describe Proposed or Completed Operations

It is intended to trip in hole with 4 1/2" 10.5# J-55 casing with an overshot with a lead seal on bottom and a cementing stage tool one joint up. Tie into existing casing at 4058'. Cement 4 1/2" tie back string with 800 sack of Class "B" cement (100% of annulus volume). Wait on cement. Drill out cement stage tool and pressure test casing to 3000 psi. Continue with pay add operations.

(Verbal approval to repair casing from Jim Lovato, BLM 8-9-01)

14. I hereby certify that the foregoing is true and correct.

Signed Supan Calle Title Regulatory Supervisor Date 8/10/01
no

(This space for Federal or State Office use)

APPROVED BY /s/ Jim Lovato Title _____ Date AUG 23
CONDITION OF APPROVAL, if any:

SJ 30-6 #73

960' S, 1000' W

M - 22 - 30N - 07W

Rio Arriba County, NM

LAT: 36 DEG 47.6172

LONG: 107 DEG 33.8088

GL = 6,645'

KB= 6,655'

Current Wellbore

Surface Casing:

9-5/8" 25.4# J-55
Cement: 125 sx TOC @ Surf
Set @ 184'

Intermediate Casing:


7" 20.0# J-55
Cement: 250 sx TOC @ 4240
Set @ 5,310'

Tubing:

2-3/8" 4.7# J-55
Set @ 5865
SN @ 5831

Production Liner:

4-1/2" 10.5# J-55
Cement: 160 sx TOC @ 4000
Set @ 0,000' to 5,911'

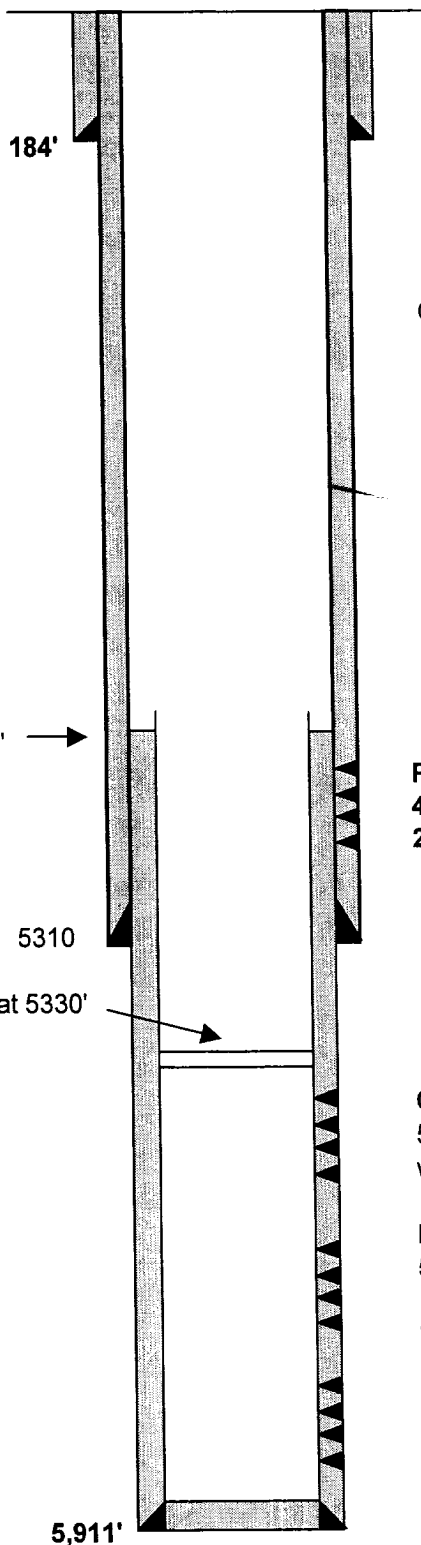

Ojo Alamo 2,473'
Kirtland 2,676'
Fruitland Coal 3,262'
Pictured Cliffs 3,565'
Lewis 3,644'
Huer Bent
Navajo City
Otero
Otero Second Bench
Upper Cliff House
Massive Cliff House 5,338'
Menefee 5,425'
Point Lookout 5,765'
Mancos 5,865'
Dakota

PROPOSED LEWIS:

4351' - 5204'

200,000# sand 75Q Gel Foam

Cliff House:

5382-5422

w/ Point Lookout

PROPOSED MENELEE:

5549 - 5722

CIBP @ 5747'

100,000# sand 60Q Slk. Foam

Point Lookout:

5774 - 5868

84 M# 20/40, 79 MGal H2O

PBTD= 5,882'

TD= 5,911'

DSD

08/09/01

SJ 30-6 #73

960' S, 1000' W

M - 22 - 30N - 07W

Rio Arriba County, NM

LAT: 36 DEG 47.6172**LONG: 107 DEG 33.8088****GL = 6,645'****KB= 6,655'****Proposed Wellbore****Surface Casing:**

9-5/8" 25.4# J-55
 Cement: 125 sx TOC @ Surf
 Set @ 184'

cement 4-1/2" tieback string with
 800 sxs class B cement

Intermediate Casing:

7" 20.0# J-55
 Cement: 250 sx TOC @ 4240
 Set @ 5,310'

cement stage tool at 4018'


4-1/2" overshoot w/ lead packoff at 4058'

Tubing:

2-3/8" 4.7# J-55
 Set @ 5865
 SN @ 5831

Production Liner:

4-1/2" 10.5# J-55
 Cement: 160 sx TOC @ 4000
 Set @ 0,000' to 5,911'

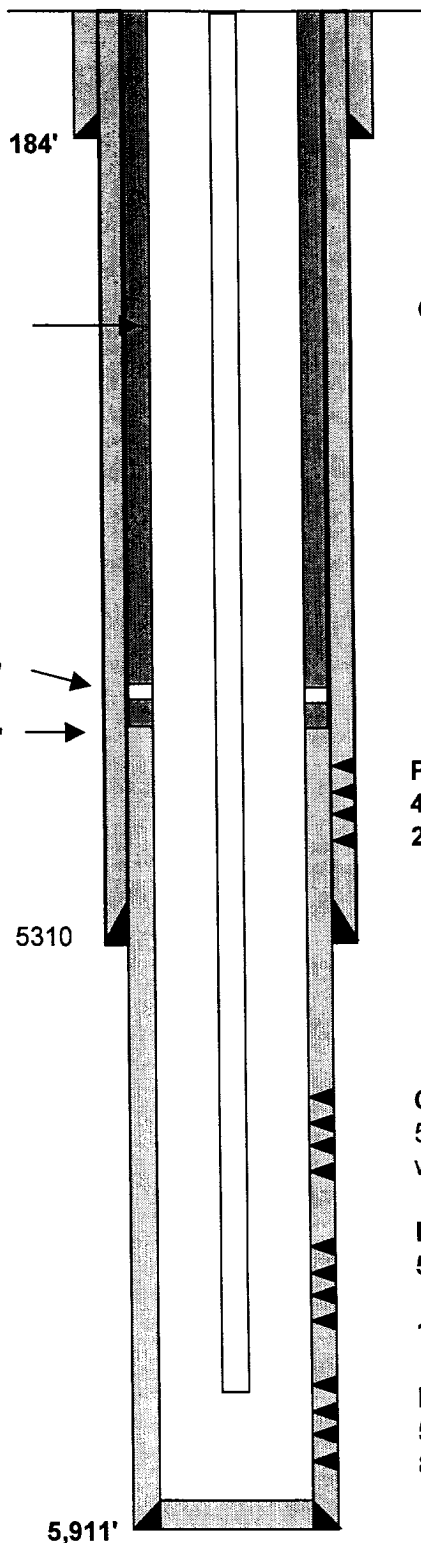

Ojo Alamo 2,473'
 Kirtland 2,676'
 Fruitland Coal 3,262'
 Pictured Cliffs 3,565'
 Lewis 3,644'
 Huer Bent
 Navajo City
 Otero
 Otero Second Bench
 Upper Cliff House
 Massive Cliff House 5,338'
 Menefee 5,425'
 Point Lookout 5,765'
 Mancos 5,865'
 Dakota

PROPOSED LEWIS:**4351' - 5204'****200,000# sand 75Q Gel Foam****Cliff House:**

5382-5422

w/ Point Lookout

PROPOSED MENELEE:**5549 - 5722****CIBP @ 5747'****100,000# sand 60Q Slk. Foam****Point Lookout:**

5774 - 5868

84 M# 20/40, 79 MGal H2O

PBTD= 5,882'**TD= 5,911'**

DSD

08/09/01