

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

OCD Hobbs

HOBBS OCD
OCT 16 2015FORM APPROVED
OMB No. 1004-0137
Expires July 31, 2010

ATS-15-555

APPLICATION FOR PERMIT TO DRILL OR REENTER

RECEIVED

5. Lease Serial No.
NMNM016353

6. If Indian, Allottee or Tribe Name

[H]

7. If Unit or CA Agreement, Name and No.

8. Lease Name and Well No.
Outrider Federal #2H

[315311]

9. API Well No.

30-025-42884
10. Field and Pool, or Exploratory
WC-025 G-06 S253306M; Bone Spring

[97899]

11. Sec., T. R. M. or Blk. and Survey or Area
N-21-T24S-R32E12. County or Parish
Lea13. State
NM1a. Type of work: ☒ DRILL ☐ REENTER1b. Type of Well: ☒ Oil Well ☐ Gas Well ☐ Other ☒ Single Zone ☐ Multiple Zone

2. Name of Operator XTO Energy, Inc. [5780]

3a. Address 500 W. Illinois St. Ste 100
Midland, Texas 797013b. Phone No. (include area code)
432-620-6714

4. Location of Well (Report location clearly and in accordance with any State requirements.)*

At surface 100'FSL & 1955'FWL, N-21-T24S-R32E (N)

At proposed prod. zone 200'FSL & 1955'FWL, N-28-T24S-R32E (N)

UNORTHODOX
LOCATION

14. Distance in miles and direction from nearest town or post office*

15. Distance from proposed* 1955'
location to nearest
property or lease line, ft.
(Also to nearest drig. unit line, if any)16. No. of acres in lease
172017. Spacing Unit dedicated to this well
16018. Distance from proposed location* 200'
to nearest well, drilling, completed,
applied for, on this lease, ft.19. Proposed Depth
MD: 15742'
TVD: 10807'20. BLM/BIA Bond No. on file
UTB00013821. Elevations (Show whether DF, KDB, RT, GL, etc.)
3539'22. Approximate date work will start*
08/01/201523. Estimated duration
45 Days

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office).
4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification
6. Such other site specific information and/or plans as may be required by the BLM.

25. Signature

Stephanie Rabadue

Name (Printed/Typed)

Stephanie Rabadue

Date

03/19/2015

Title

Regulatory Analyst

Approved by (Signature)

/s/ STEPHEN J. CAFFEY

Name (Printed/Typed)

STEPHEN J. CAFFEY

Date

OCT 08 2015

Title

FOR

FIELD MANAGER

Office

BLM-CARLSBAD FIELD OFFICE

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

APPROVAL FOR TWO YEARS

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)

Witness Surface Casing

KZ
10/16/15

Carlsbad Controlled Water Basin

APPROVAL SUBJECT TO
GENERAL REQUIREMENTS AND
SPECIAL STIPULATIONS
ATTACHEDSEE ATTACHED FOR
CONDITIONS OF APPROVAL

OCT 19 2015

DRILLING PLAN: BLM COMPLIANCE
(Supplement to BLM 3160-3)

HOBBS OGD
OCT 16 2015
RECEIVED

XTO Energy Inc.
Outrider Federal 2H
Projected TD: 15742' MD / 10807' TVD
SHL: 100' FSL & 1955' FWL, SECTION 21, T24S, R32E
BHL: 200' FSL & 1955' FWL, SECTION 28, T24S, R32E
Lea County, NM

1. GEOLOGIC NAME OF SURFACE FORMATION:

A. Permian

2. ESTIMATED TOPS OF GEOLOGICAL MARKERS & DEPTHS OF ANTICIPATED FRESH WATER, OIL OR GAS:

Formation	Well Depth (TVD)	Water / Oil / Gas
Rustler	858'	Water
Top of Salt	1165'	
Base of Salt	4477'	
Delaware	4714'	Water
Brushy Canyon	7202'	Water/Oil/Gas
Bone Spring	8622'	Water/Oil/Gas
1 st Bone Spring Ss	9770'	Water/Oil/Gas
2 nd Bone Spring Ss	10356'	Water/Oil/Gas
Target/Land Curve	10807'	Water/Oil/Gas

*** Hydrocarbons @ Brushy Canyon

*** Groundwater depth 200' (per NM State Engineers Office).

No other formations are expected to yield oil, gas or fresh water in measurable volumes. The surface fresh water sands will be protected by setting 13-3/8" casing @ 925' above the salt and circulating cement back to surface. The salt will be isolated by setting 9-5/8" casing at 4700' and circulating cement to surface. An 8-3/4" curve and lateral hole will be drilled to MD/TD and 5-1/2" casing with sliding frac sleeves will be set at TD and cemented back 500' into the 9-5/8" casing shoe.

3. CASING PROGRAM:

See COA

Hole Size	Depth	OD Csg	Weight	Collar	Grade	New/Used	SF Burst	SF Collapse	SF Tension
17-1/2"	0' - 925' 960'	13-3/8"	48#	STC	H-40	New	4.61	1.75	7.25
12-1/4"	0' - 3500'	9-5/8"	36#	LTC	J-55	New	1.70	1.19	2.60
	3500' - 4700'	9-5/8"	40#	LTC	J-55	New	1.93	1.41	10.83
8-3/4"	0' - 15742'	5-1/2"	17#	BTC	P-110	New	1.12	1.48	2.12

WELLHEAD:

- A. Starting Head: 13-5/8" 3000 psi top flange x 13-3/8" SOW bottom
- B. 'B' Section/ Drilling Spool: 13-5/8" 3000psi bottom flange x 11" 5M top flange
- C. Tubing Head: 11" 5000psi bottom flange x 7-1/16" 10,000psi top flange

4. CEMENT PROGRAM:

- A. **Surface Casing:** 13-3/8", 48#, NEW H-40, STC casing to be set at $\pm 925'$.

Lead: 20 bbls FW, then 510 sx ExtendaCem-CZ (mixed at 13.7 ppg, 1.68 ft³/sk, 8.72 gal/sx wtr)

Tail: 305 sx HalCem-C + 2% CaCl (mixed at 14.8 ppg, 1.35 ft³/sk, 6.39 gal/sx wtr)

***All volumes 100% excess in open hole. Cement to surface.

- B. **Intermediate Casing:** 9-5/8", 36#/40#, NEW J-55, LTC casing to be set at $\pm 4700'$.

Lead: 20 bbls FW, then 1390 sx EconoCem-HLC + 5% salt + 5 lbm/sk Kol-Seal (mixed at 12.9 ppg, 1.88 ft³/sk, 9.61 gal/sx wtr)

Tail: 250 sx HalCem-C (mixed at 14.8 ppg, 1.33 ft³/sk, 6.34 gal/sx wtr)

***All volumes 100% excess in open hole. Cement to surface.

- C. **Production Casing:** 5-1/2", 17#, NEW P-110, BTC casing to be set at $\pm 15742'$. Casing will be cemented and will include sliding sleeves for the completion.

Lead: 20 bbls FW, then 630 sx Tuned Light + 0.5 lbm/sk CFR-3 + 1.5 lbm/sk salt + 0.1% HR601 (mixed at 10.5 ppg, 2.69 ft³/sk, 12.26 gal/sx wtr)

Tail: 1295 sx VersaCem PBHS2 + 0.5% LAP-1 + 0.25 lbm/sk D-air 5000 + 0.2% HR 601 + 0.4% CFR-3 + 1 pps Salt (mixed at 13.2 ppg, 1.61 ft³/sk, 8.38 gal/sx wtr)

***All volumes 30% excess in open hole. Planned top of cement 500' into intermediate casing shoe

5. PRESSURE CONTROL EQUIPMENT:

The blow out preventer equipment (BOP) for this well consists of a 13-5/8" minimum 3M Hydril and a 13-5/8" minimum 3M Double Ram BOP. Max bottom hole pressure should not exceed 5075 psi.

All BOP testing will be done by an independent service company. Annular pressure tests will be limited to 50% of the working pressure. When nipping up on the 13-5/8" 3M bradenhead and flange, the BOP test will be limited to 3000psi. When nipping up on the 9-5/8", the BOP will be tested to a minimum of 3000 psi. All BOP tests will include a low pressure test as per BLM regulations. The 3M BOP diagrams are attached. Blind rams will be functioned tested each trip, pipe rams will be functioned tested each day.

See COA A variance is requested to allow use of a flex hose as the choke line from the BOP to the Choke Manifold. If this hose is used, a copy of the manufacturer's certification and pressure test chart will be kept on the rig. Attached is an example of a certification and pressure test chart. The manufacturer does not require anchors.

6. PROPOSED MUD CIRCULATION SYSTEM:

See COA

INTERVAL	Hole Size	Mud Type	MW (ppg)	Viscosity (sec/qt)	Fluid Loss (cc)
0' to 925' <i>940'</i>	17-1/2"	FW/Native	8.4 - 8.8	35 - 40	NC
925' to 4700'	12-1/4"	Brine/Gel Sweeps	9.8 - 10.2	30 - 32	NC
4700' to 15742'	8-3/4"	FW / Cut Brine / Poly-Sweeps	8.6 - 9.0	29 - 32	NC - 20

The necessary mud products for weight addition and fluid loss control will be on location at all times.

Spud with fresh water/native mud. Drill out from under 13-3/8" surface casing with brine solution. A 9.8ppg-10.2ppg brine mud will be used while drilling through the salt formation. Use fibrous materials as needed to control seepage and lost circulation. Pump viscous sweeps as needed for hole cleaning. Pump speed will be recorded on a daily drilling report after mudding up. A Pason or Totco will be used to detect changes in loss or gain of mud volume. A mud test will be performed every 24 hours to determine: density, viscosity, strength, filtration and pH as necessary. Use available solids controls equipment to help keep mud weight down after mud up. Rig up solids control equipment to operate as a closed loop system.

7. AUXILIARY WELL CONTROL AND MONITORING EQUIPMENT:

- See
COP*
- A. A Kelly cock will be in the drill string at all times.
 - B. A full opening drill pipe stabbing valve having appropriate connections will be on the rig floor at all times.
 - C. H2S monitors will be on location when drilling below the 13-3/8" casing.

8. LOGGING, CORING AND TESTING PROGRAM:

Mud Logger: Mud Logging Unit (2 man) on @ 4700'.
Catch 20' samples from 4700' to TD

Open hole logging to include Density/Neutron/PE/Dual Laterlog/Spectral Gamma from KOP to intermediate casing shoe.

9. ABNORMAL PRESSURES AND TEMPERATURES / POTENTIAL HAZARDS:

*See
COP*

None anticipated. BHT of 160 F is anticipated. No H2S is expected but monitors will be in place to detect any H2S occurrences. Should these circumstances be encountered the operator and drilling contractor are prepared to take all necessary steps to ensure safety of all personnel and environment. Lost circulation could occur but is not expected to be a serious problem in this area and hole seepage will be compensated for by additions of small amounts of LCM in the drilling fluid.

10. ANTICIPATED STARTING DATE AND DURATION OF OPERATIONS:

Road and location construction will begin after Santa Fe and BLM have approved the APD. Anticipated spud date will be as soon after Santa Fe and BLM approval and as soon as a rig will be available. Move in operations and drilling is expected to take 40 days. If production casing is run, an additional 30 days will be needed to complete well and construct surface facilities and/or lay flow lines in order to place well on production.



Project: Lea County, NM (NAD27)
Site: Outrider Federal
Well: Outrider Federal No 2H
Wellbore: Wellbore #1
Plan: Plan #1
Rig: NorAm 25

SURFACE LOCATION

US State Plane 1927 (Exact solution)
New Mexico East 3001
Elevation: GL 3539' + KB 25' @ 3564.00usft (NorAm 25)
Northing 435602.40 Easting 701673.50
Latitude 32° 11' 45.267 N Longitude 103° 40' 52.963 W

WELLBORE TARGET DETAILS (MAP CO-ORDINATES AND LAT/LONG)


Name	MD	Inc	Azi	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
Outrider Federal No 2H BHL	0.00	0.00	0.00	10807.00	-5181.00	37.90	430421.40	701711.40	32° 10' 53.994 N	103° 40' 52.888 W
Outrider Federal No 2H FTP	10234.04	0.00	0.00	10807.00	-799.80	5.90	434802.60	701679.40	32° 11' 37.352 N	103° 40' 52.951 W
Outrider Federal No 2H LTP	11134.04	90.00	179.58	10807.00	-5051.00	37.00	430551.40	701710.50	32° 10' 55.281 N	103° 40' 52.889 W


SECTION DETAILS

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSec	Annotation
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
10234.04	0.00	0.00	10234.04	0.00	0.00	0.00	0.00	0.00	KOP/Start Build
11134.04	90.00	179.58	10807.00	-572.94	4.19	10.00	179.58	572.96	End Build
15742.22	90.00	179.58	10807.00	-5181.00	37.90	0.00	0.00	5181.14	TD

To convert a Magnetic Direction to a Grid Direction, Add 7.01°

Magnetic Model: BGGM2014 Date: 09-Feb-15
Azimuths to Grid North

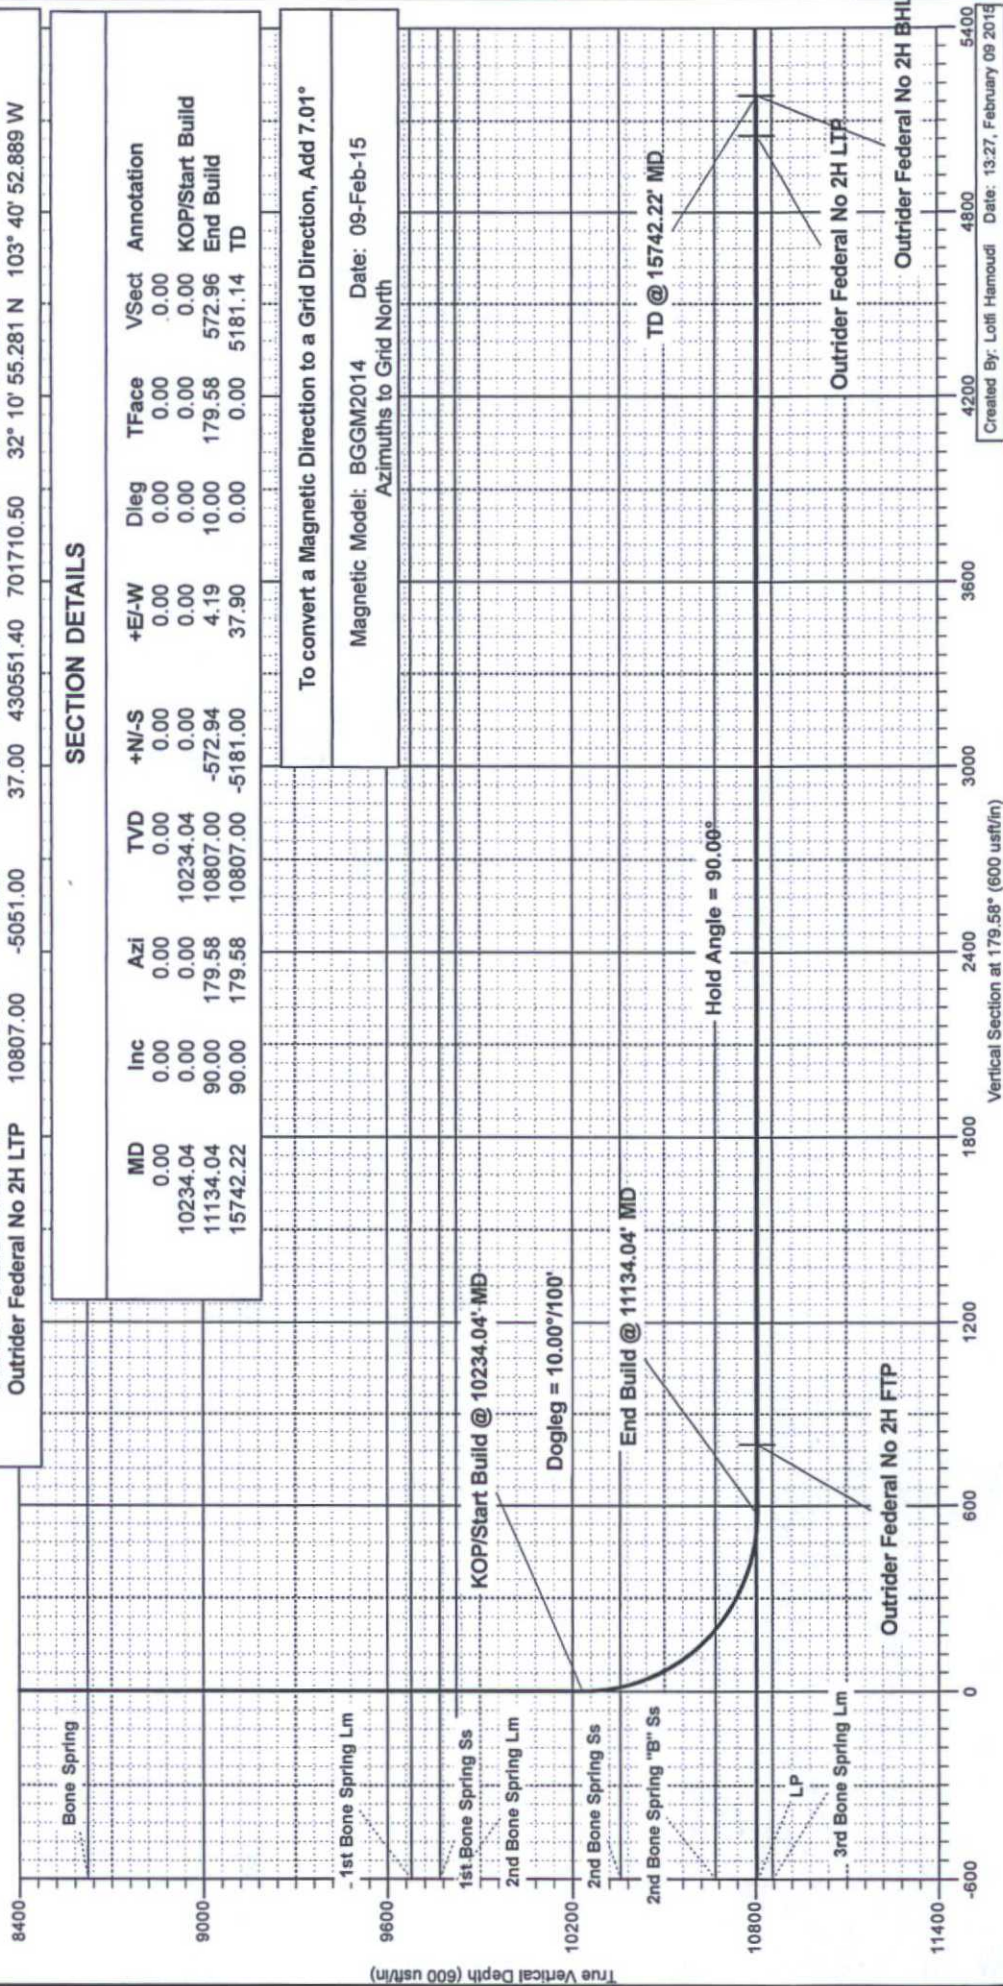

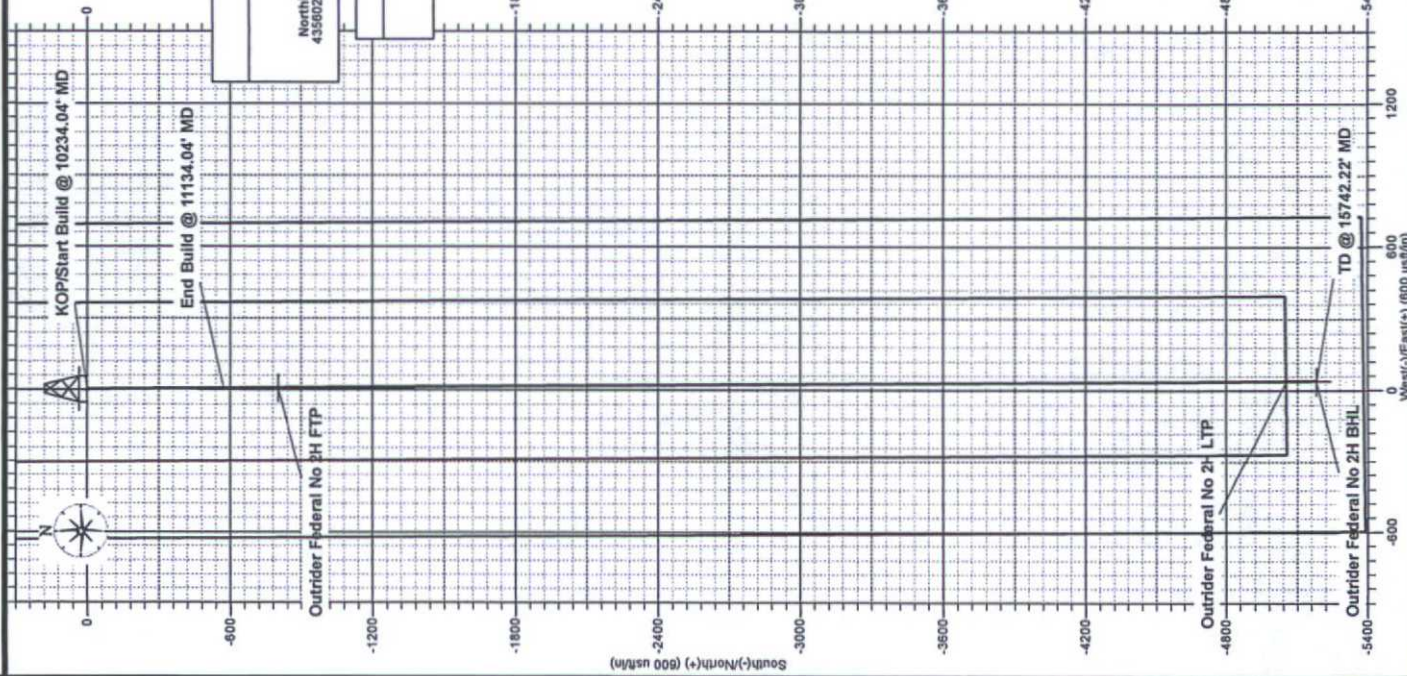

Project: Lea County, NM (NAD27)
 Site: Outrider Federal
 Well: Outrider Federal No 2H
 Wellbore: Wellbore #1
 Plan: Plan #1
 Rig: NorAm 25

SURFACE LOCATION

US State Plane 1927 (Exord solution)
 New Mexico East 3001
 Elevation: GL 3539' + KD 25' @ 3564.00usft (NorAm 25)
 Northing 435602.40
 Easting 701673.50
 Latitude 32° 11' 45.267 N
 Longitude 103° 40' 52.963 W

To convert a Magnetic Direction to a Grid Direction, Add 7.81°

Magnetic Model: BGM2014
 Azimuths to Grid North
 Date: 09-Feb-15



XTO Energy Inc.

Lea County, NM (NAD27)
Outrider Federal
Outrider Federal No 2H

Wellbore #1

Plan: Plan #1

Sperry Drilling Services Proposal Report

09 February, 2015

Well Coordinates: 435,602.40 N, 701,673.50 E (32° 11' 45.27" N, 103° 40' 52.96" W)
Ground Level: 3,539.00 usft

Local Coordinate Origin: Centered on Well Outrider Federal No 2H
Viewing Datum: GL 3539' + KB 25' @ 3564.00usft (NorAm 25)
TVDs to System: N
North Reference: Grid
Unit System: API - US Survey Feet

Version: 5000.1 Build: 72

HALLIBURTON

HALLIBURTON

Plan Report for Outrider Federal No 2H - Plan #1

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/S (usft)	+E/W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	Tooface Azimuth (°)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
858.00	0.00	0.00	858.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rustler										
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,165.00	0.00	0.00	1,165.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Top Salt										
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,600.00	0.00	0.00	2,600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,700.00	0.00	0.00	2,700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,800.00	0.00	0.00	2,800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,900.00	0.00	0.00	2,900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,000.00	0.00	0.00	3,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,100.00	0.00	0.00	3,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,200.00	0.00	0.00	3,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,300.00	0.00	0.00	3,300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,400.00	0.00	0.00	3,400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,500.00	0.00	0.00	3,500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,600.00	0.00	0.00	3,600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,700.00	0.00	0.00	3,700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,800.00	0.00	0.00	3,800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
3,900.00	0.00	0.00	3,900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,000.00	0.00	0.00	4,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,100.00	0.00	0.00	4,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,200.00	0.00	0.00	4,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,300.00	0.00	0.00	4,300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,400.00	0.00	0.00	4,400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,477.00	0.00	0.00	4,477.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Base Salt										
4,500.00	0.00	0.00	4,500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,600.00	0.00	0.00	4,600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,700.00	0.00	0.00	4,700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,714.00	0.00	0.00	4,714.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Delaware										
4,800.00	0.00	0.00	4,800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4,900.00	0.00	0.00	4,900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

HALLIBURTON

Plan Report for Outrider Federal No 2H - Plan #1

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	Toolface Azimuth (°)
5,000.00	0.00	0.00	5,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,100.00	0.00	0.00	5,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,200.00	0.00	0.00	5,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,300.00	0.00	0.00	5,300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,400.00	0.00	0.00	5,400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,500.00	0.00	0.00	5,500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,600.00	0.00	0.00	5,600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,623.00	0.00	0.00	5,623.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Cherry Canyon										
5,700.00	0.00	0.00	5,700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,800.00	0.00	0.00	5,800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5,900.00	0.00	0.00	5,900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6,000.00	0.00	0.00	6,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6,100.00	0.00	0.00	6,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6,200.00	0.00	0.00	6,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6,300.00	0.00	0.00	6,300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6,400.00	0.00	0.00	6,400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6,500.00	0.00	0.00	6,500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6,600.00	0.00	0.00	6,600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6,700.00	0.00	0.00	6,700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6,800.00	0.00	0.00	6,800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6,900.00	0.00	0.00	6,900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
7,000.00	0.00	0.00	7,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
7,100.00	0.00	0.00	7,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
7,200.00	0.00	0.00	7,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
7,202.00	0.00	0.00	7,202.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Brushy Canyon										
7,300.00	0.00	0.00	7,300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
7,400.00	0.00	0.00	7,400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
7,500.00	0.00	0.00	7,500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
7,600.00	0.00	0.00	7,600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
7,700.00	0.00	0.00	7,700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
7,800.00	0.00	0.00	7,800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
7,900.00	0.00	0.00	7,900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8,000.00	0.00	0.00	8,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8,100.00	0.00	0.00	8,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8,200.00	0.00	0.00	8,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8,300.00	0.00	0.00	8,300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8,372.00	0.00	0.00	8,372.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Basal Brushy Canyon										
8,400.00	0.00	0.00	8,400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8,500.00	0.00	0.00	8,500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8,600.00	0.00	0.00	8,600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8,622.00	0.00	0.00	8,622.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Bone Spring										
8,700.00	0.00	0.00	8,700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8,800.00	0.00	0.00	8,800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8,900.00	0.00	0.00	8,900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
9,000.00	0.00	0.00	9,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
9,100.00	0.00	0.00	9,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
9,200.00	0.00	0.00	9,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
9,300.00	0.00	0.00	9,300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
9,400.00	0.00	0.00	9,400.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
9,500.00	0.00	0.00	9,500.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
9,600.00	0.00	0.00	9,600.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
9,677.00	0.00	0.00	9,677.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1st Bone Spring Lm										
9,700.00	0.00	0.00	9,700.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
9,770.00	0.00	0.00	9,770.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

HALLIBURTON

Plan Report for Outrider Federal No 2H - Plan #1

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	Toolface Azimuth (°)
1st Bone Spring Ss										
9,800.00	0.00	0.00	9,800.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
9,824.00	0.00	0.00	9,824.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2nd Bone Spring Lm										
9,900.00	0.00	0.00	9,900.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10,000.00	0.00	0.00	10,000.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10,100.00	0.00	0.00	10,100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10,200.00	0.00	0.00	10,200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10,234.04	0.00	0.00	10,234.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00
KOP/Start Build @ 10234.04' MD - Dogleg = 10.00°/100'										
10,250.00	1.60	179.58	10,250.00	-0.22	0.00	0.22	10.00	10.00	0.00	179.58
10,300.00	6.60	179.58	10,299.85	-3.79	0.03	3.79	10.00	10.00	0.00	0.00
10,350.00	11.60	179.58	10,349.21	-11.69	0.09	11.69	10.00	10.00	0.00	0.00
10,356.94	12.29	179.58	10,356.00	-13.13	0.10	13.13	10.00	10.00	0.00	0.00
2nd Bone Spring Ss										
10,400.00	16.60	179.58	10,397.69	-23.87	0.17	23.87	10.00	10.00	0.00	0.00
10,450.00	21.60	179.58	10,444.92	-40.22	0.29	40.22	10.00	10.00	0.00	0.00
10,500.00	26.60	179.58	10,490.55	-60.62	0.44	60.63	10.00	10.00	0.00	0.00
10,550.00	31.60	179.58	10,534.23	-84.93	0.62	84.93	10.00	10.00	0.00	0.00
10,600.00	36.60	179.58	10,575.62	-112.95	0.83	112.95	10.00	10.00	0.00	0.00
10,650.00	41.60	179.58	10,614.41	-144.47	1.06	144.47	10.00	10.00	0.00	0.00
10,700.00	46.60	179.58	10,650.31	-179.25	1.31	179.25	10.00	10.00	0.00	0.00
10,727.93	49.39	179.58	10,669.00	-200.00	1.46	200.01	10.00	10.00	0.00	0.00
2nd Bone Spring "B" Ss										
10,750.00	51.60	179.58	10,683.04	-217.03	1.59	217.03	10.00	10.00	0.00	0.00
10,800.00	56.60	179.58	10,712.35	-257.51	1.88	257.52	10.00	10.00	0.00	0.00
10,850.00	61.60	179.58	10,738.02	-300.40	2.20	300.41	10.00	10.00	0.00	0.00
10,900.00	66.60	179.58	10,759.86	-345.36	2.53	345.37	10.00	10.00	0.00	0.00
10,950.00	71.60	179.58	10,777.69	-392.05	2.87	392.06	10.00	10.00	0.00	0.00
11,000.00	76.60	179.58	10,791.39	-440.12	3.22	440.13	10.00	10.00	0.00	0.00
11,050.00	81.60	179.58	10,800.85	-489.20	3.58	489.22	10.00	10.00	0.00	0.00
11,100.00	86.60	179.58	10,805.99	-538.92	3.94	538.94	10.00	10.00	0.00	0.00
11,134.04	90.00	179.58	10,807.00	-572.94	4.19	572.96	10.00	10.00	0.00	0.00
End Build @ 11134.04' MD - Hold Angle = 90.00° - LP										
11,200.00	90.00	179.58	10,807.00	-638.90	4.57	638.92	0.00	0.00	0.00	0.00
11,300.00	90.00	179.58	10,807.00	-738.90	5.41	738.92	0.00	0.00	0.00	0.00
11,350.91	90.00	179.58	10,807.00	-799.80	5.85	799.82	0.00	0.00	0.00	0.00
Outrider Federal No 2H FTP										
11,400.00	90.00	179.58	10,807.00	-838.89	6.14	838.92	0.00	0.00	0.00	0.00
11,500.00	90.00	179.58	10,807.00	-938.89	6.87	938.92	0.00	0.00	0.00	0.00
11,600.00	90.00	179.58	10,807.00	-1,038.89	7.60	1,038.92	0.00	0.00	0.00	0.00
11,700.00	90.00	179.58	10,807.00	-1,138.89	8.33	1,138.92	0.00	0.00	0.00	0.00
11,800.00	90.00	179.58	10,807.00	-1,238.88	9.06	1,238.92	0.00	0.00	0.00	0.00
11,900.00	90.00	179.58	10,807.00	-1,338.88	9.79	1,338.92	0.00	0.00	0.00	0.00
12,000.00	90.00	179.58	10,807.00	-1,438.88	10.53	1,438.92	0.00	0.00	0.00	0.00
12,100.00	90.00	179.58	10,807.00	-1,538.87	11.26	1,538.92	0.00	0.00	0.00	0.00
12,200.00	90.00	179.58	10,807.00	-1,638.87	11.99	1,638.92	0.00	0.00	0.00	0.00
12,300.00	90.00	179.58	10,807.00	-1,738.87	12.72	1,738.92	0.00	0.00	0.00	0.00
12,400.00	90.00	179.58	10,807.00	-1,838.87	13.45	1,838.92	0.00	0.00	0.00	0.00
12,500.00	90.00	179.58	10,807.00	-1,938.86	14.18	1,938.92	0.00	0.00	0.00	0.00
12,600.00	90.00	179.58	10,807.00	-2,038.86	14.91	2,038.92	0.00	0.00	0.00	0.00
12,700.00	90.00	179.58	10,807.00	-2,138.86	15.65	2,138.92	0.00	0.00	0.00	0.00
12,800.00	90.00	179.58	10,807.00	-2,238.86	16.38	2,238.92	0.00	0.00	0.00	0.00
12,900.00	90.00	179.58	10,807.00	-2,338.85	17.11	2,338.92	0.00	0.00	0.00	0.00
13,000.00	90.00	179.58	10,807.00	-2,438.85	17.84	2,438.92	0.00	0.00	0.00	0.00
13,100.00	90.00	179.58	10,807.00	-2,538.85	18.57	2,538.92	0.00	0.00	0.00	0.00
13,200.00	90.00	179.58	10,807.00	-2,638.84	19.30	2,638.92	0.00	0.00	0.00	0.00
13,300.00	90.00	179.58	10,807.00	-2,738.84	20.04	2,738.92	0.00	0.00	0.00	0.00
13,400.00	90.00	179.58	10,807.00	-2,838.84	20.77	2,838.92	0.00	0.00	0.00	0.00

HALLIBURTON

Plan Report for Outrider Federal No 2H - Plan #1

Measured Depth (usft)	Inclination (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	Toolface Azimuth (°)
13,500.00	90.00	179.58	10,807.00	-2,538.84	21.50	2,938.92	0.00	0.00	0.00
13,600.00	90.00	179.58	10,807.00	-3,038.83	22.23	3,038.92	0.00	0.00	0.00
13,700.00	90.00	179.58	10,807.00	-3,138.83	22.96	3,138.92	0.00	0.00	0.00
13,800.00	90.00	179.58	10,807.00	-3,238.83	23.69	3,238.92	0.00	0.00	0.00
13,900.00	90.00	179.58	10,807.00	-3,338.83	24.42	3,338.92	0.00	0.00	0.00
14,000.00	90.00	179.58	10,807.00	-3,438.82	25.16	3,438.92	0.00	0.00	0.00
14,100.00	90.00	179.58	10,807.00	-3,538.82	25.89	3,538.92	0.00	0.00	0.00
14,200.00	90.00	179.58	10,807.00	-3,638.82	26.62	3,638.92	0.00	0.00	0.00
14,300.00	90.00	179.58	10,807.00	-3,738.82	27.35	3,738.92	0.00	0.00	0.00
14,400.00	90.00	179.58	10,807.00	-3,838.81	28.08	3,838.92	0.00	0.00	0.00
14,500.00	90.00	179.58	10,807.00	-3,938.81	28.81	3,938.92	0.00	0.00	0.00
14,600.00	90.00	179.58	10,807.00	-4,038.81	29.54	4,038.92	0.00	0.00	0.00
14,700.00	90.00	179.58	10,807.00	-4,138.80	30.28	4,138.92	0.00	0.00	0.00
14,800.00	90.00	179.58	10,807.00	-4,238.80	31.01	4,238.92	0.00	0.00	0.00
14,900.00	90.00	179.58	10,807.00	-4,338.80	31.74	4,338.92	0.00	0.00	0.00
15,000.00	90.00	179.58	10,807.00	-4,438.80	32.47	4,438.92	0.00	0.00	0.00
15,100.00	90.00	179.58	10,807.00	-4,538.79	33.20	4,538.92	0.00	0.00	0.00
15,200.00	90.00	179.58	10,807.00	-4,638.79	33.93	4,638.92	0.00	0.00	0.00
15,300.00	90.00	179.58	10,807.00	-4,738.79	34.67	4,738.92	0.00	0.00	0.00
15,400.00	90.00	179.58	10,807.00	-4,838.79	35.40	4,838.92	0.00	0.00	0.00
15,500.00	90.00	179.58	10,807.00	-4,938.78	36.13	4,938.92	0.00	0.00	0.00
15,600.00	90.00	179.58	10,807.00	-5,038.78	36.86	5,038.92	0.00	0.00	0.00
15,612.22	90.00	179.58	10,807.00	-5,051.00	36.95	5,051.14	0.00	0.00	0.00
Outrider Federal No 2H LTP									
15,700.00	90.00	179.58	10,807.00	-5,138.78	37.59	5,138.92	0.00	0.00	0.00
15,742.22	90.00	179.58	10,807.00	-5,181.00	37.90	5,181.14	0.00	0.00	0.00
TD @ 15742.22' MD - Outrider Federal No 2H BHL									

Plan Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates +N/-S (usft)	+E/-W (usft)	Comment
10,234.04	10,234.04	0.00	0.00	KOP/Start Build @ 10234.04' MD
10,234.04	10,234.04	0.00	0.00	Dogleg = 10.00°/100'
11,134.04	10,807.00	-572.94	4.19	End Build @ 11134.04' MD
11,134.04	10,807.00	-572.94	4.19	Hold Angle = 90.00°
15,742.22	10,807.00	-5,181.00	37.90	TD @ 15742.22' MD

Vertical Section Information

Angle Type	Target	Azimuth (°)	Origin Type	Origin +N/-S (usft)	Start TVD (usft)
TD	No Target (Freehand)	179.58	Spot	0.00	0.00
Survey tool program					
From (usft)	To (usft)	Survey/Plan	Survey Tool		
0.00	15,742.22	Plan #1	MWD		

HALLIBURTON

Plan Report for Outrider Federal No 2H - Plan #1

Formation Details

Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
858.00	858.00	Rustler			
1,165.00	1,165.00	Top Salt			
4,477.00	4,477.00	Base Salt			
4,714.00	4,714.00	Delaware			
5,623.00	5,623.00	Cherry Canyon			
7,202.00	7,202.00	Brushy Canyon			
8,372.00	8,372.00	Basal Brushy Canyon			
8,622.00	8,622.00	Bone Spring			
9,677.00	9,677.00	1st Bone Spring Lm			
9,770.00	9,770.00	1st Bone Spring Ss			
9,824.00	9,824.00	2nd Bone Spring Lm			
10,356.94	10,356.00	2nd Bone Spring Ss			
10,727.93	10,669.00	2nd Bone Spring "B" Ss			
11,134.04	10,807.00	LP			


Targets associated with this wellbore

Target Name	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Shape
Outrider Federal No 2H BHL	10,807.00	-5,181.00	37.90	Point
Outrider Federal No 2H FTP	10,807.00	-799.80	5.90	Point
Outrider Federal No 2H LTP	10,807.00	-5,051.00	37.00	Point

North Reference Sheet for Outrider Federal - Outrider Federal No 2H - Wellbore #1

All data is in US Feet unless otherwise stated. Directions and Coordinates are relative to Grid North Reference.
Vertical Depths are relative to GL 3539' + KB 25' @ 3564.00usft (NorAm 25). Northing and Easting are relative to Outrider Federal No 2H
Coordinate System is US State Plane 1927 (Exact solution), New Mexico East 3001 using datum NAD 1927 (NADCON CONUS), ellipsoid Clarke 1866
Projection method is Transverse Mercator (Gauss-Kruger)
Central Meridian is -104.33°, Longitude Origin: 0° 0' 0.000 E°, Latitude Origin: 0° 0' 0.000 N°
False Easting: 500,000.00usft, False Northing: 0.00usft, Scale Reduction: 0.99995567
Grid Coordinates of Well: 435,602.40 usft N, 701,673.50 usft E
Geographical Coordinates of Well: 32° 11' 45.27" N, 103° 40' 52.96" W
Grid Convergence at Surface is: 0.35°

Based upon Minimum Curvature type calculations, at a Measured Depth of 15,742.22usft
the Bottom Hole Displacement is 5,181.14usft in the Direction of 179.58° (Grid).
Magnetic Convergence at surface is: -7.01° (9 February 2015, , BGGM2014)

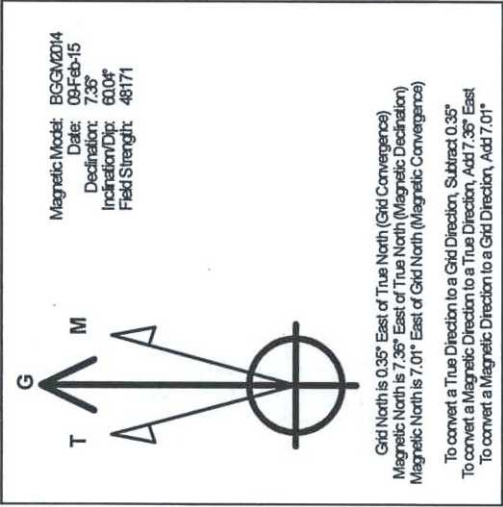



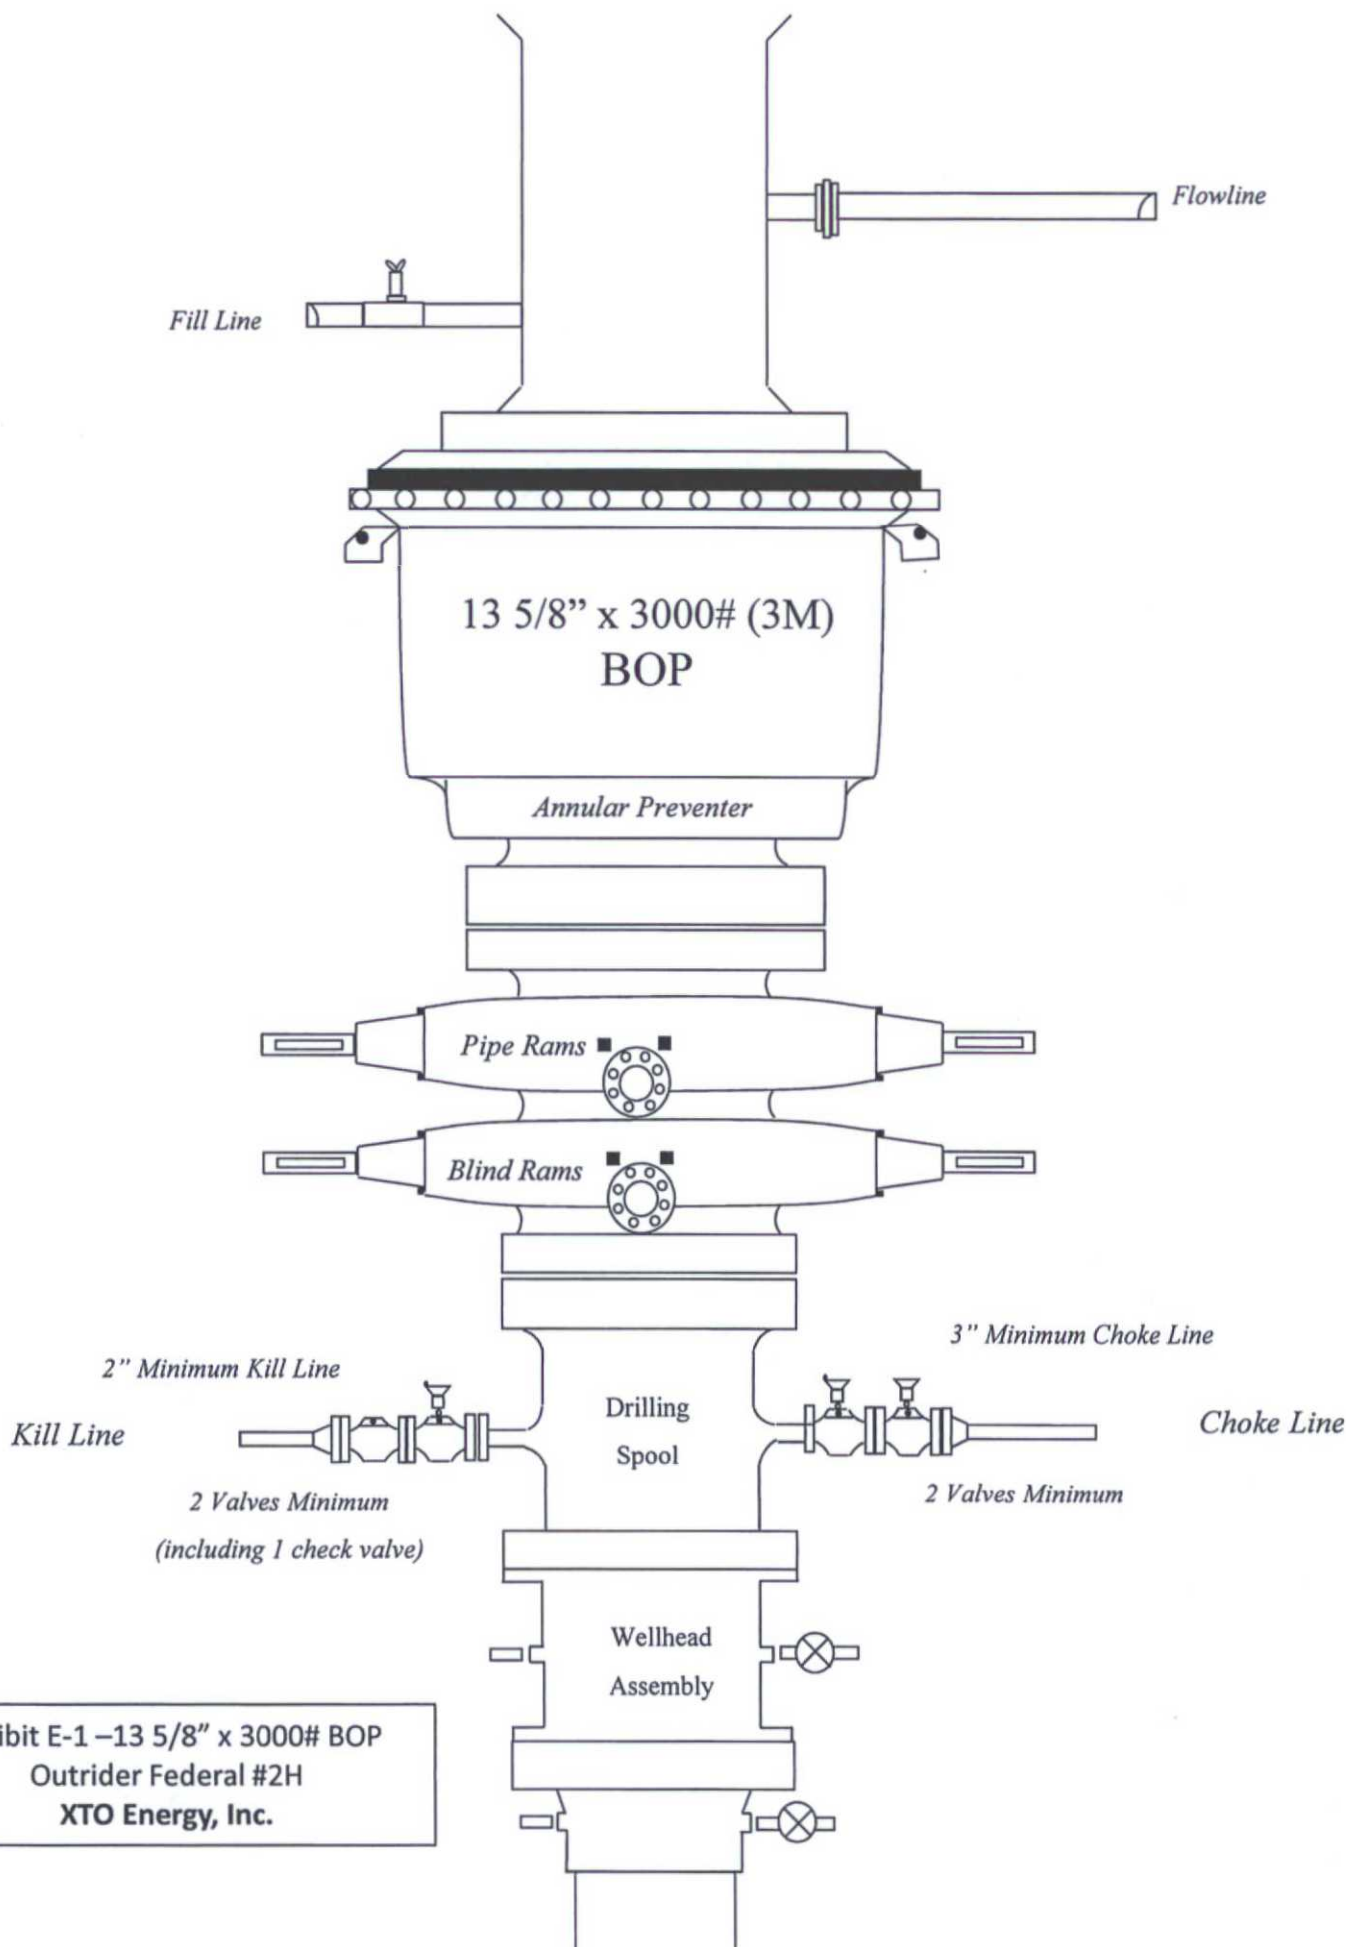


Exhibit E-1 - 13 5/8" x 3000# BOP
Outrider Federal #2H
XTO Energy, Inc.

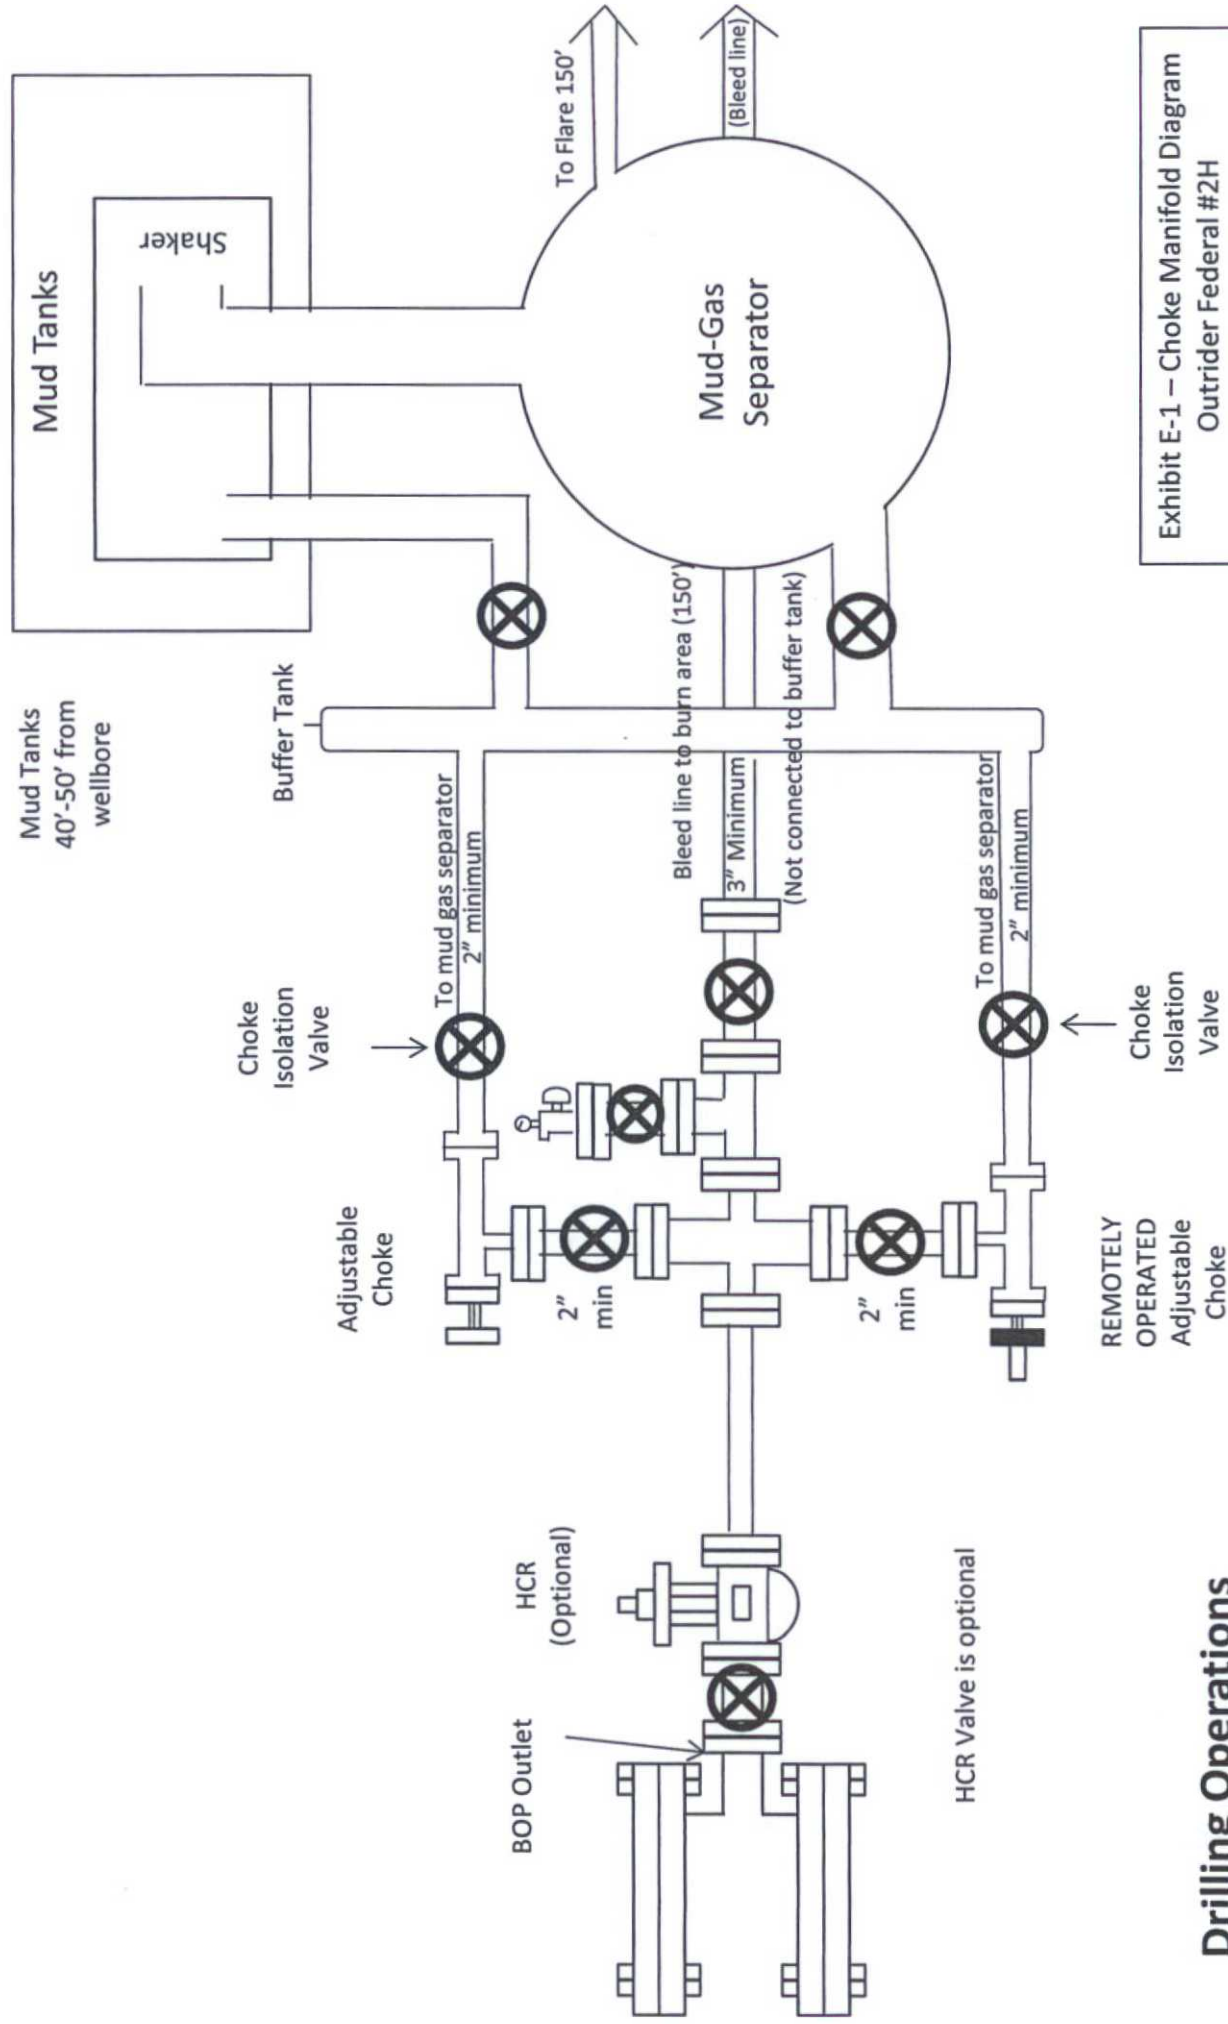

Drilling Operations Choke Manifold

Exhibit E-1 – Choke Manifold Diagram
 Outrider Federal #2H
 XTO Energy, Inc..

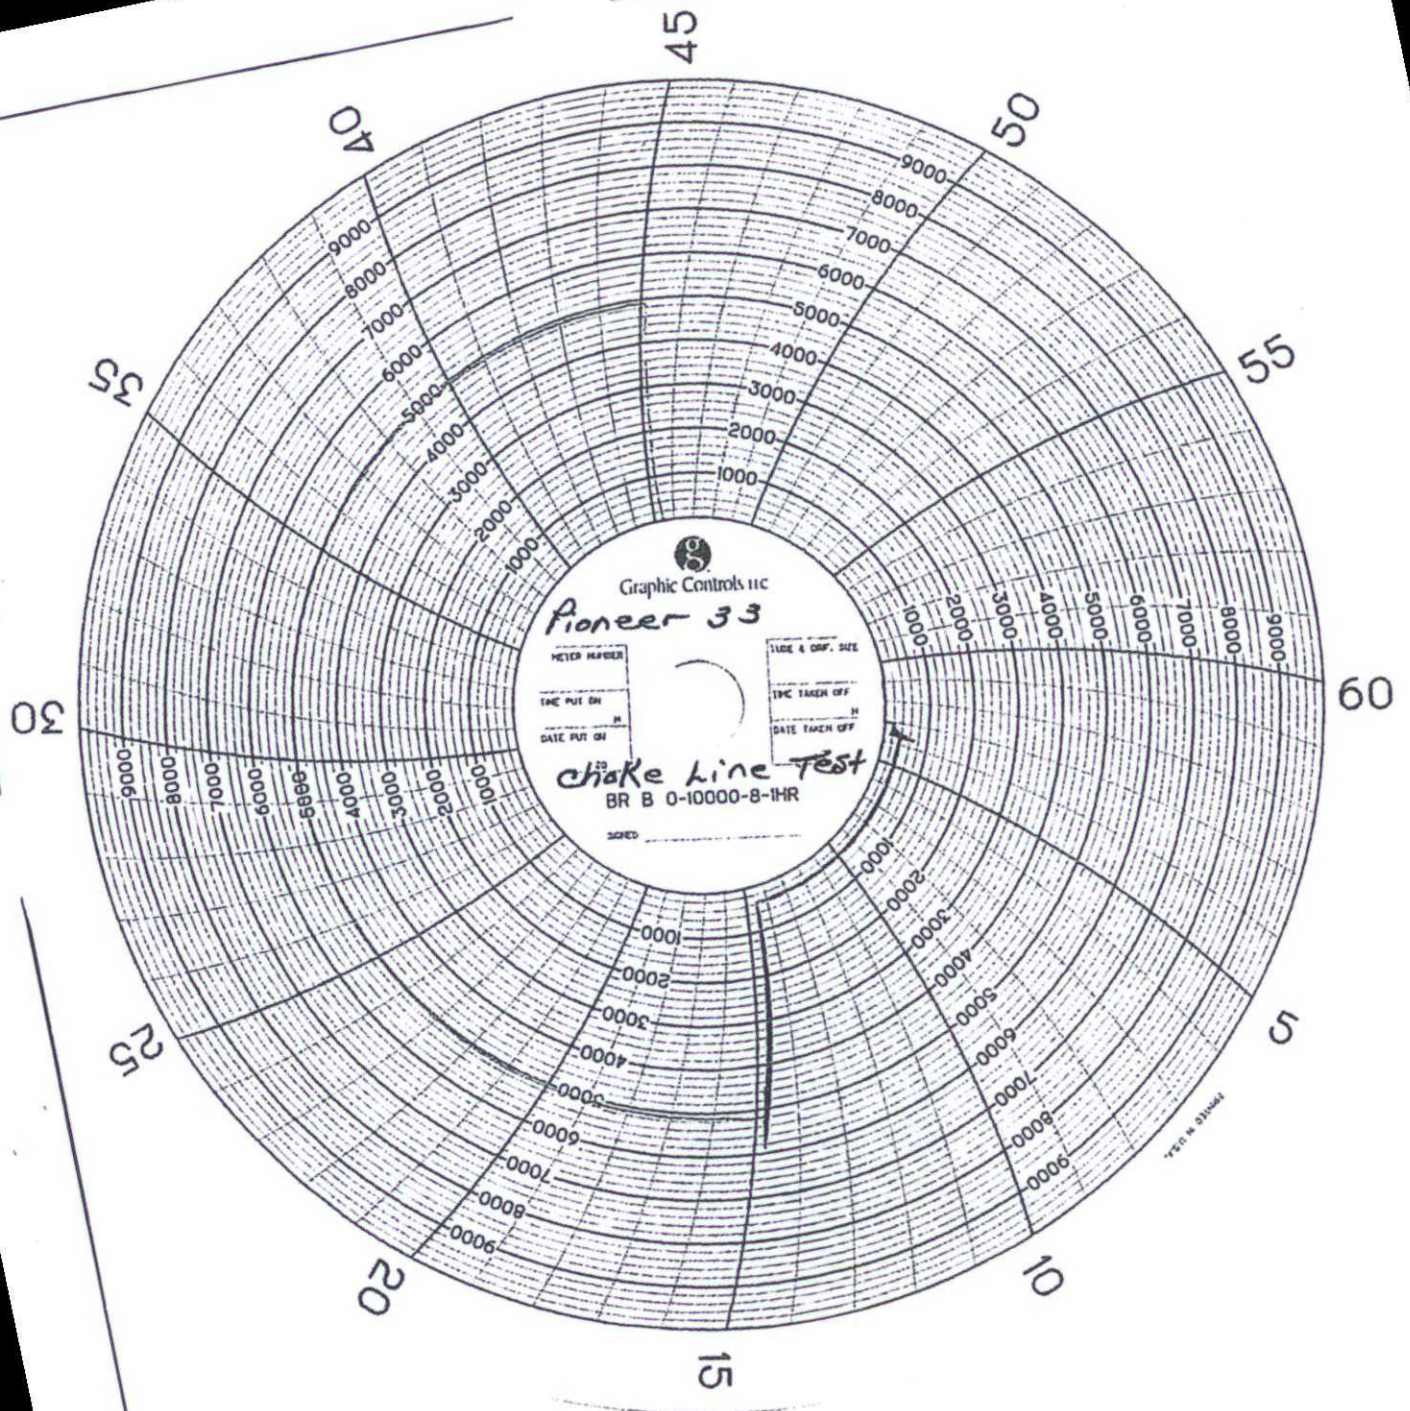

MADE IN U.S.A.



GATES E & S NORTH AMERICA, INC
DU-TEX
134 44TH STREET
CORPUS CHRISTI, TEXAS 78405


PHONE: 361-887-9807
FAX: 361-887-0812
EMAIL: crpe&s@gates.com
WEB: www.gates.com

GRADE D PRESSURE TEST CERTIFICATE

Customer :	AUSTIN DISTRIBUTING	Test Date:	6/8/2014
Customer Ref. :	PENDING	Hose Serial No.:	D-060814-1
Invoice No. :	201709	Created By:	NORMA
Product Description:	FD3.042.0R41/16.5KFLGE/E LE		
End Fitting 1 :	4 1/16 in.5K FLG	End Fitting 2 :	4 1/16 in.5K FLG
Gates Part No. :	4774-6001	Assembly Code :	L33090011513D-060814-1
Working Pressure :	5,000 PSI	Test Pressure :	7,500 PSI

Gates E & S North America, Inc. certifies that the following hose assembly has been tested to the Gates Oilfield Roughneck Agreement/Specification requirements and passed the 15 minute hydrostatic test per API Spec 7K/Q1, Fifth Edition, June 2010, Test pressure 9.6.7 and per Table 9 to 7,500 psi in accordance with this product number. Hose burst pressure 9.6.7.2 exceeds the minimum of 2.5 times the working pressure per Table 9.

Quality:	QUALITY	Technical Supervisor :	PRODUCTION
Date :	6/8/2014	Date :	6/8/2014
Signature :		Signature :	

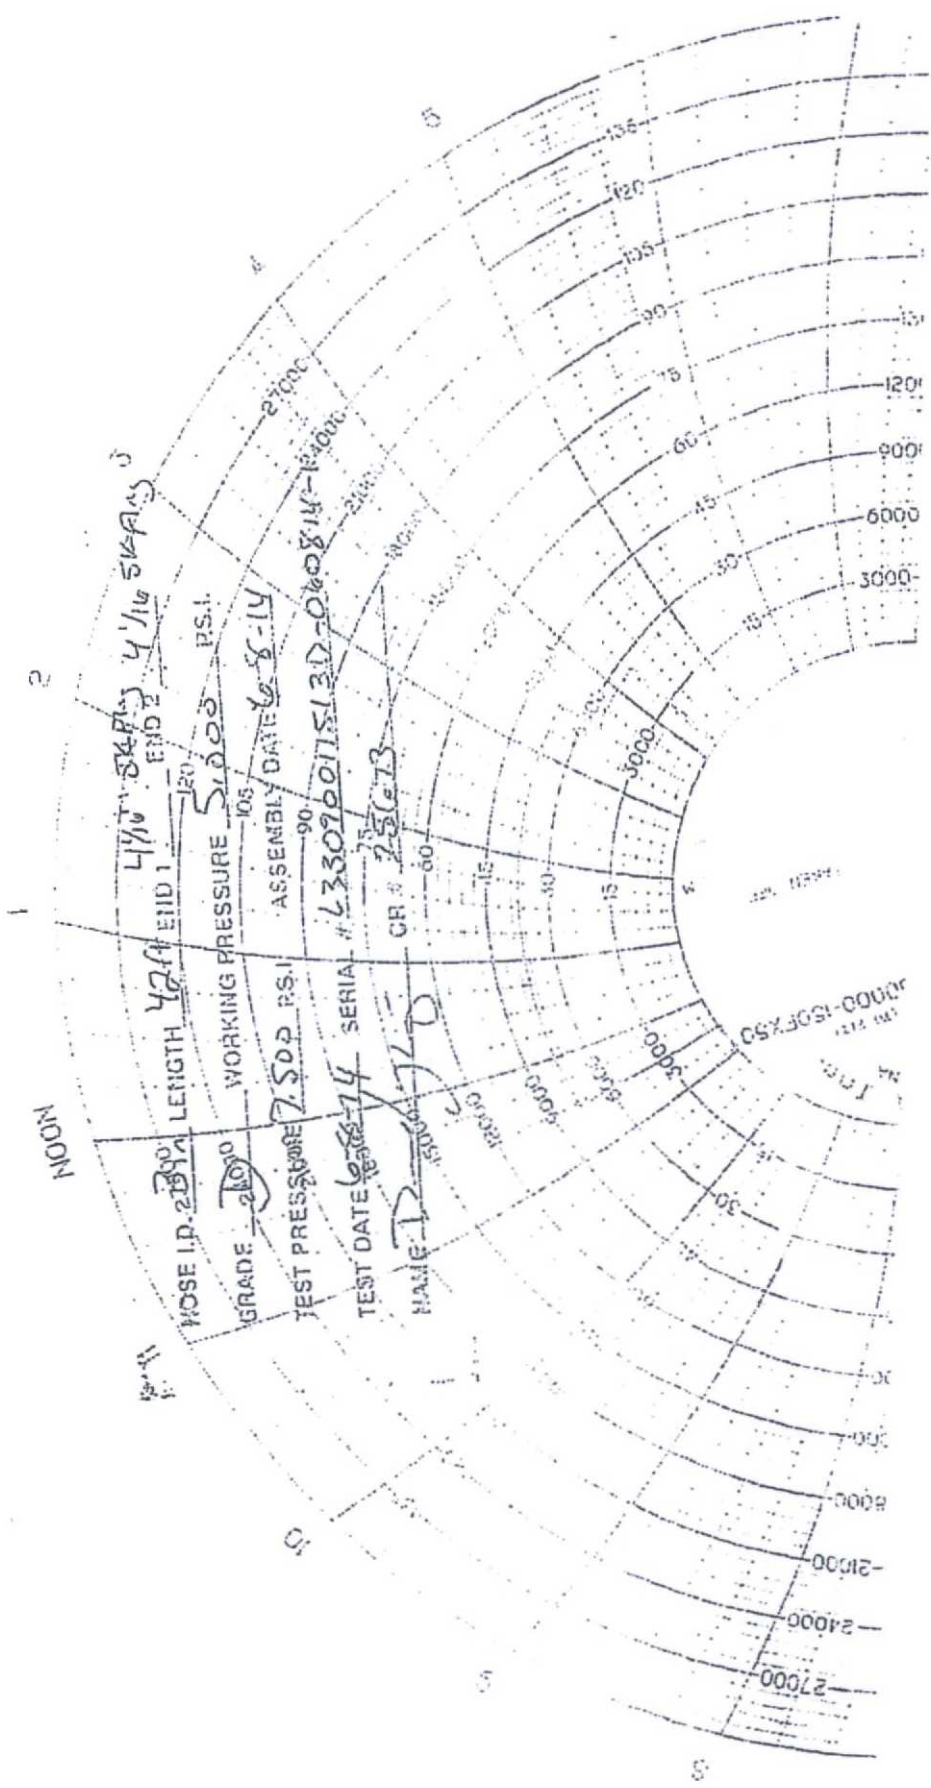

4 1/2" 3481-3 4 1/16 5481-3
END 1 END 2

4244 END 1

WORKING PRESSURE 5100 PS.I.

ASSEMBLY DATE 6-8-14

HOSE I.D. 2 1/2" LENGTH 4244

GRADE 2100

TEST PRESSURE 7500 PS.I.

TEST DATE 6-8-14

SERIAL # 133090017513D-080814-14000

CR # 25613

NAME D-770

MA. I.P.S. 15000-15000-00000
15000-15000-00000

Rig Plat Diagram Only – Dual Well Pad Layout
Outrider Federal #2H
V-Door East

