

Revised Permit Information 12/7/15:

Well Name: Lomas Rojas 26 State Com No. 703H

Location:

SL: 721' FNL & 1985' FEL, Section 26, T-25-S, R-33-E, Lea Co., N.M.

BHL: 230' FSL & 1650' FEL, Section 26, T-25-S, R-33-E, Lea Co., N.M.

Casing Program:

Hole Size	Interval	Csg OD	Weight	Grade	Conn	DF _{min} Collapse	DF _{min} Burst	DF _{min} Tension
17.5"	0 - 1,125'	13.375"	54.5#	J55	STC	1.125	1.25	1.60
12.25"	0-4,000'	9.625"	40#	J55	LTC	1.125	1.25	1.60
12.25"	4000' - 5100'	9.625"	40#	HCK-55	LTC	1.125	1.25	1.60
8.75"	0'-17,357'	5.5"	17#	HCP-110	LTC	1.125	1.25	1.60

Cement Program:

Depth	No. Sacks	Wt. ppg	Yld Ft ³ /ft	Slurry Description
1,125'	600	13.5	1.73	Class C + 4.0% Bentonite + 0.6% CD-32 + 0.5% CaCl ₂ + 0.25 lb/sk Cello-Flake (TOC @ Surface)
	300	14.8	1.34	Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate
5,100'	700	12.7	2.22	Class 'C' + 1.50% R-3 + 0.25 lb/sk Cello-Flake + 2.0% Sodium Metasilicate + 10% Salt + 0.005 lb/sk Static Free (TOC @ Surface)
	200	14.8	1.32	Tail: Class 'C' + 0.25 lb/sk Cello Flake + 0.005 lb/sk Static Free
17,357'	874	11.0	2.77	Class C + 0.15% GXT-C + 0.4% CPT-503P + 0.5% CPT-47B + 0.3% CPT-20 + 0.25% Citric Acid
	1225	14.4	1.41	Class H + 3% Salt + 0.6% CPT-12 + 0.2% CPT-35 + 5 pps MagOx + 0.15% CPT-51 + 0.3% CPT-20

Mud Program:

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0 - 1,125'	Fresh - Gel	8.6-8.8	28-34	N/c
1,125' - 5,100'	Oil Base	8.7-9.4	58-68	N/c - 6
5,100' - 12,054'	Oil Base	8.7-9.4	58-68	N/c - 6
12,054' - 17,357' Lateral	Oil Base	9.0-9.5	58-68	N/c - 6


DEC 08 2015

Lomas Rojas 26 State Com #703H
Lea County, New Mexico

721' FNL
1985' FEL
Section 26
T-25-S, R-33-E

Proposed Wellbore
Revised 12/7/15
API: 30-025-42970

KB: 3,369'
GL: 3,344'

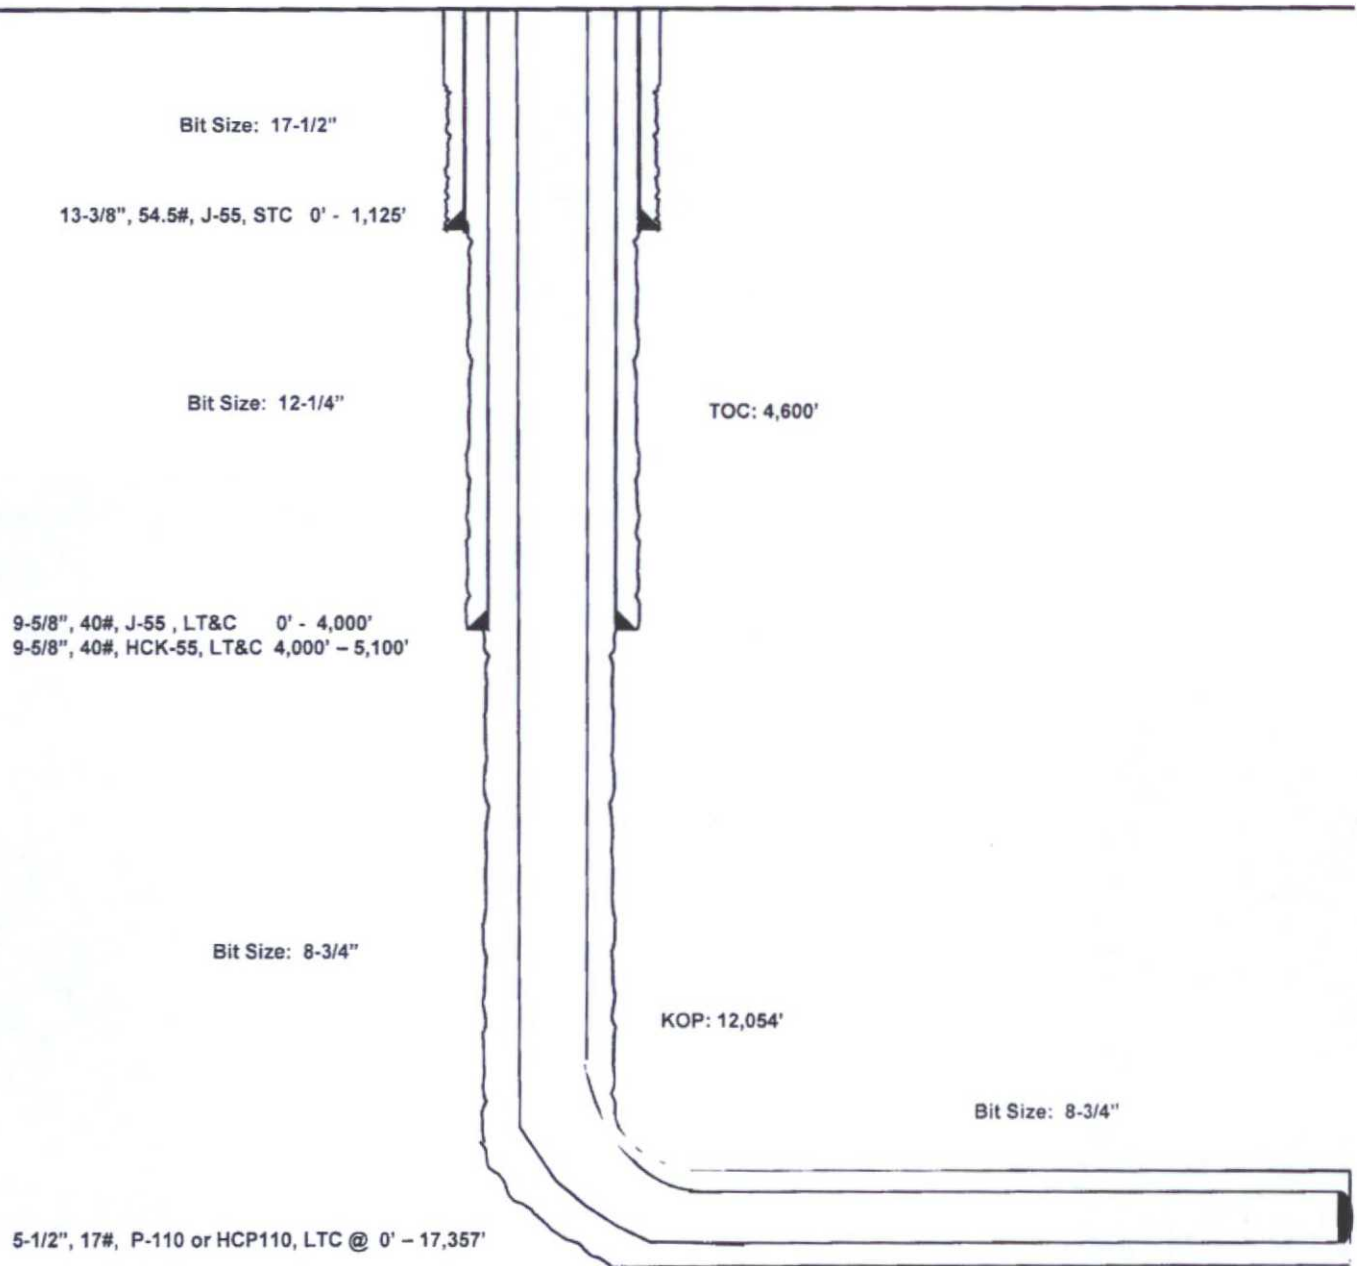

Lateral: 17,357' MD, 12,518' TVD

BH Location: 230' FSL & 1650' FEL
Section 26
T-25-S, R-33-E



Lea County, NM (NAD 27 NME)

Lomas Rojas 26 State Com #703H

H&P 260

Plan #0.2

PROJECT DETAILS: Lea County, NM (NAD 27 NME)

Geodetic System: US State Plane 1927 (Exact solution)
Datum: NAD 1927 (NADCON CONUS)
Ellipsoid: Clarke 1886
Zone: New Mexico East 3001
System Datum: Mean Sea Level

WELL DETAILS: #703H

Ground Level: 3344.0
KB= 28 @ 3365.0m (H&P 260)
Northing: 403431.50 Easting: 746461.50 Latitude: 32° 6' 23.999 N Longitude: 102° 32' 25.926 W



Azimuths to Grid North
True North: 0.42°
Magnetic North: 6.67°
Magnetic Field
Strength: 48028.5nT
Dip Angle: 69.58°
Date: 12/16/2019
Model: IGRF 2015

To convert a Magnetic Direction to a Grid Direction, Add 6.67°
To convert a Magnetic Direction to a True Direction, Add 7.09° East
To convert a True Direction to a Grid Direction, Subtract 9.42°

SECTION DETAILS






Sec	MD	Inc	Azi	TVD	+N-S	+E-W	Dleg	TFace	VSect	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	1200.0	0.00	0.00	1200.0	0.0	0.0	0.00	0.00	0.0	
3	1598.5	3.98	24.97	1598.2	12.6	5.8	1.00	24.97	-12.0	
4	12054.6	3.98	24.97	12029.0	671.3	312.6	0.00	0.00	-642.4	
5	12836.5	90.23	179.55	12536.2	193.0	331.6	12.00	154.52	-164.2	
6	17357.6	90.23	179.55	12518.0	-4328.0	367.0	0.00	0.00	4343.5	PBHL(LR 26 State Com #703H)

CASING DETAILS

No casing data is available

WELLBORE TARGET DETAILS (MAP CO-ORDINATES)

Name	TVD	+N-S	+E-W	Northing	Easting
PBHL(LR 26 State Com #703H)	12618.5	4328.0	367.0	399133.00	746848.00
FTPLR 26 State Com #703H	12537.0	393.0	536.0	403074.00	746811.50

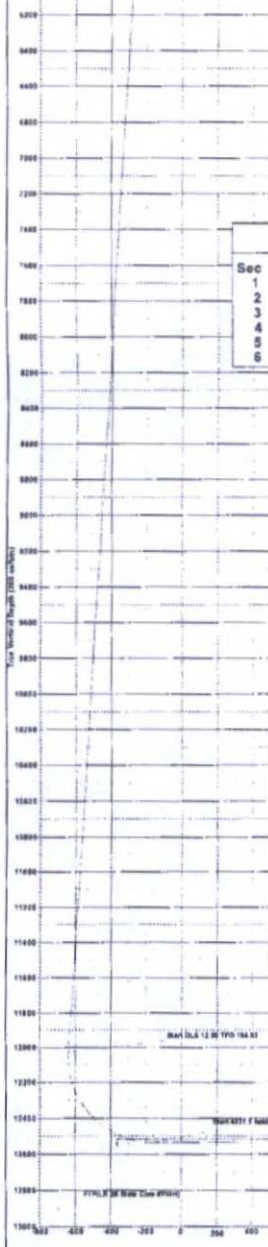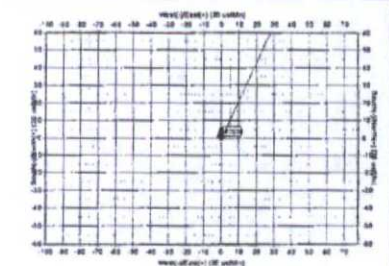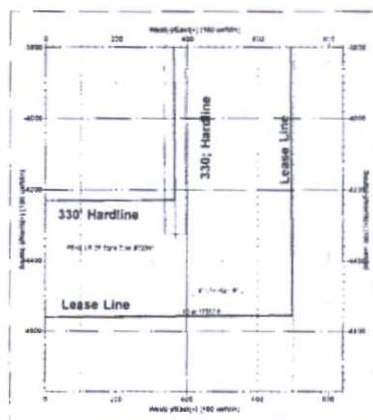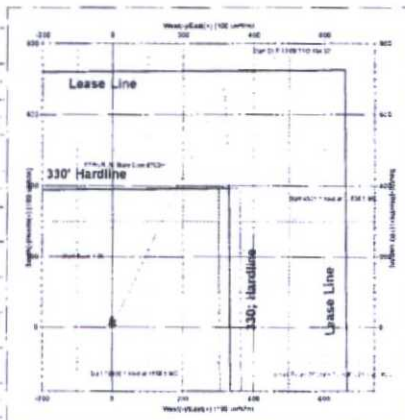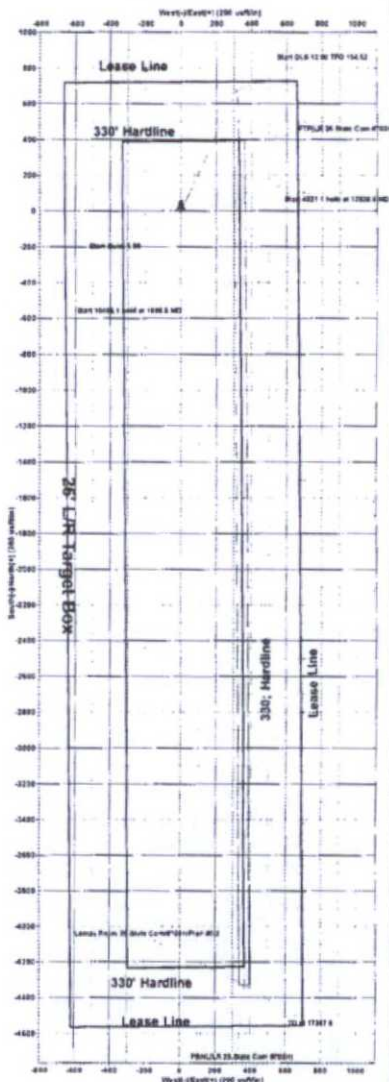

Vertical Section at 175.15° (200 uoff)



EOG Resources - Midland

Lea County, NM (NAD 27 NME)

Lomas Rojas 26 State Com

#703H

OH

Plan: Plan #0.2

Standard Planning Report

08 December, 2015



EOG Resources, Inc.

Planning Report

Database: EDM 5000.1 Single User Db
Company: EOG Resources - Midland
Project: Lea County, NM (NAD 27 NME)
Site: Lomas Rojas 26 State Com
Well: #703H
Wellbore: OH
Design: Plan #0.2

Local Co-ordinate Reference: Well #703H
TVD Reference: KB= 25 @ 3369.0usft (H&P 260)
MD Reference: KB= 25 @ 3369.0usft (H&P 260)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Project	Lea County, NM (NAD 27 NME)		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site	Lomas Rojas 26 State Com			
Site Position:		Northing:	403,820.30 usft	Latitude: 32° 6' 27.873 N
From:	Map	Easting:	745,192.70 usft	Longitude: 103° 32' 29.253 W
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16"	Grid Convergence: 0.42°

Well	#703H			
Well Position	+N/-S	-389.3 usft	Northing:	403,431.00 usft
	+E/-W	288.3 usft	Easting:	745,481.00 usft
Position Uncertainty	0.0 usft	Wellhead Elevation:	0.0 usft	Ground Level: 3,344.0 usft

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2015	12/16/2015	7.09	59.98	48,027

Design	Plan #0.2			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.0	0.0	0.0	175.15

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,598.5	3.98	24.97	1,598.2	12.6	5.8	1.00	1.00	0.00	24.97	
12,054.6	3.98	24.97	12,029.0	671.3	312.6	0.00	0.00	0.00	0.00	
12,836.5	90.23	179.55	12,536.2	193.0	331.6	12.00	11.03	19.77	154.52	
17,357.6	90.23	179.55	12,518.0	-4,328.0	367.0	0.00	0.00	0.00	0.00	PBHL(LR 26 State Cc



EOG Resources, Inc.

Planning Report

Database: EDM 5000.1 Single User Db
 Company: EOG Resources - Midland
 Project: Lea County, NM (NAD 27 NME)
 Site: Lomas Rojas 26 State Com
 Well: #703H
 Wellbore: OH
 Design: Plan #0.2

Local Co-ordinate Reference: Well #703H
 TVD Reference: KB= 25 @ 3369.0usft (H&P 260)
 MD Reference: KB= 25 @ 3369.0usft (H&P 260)
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00
1,300.0	1.00	24.97	1,300.0	0.8	0.4	-0.8	1.00	1.00	0.00
1,400.0	2.00	24.97	1,400.0	3.2	1.5	-3.0	1.00	1.00	0.00
1,500.0	3.00	24.97	1,499.9	7.1	3.3	-6.8	1.00	1.00	0.00
1,598.5	3.98	24.97	1,598.2	12.6	5.8	-12.0	1.00	1.00	0.00
1,600.0	3.98	24.97	1,599.7	12.7	5.9	-12.1	0.00	0.00	0.00
1,700.0	3.98	24.97	1,699.4	19.0	8.8	-18.1	0.00	0.00	0.00
1,800.0	3.98	24.97	1,799.2	25.3	11.8	-24.2	0.00	0.00	0.00
1,900.0	3.98	24.97	1,898.9	31.6	14.7	-30.2	0.00	0.00	0.00
2,000.0	3.98	24.97	1,998.7	37.9	17.6	-36.2	0.00	0.00	0.00
2,100.0	3.98	24.97	2,098.5	44.2	20.6	-42.3	0.00	0.00	0.00
2,200.0	3.98	24.97	2,198.2	50.5	23.5	-48.3	0.00	0.00	0.00
2,300.0	3.98	24.97	2,298.0	56.8	26.4	-54.3	0.00	0.00	0.00
2,400.0	3.98	24.97	2,397.7	63.0	29.4	-60.3	0.00	0.00	0.00
2,500.0	3.98	24.97	2,497.5	69.3	32.3	-66.4	0.00	0.00	0.00
2,600.0	3.98	24.97	2,597.3	75.6	35.2	-72.4	0.00	0.00	0.00
2,700.0	3.98	24.97	2,697.0	81.9	38.2	-78.4	0.00	0.00	0.00
2,800.0	3.98	24.97	2,796.8	88.2	41.1	-84.5	0.00	0.00	0.00
2,900.0	3.98	24.97	2,896.5	94.5	44.0	-90.5	0.00	0.00	0.00
3,000.0	3.98	24.97	2,996.3	100.8	47.0	-96.5	0.00	0.00	0.00
3,100.0	3.98	24.97	3,096.0	107.1	49.9	-102.5	0.00	0.00	0.00
3,200.0	3.98	24.97	3,195.8	113.4	52.8	-108.6	0.00	0.00	0.00
3,300.0	3.98	24.97	3,295.6	119.7	55.8	-114.6	0.00	0.00	0.00
3,400.0	3.98	24.97	3,395.3	126.0	58.7	-120.6	0.00	0.00	0.00
3,500.0	3.98	24.97	3,495.1	132.3	61.6	-126.7	0.00	0.00	0.00
3,600.0	3.98	24.97	3,594.8	138.6	64.6	-132.7	0.00	0.00	0.00
3,700.0	3.98	24.97	3,694.6	144.9	67.5	-138.7	0.00	0.00	0.00
3,800.0	3.98	24.97	3,794.4	151.2	70.4	-144.8	0.00	0.00	0.00
3,900.0	3.98	24.97	3,894.1	157.5	73.4	-150.8	0.00	0.00	0.00
4,000.0	3.98	24.97	3,993.9	163.8	76.3	-156.8	0.00	0.00	0.00
4,100.0	3.98	24.97	4,093.6	170.1	79.2	-162.8	0.00	0.00	0.00
4,200.0	3.98	24.97	4,193.4	176.4	82.2	-168.9	0.00	0.00	0.00
4,300.0	3.98	24.97	4,293.1	182.7	85.1	-174.9	0.00	0.00	0.00
4,400.0	3.98	24.97	4,392.9	189.0	88.0	-180.9	0.00	0.00	0.00
4,500.0	3.98	24.97	4,492.7	195.3	91.0	-187.0	0.00	0.00	0.00
4,600.0	3.98	24.97	4,592.4	201.6	93.9	-193.0	0.00	0.00	0.00
4,700.0	3.98	24.97	4,692.2	207.9	96.8	-199.0	0.00	0.00	0.00
4,800.0	3.98	24.97	4,791.9	214.2	99.8	-205.0	0.00	0.00	0.00
4,900.0	3.98	24.97	4,891.7	220.5	102.7	-211.1	0.00	0.00	0.00
5,000.0	3.98	24.97	4,991.5	226.8	105.6	-217.1	0.00	0.00	0.00
5,100.0	3.98	24.97	5,091.2	233.1	108.6	-223.1	0.00	0.00	0.00
5,200.0	3.98	24.97	5,191.0	239.4	111.5	-229.2	0.00	0.00	0.00



EOG Resources, Inc.

Planning Report

Database: EDM 5000.1 Single User Db
Company: EOG Resources - Midland
Project: Lea County, NM (NAD 27 NME)
Site: Lomas Rojas 26 State Com
Well: #703H
Wellbore: OH
Design: Plan #0.2

Local Co-ordinate Reference: Well #703H
TVD Reference: KB= 25 @ 3369.0usft (H&P 260)
MD Reference: KB= 25 @ 3369.0usft (H&P 260)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,300.0	3.98	24.97	5,290.7	245.7	114.4	-235.2	0.00	0.00	0.00
5,400.0	3.98	24.97	5,390.5	252.0	117.4	-241.2	0.00	0.00	0.00
5,500.0	3.98	24.97	5,490.2	258.3	120.3	-247.3	0.00	0.00	0.00
5,600.0	3.98	24.97	5,590.0	264.6	123.2	-253.3	0.00	0.00	0.00
5,700.0	3.98	24.97	5,689.8	270.9	126.2	-259.3	0.00	0.00	0.00
5,800.0	3.98	24.97	5,789.5	277.2	129.1	-265.3	0.00	0.00	0.00
5,900.0	3.98	24.97	5,889.3	283.5	132.0	-271.4	0.00	0.00	0.00
6,000.0	3.98	24.97	5,989.0	289.8	135.0	-277.4	0.00	0.00	0.00
6,100.0	3.98	24.97	6,088.8	296.1	137.9	-283.4	0.00	0.00	0.00
6,200.0	3.98	24.97	6,188.6	302.4	140.8	-289.5	0.00	0.00	0.00
6,300.0	3.98	24.97	6,288.3	308.7	143.8	-295.5	0.00	0.00	0.00
6,400.0	3.98	24.97	6,388.1	315.0	146.7	-301.5	0.00	0.00	0.00
6,500.0	3.98	24.97	6,487.8	321.3	149.6	-307.5	0.00	0.00	0.00
6,600.0	3.98	24.97	6,587.6	327.6	152.6	-313.6	0.00	0.00	0.00
6,700.0	3.98	24.97	6,687.3	333.9	155.5	-319.6	0.00	0.00	0.00
6,800.0	3.98	24.97	6,787.1	340.2	158.4	-325.6	0.00	0.00	0.00
6,900.0	3.98	24.97	6,886.9	346.5	161.4	-331.7	0.00	0.00	0.00
7,000.0	3.98	24.97	6,986.6	352.8	164.3	-337.7	0.00	0.00	0.00
7,100.0	3.98	24.97	7,086.4	359.1	167.2	-343.7	0.00	0.00	0.00
7,200.0	3.98	24.97	7,186.1	365.4	170.2	-349.8	0.00	0.00	0.00
7,300.0	3.98	24.97	7,285.9	371.7	173.1	-355.8	0.00	0.00	0.00
7,400.0	3.98	24.97	7,385.7	378.0	176.0	-361.8	0.00	0.00	0.00
7,500.0	3.98	24.97	7,485.4	384.3	179.0	-367.8	0.00	0.00	0.00
7,600.0	3.98	24.97	7,585.2	390.6	181.9	-373.9	0.00	0.00	0.00
7,700.0	3.98	24.97	7,684.9	396.9	184.8	-379.9	0.00	0.00	0.00
7,800.0	3.98	24.97	7,784.7	403.2	187.8	-385.9	0.00	0.00	0.00
7,900.0	3.98	24.97	7,884.4	409.5	190.7	-392.0	0.00	0.00	0.00
8,000.0	3.98	24.97	7,984.2	415.8	193.6	-398.0	0.00	0.00	0.00
8,100.0	3.98	24.97	8,084.0	422.1	196.6	-404.0	0.00	0.00	0.00
8,200.0	3.98	24.97	8,183.7	428.4	199.5	-410.0	0.00	0.00	0.00
8,300.0	3.98	24.97	8,283.5	434.7	202.4	-416.1	0.00	0.00	0.00
8,400.0	3.98	24.97	8,383.2	441.0	205.4	-422.1	0.00	0.00	0.00
8,500.0	3.98	24.97	8,483.0	447.3	208.3	-428.1	0.00	0.00	0.00
8,600.0	3.98	24.97	8,582.8	453.6	211.2	-434.2	0.00	0.00	0.00
8,700.0	3.98	24.97	8,682.5	459.9	214.2	-440.2	0.00	0.00	0.00
8,800.0	3.98	24.97	8,782.3	466.2	217.1	-446.2	0.00	0.00	0.00
8,900.0	3.98	24.97	8,882.0	472.5	220.0	-452.2	0.00	0.00	0.00
9,000.0	3.98	24.97	8,981.8	478.8	223.0	-458.3	0.00	0.00	0.00
9,100.0	3.98	24.97	9,081.5	485.1	225.9	-464.3	0.00	0.00	0.00
9,200.0	3.98	24.97	9,181.3	491.4	228.8	-470.3	0.00	0.00	0.00
9,300.0	3.98	24.97	9,281.1	497.7	231.8	-476.4	0.00	0.00	0.00
9,400.0	3.98	24.97	9,380.8	504.0	234.7	-482.4	0.00	0.00	0.00
9,500.0	3.98	24.97	9,480.6	510.3	237.6	-488.4	0.00	0.00	0.00
9,600.0	3.98	24.97	9,580.3	516.6	240.6	-494.5	0.00	0.00	0.00
9,700.0	3.98	24.97	9,680.1	522.9	243.5	-500.5	0.00	0.00	0.00
9,800.0	3.98	24.97	9,779.9	529.2	246.4	-506.5	0.00	0.00	0.00
9,900.0	3.98	24.97	9,879.6	535.5	249.4	-512.5	0.00	0.00	0.00
10,000.0	3.98	24.97	9,979.4	541.8	252.3	-518.6	0.00	0.00	0.00
10,100.0	3.98	24.97	10,079.1	548.1	255.3	-524.6	0.00	0.00	0.00
10,200.0	3.98	24.97	10,178.9	554.4	258.2	-530.6	0.00	0.00	0.00
10,300.0	3.98	24.97	10,278.6	560.7	261.1	-536.7	0.00	0.00	0.00
10,400.0	3.98	24.97	10,378.4	567.0	264.1	-542.7	0.00	0.00	0.00
10,500.0	3.98	24.97	10,478.2	573.3	267.0	-548.7	0.00	0.00	0.00
10,600.0	3.98	24.97	10,577.9	579.6	269.9	-554.7	0.00	0.00	0.00



EOG Resources, Inc.

Planning Report

Database: EDM 5000.1 Single User Db
Company: EOG Resources - Midland
Project: Lea County, NM (NAD 27 NME)
Site: Lomas Rojas 26 State Com
Well: #703H
Wellbore: OH
Design: Plan #0.2

Local Co-ordinate Reference: Well #703H
TVD Reference: KB= 25 @ 3369.0usft (H&P 260)
MD Reference: KB= 25 @ 3369.0usft (H&P 260)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
10,700.0	3.98	24.97	10,677.7	585.9	272.9	-560.8	0.00	0.00	0.00
10,800.0	3.98	24.97	10,777.4	592.2	275.8	-566.8	0.00	0.00	0.00
10,900.0	3.98	24.97	10,877.2	598.5	278.7	-572.8	0.00	0.00	0.00
11,000.0	3.98	24.97	10,977.0	604.8	281.7	-578.9	0.00	0.00	0.00
11,100.0	3.98	24.97	11,076.7	611.1	284.6	-584.9	0.00	0.00	0.00
11,200.0	3.98	24.97	11,176.5	617.4	287.5	-590.9	0.00	0.00	0.00
11,300.0	3.98	24.97	11,276.2	623.7	290.5	-597.0	0.00	0.00	0.00
11,400.0	3.98	24.97	11,376.0	630.0	293.4	-603.0	0.00	0.00	0.00
11,500.0	3.98	24.97	11,475.7	636.3	296.3	-609.0	0.00	0.00	0.00
11,600.0	3.98	24.97	11,575.5	642.6	299.3	-615.0	0.00	0.00	0.00
11,700.0	3.98	24.97	11,675.3	648.9	302.2	-621.1	0.00	0.00	0.00
11,800.0	3.98	24.97	11,775.0	655.2	305.1	-627.1	0.00	0.00	0.00
11,900.0	3.98	24.97	11,874.8	661.5	308.1	-633.1	0.00	0.00	0.00
12,000.0	3.98	24.97	11,974.5	667.8	311.0	-639.2	0.00	0.00	0.00
12,054.6	3.98	24.97	12,029.0	671.3	312.6	-642.4	0.00	0.00	0.00
12,075.0	2.06	55.67	12,049.4	672.1	313.2	-643.2	12.00	-9.42	150.46
12,085.6	1.72	93.65	12,060.0	672.2	313.5	-643.3	12.00	-3.26	358.11
Plan @ 12059.5 (#703H OH Plan #2)									
12,100.0	2.52	136.76	12,074.4	672.0	313.9	-643.0	12.00	5.58	299.50
12,125.0	5.14	160.14	12,099.3	670.5	314.7	-641.5	12.00	10.49	93.49
12,150.0	8.03	167.31	12,124.1	667.8	315.5	-638.7	12.00	11.56	28.69
12,175.0	10.98	170.68	12,148.8	663.7	316.2	-634.6	12.00	11.80	13.47
12,200.0	13.95	172.63	12,173.2	658.4	317.0	-629.2	12.00	11.88	7.81
12,225.0	16.93	173.91	12,197.3	651.7	317.8	-622.6	12.00	11.92	5.11
12,250.0	19.92	174.81	12,221.0	643.9	318.6	-614.7	12.00	11.95	3.61
12,275.0	22.91	175.49	12,244.3	634.8	319.3	-605.5	12.00	11.96	2.70
12,300.0	25.90	176.01	12,267.0	624.5	320.1	-595.2	12.00	11.97	2.11
12,325.0	28.90	176.44	12,289.2	613.0	320.8	-583.7	12.00	11.97	1.70
12,350.0	31.89	176.79	12,310.8	600.4	321.6	-571.1	12.00	11.98	1.40
12,375.0	34.89	177.09	12,331.7	586.8	322.3	-557.3	12.00	11.98	1.19
12,400.0	37.88	177.34	12,351.8	571.8	323.0	-542.5	12.00	11.98	1.02
12,425.0	40.88	177.56	12,371.1	556.0	323.7	-526.6	12.00	11.99	0.89
12,450.0	43.88	177.76	12,389.6	539.2	324.4	-509.8	12.00	11.99	0.79
12,475.0	46.87	177.94	12,407.1	521.4	325.1	-492.0	12.00	11.99	0.71
12,500.0	49.87	178.10	12,423.7	502.7	325.7	-473.4	12.00	11.99	0.64
12,525.0	52.87	178.25	12,439.3	483.2	326.4	-453.9	12.00	11.99	0.59
12,550.0	55.87	178.38	12,453.9	462.9	327.0	-433.6	12.00	11.99	0.54
12,575.0	58.87	178.51	12,467.4	441.8	327.5	-412.6	12.00	11.99	0.51
12,600.0	61.86	178.63	12,479.7	420.1	328.1	-390.9	12.00	11.99	0.48
12,625.0	64.86	178.74	12,491.0	397.8	328.6	-368.6	12.00	11.99	0.45
12,647.9	67.60	178.84	12,500.2	376.9	329.0	-347.7	12.00	11.99	0.43
FTP(LR 26 State Com #703H)									
12,650.0	67.86	178.85	12,501.0	374.9	329.1	-345.7	12.00	11.99	0.42
12,675.0	70.86	178.95	12,509.8	351.5	329.5	-322.4	12.00	11.99	0.41
12,700.0	73.86	179.05	12,517.4	327.7	329.9	-298.6	12.00	11.99	0.40
12,725.0	76.86	179.14	12,523.7	303.5	330.3	-274.5	12.00	11.99	0.38
12,750.0	79.85	179.24	12,528.7	279.0	330.7	-250.1	12.00	11.99	0.37
12,775.0	82.85	179.33	12,532.5	254.3	331.0	-225.4	12.00	11.99	0.37
12,800.0	85.85	179.42	12,534.9	229.4	331.2	-200.6	12.00	11.99	0.36
12,825.0	88.85	179.51	12,536.1	204.5	331.5	-175.7	12.00	11.99	0.36
12,836.5	90.23	179.55	12,536.2	193.0	331.6	-164.2	12.00	11.99	0.36
12,900.0	90.23	179.55	12,535.9	129.5	332.1	-100.9	0.00	0.00	0.00
13,000.0	90.23	179.55	12,535.5	29.5	332.8	-1.2	0.00	0.00	0.00
13,100.0	90.23	179.55	12,535.1	-70.5	333.6	98.5	0.00	0.00	0.00



EOG Resources, Inc.
Planning Report

Database: EDM 5000.1 Single User Db
Company: EOG Resources - Midland
Project: Lea County, NM (NAD 27 NME)
Site: Lomas Rojas 26 State Com
Well: #703H
Wellbore: OH
Design: Plan #0.2

Local Co-ordinate Reference: Well #703H
TVD Reference: KB= 25 @ 3369.0usft (H&P 260)
MD Reference: KB= 25 @ 3369.0usft (H&P 260)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
13,200.0	90.23	179.55	12,534.7	-170.5	334.4	198.2	0.00	0.00	0.00
13,300.0	90.23	179.55	12,534.3	-270.5	335.2	297.9	0.00	0.00	0.00
13,400.0	90.23	179.55	12,533.9	-370.5	336.0	397.6	0.00	0.00	0.00
13,500.0	90.23	179.55	12,533.5	-470.5	336.8	497.3	0.00	0.00	0.00
13,600.0	90.23	179.55	12,533.1	-570.5	337.6	597.0	0.00	0.00	0.00
13,700.0	90.23	179.55	12,532.7	-670.5	338.3	696.7	0.00	0.00	0.00
13,800.0	90.23	179.55	12,532.3	-770.5	339.1	796.4	0.00	0.00	0.00
13,900.0	90.23	179.55	12,531.9	-870.5	339.9	896.1	0.00	0.00	0.00
14,000.0	90.23	179.55	12,531.5	-970.5	340.7	995.8	0.00	0.00	0.00
14,100.0	90.23	179.55	12,531.1	-1,070.5	341.5	1,095.5	0.00	0.00	0.00
14,200.0	90.23	179.55	12,530.7	-1,170.5	342.3	1,195.2	0.00	0.00	0.00
14,300.0	90.23	179.55	12,530.3	-1,270.5	343.0	1,294.9	0.00	0.00	0.00
14,400.0	90.23	179.55	12,529.9	-1,370.5	343.8	1,394.6	0.00	0.00	0.00
14,500.0	90.23	179.55	12,529.5	-1,470.5	344.6	1,494.3	0.00	0.00	0.00
14,600.0	90.23	179.55	12,529.1	-1,570.5	345.4	1,594.0	0.00	0.00	0.00
14,700.0	90.23	179.55	12,528.7	-1,670.5	346.2	1,693.7	0.00	0.00	0.00
14,800.0	90.23	179.55	12,528.3	-1,770.5	347.0	1,793.5	0.00	0.00	0.00
14,900.0	90.23	179.55	12,527.9	-1,870.5	347.7	1,893.2	0.00	0.00	0.00
15,000.0	90.23	179.55	12,527.5	-1,970.5	348.5	1,992.9	0.00	0.00	0.00
15,007.1	90.23	179.55	12,527.5	-1,977.6	348.6	2,000.0	0.00	0.00	0.00
TGT#1(LR 26 State Com #703H)									
15,100.0	90.23	179.55	12,527.1	-2,070.5	349.3	2,092.6	0.00	0.00	0.00
15,200.0	90.23	179.55	12,526.7	-2,170.5	350.1	2,192.3	0.00	0.00	0.00
15,300.0	90.23	179.55	12,526.3	-2,270.5	350.9	2,292.0	0.00	0.00	0.00
15,400.0	90.23	179.55	12,525.9	-2,370.4	351.7	2,391.7	0.00	0.00	0.00
15,500.0	90.23	179.55	12,525.5	-2,470.4	352.4	2,491.4	0.00	0.00	0.00
15,600.0	90.23	179.55	12,525.1	-2,570.4	353.2	2,591.1	0.00	0.00	0.00
15,700.0	90.23	179.55	12,524.7	-2,670.4	354.0	2,690.8	0.00	0.00	0.00
15,800.0	90.23	179.55	12,524.3	-2,770.4	354.8	2,790.5	0.00	0.00	0.00
15,900.0	90.23	179.55	12,523.9	-2,870.4	355.6	2,890.2	0.00	0.00	0.00
16,000.0	90.23	179.55	12,523.5	-2,970.4	356.4	2,989.9	0.00	0.00	0.00
16,100.0	90.23	179.55	12,523.1	-3,070.4	357.1	3,089.6	0.00	0.00	0.00
16,200.0	90.23	179.55	12,522.7	-3,170.4	357.9	3,189.3	0.00	0.00	0.00
16,210.7	90.23	179.55	12,522.6	-3,181.1	358.0	3,200.0	0.00	0.00	0.00
TGT#2(LR 26 State Com #703H)									
16,300.0	90.23	179.55	12,522.3	-3,270.4	358.7	3,289.0	0.00	0.00	0.00
16,400.0	90.23	179.55	12,521.9	-3,370.4	359.5	3,388.7	0.00	0.00	0.00
16,500.0	90.23	179.55	12,521.5	-3,470.4	360.3	3,488.4	0.00	0.00	0.00
16,600.0	90.23	179.55	12,521.0	-3,570.4	361.1	3,588.1	0.00	0.00	0.00
16,700.0	90.23	179.55	12,520.6	-3,670.4	361.8	3,687.8	0.00	0.00	0.00
16,800.0	90.23	179.55	12,520.2	-3,770.4	362.6	3,787.5	0.00	0.00	0.00
16,900.0	90.23	179.55	12,519.8	-3,870.4	363.4	3,887.3	0.00	0.00	0.00
17,000.0	90.23	179.55	12,519.4	-3,970.4	364.2	3,987.0	0.00	0.00	0.00
17,100.0	90.23	179.55	12,519.0	-4,070.4	365.0	4,086.7	0.00	0.00	0.00
17,200.0	90.23	179.55	12,518.6	-4,170.4	365.8	4,186.4	0.00	0.00	0.00
17,300.0	90.23	179.55	12,518.2	-4,270.4	366.5	4,286.1	0.00	0.00	0.00
17,357.6	90.23	179.55	12,518.0	-4,328.0	367.0	4,343.5	0.00	0.00	0.00
PBHL(LR 26 State Com #703H)									



EOG Resources, Inc.

Planning Report

Database: EDM 5000.1 Single User Db
Company: EOG Resources - Midland
Project: Lea County, NM (NAD 27 NME)
Site: Lomas Rojas 26 State Com
Well: #703H
Wellbore: OH
Design: Plan #0.2

Local Co-ordinate Reference: Well #703H
TVD Reference: KB= 25 @ 3369.0usft (H&P 260)
MD Reference: KB= 25 @ 3369.0usft (H&P 260)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Design Targets

Target Name	Dip Angle	Dip Dir.	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
- hit/miss target	(°)	(°)	(usft)	(usft)	(usft)	(usft)	(usft)		
- Shape									
PBHL(LR 26 State Com	90.00	179.57	12,518.0	-4,328.0	367.0	399,103.00	745,848.00	32° 5' 41.144 N	103° 32' 22.039 W
- plan hits target center									
- Rectangle (sides W60.0 H0.0 D4,721.2)									
FTP(LR 26 State Com #	0.00	0.00	12,537.0	393.0	330.0	403,824.00	745,811.00	32° 6' 27.864 N	103° 32' 22.065 W
- plan misses target center by 40.2usft at 12647.9usft MD (12500.2 TVD, 376.9 N, 329.0 E)									
- Point									