





Project: Lea County, NM (NAD27 NME)
Site: SD WE 24 Fed P23
Well: 2H
Wellbore: OH / Job 1514568
Design: Plan 3 02-11-16
Rig: Pace X30



RKB @ 3161.00ufl (Pace X30)



WELL DETAILS

Ground Level: 3134.00
Northing: 372252.00
Easting: 0.00
Latitude: 32° 11' 39.175" N
Longitude: 103° 37' 56.4868" W

SECTION DETAILS


Sec	MD	Inc	Azi	TVD	-N/S	-E/W	Diag	T/Freq	V/Sec	Target
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2	2000.00	0.00	0.00	2000.00	0.00	0.00	0.00	0.00	0.00	0.00
3	2100.00	1.50	200.00	2099.99	-1.23	-0.45	1.50	200.00	-1.21	0.00
4	6011.35	1.50	200.00	6010.00	-97.44	-35.47	0.00	0.00	-95.95	0.00
5	6290.83	0.00	287.15	6288.89	-101.61	-37.32	0.00	0.00	-97.46	0.00
6	8559.49	89.84	359.71	8557.12	-458.17	-340.40	10.00	92.56	-471.40	0.00
7	18159.49	89.84	359.71	18159.49	0.00	0.00	10265.39	0.00	0.00	0.00
8	18159.49	89.84	359.71	18159.49	0.00	0.00	10265.39	0.00	0.00	0.00

DESIGN TARGET DETAILS

Name	MD	Inc	Azi	TVD	-N/S	-E/W	Diag	T/Freq	V/Sec	Target
BHL SD WE 24 Fed P23 2H	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Plan 1514568	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

LEGEND

- SWD 13-1, OH / Job 1513029, Surveys (Ensign 789) VO
- 1H, OH / Job 1514587, Plan 3 02-11-16 VO
- 4H, OH / Job 1514570, Plan 2 11-08-15 VO
- 3H, OH / Job 1514569, Plan 2 11-08-15 VO
- Plan 3 02-11-16



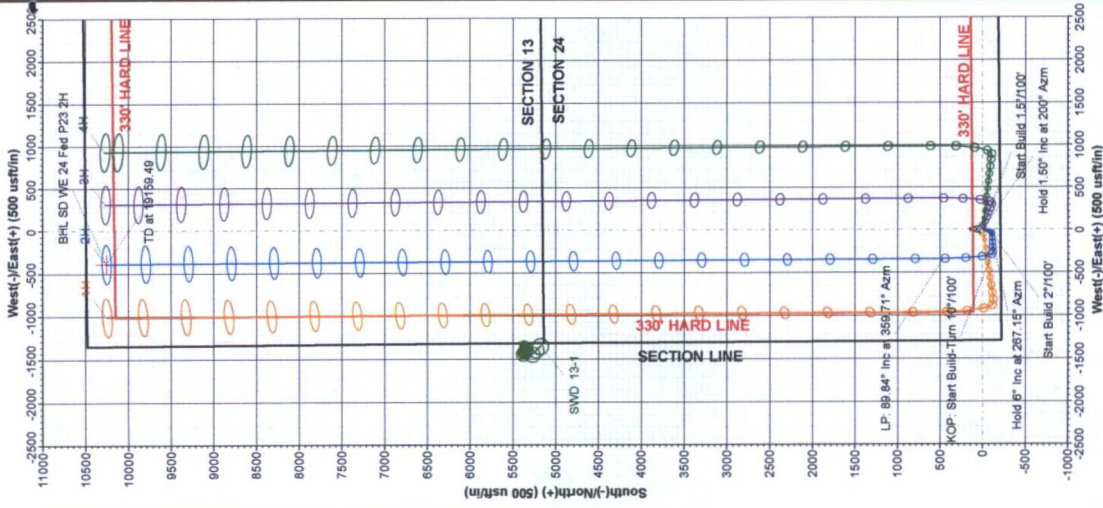


Map System: US State Plane 1927 (Exact solution)
Datum: NAD 83 (NADCON CONUS)
Zone Name: New Mexico East 3001
Local Origin: Well 2H, Grid North
Latitude: 32° 11' 39.175" N
Longitude: 103° 37' 56.4868" W
Grid East: 717251.00
Grid North: 372252.00
Scale Factor: 1.000

Geographic Model: HDGM
Magnetic Declination: 7.02°
Magnetic Declination Date: 19-Nov-15
Dip Angle from Horizontal: 59.75°
Magnetic Field Strength: 48053
To convert a Magnetic Direction to a Grid Direction, Add 6.65°
To convert a Grid Direction to a Magnetic Direction, Subtract 6.65°
To convert a True Direction to a Grid Direction, Subtract 0.37°

FORMATION TOP DETAILS

No formation data is available

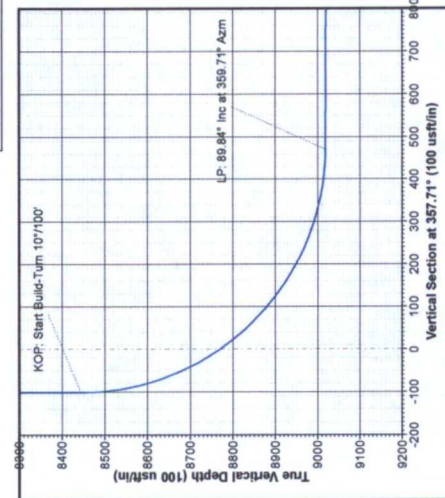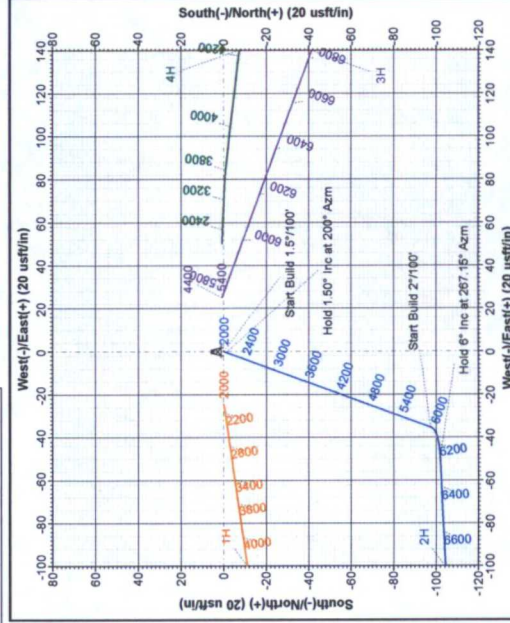

Vertical Section at 357.71° (250 usft/in)



Chevron

Lea County, NM (NAD27 NME)

SD WE 24 Fed P23

2H

OH / Job 1514568

Plan: Plan 3 02-11-16

Standard Planning Report

12 February, 2016





Phoenix Technology Services

Planning Report



Database:	Compass 5000 GCR	Local Co-ordinate Reference:	Well 2H
Company:	Chevron	TVD Reference:	RKB @ 3161.00usft (Pace X30)
Project:	Lea County, NM (NAD27 NME)	MD Reference:	RKB @ 3161.00usft (Pace X30)
Site:	SD WE 24 Fed P23	North Reference:	Grid
Well:	2H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH / Job 1514568		
Design:	Plan 3 02-11-16		

Project	Lea County, NM (NAD27 NME)		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site	SD WE 24 Fed P23		
Site Position:		Northing:	372,252.00 usft
From:	Map	Easting:	717,226.00 usft
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "
		Latitude:	32° 1' 17.39335 N
		Longitude:	103° 37' 56.77105 W
		Grid Convergence:	0.37 °

Well	2H		
Well Position	+N/-S	0.00 usft	Northing:
	+E/-W	25.00 usft	Easting:
Position Uncertainty	0.00 usft	Wellhead Elevation:	0.00 usft
		Latitude:	32° 1' 17.39175 N
		Longitude:	103° 37' 56.48068 W
		Ground Level:	3,134.00 usft

Wellbore	OH / Job 1514568		
Magnetics	Model Name	Sample Date	Declination
			(°)
	HDGM	11/18/2015	7.02
			Dip Angle
			(°)
			59.75
			Field Strength
			(nT)
			48,063

Design	Plan 3 02-11-16		
Audit Notes:			
Version:	Phase:	PLAN	Tie On Depth:
			0.00
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W
	(usft)	(usft)	(usft)
	0.00	0.00	0.00
			Direction
			(°)
			357.71

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00	
2,100.00	1.50	200.00	2,099.99	-1.23	-0.45	1.50	1.50	0.00	200.00	
6,011.35	1.50	200.00	6,010.00	-97.44	-35.47	0.00	0.00	0.00	0.00	
6,290.83	6.00	267.15	6,288.89	-101.61	-51.32	2.00	1.61	24.03	81.42	
8,458.44	6.00	267.15	8,444.62	-112.85	-277.58	0.00	0.00	0.00	0.00	
9,359.49	89.84	359.71	9,017.12	458.17	-340.40	10.00	9.30	10.27	92.56	
19,159.49	89.84	359.71	9,045.00	10,258.00	-390.00	0.00	0.00	0.00	0.00	BHL SD WE 24 Fed F



Phoenix Technology Services

Planning Report



Database: Compass 5000 GCR
 Company: Chevron
 Project: Lea County, NM (NAD27 NME)
 Site: SD WE 24 Fed P23
 Well: 2H
 Wellbore: OH / Job 1514568
 Design: Plan 3 02-11-16

Local Co-ordinate Reference: Well 2H
 TVD Reference: RKB @ 3161.00usft (Pace X30)
 MD Reference: RKB @ 3161.00usft (Pace X30)
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
Start Build 1.5°/100'									
2,100.00	1.50	200.00	2,099.99	-1.23	-0.45	-1.21	1.50	1.50	0.00
Hold 1.50° Inc at 200° Azm									
2,200.00	1.50	200.00	2,199.95	-3.69	-1.34	-3.63	0.00	0.00	0.00
2,300.00	1.50	200.00	2,299.92	-6.15	-2.24	-6.06	0.00	0.00	0.00
2,400.00	1.50	200.00	2,399.89	-8.61	-3.13	-8.48	0.00	0.00	0.00
2,500.00	1.50	200.00	2,499.85	-11.07	-4.03	-10.90	0.00	0.00	0.00
2,600.00	1.50	200.00	2,599.82	-13.53	-4.92	-13.32	0.00	0.00	0.00
2,700.00	1.50	200.00	2,699.78	-15.99	-5.82	-15.74	0.00	0.00	0.00
2,800.00	1.50	200.00	2,799.75	-18.45	-6.71	-18.17	0.00	0.00	0.00
2,900.00	1.50	200.00	2,899.71	-20.91	-7.61	-20.59	0.00	0.00	0.00
3,000.00	1.50	200.00	2,999.68	-23.37	-8.51	-23.01	0.00	0.00	0.00
3,100.00	1.50	200.00	3,099.65	-25.83	-9.40	-25.43	0.00	0.00	0.00
3,200.00	1.50	200.00	3,199.61	-28.29	-10.30	-27.85	0.00	0.00	0.00
3,300.00	1.50	200.00	3,299.58	-30.75	-11.19	-30.28	0.00	0.00	0.00
3,400.00	1.50	200.00	3,399.54	-33.21	-12.09	-32.70	0.00	0.00	0.00
3,500.00	1.50	200.00	3,499.51	-35.67	-12.98	-35.12	0.00	0.00	0.00
3,600.00	1.50	200.00	3,599.47	-38.13	-13.88	-37.54	0.00	0.00	0.00
3,700.00	1.50	200.00	3,699.44	-40.59	-14.77	-39.96	0.00	0.00	0.00
3,800.00	1.50	200.00	3,799.41	-43.05	-15.67	-42.39	0.00	0.00	0.00
3,900.00	1.50	200.00	3,899.37	-45.51	-16.56	-44.81	0.00	0.00	0.00
4,000.00	1.50	200.00	3,999.34	-47.97	-17.46	-47.23	0.00	0.00	0.00
4,100.00	1.50	200.00	4,099.30	-50.43	-18.35	-49.65	0.00	0.00	0.00
4,200.00	1.50	200.00	4,199.27	-52.89	-19.25	-52.08	0.00	0.00	0.00
4,300.00	1.50	200.00	4,299.23	-55.35	-20.14	-54.50	0.00	0.00	0.00
4,400.00	1.50	200.00	4,399.20	-57.81	-21.04	-56.92	0.00	0.00	0.00
4,500.00	1.50	200.00	4,499.17	-60.27	-21.93	-59.34	0.00	0.00	0.00
4,600.00	1.50	200.00	4,599.13	-62.73	-22.83	-61.76	0.00	0.00	0.00
4,700.00	1.50	200.00	4,699.10	-65.19	-23.73	-64.19	0.00	0.00	0.00
4,800.00	1.50	200.00	4,799.06	-67.65	-24.62	-66.61	0.00	0.00	0.00
4,900.00	1.50	200.00	4,899.03	-70.11	-25.52	-69.03	0.00	0.00	0.00
5,000.00	1.50	200.00	4,998.99	-72.57	-26.41	-71.45	0.00	0.00	0.00
5,100.00	1.50	200.00	5,098.96	-75.02	-27.31	-73.87	0.00	0.00	0.00



Phoenix Technology Services

Planning Report



Database: Compass 5000 GCR
 Company: Chevron
 Project: Lea County, NM (NAD27 NME)
 Site: SD WE 24 Fed P23
 Well: 2H
 Wellbore: OH / Job 1514568
 Design: Plan 3 02-11-16

Local Co-ordinate Reference:
 TVD Reference:
 MD Reference:
 North Reference:
 Survey Calculation Method:

Well 2H
 RKB @ 3161.00usft (Pace X30)
 RKB @ 3161.00usft (Pace X30)
 Grid
 Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,200.00	1.50	200.00	5,198.93	-77.48	-28.20	-76.30	0.00	0.00	0.00
5,300.00	1.50	200.00	5,298.89	-79.94	-29.10	-78.72	0.00	0.00	0.00
5,400.00	1.50	200.00	5,398.86	-82.40	-29.99	-81.14	0.00	0.00	0.00
5,500.00	1.50	200.00	5,498.82	-84.86	-30.89	-83.56	0.00	0.00	0.00
5,600.00	1.50	200.00	5,598.79	-87.32	-31.78	-85.98	0.00	0.00	0.00
5,700.00	1.50	200.00	5,698.76	-89.78	-32.68	-88.41	0.00	0.00	0.00
5,800.00	1.50	200.00	5,798.72	-92.24	-33.57	-90.83	0.00	0.00	0.00
5,900.00	1.50	200.00	5,898.69	-94.70	-34.47	-93.25	0.00	0.00	0.00
6,000.00	1.50	200.00	5,998.65	-97.16	-35.36	-95.67	0.00	0.00	0.00
6,011.35	1.50	200.00	6,010.00	-97.44	-35.47	-95.95	0.00	0.00	0.00
Start Build 2°/100'									
6,100.00	2.49	244.83	6,098.60	-99.35	-37.60	-97.77	2.00	1.11	50.57
6,200.00	4.26	261.09	6,198.42	-100.85	-43.24	-99.04	2.00	1.78	16.26
6,290.83	6.00	267.15	6,288.89	-101.61	-51.32	-99.48	2.00	1.91	6.68
Hold 6° Inc at 267.15° Azm									
6,300.00	6.00	267.15	6,298.01	-101.66	-52.27	-99.49	0.00	0.00	0.00
6,400.00	6.00	267.15	6,397.46	-102.17	-62.71	-99.59	0.00	0.00	0.00
6,500.00	6.00	267.15	6,496.91	-102.69	-73.15	-99.69	0.00	0.00	0.00
6,600.00	6.00	267.15	6,596.36	-103.21	-83.59	-99.79	0.00	0.00	0.00
6,700.00	6.00	267.15	6,695.82	-103.73	-94.03	-99.89	0.00	0.00	0.00
6,800.00	6.00	267.15	6,795.27	-104.25	-104.46	-99.99	0.00	0.00	0.00
6,900.00	6.00	267.15	6,894.72	-104.77	-114.90	-100.09	0.00	0.00	0.00
7,000.00	6.00	267.15	6,994.17	-105.29	-125.34	-100.20	0.00	0.00	0.00
7,100.00	6.00	267.15	7,093.63	-105.81	-135.78	-100.30	0.00	0.00	0.00
7,200.00	6.00	267.15	7,193.08	-106.33	-146.22	-100.40	0.00	0.00	0.00
7,300.00	6.00	267.15	7,292.53	-106.84	-156.66	-100.50	0.00	0.00	0.00
7,400.00	6.00	267.15	7,391.98	-107.36	-167.09	-100.60	0.00	0.00	0.00
7,500.00	6.00	267.15	7,491.43	-107.88	-177.53	-100.70	0.00	0.00	0.00
7,600.00	6.00	267.15	7,590.89	-108.40	-187.97	-100.80	0.00	0.00	0.00
7,700.00	6.00	267.15	7,690.34	-108.92	-198.41	-100.91	0.00	0.00	0.00
7,800.00	6.00	267.15	7,789.79	-109.44	-208.85	-101.01	0.00	0.00	0.00
7,900.00	6.00	267.15	7,889.24	-109.96	-219.29	-101.11	0.00	0.00	0.00
8,000.00	6.00	267.15	7,988.70	-110.48	-229.72	-101.21	0.00	0.00	0.00
8,100.00	6.00	267.15	8,088.15	-110.99	-240.16	-101.31	0.00	0.00	0.00
8,200.00	6.00	267.15	8,187.60	-111.51	-250.60	-101.41	0.00	0.00	0.00
8,300.00	6.00	267.15	8,287.05	-112.03	-261.04	-101.51	0.00	0.00	0.00
8,400.00	6.00	267.15	8,386.51	-112.55	-271.48	-101.62	0.00	0.00	0.00
8,458.44	6.00	267.15	8,444.63	-112.85	-277.58	-101.68	0.00	0.00	0.00
KOP: Start Build-Turn 10°/100'									
8,500.00	7.14	302.79	8,485.93	-111.56	-281.92	-100.21	10.00	2.74	85.73
8,550.00	10.71	326.00	8,535.33	-106.03	-287.13	-94.47	10.00	7.13	46.42
8,600.00	15.10	336.83	8,584.06	-96.18	-292.29	-84.43	10.00	8.79	21.67
8,650.00	19.78	342.76	8,631.76	-82.10	-297.37	-70.16	10.00	9.36	11.85
8,700.00	24.59	346.46	8,678.04	-63.90	-302.31	-51.77	10.00	9.61	7.41
8,750.00	29.45	349.01	8,722.57	-41.71	-307.10	-29.41	10.00	9.73	5.10
8,800.00	34.35	350.89	8,765.01	-15.70	-311.67	-3.23	10.00	9.80	3.76
8,850.00	39.27	352.35	8,805.03	13.94	-316.02	26.55	10.00	9.85	2.92
8,900.00	44.21	353.53	8,842.33	46.96	-320.09	59.71	10.00	9.88	2.36
8,950.00	49.16	354.52	8,876.61	83.14	-323.86	96.01	10.00	9.90	1.98
9,000.00	54.12	355.37	8,907.64	122.18	-327.30	135.16	10.00	9.91	1.70
9,050.00	59.08	356.12	8,935.16	163.79	-330.39	176.86	10.00	9.92	1.50
9,100.00	64.04	356.80	8,958.96	207.66	-333.10	220.80	10.00	9.93	1.35
9,150.00	69.01	357.42	8,978.87	253.45	-335.41	266.64	10.00	9.93	1.24



Phoenix Technology Services

Planning Report



Database: Compass 5000 GCR
 Company: Chevron
 Project: Lea County, NM (NAD27 NME)
 Site: SD WE 24 Fed P23
 Well: 2H
 Wellbore: OH / Job 1514568
 Design: Plan 3 02-11-16

Local Co-ordinate Reference: Well 2H
 TVD Reference: RKB @ 3161.00usft (Pace X30)
 MD Reference: RKB @ 3161.00usft (Pace X30)
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
9,200.00	73.98	358.00	8,994.74	300.81	-337.30	314.04	10.00	9.94	1.16
9,250.00	78.95	358.55	9,006.44	349.38	-338.76	362.64	10.00	9.94	1.11
9,300.00	83.92	359.09	9,013.88	398.80	-339.78	412.05	10.00	9.94	1.07
9,350.00	88.89	359.61	9,017.02	448.68	-340.34	461.92	10.00	9.95	1.05
9,359.49	89.84	359.71	9,017.12	458.17	-340.40	471.40	10.00	9.94	1.04
LP: 89.84° Inc at 359.71° Azm									
9,400.00	89.84	359.71	9,017.24	498.68	-340.60	511.89	0.00	0.00	0.00
9,500.00	89.84	359.71	9,017.52	598.68	-341.11	611.83	0.00	0.00	0.00
9,600.00	89.84	359.71	9,017.80	698.68	-341.62	711.76	0.00	0.00	0.00
9,700.00	89.84	359.71	9,018.09	798.67	-342.12	811.70	0.00	0.00	0.00
9,800.00	89.84	359.71	9,018.37	898.67	-342.63	911.64	0.00	0.00	0.00
9,900.00	89.84	359.71	9,018.66	998.67	-343.13	1,011.58	0.00	0.00	0.00
10,000.00	89.84	359.71	9,018.94	1,098.67	-343.64	1,111.52	0.00	0.00	0.00
10,100.00	89.84	359.71	9,019.23	1,198.67	-344.15	1,211.46	0.00	0.00	0.00
10,200.00	89.84	359.71	9,019.51	1,298.67	-344.65	1,311.40	0.00	0.00	0.00
10,300.00	89.84	359.71	9,019.80	1,398.66	-345.16	1,411.34	0.00	0.00	0.00
10,400.00	89.84	359.71	9,020.08	1,498.66	-345.66	1,511.27	0.00	0.00	0.00
10,500.00	89.84	359.71	9,020.36	1,598.66	-346.17	1,611.21	0.00	0.00	0.00
10,600.00	89.84	359.71	9,020.65	1,698.66	-346.68	1,711.15	0.00	0.00	0.00
10,700.00	89.84	359.71	9,020.93	1,798.66	-347.18	1,811.09	0.00	0.00	0.00
10,800.00	89.84	359.71	9,021.22	1,898.65	-347.69	1,911.03	0.00	0.00	0.00
10,900.00	89.84	359.71	9,021.50	1,998.65	-348.20	2,010.97	0.00	0.00	0.00
11,000.00	89.84	359.71	9,021.79	2,098.65	-348.70	2,110.91	0.00	0.00	0.00
11,100.00	89.84	359.71	9,022.07	2,198.65	-349.21	2,210.85	0.00	0.00	0.00
11,200.00	89.84	359.71	9,022.36	2,298.65	-349.71	2,310.78	0.00	0.00	0.00
11,300.00	89.84	359.71	9,022.64	2,398.65	-350.22	2,410.72	0.00	0.00	0.00
11,400.00	89.84	359.71	9,022.93	2,498.64	-350.73	2,510.66	0.00	0.00	0.00
11,500.00	89.84	359.71	9,023.21	2,598.64	-351.23	2,610.60	0.00	0.00	0.00
11,600.00	89.84	359.71	9,023.49	2,698.64	-351.74	2,710.54	0.00	0.00	0.00
11,700.00	89.84	359.71	9,023.78	2,798.64	-352.24	2,810.48	0.00	0.00	0.00
11,800.00	89.84	359.71	9,024.06	2,898.64	-352.75	2,910.42	0.00	0.00	0.00
11,900.00	89.84	359.71	9,024.35	2,998.64	-353.26	3,010.36	0.00	0.00	0.00
12,000.00	89.84	359.71	9,024.63	3,098.63	-353.76	3,110.29	0.00	0.00	0.00
12,100.00	89.84	359.71	9,024.92	3,198.63	-354.27	3,210.23	0.00	0.00	0.00
12,200.00	89.84	359.71	9,025.20	3,298.63	-354.78	3,310.17	0.00	0.00	0.00
12,300.00	89.84	359.71	9,025.49	3,398.63	-355.28	3,410.11	0.00	0.00	0.00
12,400.00	89.84	359.71	9,025.77	3,498.63	-355.79	3,510.05	0.00	0.00	0.00
12,500.00	89.84	359.71	9,026.05	3,598.63	-356.29	3,609.99	0.00	0.00	0.00
12,600.00	89.84	359.71	9,026.34	3,698.62	-356.80	3,709.93	0.00	0.00	0.00
12,700.00	89.84	359.71	9,026.62	3,798.62	-357.31	3,809.86	0.00	0.00	0.00
12,800.00	89.84	359.71	9,026.91	3,898.62	-357.81	3,909.80	0.00	0.00	0.00
12,900.00	89.84	359.71	9,027.19	3,998.62	-358.32	4,009.74	0.00	0.00	0.00
13,000.00	89.84	359.71	9,027.48	4,098.62	-358.82	4,109.68	0.00	0.00	0.00
13,100.00	89.84	359.71	9,027.76	4,198.62	-359.33	4,209.62	0.00	0.00	0.00
13,200.00	89.84	359.71	9,028.05	4,298.61	-359.84	4,309.56	0.00	0.00	0.00
13,300.00	89.84	359.71	9,028.33	4,398.61	-360.34	4,409.50	0.00	0.00	0.00
13,400.00	89.84	359.71	9,028.62	4,498.61	-360.85	4,509.44	0.00	0.00	0.00
13,500.00	89.84	359.71	9,028.90	4,598.61	-361.36	4,609.37	0.00	0.00	0.00
13,600.00	89.84	359.71	9,029.18	4,698.61	-361.86	4,709.31	0.00	0.00	0.00
13,700.00	89.84	359.71	9,029.47	4,798.61	-362.37	4,809.25	0.00	0.00	0.00
13,800.00	89.84	359.71	9,029.75	4,898.60	-362.87	4,909.19	0.00	0.00	0.00
13,900.00	89.84	359.71	9,030.04	4,998.60	-363.38	5,009.13	0.00	0.00	0.00
14,000.00	89.84	359.71	9,030.32	5,098.60	-363.89	5,109.07	0.00	0.00	0.00
14,100.00	89.84	359.71	9,030.61	5,198.60	-364.39	5,209.01	0.00	0.00	0.00



Phoenix Technology Services

Planning Report



Database: Compass 5000 GCR
 Company: Chevron
 Project: Lea County, NM (NAD27 NME)
 Site: SD WE 24 Fed P23
 Well: 2H
 Wellbore: OH / Job 1514568
 Design: Plan 3 02-11-16

Local Co-ordinate Reference: Well 2H
 TVD Reference: RKB @ 3161.00usft (Pace X30)
 MD Reference: RKB @ 3161.00usft (Pace X30)
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
14,200.00	89.84	359.71	9,030.89	5,298.60	-364.90	5,308.95	0.00	0.00	0.00
14,300.00	89.84	359.71	9,031.18	5,398.60	-365.40	5,408.88	0.00	0.00	0.00
14,400.00	89.84	359.71	9,031.46	5,498.59	-365.91	5,508.82	0.00	0.00	0.00
14,500.00	89.84	359.71	9,031.74	5,598.59	-366.42	5,608.76	0.00	0.00	0.00
14,600.00	89.84	359.71	9,032.03	5,698.59	-366.92	5,708.70	0.00	0.00	0.00
14,700.00	89.84	359.71	9,032.31	5,798.59	-367.43	5,808.64	0.00	0.00	0.00
14,800.00	89.84	359.71	9,032.60	5,898.59	-367.93	5,908.58	0.00	0.00	0.00
14,900.00	89.84	359.71	9,032.88	5,998.59	-368.44	6,008.52	0.00	0.00	0.00
15,000.00	89.84	359.71	9,033.17	6,098.58	-368.95	6,108.46	0.00	0.00	0.00
15,100.00	89.84	359.71	9,033.45	6,198.58	-369.45	6,208.39	0.00	0.00	0.00
15,200.00	89.84	359.71	9,033.74	6,298.58	-369.96	6,308.33	0.00	0.00	0.00
15,300.00	89.84	359.71	9,034.02	6,398.58	-370.47	6,408.27	0.00	0.00	0.00
15,400.00	89.84	359.71	9,034.30	6,498.58	-370.97	6,508.21	0.00	0.00	0.00
15,500.00	89.84	359.71	9,034.59	6,598.58	-371.48	6,608.15	0.00	0.00	0.00
15,600.00	89.84	359.71	9,034.87	6,698.57	-371.98	6,708.09	0.00	0.00	0.00
15,700.00	89.84	359.71	9,035.16	6,798.57	-372.49	6,808.03	0.00	0.00	0.00
15,800.00	89.84	359.71	9,035.44	6,898.57	-373.00	6,907.96	0.00	0.00	0.00
15,900.00	89.84	359.71	9,035.73	6,998.57	-373.50	7,007.90	0.00	0.00	0.00
16,000.00	89.84	359.71	9,036.01	7,098.57	-374.01	7,107.84	0.00	0.00	0.00
16,100.00	89.84	359.71	9,036.30	7,198.57	-374.51	7,207.78	0.00	0.00	0.00
16,200.00	89.84	359.71	9,036.58	7,298.56	-375.02	7,307.72	0.00	0.00	0.00
16,300.00	89.84	359.71	9,036.87	7,398.56	-375.53	7,407.66	0.00	0.00	0.00
16,400.00	89.84	359.71	9,037.15	7,498.56	-376.03	7,507.60	0.00	0.00	0.00
16,500.00	89.84	359.71	9,037.43	7,598.56	-376.54	7,607.54	0.00	0.00	0.00
16,600.00	89.84	359.71	9,037.72	7,698.56	-377.05	7,707.47	0.00	0.00	0.00
16,700.00	89.84	359.71	9,038.00	7,798.56	-377.55	7,807.41	0.00	0.00	0.00
16,800.00	89.84	359.71	9,038.29	7,898.55	-378.06	7,907.35	0.00	0.00	0.00
16,900.00	89.84	359.71	9,038.57	7,998.55	-378.56	8,007.29	0.00	0.00	0.00
17,000.00	89.84	359.71	9,038.86	8,098.55	-379.07	8,107.23	0.00	0.00	0.00
17,100.00	89.84	359.71	9,039.14	8,198.55	-379.58	8,207.17	0.00	0.00	0.00
17,200.00	89.84	359.71	9,039.43	8,298.55	-380.08	8,307.11	0.00	0.00	0.00
17,300.00	89.84	359.71	9,039.71	8,398.55	-380.59	8,407.05	0.00	0.00	0.00
17,400.00	89.84	359.71	9,039.99	8,498.54	-381.09	8,506.98	0.00	0.00	0.00
17,500.00	89.84	359.71	9,040.28	8,598.54	-381.60	8,606.92	0.00	0.00	0.00
17,600.00	89.84	359.71	9,040.56	8,698.54	-382.11	8,706.86	0.00	0.00	0.00
17,700.00	89.84	359.71	9,040.85	8,798.54	-382.61	8,806.80	0.00	0.00	0.00
17,800.00	89.84	359.71	9,041.13	8,898.54	-383.12	8,906.74	0.00	0.00	0.00
17,900.00	89.84	359.71	9,041.42	8,998.54	-383.63	9,006.68	0.00	0.00	0.00
18,000.00	89.84	359.71	9,041.70	9,098.53	-384.13	9,106.62	0.00	0.00	0.00
18,100.00	89.84	359.71	9,041.99	9,198.53	-384.64	9,206.55	0.00	0.00	0.00
18,200.00	89.84	359.71	9,042.27	9,298.53	-385.14	9,306.49	0.00	0.00	0.00
18,300.00	89.84	359.71	9,042.56	9,398.53	-385.65	9,406.43	0.00	0.00	0.00
18,400.00	89.84	359.71	9,042.84	9,498.53	-386.16	9,506.37	0.00	0.00	0.00
18,500.00	89.84	359.71	9,043.12	9,598.53	-386.66	9,606.31	0.00	0.00	0.00
18,600.00	89.84	359.71	9,043.41	9,698.52	-387.17	9,706.25	0.00	0.00	0.00
18,700.00	89.84	359.71	9,043.69	9,798.52	-387.67	9,806.19	0.00	0.00	0.00
18,800.00	89.84	359.71	9,043.98	9,898.52	-388.18	9,906.13	0.00	0.00	0.00
18,900.00	89.84	359.71	9,044.26	9,998.52	-388.69	10,006.06	0.00	0.00	0.00
19,000.00	89.84	359.71	9,044.55	10,098.52	-389.19	10,106.00	0.00	0.00	0.00
19,100.00	89.84	359.71	9,044.83	10,198.52	-389.70	10,205.94	0.00	0.00	0.00
19,159.49	89.84	359.71	9,045.00	10,258.00	-390.00	10,265.39	0.00	0.00	0.00

TD at 19159.49



Phoenix Technology Services

Planning Report



Database:	Compass 5000 GCR	Local Co-ordinate Reference:	Well 2H
Company:	Chevron	TVD Reference:	RKB @ 3161.00usft (Pace X30)
Project:	Lea County, NM (NAD27 NME)	MD Reference:	RKB @ 3161.00usft (Pace X30)
Site:	SD WE 24 Fed P23	North Reference:	Grid
Well:	2H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH / Job 1514568		
Design:	Plan 3 02-11-16		

Design Targets									
Target Name	Dip Angle	Dip Dir.	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
- hit/miss target	(°)	(°)	(usft)	(usft)	(usft)	(usft)	(usft)		
- Shape									
BHL SD WE 24 Fed P23	0.00	0.00	9,045.00	10,258.00	-390.00	382,510.00	716,861.00	32° 2' 58.92932 N	103° 38' 0.23840 W
- plan hits target center									
- Point									

Plan Annotations					
Measured Depth	Vertical Depth	Local Coordinates			
(usft)	(usft)	+N/-S	+E/-W	Comment	
		(usft)	(usft)		
2,000.00	2,000.00	0.00	0.00	Start Build 1.5"/100'	
2,100.00	2,099.99	-1.23	-0.45	Hold 1.50° Inc at 200° Azm	
6,011.35	6,010.00	-97.44	-35.47	Start Build 2"/100'	
6,290.83	6,288.89	-101.61	-51.32	Hold 6° Inc at 267.15° Azm	
8,458.44	8,444.63	-112.85	-277.58	KOP: Start Build-Turn 10"/100'	
9,359.49	9,017.12	458.17	-340.40	LP: 89.84° Inc at 359.71° Azm	
19,159.49	9,045.00	10,258.00	-390.00	TD at 19159.49	