



Company: ConocoPhillips
 Site: MCA Unit
 Well: 580
 Project: Lea County, New Mexico (NAD 27)
 Rig Name: Precision 194



ANNOTATIONS

MD	Inc	Azi	TVD	+N/-S	+E/-W	Vsect	Departure	Annotation
1849.10	0.00	0.00	1849.10	0.00	0.00	0.00	0.00	KOP, 2.00"/100' Build
2791.53	18.85	21.44	2774.62	143.00	58.14	153.62	153.62	Begin 18.85° Tangent
4518.62	18.85	21.44	4409.10	662.37	260.05	711.59	711.59	PBHL





Azimuths to Grid North
 True North: -0.29°
 Magnetic North: 7.11°

Magnetic Field
 Strength: 48549.5snT
 Dip Angle: 60.64°
 Date: 6/4/2015
 Model: BGGM2015

US State Plane 1927 (Exact solution)
 New Mexico East 3001

Created By: HLH
 Date: 15:11, June 05 2015
 Plan: Design #1

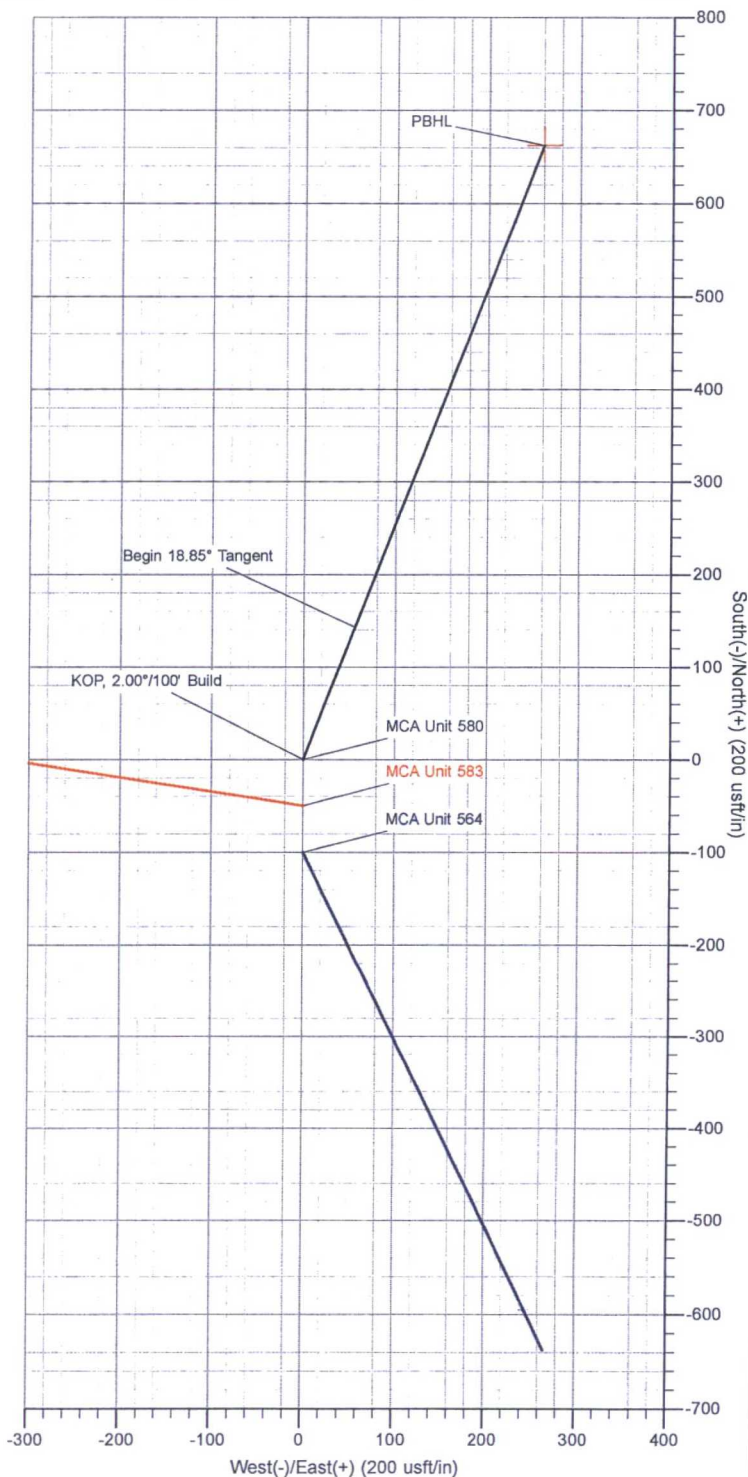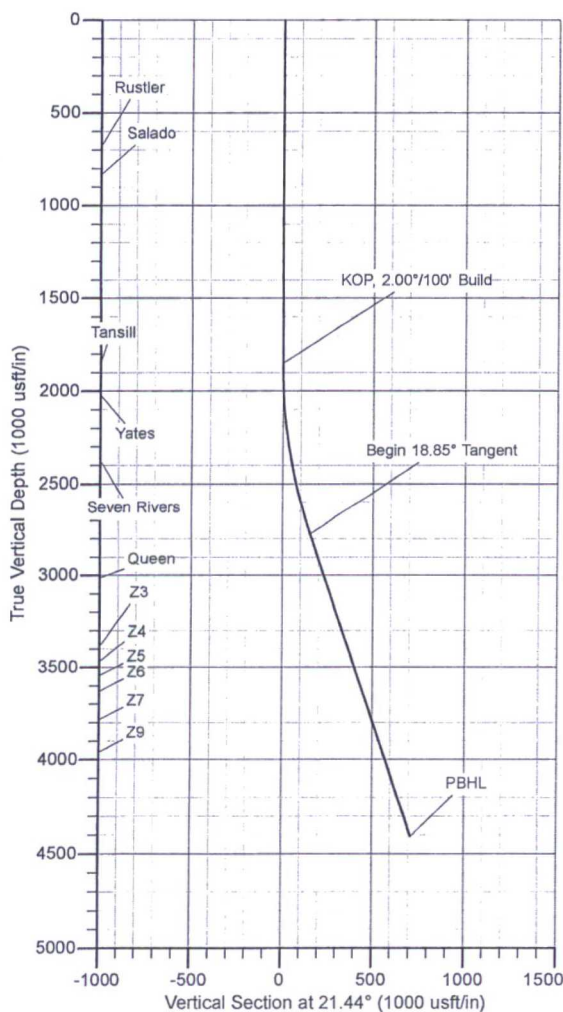

The customer should only rely on this document after independently verifying all paths, targets, coordinates, lease and hard lines represented. Any decisions made or wells drilled utilizing this or any other information supplied by MS Energy are at the sole risk and responsibility of the customer. MS Energy is not responsible for the accuracy of this schematic or the information contained herein.



HOBBS OCD
JAN 11 2017
RECEIVED

ConocoPhillips

Lea County, New Mexico (NAD 27)

MCA Unit

580

Wellbore #1

Plan: Design #1

Standard Planning Report

05 June, 2015

Database:	EDM 5000.1 Conroe DB	Local Co-ordinate Reference:	Well 580
Company:	ConocoPhillips	TVD Reference:	WELL @ 3949.10usft (Precision 194)
Project:	Lea County, New Mexico (NAD 27)	MD Reference:	WELL @ 3949.10usft (Precision 194)
Site:	MCA Unit	North Reference:	Grid
Well:	580	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Project	Lea County, New Mexico (NAD 27)		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Well	580				
Well Position	+N/-S	659,150.05 usft	Northing:	659,150.05 usft	Latitude: 32° 48' 39.370 N
	+E/-W	665,276.03 usft	Easting:	665,276.03 usft	Longitude: 103° 47' 43.407 W
Position Uncertainty		0.00 usft	Wellhead Elevation:	0.00 usft	Ground Level: 3,935.10 usft

Wellbore	Wellbore #1
-----------------	-------------

Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	BGGM2015	06/04/15	7.40	60.64	48,549

Design	Design #1
---------------	-----------

Audit Notes:	
Version:	Phase: PROTOTYPE Tie On Depth: 0.00

Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.00	0.00	0.00	21.44

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
1,849.10	0.00	0.00	1,849.10	0.00	0.00	0.00	0.00	0.00	0.00	
2,791.53	18.85	21.44	2,774.62	143.00	56.14	2.00	2.00	0.00	21.44	
4,518.62	18.85	21.44	4,409.10	662.37	260.05	0.00	0.00	0.00	0.00	PBHL - MCA Unit 5

Database:	EDM 5000.1 Conroe DB	Local Co-ordinate Reference:	Well 580
Company:	ConocoPhillips	TVD Reference:	WELL @ 3949.10usft (Precision 194)
Project:	Lea County, New Mexico (NAD 27)	MD Reference:	WELL @ 3949.10usft (Precision 194)
Site:	MCA Unit	North Reference:	Grid
Well:	580	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
681.10	0.00	0.00	681.10	0.00	0.00	0.00	0.00	0.00	0.00
Rustler									
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
834.10	0.00	0.00	834.10	0.00	0.00	0.00	0.00	0.00	0.00
Salado									
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,849.10	0.00	0.00	1,849.10	0.00	0.00	0.00	0.00	0.00	0.00
KOP, 2.00°/100' Build - Tansill									
1,900.00	1.02	21.44	1,900.00	0.42	0.17	0.45	2.00	2.00	0.00
2,000.00	3.02	21.44	1,999.93	3.70	1.45	3.97	2.00	2.00	0.00
2,019.20	3.40	21.44	2,019.10	4.70	1.84	5.05	2.00	2.00	0.00
Yates									
2,100.00	5.02	21.44	2,099.68	10.22	4.01	10.98	2.00	2.00	0.00
2,200.00	7.02	21.44	2,199.12	19.98	7.84	21.46	2.00	2.00	0.00
2,300.00	9.02	21.44	2,298.14	32.96	12.94	35.41	2.00	2.00	0.00
2,377.08	10.56	21.44	2,374.10	45.16	17.73	48.52	2.00	2.00	0.00
Seven Rivers									
2,400.00	11.02	21.44	2,396.61	49.15	19.30	52.81	2.00	2.00	0.00
2,500.00	13.02	21.44	2,494.41	68.53	26.91	73.63	2.00	2.00	0.00
2,600.00	15.02	21.44	2,591.43	91.08	35.76	97.85	2.00	2.00	0.00
2,700.00	17.02	21.44	2,687.54	116.76	45.84	125.44	2.00	2.00	0.00
2,791.53	18.85	21.44	2,774.62	143.00	56.14	153.62	2.00	2.00	0.00
Begin 18.85° Tangent									
2,800.00	18.85	21.44	2,782.64	145.54	57.14	156.36	0.00	0.00	0.00
2,900.00	18.85	21.44	2,877.28	175.62	68.95	188.67	0.00	0.00	0.00
3,000.00	18.85	21.44	2,971.91	205.69	80.75	220.97	0.00	0.00	0.00
3,044.58	18.85	21.44	3,014.10	219.09	86.02	235.37	0.00	0.00	0.00
Queen									
3,100.00	18.85	21.44	3,066.55	235.76	92.56	253.28	0.00	0.00	0.00
3,200.00	18.85	21.44	3,161.19	265.83	104.37	285.59	0.00	0.00	0.00
3,300.00	18.85	21.44	3,255.83	295.90	116.17	317.89	0.00	0.00	0.00
3,400.00	18.85	21.44	3,350.46	325.98	127.98	350.20	0.00	0.00	0.00
3,440.82	18.85	21.44	3,389.10	338.25	132.80	363.39	0.00	0.00	0.00
Z3									
3,500.00	18.85	21.44	3,445.10	356.05	139.79	382.51	0.00	0.00	0.00
3,525.36	18.85	21.44	3,469.10	363.67	142.78	390.70	0.00	0.00	0.00

Database:	EDM 5000.1 Conroe DB	Local Co-ordinate Reference:	Well 580
Company:	ConocoPhillips	TVD Reference:	WELL @ 3949.10usft (Precision 194)
Project:	Lea County, New Mexico (NAD 27)	MD Reference:	WELL @ 3949.10usft (Precision 194)
Site:	MCA Unit	North Reference:	Grid
Well:	580	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
Z4									
3,600.00	18.85	21.44	3,539.74	386.12	151.59	414.81	0.00	0.00	0.00
3,604.61	18.85	21.44	3,544.10	387.51	152.14	416.30	0.00	0.00	0.00
Z5									
3,694.42	18.85	21.44	3,629.10	414.52	162.74	445.32	0.00	0.00	0.00
Z6									
3,700.00	18.85	21.44	3,634.38	416.19	163.40	447.12	0.00	0.00	0.00
3,800.00	18.85	21.44	3,729.01	446.27	175.21	479.43	0.00	0.00	0.00
3,858.21	18.85	21.44	3,784.10	463.77	182.08	498.23	0.00	0.00	0.00
Z7									
3,900.00	18.85	21.44	3,823.65	476.34	187.01	511.73	0.00	0.00	0.00
4,000.00	18.85	21.44	3,918.29	506.41	198.82	544.04	0.00	0.00	0.00
4,043.12	18.85	21.44	3,959.10	519.38	203.91	557.97	0.00	0.00	0.00
Z9									
4,100.00	18.85	21.44	4,012.93	536.48	210.63	576.35	0.00	0.00	0.00
4,200.00	18.85	21.44	4,107.57	566.55	222.43	608.65	0.00	0.00	0.00
4,300.00	18.85	21.44	4,202.20	596.63	234.24	640.96	0.00	0.00	0.00
4,400.00	18.85	21.44	4,296.84	626.70	246.05	673.27	0.00	0.00	0.00
4,500.00	18.85	21.44	4,391.48	656.77	257.85	705.57	0.00	0.00	0.00
4,518.62	18.85	21.44	4,409.10	662.37	260.05	711.59	0.00	0.00	0.00
PBHL - 5 1/2"									

Design Targets									
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
- hit/miss target									
- Shape									
PBHL - MCA Unit 580	0.00	0.00	4,409.10	662.37	260.05	659,812.42	665,536.08	32° 48' 45.911 N	103° 47' 40.320 W
- plan hits target center									
- Point									

Casing Points					
Measured Depth (usft)	Vertical Depth (usft)	Name	Casing Diameter (")	Hole Diameter (")	
4,518.62	4,409.10	5 1/2"	5-1/2	6	

Database:	EDM 5000.1 Conroe DB	Local Co-ordinate Reference:	Well 580
Company:	ConocoPhillips	TVD Reference:	WELL @ 3949.10usft (Precision 194)
Project:	Lea County, New Mexico (NAD 27)	MD Reference:	WELL @ 3949.10usft (Precision 194)
Site:	MCA Unit	North Reference:	Grid
Well:	580	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #1		

Formations

Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
681.10	681.10	Rustler		0.00	21.44
834.10	834.10	Salado		0.00	21.44
1,849.10	1,849.10	Tansill		0.00	21.44
2,019.20	2,019.10	Yates		0.00	21.44
2,377.08	2,374.10	Seven Rivers		0.00	21.44
3,044.58	3,014.10	Queen		0.00	21.44
3,440.82	3,389.10	Z3		0.00	21.44
3,525.36	3,469.10	Z4		0.00	21.44
3,604.61	3,544.10	Z5		0.00	21.44
3,694.42	3,629.10	Z6		0.00	21.44
3,858.21	3,784.10	Z7		0.00	21.44
4,043.12	3,959.10	Z9		0.00	21.44

Plan Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
1,849.10	1,849.10	0.00	0.00	KOP, 2.00°/100' Build
2,791.53	2,774.62	143.00	56.14	Begin 18.85° Tangent
4,518.62	4,409.10	662.37	260.05	PBHL