


SCALE: 1" = 1000'


SECTION 26, TOWNSHIP 25-S, RANGE 32-E, N.M.P.M.
LEA COUNTY, NEW MEXICO



LEASE NAME & WELL NO.: FEARLESS BSF FED COM #2H
SECTION 26 TWP 25-S RGE 32-E SURVEY N.M.P.M.
COUNTY LEA STATE NM ELEVATION 3411'
DESCRIPTION 201' FNL & 439' FEL

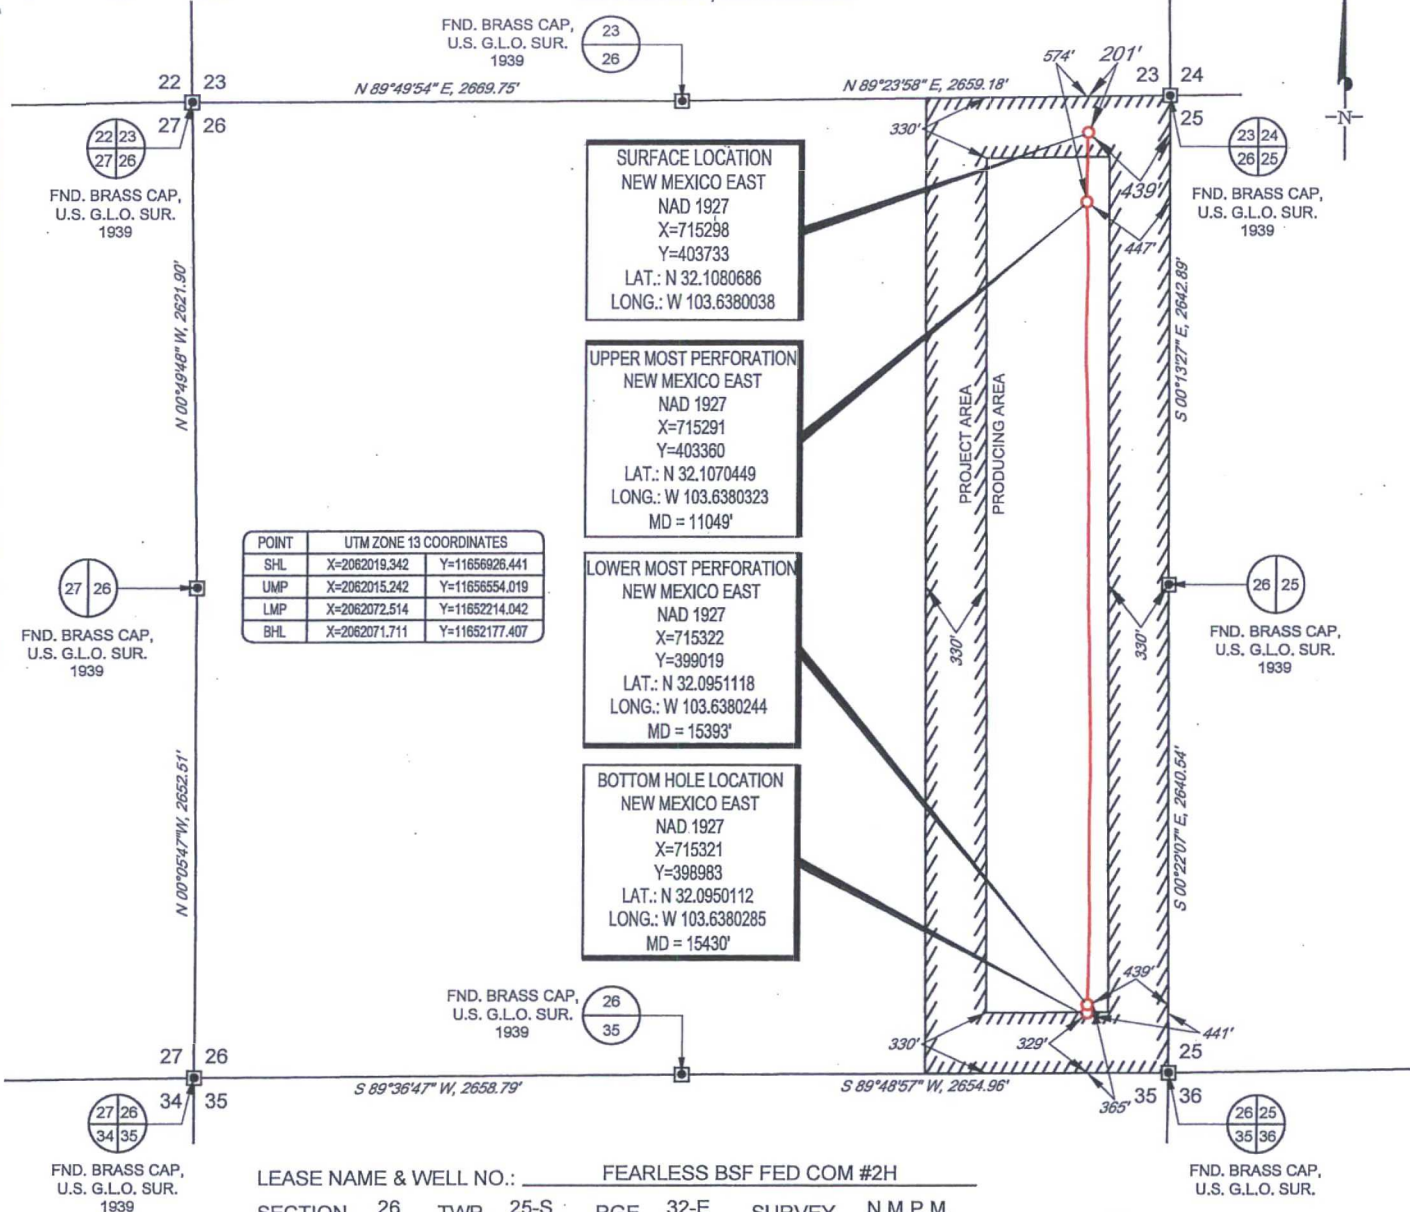

1400 EVERMAN PARKWAY, Ste. 197 • FT. WORTH, TEXAS 76140
TELEPHONE: (817) 744-7512 • FAX (817) 744-7548
2903 NORTH BIG SPRING • MIDLAND, TEXAS 79705
TELEPHONE: (432) 682-1653 OR (800) 767-1653 • FAX (432) 682-1743
WWW.TOPOGRAPHIC.COM

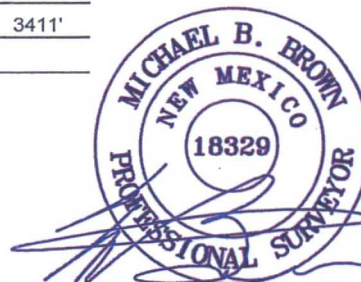

Michael Blake Brown, P.S. No. 18329
APRIL 17, 2017




FEARLESS BSF
FED COM #2H
AS-COMPLETED

REVISION:

NOTES:

1. ORIGINAL DOCUMENT SIZE: 8.5" X 11"
2. ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREIN ARE GRID BASED UPON THE NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE, U.S. SURVEY FEET, NORTH AMERICAN DATUM 19 27.
3. THIS WELL LOCATION SHOWN HEREON HAS BEEN SURVEYED ON THE GROUND UNDER MY SUPERVISION AND PREPARED ACCORDING TO THE EVIDENCE FOUND AT THE TIME OF SURVEY, AND DATA PROVIDED BY EOG RESOURCES, INC. THIS CERTIFICATION IS MADE AND LIMITED TO THOSE PERSONS OR ENTITIES SHOWN ON THE FACE OF THIS PLAT AND IS NON-TRANSFERABLE. THIS SURVEY IS CERTIFIED FOR THIS TRANSACTION ONLY.

DATE: 04/17/17
FILE: AD_FEARLESS_BSF_FED_COM_2H
DRAWN BY: A.C.C.
SHEET: 1 OF 1



Yates Petroleum Corp.

**Lea County, NM (NAD83)
Fearless "BSF" Federal Com
#2H**

OH

Design: OH

Standard Survey Report

03 June, 2015

**HODBS OCD
MAY 18 2017
RECEIVED**





TDS
Survey Report



Company:	Yates Petroleum Corp.	Local Co-ordinate Reference:	Well #2H
Project:	Lea County, NM (NAD83)	TVD Reference:	KB @ 3435.0usft (Nomac 22)
Site:	Fearless "BSF" Federal Com	MD Reference:	KB @ 3435.0usft (Nomac 22)
Well:	#2H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	OH	Database:	EDM 5000.1 Single User Db

Project	Lea County, NM (NAD83)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Fearless "BSF" Federal Com				
Site Position:		Northing:	403,792.75 usft	Latitude:	32° 6' 29.517 N
From:	Map	Easting:	756,483.52 usft	Longitude:	103° 38' 18.519 W
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "	Grid Convergence:	0.37 °

Well	#2H					
Well Position	+N/-S	0.0 usft	Northing:	403,792.75 usft	Latitude:	32° 6' 29.517 N
	+E/-W	0.0 usft	Easting:	756,483.52 usft	Longitude:	103° 38' 18.519 W
Position Uncertainty		0.0 usft	Wellhead Elevation:	0.0 usft	Ground Level:	3,413.0 usft

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2010	3/26/2015	7.14	59.97	48,162

Design	OH				
Audit Notes:					
Version:	1.0	Phase:	ACTUAL	Tie On Depth:	0.0
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.0	0.0	0.0	179.70	

Survey Program	Date 6/3/2015				
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description	
100.0	15,430.0	MWD #1 (OH)	MWD	MWD - Standard	

Survey	Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
	0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
	100.0	0.26	42.06	100.0	0.2	0.2	-0.2	0.26	0.26	0.00
	200.0	0.47	41.43	200.0	0.6	0.6	-0.6	0.21	0.21	-0.63
	300.0	0.75	33.69	300.0	1.5	1.2	-1.5	0.29	0.28	-7.74
	400.0	0.92	52.04	400.0	2.5	2.2	-2.5	0.31	0.17	18.35
	500.0	1.35	58.26	500.0	3.6	3.8	-3.6	0.45	0.43	6.22
	600.0	1.35	49.32	599.9	5.0	5.7	-5.0	0.21	0.00	-8.94
	700.0	1.24	42.20	699.9	6.6	7.4	-6.6	0.19	-0.11	-7.12
	800.0	0.96	46.57	799.9	8.0	8.7	-7.9	0.29	-0.28	4.37
TIE-IN to Gyro Survey										
	932.0	0.80	43.00	931.9	9.4	10.1	-9.4	0.13	-0.12	-2.70



TDS
Survey Report



Company: Yates Petroleum Corp.
Project: Lea County, NM (NAD83)
Site: Fearless "BSF" Federal Com.
Well: #2H
Wellbore: OH
Design: OH

Local Co-ordinate Reference: Well #2H
TVD Reference: KB @ 3435.0usft (Nomac 22)
MD Reference: KB @ 3435.0usft (Nomac 22)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: EDM 5000.1 Single User Db

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
1,120.0	0.80	43.10	1,119.9	11.3	11.9	-11.3	0.00	0.00	0.05
1,308.0	0.60	32.00	1,307.8	13.1	13.3	-13.1	0.13	-0.11	-5.90
1,496.0	0.50	32.40	1,495.8	14.7	14.3	-14.6	0.05	-0.05	0.21
1,683.0	0.20	58.40	1,682.8	15.5	15.0	-15.4	0.18	-0.16	13.90
1,870.0	0.00	209.60	1,869.8	15.7	15.3	-15.6	0.11	-0.11	0.00
2,058.0	0.00	276.50	2,057.8	15.7	15.3	-15.6	0.00	0.00	0.00
2,245.0	0.30	246.40	2,244.8	15.5	14.8	-15.4	0.16	0.16	0.00
2,434.0	0.20	224.30	2,433.8	15.1	14.2	-15.0	0.07	-0.05	-11.69
2,622.0	0.30	212.00	2,621.8	14.4	13.7	-14.3	0.06	0.05	-6.54
2,810.0	0.30	201.80	2,809.8	13.5	13.2	-13.5	0.03	0.00	-5.43
2,997.0	0.30	217.80	2,996.8	12.7	12.7	-12.6	0.04	0.00	8.56
3,183.0	0.10	144.50	3,182.8	12.2	12.5	-12.1	0.15	-0.11	-39.41
3,370.0	0.40	79.60	3,369.8	12.2	13.3	-12.1	0.20	0.16	-34.71
3,557.0	0.70	90.80	3,556.8	12.3	15.1	-12.2	0.17	0.16	5.99
3,745.0	0.40	6.40	3,744.8	12.9	16.3	-12.8	0.41	-0.16	-44.89
3,931.0	0.20	45.20	3,930.8	13.8	16.6	-13.7	0.15	-0.11	20.86
4,119.0	0.70	97.20	4,118.8	13.9	18.0	-13.8	0.32	0.27	27.66
4,306.0	0.40	95.90	4,305.8	13.6	19.7	-13.5	0.16	-0.16	-0.70
4,494.0	0.40	76.10	4,493.8	13.7	21.0	-13.6	0.07	0.00	-10.53
4,641.0	0.10	29.70	4,640.8	14.0	21.6	-13.9	0.23	-0.20	-31.56
4,775.0	0.40	10.10	4,774.8	14.5	21.7	-14.4	0.23	0.22	-14.63
4,962.0	0.60	209.20	4,961.8	14.3	21.4	-14.2	0.53	0.11	-86.04
5,150.0	0.30	51.50	5,149.8	13.8	21.3	-13.7	0.47	-0.16	-83.88
5,336.0	0.10	27.90	5,335.8	14.2	21.7	-14.1	0.11	-0.11	-12.69
5,522.0	0.10	24.00	5,521.8	14.5	21.9	-14.4	0.00	0.00	-2.10
5,710.0	0.50	333.20	5,709.8	15.4	21.6	-15.3	0.24	0.21	-27.02
5,897.0	0.40	326.90	5,896.8	16.7	20.8	-16.6	0.06	-0.05	-3.37
6,084.0	0.30	297.70	6,083.8	17.4	20.0	-17.3	0.11	-0.05	-15.61
6,271.0	0.60	318.30	6,270.8	18.4	19.0	-18.3	0.18	0.16	11.02
6,458.0	0.60	319.70	6,457.7	19.9	17.7	-19.8	0.01	0.00	0.75
6,646.0	0.50	295.00	6,645.7	21.0	16.3	-20.9	0.14	-0.05	-13.14
6,833.0	0.40	305.80	6,832.7	21.7	15.0	-21.6	0.07	-0.05	5.78
7,020.0	0.50	292.70	7,019.7	22.4	13.7	-22.3	0.08	0.05	-7.01
7,207.0	0.50	251.20	7,206.7	22.4	12.2	-22.4	0.19	0.00	-22.19
7,394.0	0.60	242.40	7,393.7	21.7	10.6	-21.7	0.07	0.05	-4.71
7,582.0	0.50	229.00	7,581.7	20.7	9.1	-20.7	0.09	-0.05	-7.13
7,770.0	0.70	231.90	7,769.7	19.5	7.6	-19.4	0.11	0.11	1.54
7,956.0	0.40	233.00	7,955.7	18.4	6.2	-18.4	0.16	-0.16	0.59
8,144.0	0.70	230.30	8,143.7	17.3	4.7	-17.2	0.16	0.16	-1.44
8,332.0	0.40	277.10	8,331.7	16.6	3.2	-16.6	0.27	-0.16	24.89
8,519.0	0.50	276.90	8,518.7	16.8	1.8	-16.8	0.05	0.05	-0.11
8,706.0	0.50	258.10	8,705.6	16.7	0.1	-16.7	0.09	0.00	-10.05
8,893.0	1.00	290.20	8,892.6	17.1	-2.2	-17.1	0.34	0.27	17.17



TDS Survey Report



Company: Yates Petroleum Corp.
Project: Lea County, NM (NAD83)
Site: Fearless "BSF" Federal Com
Well: #2H
Wellbore: OH
Design: OH

Local Co-ordinate Reference: Well #2H
TVD Reference: KB @ 3435.0usft (Nomac 22)
MD Reference: KB @ 3435.0usft (Nomac 22)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: EDM 5000.1 Single User Db

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
9,080.0	0.70	267.50	9,079.6	17.6	-4.9	-17.7	0.24	-0.16	-12.14
9,267.0	0.20	165.90	9,266.6	17.3	-5.9	-17.3	0.41	-0.27	-54.33
9,454.0	0.10	127.00	9,453.6	16.9	-5.7	-16.9	0.07	-0.05	-20.80
9,641.0	0.90	305.20	9,640.6	17.6	-6.8	-17.6	0.53	0.43	95.29
9,828.0	0.60	30.90	9,827.6	19.3	-7.5	-19.3	0.56	-0.16	45.83
10,014.0	0.60	105.60	10,013.6	19.9	-6.0	-19.9	0.39	0.00	40.16
10,202.0	0.90	128.40	10,201.6	18.7	-3.9	-18.7	0.22	0.16	12.13
10,353.0	1.40	136.20	10,352.5	16.6	-1.7	-16.6	0.35	0.33	5.17
As-Drilled KOP									
10,400.0	2.20	160.50	10,399.5	15.3	-1.0	-15.4	2.32	1.70	51.70
10,442.0	7.60	181.00	10,441.3	11.8	-0.8	-11.8	13.32	12.86	48.81
10,489.0	14.40	184.00	10,487.5	2.9	-1.3	-2.9	14.51	14.47	6.38
10,536.0	20.40	183.80	10,532.3	-11.2	-2.2	11.1	12.77	12.77	-0.43
10,582.0	25.80	180.70	10,574.6	-29.2	-2.9	29.2	12.03	11.74	-6.74
10,629.0	31.10	179.60	10,615.9	-51.6	-2.9	51.5	11.33	11.28	-2.34
10,676.0	36.10	177.50	10,655.0	-77.6	-2.2	77.5	10.92	10.64	-4.47
10,723.0	40.80	177.50	10,691.8	-106.7	-0.9	106.7	10.00	10.00	0.00
10,757.7	43.29	181.10	10,717.6	-130.0	-0.7	130.0	9.99	7.18	10.38
As-Drilled Crosses Production Zone Boundary Line									
10,770.0	44.20	182.30	10,726.5	-138.5	-0.9	138.5	9.99	7.39	9.73
10,817.0	48.10	183.80	10,759.0	-172.3	-2.8	172.3	8.61	8.30	3.19
10,863.0	50.90	183.10	10,788.9	-207.2	-4.9	207.2	6.20	6.09	-1.52
10,910.0	56.40	180.70	10,816.8	-245.0	-6.1	245.0	12.40	11.70	-5.11
10,957.0	63.40	180.00	10,840.3	-285.7	-6.3	285.6	14.95	14.89	-1.49
11,004.0	70.60	180.40	10,858.7	-328.9	-6.5	328.9	15.34	15.32	0.85
11,043.0	76.60	179.70	10,869.7	-366.3	-6.5	366.3	15.48	15.38	-1.79
11,070.0	80.10	178.50	10,875.1	-392.7	-6.1	392.7	13.67	12.96	-4.44
11,101.0	83.70	177.40	10,879.5	-423.4	-5.0	423.4	12.13	11.61	-3.55
11,132.0	85.70	176.80	10,882.4	-454.2	-3.4	454.2	6.73	6.45	-1.94
11,163.0	87.10	177.00	10,884.3	-485.1	-1.8	485.1	4.56	4.52	0.65
11,194.0	87.90	177.70	10,885.7	-516.1	-0.3	516.0	3.43	2.58	2.26
11,238.0	88.80	178.50	10,886.9	-560.0	1.1	560.0	2.74	2.05	1.82
11,288.0	89.50	179.10	10,887.7	-610.0	2.2	610.0	1.84	1.40	1.20
11,327.0	90.00	179.64	10,887.8	-649.0	2.6	649.0	1.88	1.28	1.38
As-Drilled EOC									
11,382.0	90.70	180.40	10,887.5	-704.0	2.6	704.0	1.88	1.28	1.38
11,476.0	90.90	181.20	10,886.2	-798.0	1.3	798.0	0.88	0.21	0.85
11,569.0	91.00	181.60	10,884.6	-890.9	-1.0	890.9	0.44	0.11	0.43
11,662.0	92.00	181.10	10,882.2	-983.9	-3.2	983.8	1.20	1.08	-0.54
11,755.0	92.60	181.00	10,878.5	-1,076.8	-4.9	1,076.7	0.65	0.65	-0.11
11,849.0	92.50	179.40	10,874.3	-1,170.7	-5.2	1,170.6	1.70	-0.11	-1.70
11,942.0	90.90	177.40	10,871.5	-1,263.6	-2.6	1,263.6	2.75	-1.72	-2.15
12,036.0	91.40	177.60	10,869.6	-1,357.5	1.5	1,357.5	0.57	0.53	0.21
12,129.0	91.90	178.20	10,867.0	-1,450.4	4.9	1,450.4	0.84	0.54	0.65



TDS
Survey Report



Company: Yates Petroleum Corp.
Project: Lea County, NM (NAD83)
Site: Fearless "BSF" Federal Com
Well: #2H
Wellbore: OH
Design: OH

Local Co-ordinate Reference: Well #2H
TVD Reference: KB @ 3435.0usft (Nomac 22)
MD Reference: KB @ 3435.0usft (Nomac 22)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: EDM 5000.1 Single User Db

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
12,222.0	91.90	178.70	10,863.9	-1,543.3	7.4	1,543.3	0.54	0.00	0.54
12,316.0	90.70	178.40	10,861.8	-1,637.2	9.8	1,637.3	1.32	-1.28	-0.32
12,409.0	91.00	178.90	10,860.4	-1,730.2	12.0	1,730.3	0.63	0.32	0.54
12,503.0	91.30	179.20	10,858.5	-1,824.2	13.5	1,824.2	0.45	0.32	0.32
12,596.0	91.30	179.70	10,856.4	-1,917.2	14.4	1,917.2	0.54	0.00	0.54
12,690.0	91.70	179.70	10,853.9	-2,011.1	14.9	2,011.2	0.43	0.43	0.00
12,784.0	89.80	180.50	10,852.7	-2,105.1	14.8	2,105.2	2.19	-2.02	0.85
12,878.0	90.90	179.80	10,852.1	-2,199.1	14.5	2,199.1	1.39	1.17	-0.74
12,972.0	90.90	179.80	10,850.6	-2,293.1	14.8	2,293.1	0.00	0.00	0.00
13,064.0	91.40	179.90	10,848.8	-2,385.1	15.1	2,385.1	0.55	0.54	0.11
13,158.0	91.90	179.50	10,846.1	-2,479.0	15.6	2,479.1	0.68	0.53	-0.43
13,251.0	91.30	178.90	10,843.5	-2,572.0	16.9	2,572.0	0.91	-0.65	-0.65
13,344.0	91.30	178.50	10,841.4	-2,664.9	19.0	2,665.0	0.43	0.00	-0.43
13,438.0	91.50	178.60	10,839.1	-2,758.9	21.4	2,758.9	0.24	0.21	0.11
13,531.0	91.50	178.80	10,836.6	-2,851.8	23.5	2,851.9	0.21	0.00	0.22
13,625.0	91.50	178.80	10,834.2	-2,945.8	25.4	2,945.9	0.00	0.00	0.00
13,718.0	91.60	178.60	10,831.7	-3,038.7	27.5	3,038.8	0.24	0.11	-0.22
13,811.0	91.10	179.50	10,829.5	-3,131.7	29.1	3,131.8	1.11	-0.54	0.97
13,904.0	90.90	179.30	10,827.9	-3,224.7	30.1	3,224.8	0.30	-0.22	-0.22
13,998.0	91.30	179.50	10,826.1	-3,318.6	31.0	3,318.7	0.48	0.43	0.21
14,091.0	91.60	179.90	10,823.7	-3,411.6	31.5	3,411.7	0.54	0.32	0.43
14,185.0	91.50	180.40	10,821.2	-3,505.6	31.3	3,505.7	0.54	-0.11	0.53
14,279.0	91.30	180.50	10,818.9	-3,599.5	30.5	3,599.6	0.24	-0.21	0.11
14,373.0	91.50	180.80	10,816.6	-3,693.5	29.5	3,693.6	0.38	0.21	0.32
14,466.0	92.00	180.00	10,813.7	-3,786.4	28.8	3,786.5	1.01	0.54	-0.86
14,560.0	91.20	179.70	10,811.1	-3,880.4	29.1	3,880.5	0.91	-0.85	-0.32
14,654.0	91.60	179.70	10,808.8	-3,974.4	29.6	3,974.5	0.43	0.43	0.00
14,747.0	92.20	179.00	10,805.7	-4,067.3	30.6	4,067.4	0.99	0.65	-0.75
14,841.0	91.60	179.50	10,802.6	-4,161.3	31.8	4,161.4	0.83	-0.64	0.53
14,937.0	91.30	179.40	10,800.2	-4,257.2	32.8	4,257.3	0.33	-0.31	-0.10
15,028.0	91.10	181.10	10,798.3	-4,348.2	32.4	4,348.3	1.88	-0.22	1.87
15,122.0	90.60	181.00	10,796.9	-4,442.2	30.6	4,442.3	0.54	-0.53	-0.11
15,215.0	90.90	181.40	10,795.7	-4,535.1	28.7	4,535.2	0.54	0.32	0.43
15,247.0	90.70	181.30	10,795.2	-4,567.1	27.9	4,567.2	0.70	-0.63	-0.31
15,310.0	90.90	181.60	10,794.3	-4,630.1	26.4	4,630.2	0.57	0.32	0.48
15,373.0	91.80	181.60	10,792.8	-4,693.1	24.6	4,693.1	1.43	1.43	0.00
Final MWD Survey									
15,430.0	91.80	181.60	10,791.1	-4,750.0	23.0	4,750.1	0.00	0.00	0.00
Projection to Bit/TD									



TDS
Survey Report



Company: Yates Petroleum Corp.
Project: Lea County, NM (NAD83)
Site: Fearless "BSF" Federal Com
Well: #2H
Wellbore: OH
Design: OH

Local Co-ordinate Reference: Well #2H
TVD Reference: KB @ 3435.0usft (Nomac 22)
MD Reference: KB @ 3435.0usft (Nomac 22)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: EDM 5000.1 Single User Db

Design Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
800.0	799.9	8.0	8.7	TIE-IN to Gyro Survey
10,353.0	10,352.5	16.6	-1.7	As-Drilled KOP
10,757.7	10,717.6	-130.0	-0.7	As-Drilled Crosses Production Zone Boundary Line
11,327.0	10,887.8	-649.0	2.6	As-Drilled EOC
15,373.0	10,792.8	-4,693.1	24.6	Final MWD Survey
15,430.0	10,791.1	-4,750.0	23.0	Projection to Bit/TD

Checked By: _____ Approved By: _____ Date: _____




Yates Petroleum Corp.
Project: Lea County, NM (NAD83)
Site: Fearless "BSF" Federal Com
Well: #2H
Wellbore: OH
Plan: Plan #1

WELL DETAILS: #2H



Ground Elevation: 3413.0
RKB Elevation: KB @ 3435.0usft (Nomac 22)
Rig Name: Nomac 22

Northing 403792.75 Easting 756483.52 Latitude 32° 6' 29.517 N Longitude 103° 38' 18.519 W

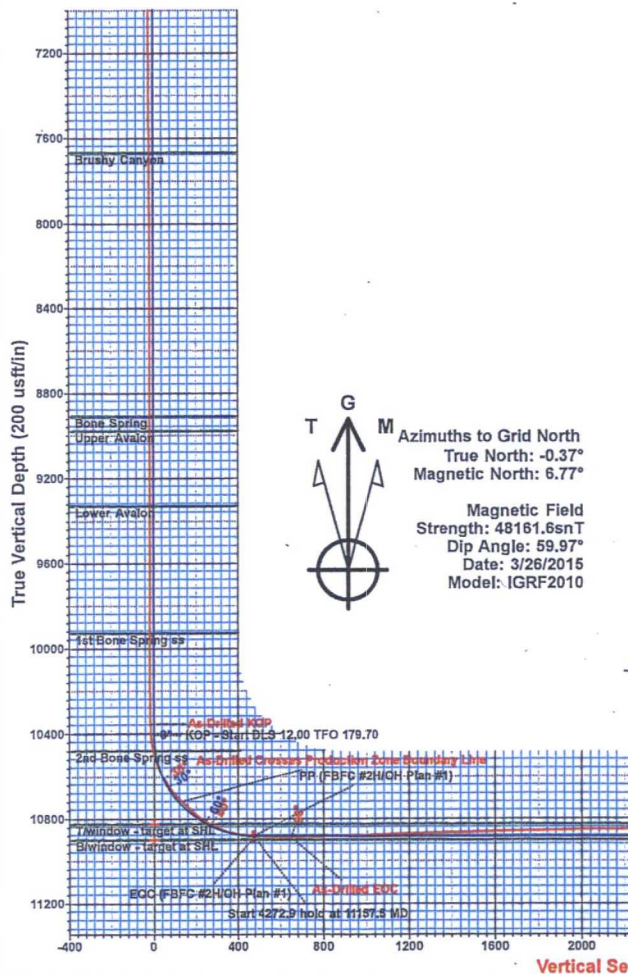

Section Details

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	Vsect	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	10407.5	0.00	0.00	10407.5	0.0	0.0	0.00	0.00	0.0	
3	11157.5	90.00	179.70	10885.0	-477.5	2.5	12.00	179.70	477.5	PBHL (FBFC #2H/OH)
4	15430.4	90.00	179.70	10885.0	-4750.3	24.5	0.00	0.00	4750.3	PBHL (FBFC #2H/OH)

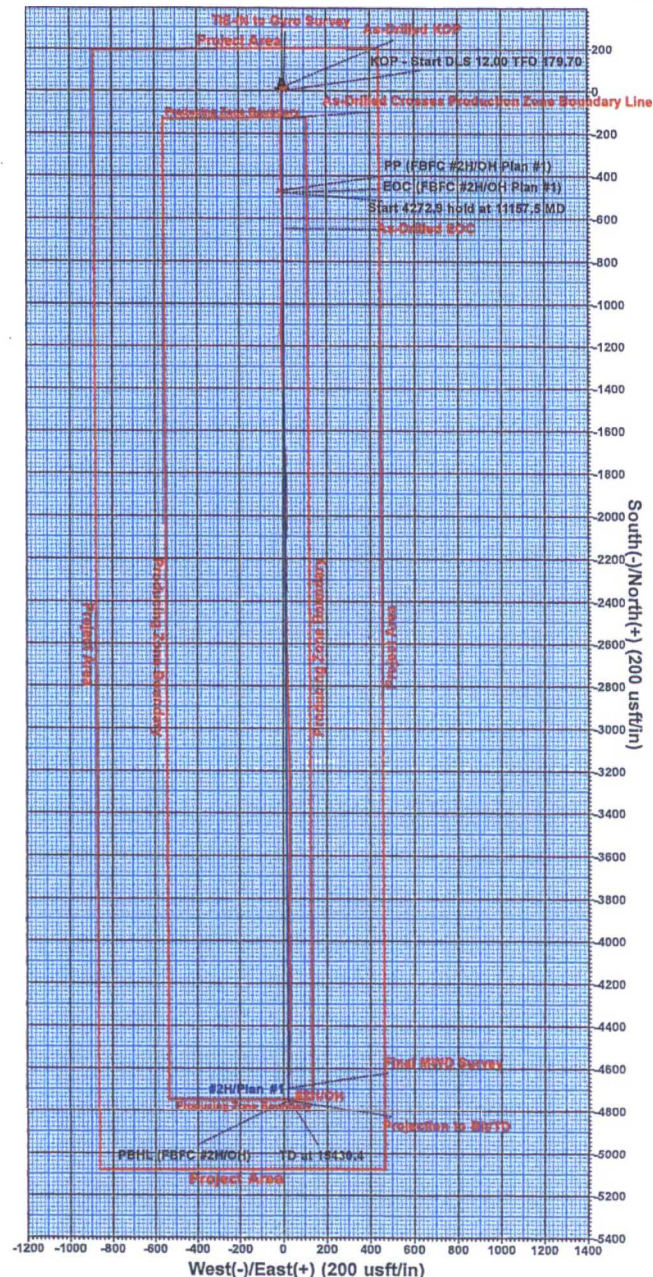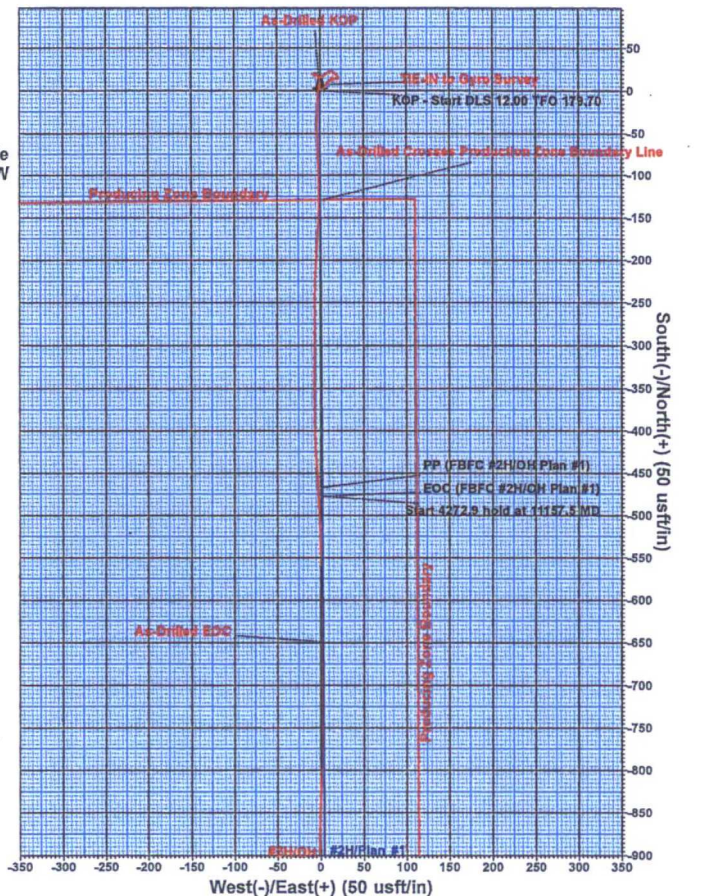

Terra Directional Services LLC
322 Spring Hill Drive, Suite A300, Spring, Tx 77386
Phone: 432-425-7532

PROJECT DETAILS: Lea County, NM (NAD83)
Geodetic System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: New Mexico Eastern Zone
System Datum: Mean Sea Level
Local North: Grid