

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

1. TYPE OF WELL GAS		5. LEASE NUMBER SF-080712A	
2. OPERATOR <i>Meridian</i> EL PASO NATURAL GAS CO.		6. IF INDIAN, ALL. OR TRIBE NAME	
3. ADDRESS & PHONE NO. OF OPERATOR P O BOX 4289 FARMINGTON, NM 87499		7. UNIT AGREEMENT NAME SAN JUAN 30-6 UNIT	
4. LOCATION OF WELL 1230'N 1660'E		8. FARM OR LEASE NAME SAN JUAN 30-6 UNIT	
		9. WELL NO. 474	
		10. FIELD, POOL, OR WILDCAT BASIN FRUITLAND COAL	
		11. SEC. T. R. M OR BLK. SEC. 27 T30N R06W NMPM	
14. PERMIT NO.	15. ELEVATIONS 6484'GL	12. COUNTY RIO ARRIBA	13. STATE NM
16. NOTICE OF INTENTION TO: Change Plans			
17. Describe proposed or completed operations			

Attached is a revised operations plan, BOPE diagram and anticipated production facilities diagram on the subject well.

RECEIVED

APR 02 1990

OIL CON. DIV.
DIST. 3


18. AUTHORIZED BY: *[Signature]*
REGULATORY AFFAIRS

9/9/89
DATE

NOTE: THIS FORMAT IS ISSUED IN LIEU OF US BLM FORM 3160-5.

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____
CONDITION OF APPROVAL, IF ANY: _____

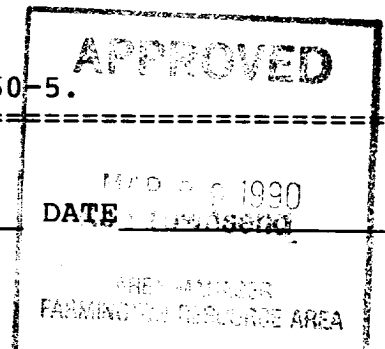

Well Name: 474 SAN JUAN 30-6 UNIT 1230'N 1660'E
 Sec. 27 T30N R06W RIO ARRIBA NEW MEXICO
 BASIN FRUITLAND COAL Elevation 6484'GL

Formation tops: Surface- SAN JOSE
 Ojo Alamo- 2530
 Kirtland- 2696
 Fruitland- 3097
 Fruitland Coal Top- 3205
 Fruitland Coal Base- 3409
 Intermediate TD- 3185
 Total Depth- 3410

Logging Program: Mud logs from intermediate to total depth.

Mud Program:	Interval	Type	Spud	Weight	Visc.	F1. Loss
	0 - 200			8.4 - 8.9	40-50	no control
	200 - 3185	Non-dispersed		8.4 - 9.1	30-60	no control
	3185 - 3410	Formation Water	8.4			no control

Casing Program:	Hole Size	Depth	Interval	Csg. Size	Weight	Grade
	12 1/4"	0 - 200		9 5/8"	32.3#	H-40
	8 3/4"	0 - 3185		7"	20.0#	K-55
	6 1/4"	3135 - 3410		5 1/2"	15.5#	K-55
Tubing Program:		0 - 3410		2 7/8"	6.5#	J-55

Float Equipment: 9 5/8" surface casing - saw tooth guide shoe.

7" intermediate casing - guide shoe and self-fill insert float valve.
 Three centralizers run every other joint above shoe. Run insert float
 one joint above the guide shoe.

5 1/2" production casing - float shoe on bottom and a pre-drilled liner
 run to the 7" casing with a minimum 50' overlap. Liner hanger is a
 double slip grip type.

Wellhead Equipment: 9 5/8" x 7" x 2 7/8" x 11" 3000 psi xmas tree assembly.

Cementing:

9 5/8" surface casing - cement with 106 sacks of class "B" cement with 1/4#
 floccule/sack and 3% calcium chloride (125 cu ft. of slurry, 100%
 excess to circulate to surface). WOC 12 hours. Test casing to 600
 psi for 30 minutes.

7" intermediate casing - lead with 41 sacks of 65/35 class "B" poz with 6%
 gel, 2% calcium chloride and 1/2 cu ft. Perlite/sack (10.3 gallons of
 water/sack) tail with 100 sacks of class "B" with 2% calcium chloride.
 197 cu ft. of slurry, 100% excess to cover the Ojo Alamo. Run
 temperature survey at 8 hours. WOC 12 hours. Test casing to 1500 psi
 for 30 minutes.

5 1/2" liner - do not cement.

BOP and Tests:

Surface to Intermediate TD - 11" 2000 psi(minimum) double gate BOP stack (Reference Figure #1). Prior to drilling out surface casing, test rams to 600 psi for 30 minutes.

Intermediate TD to TD - 7 1/16" 2000 psi(minimum) double gate BOP stack (Reference Figure #2). Prior to drilling out intermediate casing, test rams to 1500 psi(minimum) for 30 minutes.

From surface to TD - choke manifold (Reference Figure #3).

Pipe rams will be actuated at least once each day and blind rams actuated once each trip to test proper functioning. A Kelly cock valve and drill string safety valves to fit each drill string will be maintained and available on the rig floor.


Addition Information:

The Fruitland coal formation will be completed.
This gas is dedicated.

The E/2 of Section 27 is dedicated to this well.

TOP SET FRUITLAND COAL


FIGURE #1

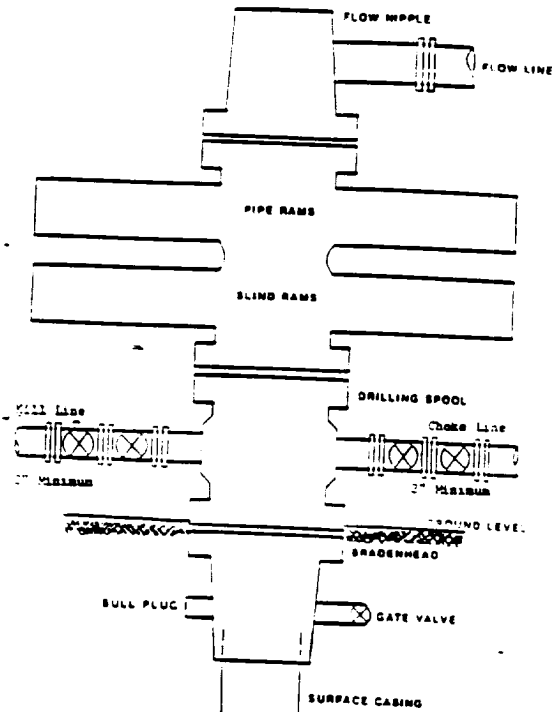

Minimum SOPE installation for a typical Fruitland Coal well from surface to intermediate CD. 117, 2000 psi working pressure double gate SOPE equipped with blind and pipe rams.

TOP SET FRUITLAND COAL


FIGURE #3

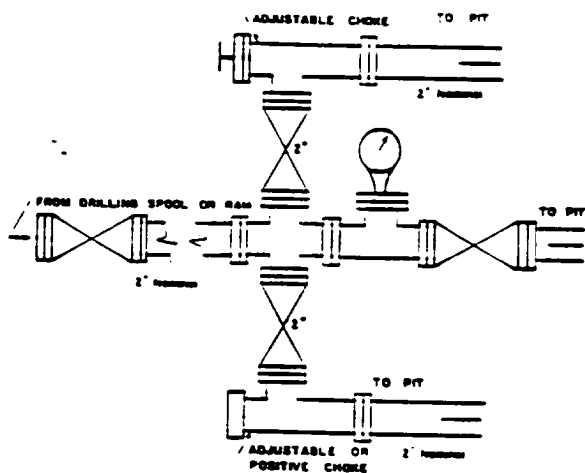

Minimum choke manifold configuration for a typical Fruitland Coal well from surface to CD. 2", 2000 psi working pressure equipment with two chokes.

TOP SET FRUITLAND COAL


FIGURE #2

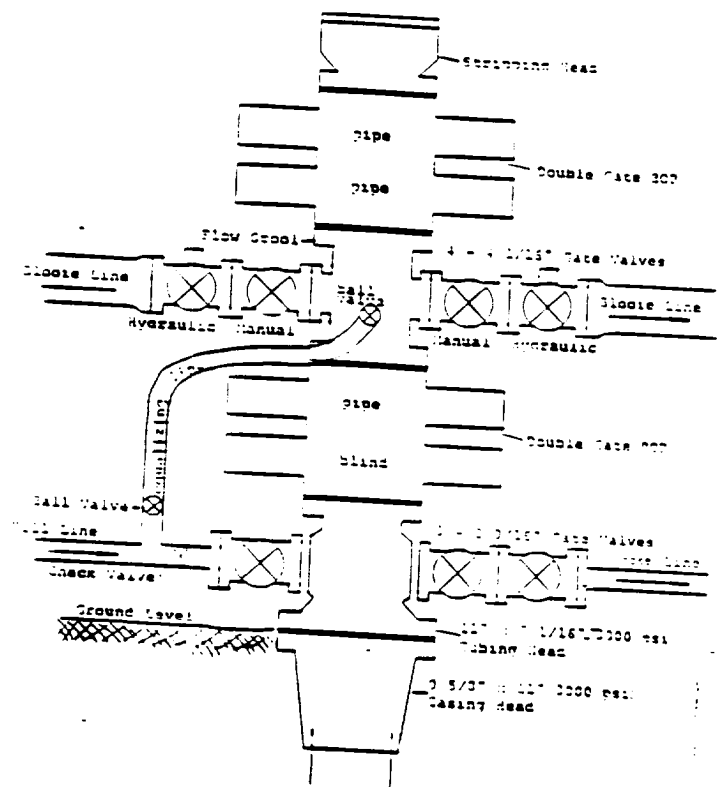

Minimum SOPE installation for a typical Fruitland Coal well from intermediate CD to CD. 6", 2000 psi working pressure double gate SOPE equipped with three pipe and one blind ram.

TOP SET FRUITLAND
COAL WELL BOPE.

UPDATED
9/8/89

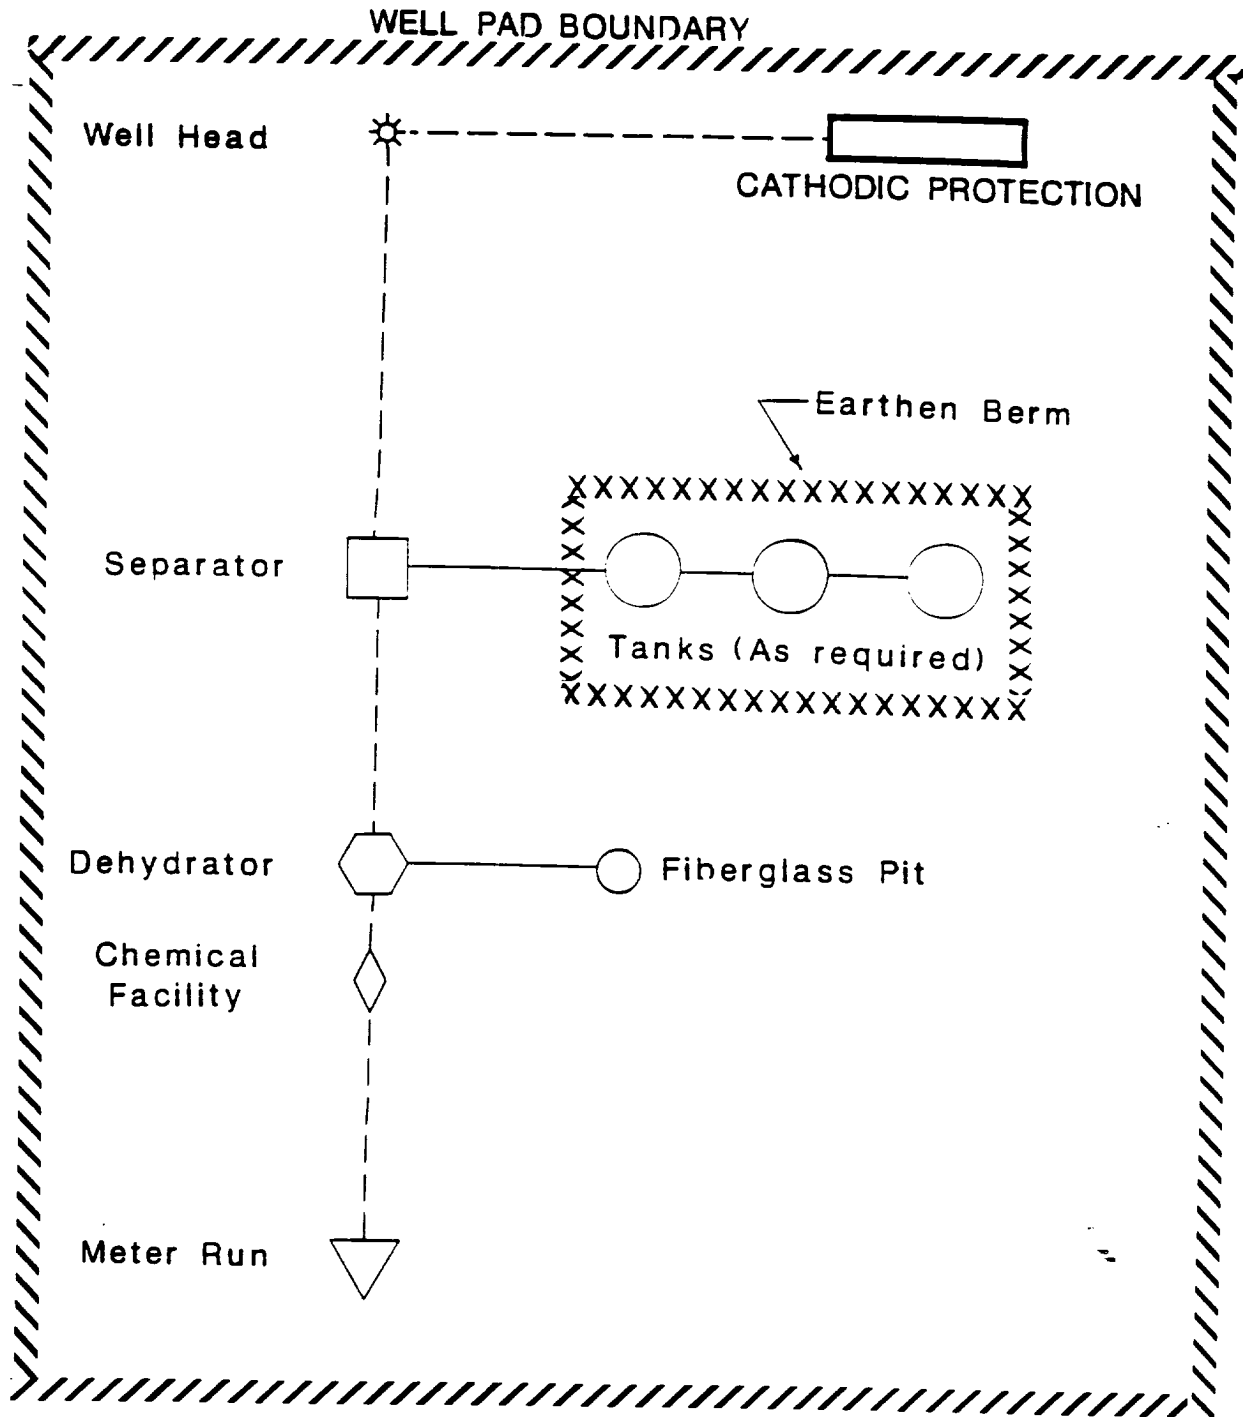

MERIDIAN OIL

ANTICIPATED
PRODUCTION FACILITIES
FOR A
FRUITLAND WELL

J. Falconi

4/28/89