

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

1. TYPE OF WELL GAS	5. LEASE NUMBER SF-080712A
2. OPERATOR <i>Meridian</i> EL PASO NATURAL GAS CO.	6. IF INDIAN, ALL. OR TRIBE NAME
3. ADDRESS & PHONE NO. OF OPERATOR P O BOX 4289 FARMINGTON, NM 87499	7. UNIT AGREEMENT NAME SAN JUAN 30-6 UNIT
4. LOCATION OF WELL 790'N 1305'E	8. FARM OR LEASE NAME SAN JUAN 30-6 UNIT
	9. WELL NO. 480
14. PERMIT NO.	15. ELEVATIONS 6270'GL
	10. FIELD, POOL, OR WILDCAT BASIN FRUITLAND COAL
	11. SEC. T. R. M OR BLK. SEC. 30 T30N R06W NMPM
	12. COUNTY RIO ARRIBA
	13. STATE NM
16. NOTICE OF INTENTION TO: Change Plans	
17. Describe proposed or completed operations	

Attached is a revised operations plan, BOPE diagram and anticipated production facilities diagram on the subject well.

RECEIVED

APR 02 1990

OIL CON. DIV.
DIST. 3

18. AUTHORIZED BY:

[Signature]
REGULATORY AFFAIRS

9/9/89
DATE

APPROVED

NOTE: THIS FORMAT IS ISSUED IN LIEU OF US BLM FORM 3160-5.

=====

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____

CONDITION OF APPROVAL, IF ANY: _____

DATE

RECEIVED

OCT 17 1960

LVID 1100 NO

OFF CONT DIAI

8 1960

Well Name: 480 SAN JUAN 30-6 UNIT 790°N 1305°E
 Sec. 30 T30N R06W RIO ARRIBA NEW MEXICO
 BASIN FRUITLAND COAL Elevation 6270'GL

Formation tops: Surface- SAN JOSE

Ojo Alamo- 2279
 Kirtland- 2388
 Fruitland- 2745
 Fruitland Coal Top- 2988
 Fruitland Coal Base- 3187
 Intermediate TD- 2968
 Total Depth- 3143

Logging Program: Mud logs from intermediate to total depth.

Mud Program:	Interval	Type	Spud	Weight	Visc.	Fl. Loss
	0 - 200			8.4 - 8.9	40-50	no control
	200 - 2968	Non-dispersed		8.4 - 9.1	30-60	no control
	2968 - 3143	Formation Water		8.4		no control

Casing Program:	Hole Size	Depth	Interval	Csg. Size	Weight	Grade
	12 1/4"	0 - 200		9 5/8"	32.3#	H-40
	8 3/4"	0 - 2968		7"	20.0#	K-55
	6 1/4"	2918 - 3143		5 1/2"	15.5#	K-55
Tubing Program:		0 - 3143		2 7/8"	6.5#	J-55

Float Equipment: 9 5/8" surface casing - saw tooth guide shoe.

7" intermediate casing - guide shoe and self-fill insert float valve. Three centralizers run every other joint above shoe. Run insert float one joint above the guide shoe.

5 1/2" production casing - float shoe on bottom and a pre-drilled liner run to the 7" casing with a minimum 50' overlap. Liner hanger is a double slip grip type.

Wellhead Equipment: 9 5/8" x 7" x 2 7/8" x 11" 3000 psi xmas tree assembly.

Cementing:

9 5/8" surface casing - cement with 106 sacks of class "B" cement with 1/4# floccule/sack and 3% calcium chloride (125 cu ft. of slurry, 100% excess to circulate to surface). WOC 12 hours. Test casing to 600 psi for 30 minutes.

7" intermediate casing - lead with 46 sacks of 65/35 class "B" poz with 6% gel, 2% calcium chloride and 1/2 cu ft. Perlite/sack (10.3 gallons of water/sack) tail with 100 sacks of class "B" with 2% calcium chloride. 207 cu ft. of slurry, 100% excess to cover the Ojo Alamo. Run temperature survey at 8 hours. WOC 12 hours. Test casing to 1500 psi for 30 minutes.

5 1/2" liner - do not cement.

BOP and Tests:

Surface to Intermediate TD - 11" 2000 psi(minimum) double gate BOP stack (Reference Figure #1). Prior to drilling out surface casing, test rams to 600 psi for 30 minutes.

Intermediate TD to TD - 7 1/16" 2000 psi(minimum) double gate BOP stack (Reference Figure #2). Prior to drilling out intermediate casing, test rams to 1500 psi(minimum) for 30 minutes.

From surface to TD - choke manifold (Reference Figure #3).


Pipe rams will be actuated at least once each day and blind rams actuated once each trip to test proper functioning. A Kelly cock valve and drill string safety valves to fit each drill string will be maintained and available on the rig floor.

Addition Information:

The Fruitland coal formation will be completed.
This gas is dedicated.
The E/2 of Section 30 is dedicated to this well.

TOP SET FRUITLAND COAL


FIGURE #1

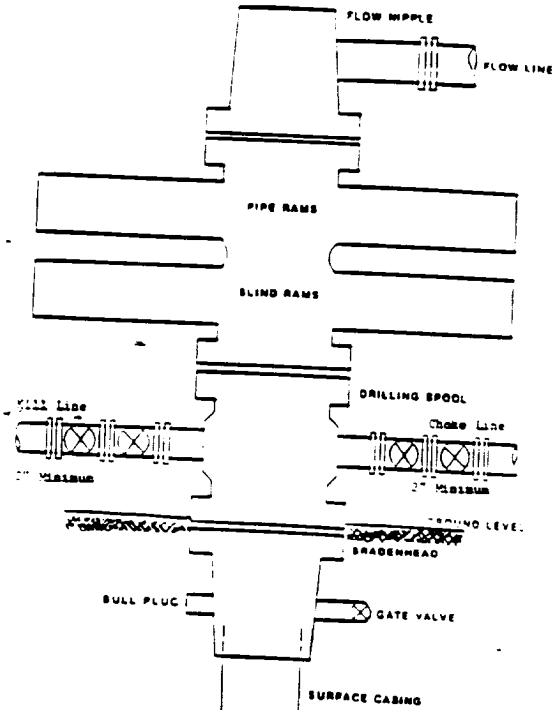

Minimum BOPE installation for a typical Fruitland Coal well from surface to intermediate TD. 117, 2000 psi working pressure double gate BOP equipped with blind and side rams.

TOP SET FRUITLAND COAL


FIGURE #2

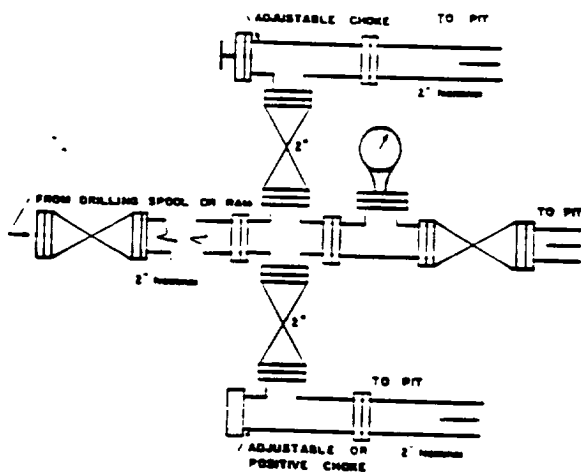

Minimum choke manifold configuration for a typical Fruitland Coal well from surface to TD. 2\", 2000 psi working pressure equipment with two chokes.

TOP SET FRUITLAND COAL

FIGURE #2

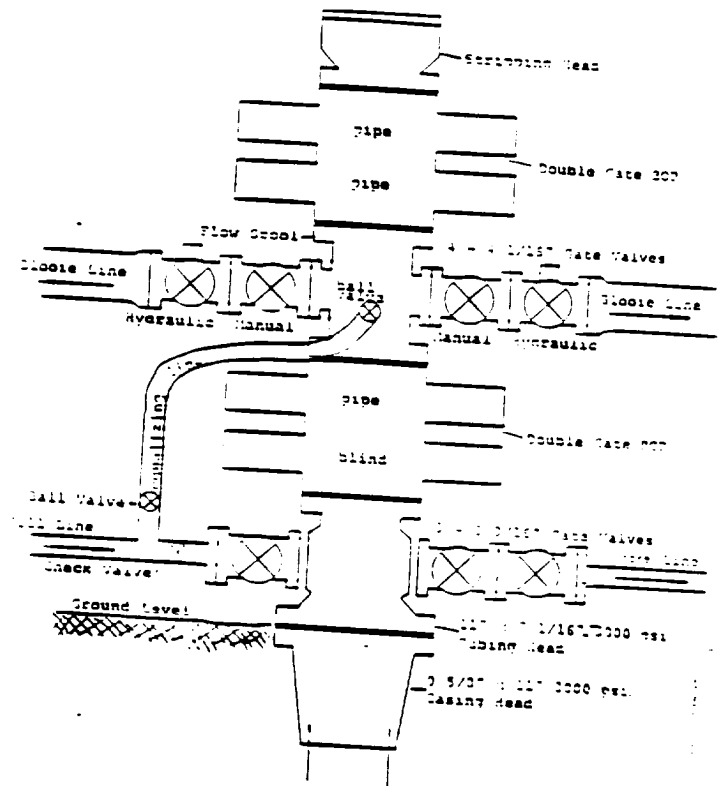


Minimum BOPE installation for a typical Fruitland Coal well from intermediate TD to TD. 6\", 2000 psi working pressure double stack double gate BOP equipped with three pipe and one blind ram.

TOP SET FRUITLAND
COAL WELL BOPE.

UPDATED

9/8/89

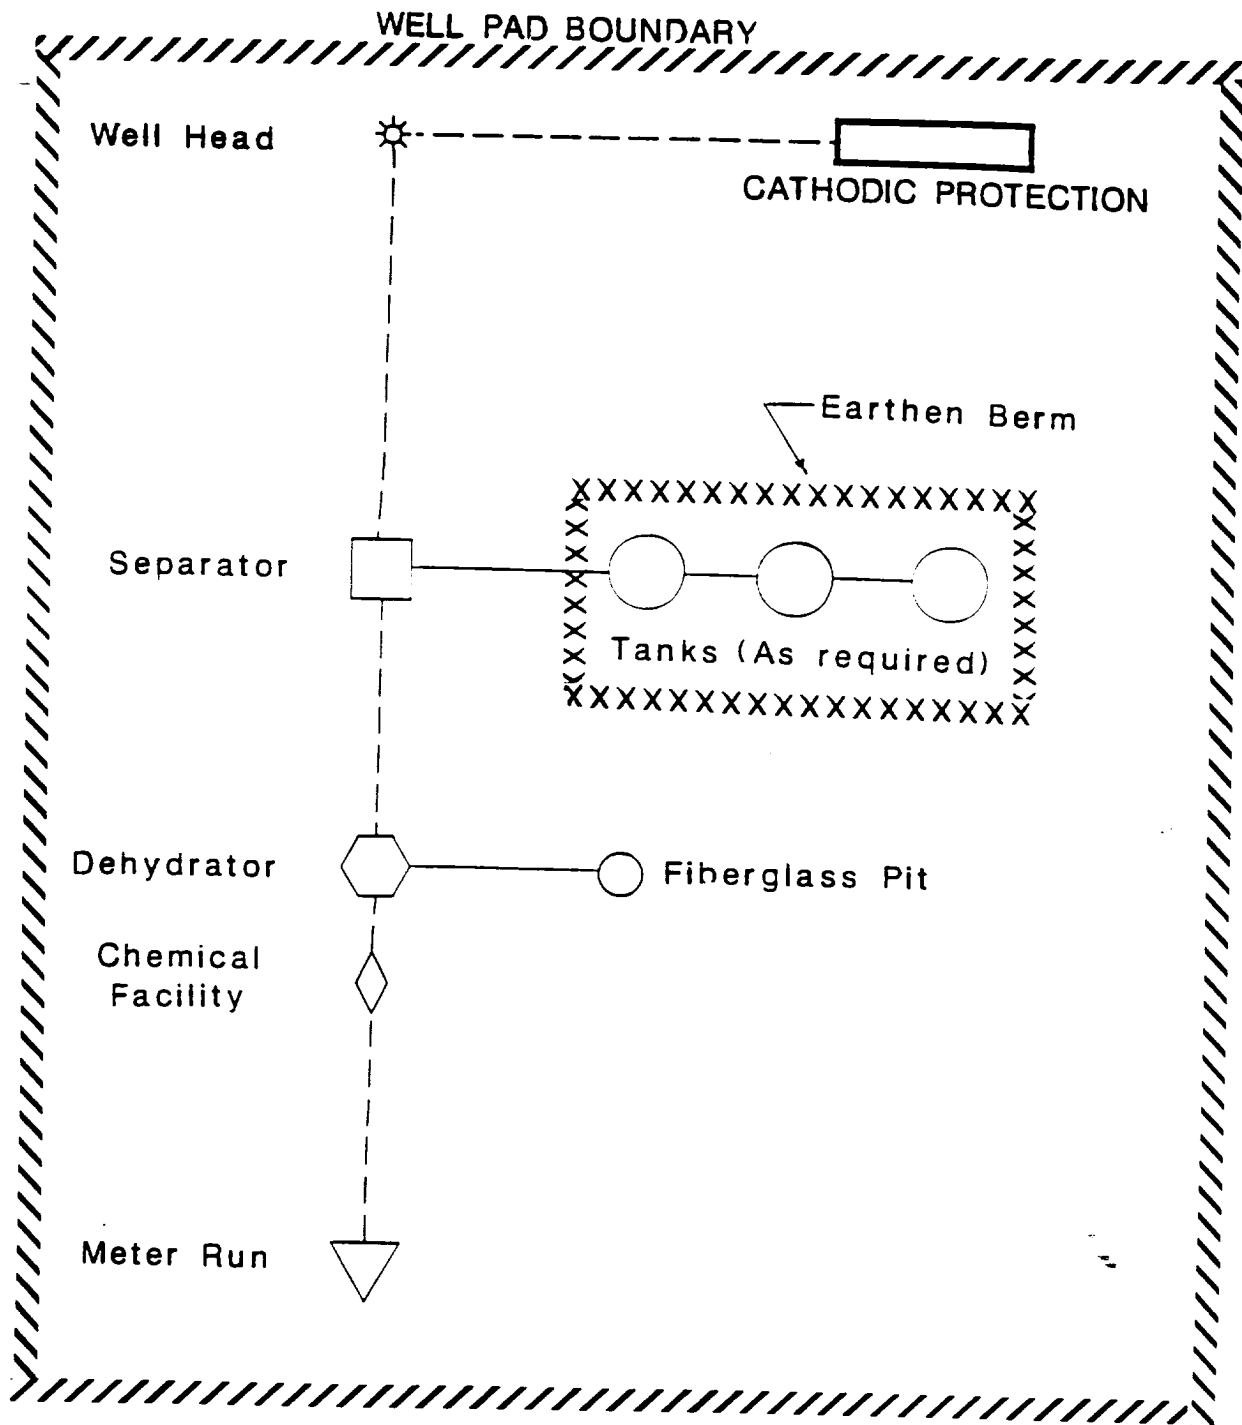

MERIDIAN OIL

ANTICIPATED
PRODUCTION FACILITIES
FOR A
FRUITLAND WELL

J. Falconi

4/28/89