

Devon Energy

Project: Lea County, NM (NAD-83)
 Site: Thistle Unit Sec 22-27 Trac Pad
 Well: Thistle Unit 100H
 Wellbore: OH
 Design: Plan #2

3713.2' GE +23.5' KB @ 3736.70usft
 Ground Level: 3713.20



Azimuths to Grid North
 True North: -0.41°
 Magnetic North: 6.42°
 Magnetic Field
 Strength: 48166.4snT
 Dip Angle: 60.12°
 Date: 9/19/2017
 Model: HDGM


PROJECT DETAILS: Lea County, NM (NAD-83)

Geodetic System: US State Plane 1983
 Datum: North American Datum 1983
 Ellipsoid: GRS 1980
 Zone: New Mexico Eastern Zone



30-025-44085

RECEIVED
 OCT 02 2017
 HOBBS OCD


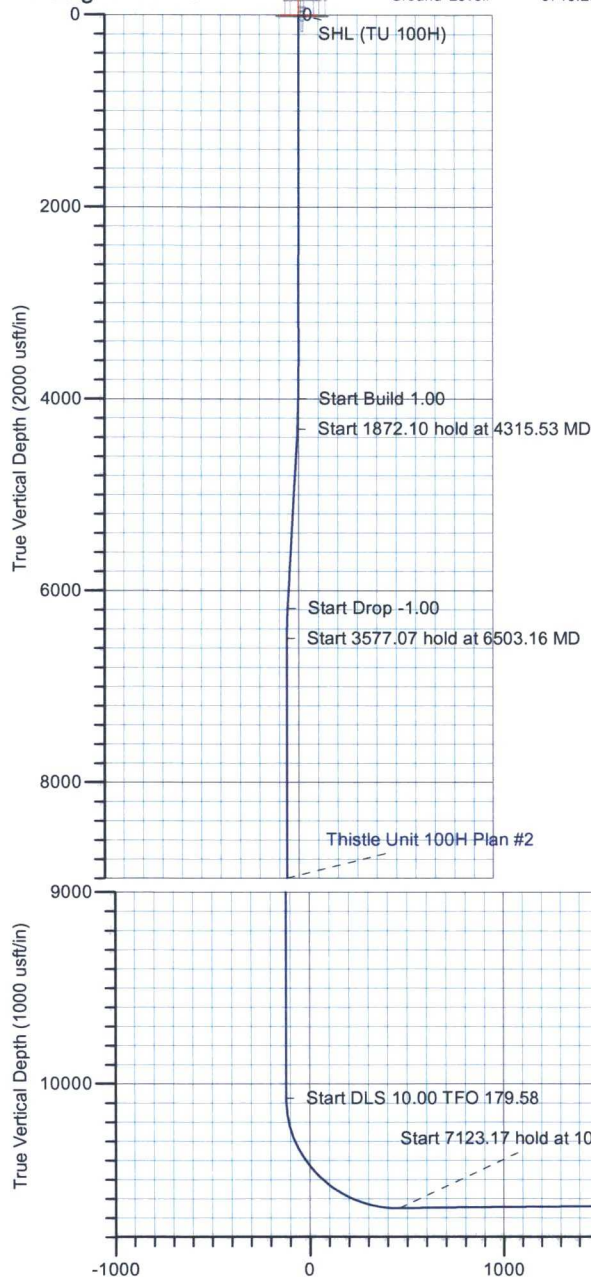


SECTION DETAILS

MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	Vsect	Annotation
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
4000.00	0.00	0.00	4000.00	0.00	0.00	0.00	0.00	0.00	Start Build 1.00
4315.53	3.16	355.24	4315.37	8.66	-0.72	1.00	355.24	-8.66	Start 1872.10 hold at 4315.53 MD
6187.63	3.16	355.24	6184.63	111.34	-9.28	0.00	0.00	-111.40	Start Drop -1.00
6503.16	0.00	0.00	6500.00	120.00	-10.00	1.00	180.00	-120.06	Start 3577.07 hold at 6503.16 MD
10080.23	0.00	0.00	10077.07	120.00	-10.00	0.00	0.00	-120.06	Start DLS 10.00 TFO 179.58
10985.46	90.52	179.58	10650.00	-458.17	-5.72	10.00	179.58	458.13	Start 7123.17 hold at 10985.46 MD
18108.63	90.52	179.58	10585.00	-7580.85	47.00	0.00	0.00	7581.00	TD at 18108.63

DESIGN TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Latitude	Longitude
PBHL (TU 100H)	10585.00	-7580.85	47.00	32° 16' 32.5269 N	103° 33' 25.8069 W
SHL (TU 100H)	0.00	0.00	0.00	32° 17' 47.5433 N	103° 33' 25.7153 W

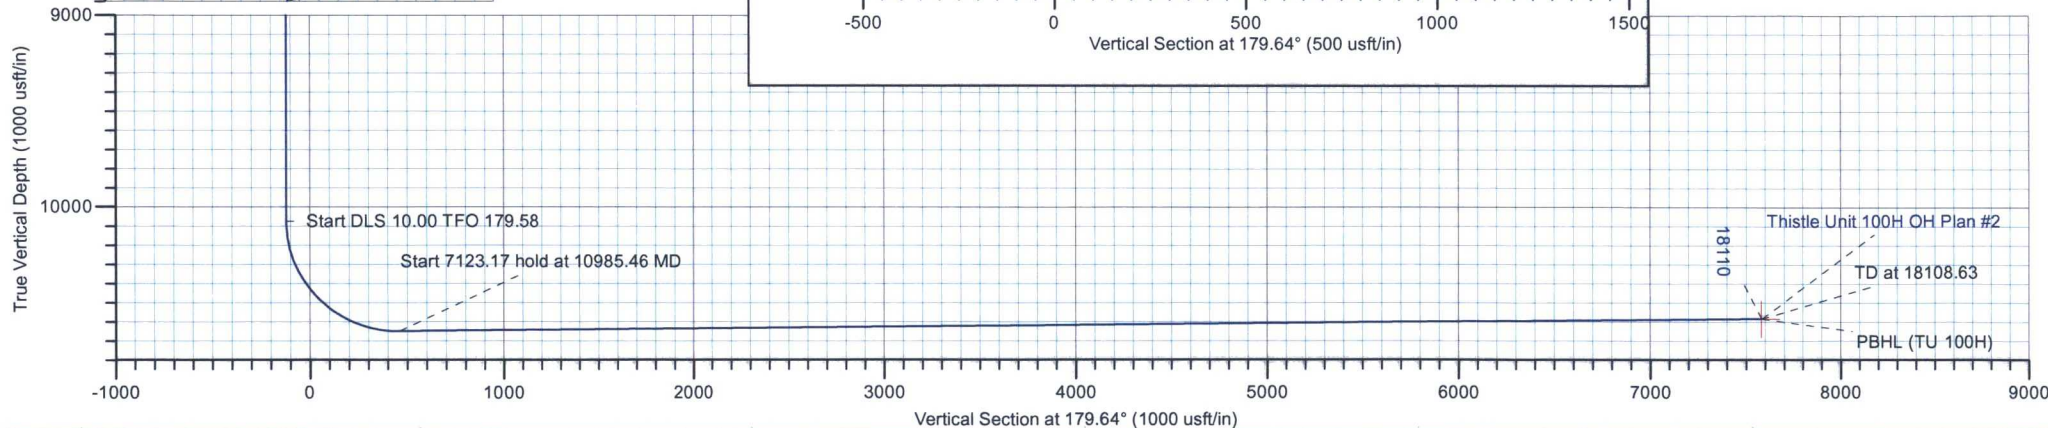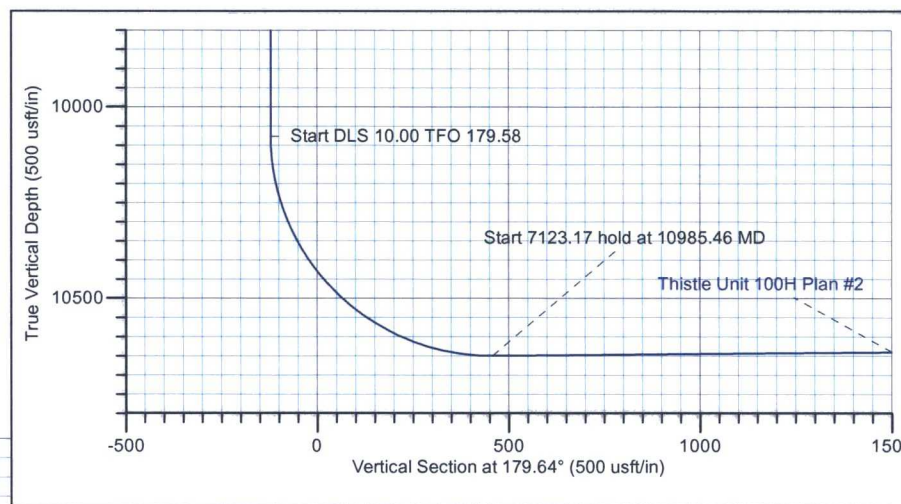

LEAM DRILLING SYSTEMS LLC
 2010 East Davis, Conroe, Texas 77301

Plan: Plan #2 (Thistle Unit 100H/OH)
 Thistle Unit Sec 22-27 Trac Pad
 Created By: Dustin Ault
 Date: 15:29, September 20 2017

Devon Energy

Project: Lea County, NM (NAD-83)
Site: Thistle Unit Sec 22-27 Trac Pad
Well: Thistle Unit 100H
Wellbore: OH
Design: Plan #2



Azimuths to Grid North
True North: -0.41°
Magnetic North: 6.42°

Magnetic Field
Strength: 48166.4snT
Dip Angle: 60.12°
Date: 9/19/2017
Model: HDGM



PROJECT DETAILS: Lea County, NM (NAD-83)
Geodetic System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: New Mexico Eastern Zone



SECTION DETAILS										
MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect	Target	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
4000.00	0.00	0.00	4000.00	0.00	0.00	0.00	0.00	0.00		
4315.53	3.16	355.24	4315.37	8.66	-0.72	1.00	355.24	-8.66		
6187.63	3.16	355.24	6184.63	111.34	-9.28	0.00	0.00	-111.40		
6503.16	0.00	0.00	6500.00	120.00	-10.00	1.00	180.00	-120.06		
10080.23	0.00	0.00	10077.07	120.00	-10.00	0.00	0.00	-120.06		
10985.46	90.52	179.58	10650.00	-458.17	-5.72	10.00	179.58	458.13		
18108.63	90.52	179.58	10585.00	-7580.85	47.00	0.00	0.00	7581.00	PBHL (TU 100H)	

DESIGN TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
PBHL (TU 100H)	10585.00	-7580.85	47.00	464900.94	781219.75	32° 16' 32.5269 N	103° 33' 25.8069 W
SHL (TU 100H)	0.00	0.00	0.00	472481.79	781172.75	32° 17' 47.5433 N	103° 33' 25.7153 W

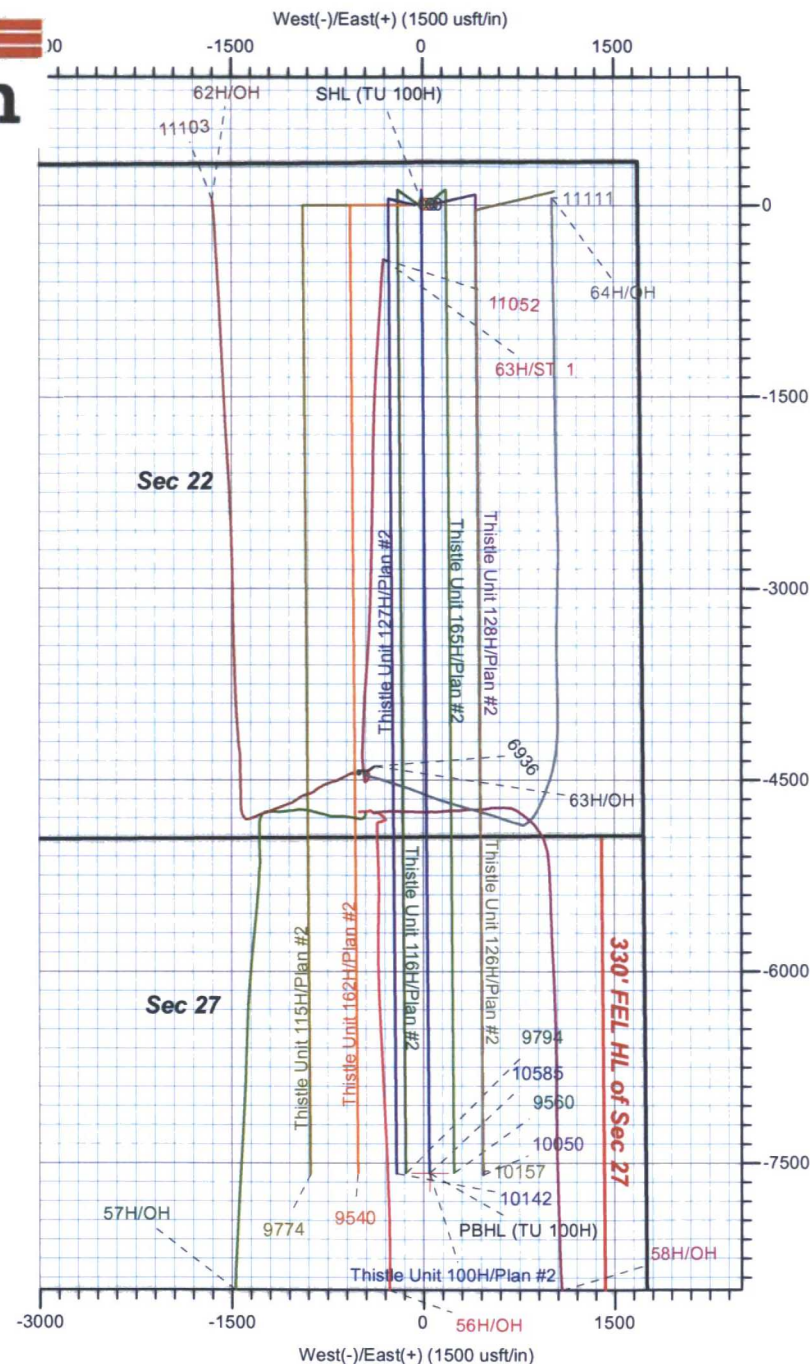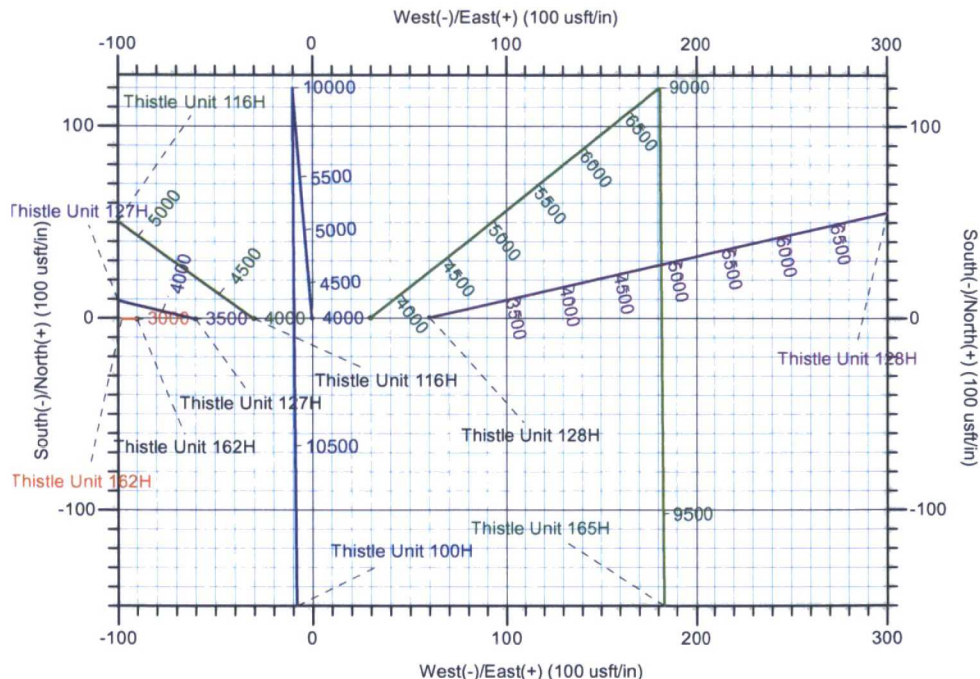

LEAM DRILLING SYSTEMS LLC
2010 East Davis, Conroe, Texas 77301

Plan: Plan #2 (Thistle Unit 100H/OH)
Thistle Unit Sec 22-27 Trac Pad
Created By: Dustin Ault
Date: 15/30, September 20 2017

Devon Energy

Lea County, NM (NAD-83)

Thistle Unit Sec 22-27 Trac Pad

Thistle Unit 100H

OH

Plan: Plan #2

Standard Planning Report

20 September, 2017

LEAM Drilling Systems LLC

Planning Report

Database:	EDM 5000.1 Multi User Db	Local Co-ordinate Reference:	Well Thistle Unit 100H
Company:	Devon Energy	TVD Reference:	3713.2' GE + 23.5' KB @ 3736.70usft
Project:	Lea County, NM (NAD-83)	MD Reference:	3713.2' GE + 23.5' KB @ 3736.70usft
Site:	Thistle Unit Sec 22-27 Trac Pad	North Reference:	Grid
Well:	Thistle Unit 100H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #2		

Project	Lea County, NM (NAD-83)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site		Thistle Unit Sec 22-27 Trac Pad			
Site Position:		Northing:	472,548.43 usft	Latitude:	32° 17' 48.4331 N
From:	Map	Easting:	777,932.69 usft	Longitude:	103° 34' 3.4563 W
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "	Grid Convergence:	0.41 °

Well	Thistle Unit 100H					
Well Position	+N/-S	-66.64 usft	Northing:	472,481.79 usft	Latitude:	32° 17' 47.5433 N
	+E/-W	3,240.06 usft	Easting:	781,172.75 usft	Longitude:	103° 33' 25.7153 W
Position Uncertainty		0.00 usft	Wellhead Elevation:	0.00 usft	Ground Level:	3,713.20 usft

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	HDGM	9/19/2017	6.83	60.12	48,166

Design	Plan #2			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.00	0.00	0.00	179.64

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
4,000.00	0.00	0.01	4,000.00	0.00	0.00	0.00	0.00	0.00	0.01	
4,315.53	3.16	355.24	4,315.37	8.66	-0.72	1.00	1.00	0.00	355.24	
6,187.63	3.16	355.24	6,184.63	111.34	-9.28	0.00	0.00	0.00	0.00	
6,503.16	0.00	0.01	6,500.00	120.00	-10.00	1.00	-1.00	0.00	180.00	
10,080.23	0.00	0.01	10,077.07	120.00	-10.00	0.00	0.00	0.00	0.01	
10,985.46	90.52	179.58	10,650.00	-458.17	-5.72	10.00	10.00	19.84	179.58	
18,108.63	90.52	179.58	10,585.00	-7,580.85	47.00	0.00	0.00	0.00	0.00	PBHL (TU 100H)

LEAM Drilling Systems LLC

Planning Report

Database:	EDM 5000.1 Multi User Db	Local Co-ordinate Reference:	Well Thistle Unit 100H
Company:	Devon Energy	TVD Reference:	3713.2' GE + 23.5' KB @ 3736.70usft
Project:	Lea County, NM (NAD-83)	MD Reference:	3713.2' GE + 23.5' KB @ 3736.70usft
Site:	Thistle Unit Sec 22-27 Trac Pad	North Reference:	Grid
Well:	Thistle Unit 100H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #2		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N-S (usft)	+E-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
SHL (TU 100H)									
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,400.00	0.00	0.00	0.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00
2,600.00	0.00	0.00	2,600.00	0.00	0.00	0.00	0.00	0.00	0.00
2,700.00	0.00	0.00	2,700.00	0.00	0.00	0.00	0.00	0.00	0.00
2,800.00	0.00	0.00	2,800.00	0.00	0.00	0.00	0.00	0.00	0.00
2,900.00	0.00	0.00	2,900.00	0.00	0.00	0.00	0.00	0.00	0.00
3,000.00	0.00	0.00	3,000.00	0.00	0.00	0.00	0.00	0.00	0.00
3,100.00	0.00	0.00	3,100.00	0.00	0.00	0.00	0.00	0.00	0.00
3,200.00	0.00	0.00	3,200.00	0.00	0.00	0.00	0.00	0.00	0.00
3,300.00	0.00	0.00	3,300.00	0.00	0.00	0.00	0.00	0.00	0.00
3,400.00	0.00	0.00	3,400.00	0.00	0.00	0.00	0.00	0.00	0.00
3,500.00	0.00	0.00	3,500.00	0.00	0.00	0.00	0.00	0.00	0.00
3,600.00	0.00	0.00	3,600.00	0.00	0.00	0.00	0.00	0.00	0.00
3,700.00	0.00	0.00	3,700.00	0.00	0.00	0.00	0.00	0.00	0.00
3,800.00	0.00	0.00	3,800.00	0.00	0.00	0.00	0.00	0.00	0.00
3,900.00	0.00	0.00	3,900.00	0.00	0.00	0.00	0.00	0.00	0.00
4,000.00	0.00	0.00	4,000.00	0.00	0.00	0.00	0.00	0.00	0.00
Start Build 1.00									
4,100.00	1.00	355.24	4,100.00	0.87	-0.07	-0.87	1.00	1.00	0.00
4,200.00	2.00	355.24	4,199.96	3.48	-0.29	-3.48	1.00	1.00	0.00
4,300.00	3.00	355.24	4,299.86	7.83	-0.65	-7.83	1.00	1.00	0.00
4,315.53	3.16	355.24	4,315.37	8.66	-0.72	-8.66	1.00	1.00	0.00
Start 1872.10 hold at 4315.53 MD									
4,400.00	3.16	355.24	4,399.71	13.29	-1.11	-13.30	0.00	0.00	0.00
4,500.00	3.16	355.24	4,499.56	18.77	-1.56	-18.78	0.00	0.00	0.00
4,600.00	3.16	355.24	4,599.41	24.26	-2.02	-24.27	0.00	0.00	0.00
4,700.00	3.16	355.24	4,699.26	29.74	-2.48	-29.76	0.00	0.00	0.00
4,800.00	3.16	355.24	4,799.11	35.23	-2.94	-35.25	0.00	0.00	0.00

LEAM Drilling Systems LLC

Planning Report

Database:	EDM 5000.1 Multi User Db	Local Co-ordinate Reference:	Well Thistle Unit 100H
Company:	Devon Energy	TVD Reference:	3713.2' GE + 23.5' KB @ 3736.70usft
Project:	Lea County, NM (NAD-83)	MD Reference:	3713.2' GE + 23.5' KB @ 3736.70usft
Site:	Thistle Unit Sec 22-27 Trac Pad	North Reference:	Grid
Well:	Thistle Unit 100H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #2		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,900.00	3.16	355.24	4,898.95	40.72	-3.39	-40.74	0.00	0.00	0.00
5,000.00	3.16	355.24	4,998.80	46.20	-3.85	-46.22	0.00	0.00	0.00
5,100.00	3.16	355.24	5,098.65	51.69	-4.31	-51.71	0.00	0.00	0.00
5,200.00	3.16	355.24	5,198.50	57.17	-4.76	-57.20	0.00	0.00	0.00
5,300.00	3.16	355.24	5,298.35	62.66	-5.22	-62.69	0.00	0.00	0.00
5,400.00	3.16	355.24	5,398.20	68.14	-5.68	-68.18	0.00	0.00	0.00
5,500.00	3.16	355.24	5,498.05	73.63	-6.14	-73.66	0.00	0.00	0.00
5,600.00	3.16	355.24	5,597.89	79.11	-6.59	-79.15	0.00	0.00	0.00
5,700.00	3.16	355.24	5,697.74	84.60	-7.05	-84.64	0.00	0.00	0.00
5,800.00	3.16	355.24	5,797.59	90.08	-7.51	-90.13	0.00	0.00	0.00
5,900.00	3.16	355.24	5,897.44	95.57	-7.96	-95.61	0.00	0.00	0.00
6,000.00	3.16	355.24	5,997.29	101.05	-8.42	-101.10	0.00	0.00	0.00
6,100.00	3.16	355.24	6,097.14	106.54	-8.88	-106.59	0.00	0.00	0.00
6,187.63	3.16	355.24	6,184.63	111.34	-9.28	-111.40	0.00	0.00	0.00
Start Drop -1.00									
6,200.00	3.03	355.24	6,196.98	112.01	-9.33	-112.07	1.00	-1.00	0.00
6,300.00	2.03	355.24	6,296.89	116.41	-9.70	-116.47	1.00	-1.00	0.00
6,400.00	1.03	355.24	6,396.85	119.07	-9.92	-119.13	1.00	-1.00	0.00
6,503.16	0.00	0.01	6,500.00	120.00	-10.00	-120.06	1.00	-1.00	0.00
Start 3577.07 hold at 6503.16 MD									
6,600.00	0.00	0.00	6,596.84	120.00	-10.00	-120.06	0.00	0.00	0.00
6,700.00	0.00	0.00	6,696.84	120.00	-10.00	-120.06	0.00	0.00	0.00
6,800.00	0.00	0.00	6,796.84	120.00	-10.00	-120.06	0.00	0.00	0.00
6,900.00	0.00	0.00	6,896.84	120.00	-10.00	-120.06	0.00	0.00	0.00
7,000.00	0.00	0.00	6,996.84	120.00	-10.00	-120.06	0.00	0.00	0.00
7,100.00	0.00	0.00	7,096.84	120.00	-10.00	-120.06	0.00	0.00	0.00
7,200.00	0.00	0.00	7,196.84	120.00	-10.00	-120.06	0.00	0.00	0.00
7,300.00	0.00	0.00	7,296.84	120.00	-10.00	-120.06	0.00	0.00	0.00
7,400.00	0.00	0.00	7,396.84	120.00	-10.00	-120.06	0.00	0.00	0.00
7,500.00	0.00	0.00	7,496.84	120.00	-10.00	-120.06	0.00	0.00	0.00
7,600.00	0.00	0.00	7,596.84	120.00	-10.00	-120.06	0.00	0.00	0.00
7,700.00	0.00	0.00	7,696.84	120.00	-10.00	-120.06	0.00	0.00	0.00
7,800.00	0.00	0.00	7,796.84	120.00	-10.00	-120.06	0.00	0.00	0.00
7,900.00	0.00	0.00	7,896.84	120.00	-10.00	-120.06	0.00	0.00	0.00
8,000.00	0.00	0.00	7,996.84	120.00	-10.00	-120.06	0.00	0.00	0.00
8,100.00	0.00	0.00	8,096.84	120.00	-10.00	-120.06	0.00	0.00	0.00
8,200.00	0.00	0.00	8,196.84	120.00	-10.00	-120.06	0.00	0.00	0.00
8,300.00	0.00	0.00	8,296.84	120.00	-10.00	-120.06	0.00	0.00	0.00
8,400.00	0.00	0.00	8,396.84	120.00	-10.00	-120.06	0.00	0.00	0.00
8,500.00	0.00	0.00	8,496.84	120.00	-10.00	-120.06	0.00	0.00	0.00
8,600.00	0.00	0.00	8,596.84	120.00	-10.00	-120.06	0.00	0.00	0.00
8,700.00	0.00	0.00	8,696.84	120.00	-10.00	-120.06	0.00	0.00	0.00
8,800.00	0.00	0.00	8,796.84	120.00	-10.00	-120.06	0.00	0.00	0.00
8,900.00	0.00	0.00	8,896.84	120.00	-10.00	-120.06	0.00	0.00	0.00
9,000.00	0.00	0.00	8,996.84	120.00	-10.00	-120.06	0.00	0.00	0.00
9,100.00	0.00	0.00	9,096.84	120.00	-10.00	-120.06	0.00	0.00	0.00
9,200.00	0.00	0.00	9,196.84	120.00	-10.00	-120.06	0.00	0.00	0.00
9,300.00	0.00	0.00	9,296.84	120.00	-10.00	-120.06	0.00	0.00	0.00
9,400.00	0.00	0.00	9,396.84	120.00	-10.00	-120.06	0.00	0.00	0.00
9,500.00	0.00	0.00	9,496.84	120.00	-10.00	-120.06	0.00	0.00	0.00
9,600.00	0.00	0.00	9,596.84	120.00	-10.00	-120.06	0.00	0.00	0.00
9,700.00	0.00	0.00	9,696.84	120.00	-10.00	-120.06	0.00	0.00	0.00
9,800.00	0.00	0.00	9,796.84	120.00	-10.00	-120.06	0.00	0.00	0.00
9,900.00	0.00	0.00	9,896.84	120.00	-10.00	-120.06	0.00	0.00	0.00

LEAM Drilling Systems LLC

Planning Report

Database:	EDM 5000.1 Multi User Db	Local Co-ordinate Reference:	Well Thistle Unit 100H
Company:	Devon Energy	TVD Reference:	3713.2' GE + 23.5' KB @ 3736.70usft
Project:	Lea County, NM (NAD-83)	MD Reference:	3713.2' GE + 23.5' KB @ 3736.70usft
Site:	Thistle Unit Sec 22-27 Trac Pad	North Reference:	Grid
Well:	Thistle Unit 100H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #2		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
10,000.00	0.00	0.00	9,996.84	120.00	-10.00	-120.06	0.00	0.00	0.00
10,080.23	0.00	0.00	10,077.07	120.00	-10.00	-120.06	0.00	0.00	0.00
Start DLS 10.00 TFO 179.58									
10,100.00	1.98	179.58	10,096.84	119.66	-10.00	-119.72	10.00	10.00	0.00
10,150.00	6.98	179.58	10,146.67	115.76	-9.97	-115.82	10.00	10.00	0.00
10,200.00	11.98	179.58	10,195.97	107.53	-9.91	-107.59	10.00	10.00	0.00
10,250.00	16.98	179.58	10,244.37	95.03	-9.82	-95.09	10.00	10.00	0.00
10,300.00	21.98	179.58	10,291.49	78.37	-9.69	-78.42	10.00	10.00	0.00
10,350.00	26.98	179.58	10,336.99	57.66	-9.54	-57.71	10.00	10.00	0.00
10,400.00	31.98	179.58	10,380.50	33.06	-9.36	-33.12	10.00	10.00	0.00
10,450.00	36.98	179.58	10,421.70	4.77	-9.15	-4.82	10.00	10.00	0.00
10,500.00	41.98	179.58	10,460.29	-27.01	-8.91	26.96	10.00	10.00	0.00
10,550.00	46.98	179.58	10,495.95	-62.03	-8.65	61.98	10.00	10.00	0.00
10,600.00	51.98	179.58	10,528.43	-100.02	-8.37	99.97	10.00	10.00	0.00
10,650.00	56.98	179.58	10,557.47	-140.71	-8.07	140.65	10.00	10.00	0.00
10,700.00	61.98	179.58	10,582.86	-183.76	-7.75	183.71	10.00	10.00	0.00
10,750.00	66.98	179.58	10,604.39	-228.87	-7.42	228.82	10.00	10.00	0.00
10,800.00	71.98	179.58	10,621.92	-275.68	-7.07	275.63	10.00	10.00	0.00
10,850.00	76.98	179.58	10,635.29	-323.84	-6.71	323.79	10.00	10.00	0.00
10,900.00	81.98	179.58	10,644.42	-372.98	-6.35	372.93	10.00	10.00	0.00
10,950.00	86.98	179.58	10,649.23	-422.73	-5.98	422.68	10.00	10.00	0.00
10,985.46	90.52	179.58	10,650.00	-458.17	-5.72	458.13	10.00	10.00	0.00
Start 7123.17 hold at 10985.46 MD									
11,000.00	90.52	179.58	10,649.87	-472.71	-5.61	472.67	0.00	0.00	0.00
11,100.00	90.52	179.58	10,648.96	-572.71	-4.87	572.67	0.00	0.00	0.00
11,200.00	90.52	179.58	10,648.05	-672.70	-4.13	672.66	0.00	0.00	0.00
11,300.00	90.52	179.58	10,647.13	-772.69	-3.39	772.66	0.00	0.00	0.00
11,400.00	90.52	179.58	10,646.22	-872.69	-2.65	872.65	0.00	0.00	0.00
11,500.00	90.52	179.58	10,645.31	-972.68	-1.91	972.65	0.00	0.00	0.00
11,600.00	90.52	179.58	10,644.40	-1,072.67	-1.17	1,072.64	0.00	0.00	0.00
11,700.00	90.52	179.58	10,643.48	-1,172.67	-0.43	1,172.64	0.00	0.00	0.00
11,800.00	90.52	179.58	10,642.57	-1,272.66	0.31	1,272.64	0.00	0.00	0.00
11,900.00	90.52	179.58	10,641.66	-1,372.65	1.05	1,372.63	0.00	0.00	0.00
12,000.00	90.52	179.58	10,640.75	-1,472.64	1.79	1,472.63	0.00	0.00	0.00
12,100.00	90.52	179.58	10,639.83	-1,572.64	2.53	1,572.62	0.00	0.00	0.00
12,200.00	90.52	179.58	10,638.92	-1,672.63	3.27	1,672.62	0.00	0.00	0.00
12,300.00	90.52	179.58	10,638.01	-1,772.62	4.01	1,772.61	0.00	0.00	0.00
12,400.00	90.52	179.58	10,637.10	-1,872.62	4.75	1,872.61	0.00	0.00	0.00
12,500.00	90.52	179.58	10,636.18	-1,972.61	5.49	1,972.61	0.00	0.00	0.00
12,600.00	90.52	179.58	10,635.27	-2,072.60	6.23	2,072.60	0.00	0.00	0.00
12,700.00	90.52	179.58	10,634.36	-2,172.60	6.97	2,172.60	0.00	0.00	0.00
12,800.00	90.52	179.58	10,633.45	-2,272.59	7.71	2,272.59	0.00	0.00	0.00
12,900.00	90.52	179.58	10,632.53	-2,372.58	8.45	2,372.59	0.00	0.00	0.00
13,000.00	90.52	179.58	10,631.62	-2,472.58	9.19	2,472.59	0.00	0.00	0.00
13,100.00	90.52	179.58	10,630.71	-2,572.57	9.93	2,572.58	0.00	0.00	0.00
13,200.00	90.52	179.58	10,629.79	-2,672.56	10.67	2,672.58	0.00	0.00	0.00
13,300.00	90.52	179.58	10,628.88	-2,772.56	11.41	2,772.57	0.00	0.00	0.00
13,400.00	90.52	179.58	10,627.97	-2,872.55	12.15	2,872.57	0.00	0.00	0.00
13,500.00	90.52	179.58	10,627.06	-2,972.54	12.89	2,972.56	0.00	0.00	0.00
13,600.00	90.52	179.58	10,626.14	-3,072.53	13.63	3,072.56	0.00	0.00	0.00
13,700.00	90.52	179.58	10,625.23	-3,172.53	14.37	3,172.56	0.00	0.00	0.00
13,800.00	90.52	179.58	10,624.32	-3,272.52	15.11	3,272.55	0.00	0.00	0.00
13,900.00	90.52	179.58	10,623.41	-3,372.51	15.85	3,372.55	0.00	0.00	0.00
14,000.00	90.52	179.58	10,622.49	-3,472.51	16.59	3,472.54	0.00	0.00	0.00

LEAM Drilling Systems LLC

Planning Report

Database:	EDM 5000.1 Multi User Db	Local Co-ordinate Reference:	Well Thistle Unit 100H
Company:	Devon Energy	TVD Reference:	3713.2' GE + 23.5' KB @ 3736.70usft
Project:	Lea County, NM (NAD-83)	MD Reference:	3713.2' GE + 23.5' KB @ 3736.70usft
Site:	Thistle Unit Sec 22-27 Trac Pad	North Reference:	Grid
Well:	Thistle Unit 100H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #2		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
14,100.00	90.52	179.58	10,621.58	-3,572.50	17.33	3,572.54	0.00	0.00	0.00
14,200.00	90.52	179.58	10,620.67	-3,672.49	18.07	3,672.53	0.00	0.00	0.00
14,300.00	90.52	179.58	10,619.76	-3,772.49	18.81	3,772.53	0.00	0.00	0.00
14,400.00	90.52	179.58	10,618.84	-3,872.48	19.55	3,872.53	0.00	0.00	0.00
14,500.00	90.52	179.58	10,617.93	-3,972.47	20.29	3,972.52	0.00	0.00	0.00
14,600.00	90.52	179.58	10,617.02	-4,072.47	21.03	4,072.52	0.00	0.00	0.00
14,700.00	90.52	179.58	10,616.11	-4,172.46	21.77	4,172.51	0.00	0.00	0.00
14,800.00	90.52	179.58	10,615.19	-4,272.45	22.51	4,272.51	0.00	0.00	0.00
14,900.00	90.52	179.58	10,614.28	-4,372.44	23.25	4,372.50	0.00	0.00	0.00
15,000.00	90.52	179.58	10,613.37	-4,472.44	23.99	4,472.50	0.00	0.00	0.00
15,100.00	90.52	179.58	10,612.46	-4,572.43	24.73	4,572.50	0.00	0.00	0.00
15,200.00	90.52	179.58	10,611.54	-4,672.42	25.47	4,672.49	0.00	0.00	0.00
15,300.00	90.52	179.58	10,610.63	-4,772.42	26.21	4,772.49	0.00	0.00	0.00
15,400.00	90.52	179.58	10,609.72	-4,872.41	26.95	4,872.48	0.00	0.00	0.00
15,500.00	90.52	179.58	10,608.81	-4,972.40	27.69	4,972.48	0.00	0.00	0.00
15,600.00	90.52	179.58	10,607.89	-5,072.40	28.43	5,072.48	0.00	0.00	0.00
15,700.00	90.52	179.58	10,606.98	-5,172.39	29.17	5,172.47	0.00	0.00	0.00
15,800.00	90.52	179.58	10,606.07	-5,272.38	29.91	5,272.47	0.00	0.00	0.00
15,900.00	90.52	179.58	10,605.16	-5,372.38	30.65	5,372.46	0.00	0.00	0.00
16,000.00	90.52	179.58	10,604.24	-5,472.37	31.39	5,472.46	0.00	0.00	0.00
16,100.00	90.52	179.58	10,603.33	-5,572.36	32.13	5,572.45	0.00	0.00	0.00
16,200.00	90.52	179.58	10,602.42	-5,672.36	32.87	5,672.45	0.00	0.00	0.00
16,300.00	90.52	179.58	10,601.51	-5,772.35	33.61	5,772.45	0.00	0.00	0.00
16,400.00	90.52	179.58	10,600.59	-5,872.34	34.35	5,872.44	0.00	0.00	0.00
16,500.00	90.52	179.58	10,599.68	-5,972.33	35.09	5,972.44	0.00	0.00	0.00
16,600.00	90.52	179.58	10,598.77	-6,072.33	35.83	6,072.43	0.00	0.00	0.00
16,700.00	90.52	179.58	10,597.85	-6,172.32	36.57	6,172.43	0.00	0.00	0.00
16,800.00	90.52	179.58	10,596.94	-6,272.31	37.31	6,272.42	0.00	0.00	0.00
16,900.00	90.52	179.58	10,596.03	-6,372.31	38.05	6,372.42	0.00	0.00	0.00
17,000.00	90.52	179.58	10,595.12	-6,472.30	38.79	6,472.42	0.00	0.00	0.00
17,100.00	90.52	179.58	10,594.20	-6,572.29	39.53	6,572.41	0.00	0.00	0.00
17,200.00	90.52	179.58	10,593.29	-6,672.29	40.28	6,672.41	0.00	0.00	0.00
17,300.00	90.52	179.58	10,592.38	-6,772.28	41.02	6,772.40	0.00	0.00	0.00
17,400.00	90.52	179.58	10,591.47	-6,872.27	41.76	6,872.40	0.00	0.00	0.00
17,500.00	90.52	179.58	10,590.55	-6,972.27	42.50	6,972.39	0.00	0.00	0.00
17,600.00	90.52	179.58	10,589.64	-7,072.26	43.24	7,072.39	0.00	0.00	0.00
17,700.00	90.52	179.58	10,588.73	-7,172.25	43.98	7,172.39	0.00	0.00	0.00
17,800.00	90.52	179.58	10,587.82	-7,272.24	44.72	7,272.38	0.00	0.00	0.00
17,900.00	90.52	179.58	10,586.90	-7,372.24	45.46	7,372.38	0.00	0.00	0.00
18,000.00	90.52	179.58	10,585.99	-7,472.23	46.20	7,472.37	0.00	0.00	0.00
18,108.63	90.52	179.58	10,585.00	-7,580.85	47.00	7,581.00	0.00	0.00	0.00

TD at 18108.63 - PBHL (TU 100H)

LEAM Drilling Systems LLC

Planning Report

Database:	EDM 5000.1 Multi User Db	Local Co-ordinate Reference:	Well Thistle Unit 100H
Company:	Devon Energy	TVD Reference:	3713.2' GE + 23.5' KB @ 3736.70usft
Project:	Lea County, NM (NAD-83)	MD Reference:	3713.2' GE + 23.5' KB @ 3736.70usft
Site:	Thistle Unit Sec 22-27 Trac Pad	North Reference:	Grid
Well:	Thistle Unit 100H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #2		

Design Targets									
Target Name	Dip Angle	Dip Dir.	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
- hit/miss target	(°)	(°)	(usft)	(usft)	(usft)	(usft)	(usft)		
- Shape									
SHL (TU 100H)	0.00	0.01	0.00	0.00	0.00	472,481.79	781,172.75	32° 17' 47.5433 N	103° 33' 25.7153 W
- plan hits target center									
- Point									
PBHL (TU 100H)	0.00	0.00	10,585.00	-7,580.85	47.00	464,900.94	781,219.75	32° 16' 32.5270 N	103° 33' 25.8069 W
- plan hits target center									
- Point									

Plan Annotations					
Measured Depth	Vertical Depth	Local Coordinates			
(usft)	(usft)	+N/-S (usft)	+E/-W (usft)	Comment	
4,000.00	4,000.00	0.00	0.00	Start Build 1.00	
4,315.53	4,315.37	8.66	-0.72	Start 1872.10 hold at 4315.53 MD	
6,187.63	6,184.63	111.34	-9.28	Start Drop -1.00	
6,503.16	6,500.00	120.00	-10.00	Start 3577.07 hold at 6503.16 MD	
10,080.23	10,077.07	120.00	-10.00	Start DLS 10.00 TFO 179.58	
10,985.46	10,650.00	-458.17	-5.72	Start 7123.17 hold at 10985.46 MD	
18,108.63	10,585.00	-7,580.85	47.00	TD at 18108.63	