#### UNITED STATES

# DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

| Sundry Notices and Reports on Wells   | *       |   |
|---|---------|---|
| 1. Type of Well GAS   | 5.      | Lease Number<br>SF-079382<br>If Indian, All. or<br>Tribe Name   |
| 2. Name of Operator  PESOURCES  OIL & GAS COMPANY  3. Address & Phone No. of Operator  PO Box 4289, Farmington, NM 87499 (505) 326-9700   | ONY .   | Unit Agreement Name<br>San Juan 30-6 Unit   |
| 3. Address & Phone No. of Operator PO Box 4289, Farmington, NM 87499 (505) 326-9700  4. Location of Well, Footage, Sec., T, R, M 840'FNL, 790'FWL, Sec.23, T-30-N, R-7-W, NMPM  | 10.     | Well Name & Number San Juan 30-6 Unit #75A API Well No. 30-039-25446 Field and Pool Blanco Mesaverde County and State Rio Arriba Co, NM |
| 12. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT,   | OTHER   | DATA  |
| Recompletion New Co Subsequent Report Plugging Back Non-Ro  | Shut o  | tion<br>Fracturing<br>ff  |
| 13. Describe Proposed or Completed Operations   |         |   |
| It is intended to run a spinner survey in the subject we procedure and wellbore diagram.  | ll acco | RECEIVED BLM 5: 03 to 070 FARMANGION, NM  |
| 14. I hereby certify that the foregoing is true and correct.  Signed Hall Hill Title Regulatory Administration  |         | e 6/30/99   |
| (This space for Federal or State Office use)  APPROVED BY STORY  CONDITION OF APPROVAL if a CONDITION OF APPROVAL IN TAXABLE CONDITION OF APPROXICE | trc_    | JUL 2 0 1999  |

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

## San Juan 30-6 Unit #75A

Unit D, Section 23, T30N, R07W Rio Arriba County, New Mexico Elevation 6290' GL, 6302' KB LAT: 36° 48.1769' Long: 107° 32.7466'

### Summary:

The San Juan 30-6 Unit #75A was spudded in September of 1994 and was originally completed in the Point Lookout, Menefee, Cliff House, and Lewis in three stages. A spinner survey will be run on this well to help quantify the contribution of the Lewis in the 30-6 Unit. This data, along with data from other spinner surveys and the Shale Data Wells, will also be used in the completion design optimization of the Lewis.

#### Procedure:

1. Comply with all NMOCD, BLM, and BR regulations. Conduct daily safety meetings for all personnel on location.

# DO NOT KILL WELL. ANY FLUIDS USED IN WELLBORE WILL INVALIDATE DATA. IF FLUIDS ARE REQUIRED, CONTACT MICHELE QUISEL TO DISCUSS ALTERNATIVES.

- 2. Inspect location and wellhead and install rig anchors prior to rig move if needed.
- 3. RU slickline unit. RIH w/ slickline and set tubing choke in FN @ 5553 ' (1.81" I.D. bore). RD slickline unit.
- 4. MIRU. Check all safety equipment to insure proper location and working order. ND wellhead and NU BOP, spool, stripping head and blooie line to pit. Continue to flow well through casing valve. Flow well through casing valve and blow well through blooie line to pit.
- 5. Strip178 jts. 2-3/8" 4.7# J-55 tubing through stripping head and stand back. SI rams on BOP. ND stripping head. Place well back on production down the line.

### THE WELL WILL REMAIN ON PRODUCTION DURING THE ENTIRE SPINNER SURVEY.

- 6. RU Schlumberger and full lubricator. Open rams on BOP and RIH w/ spinner flowmeter tool/GR/CCL/Gradio. Correlate depth to GR/CCL logs provided by the engineer on location.
- 7. Take spinner survey readings at the following stations:

| • | Station #1 | 4240' | Top of Otero Chacra        |
|---|------------|-------|----------------------------|
| • | Station #2 | 4360' | Top of Middle Bench        |
| • | Station #3 | 4760' | Top of Upper Cliff House   |
| • | Station #4 | 4950' | Top of Massive Cliff House |

8. Tag bottom w/ spinner tool. POOH w/ spinner flowmeter tool/GR/CCL/Gradio and SI rams on BOP. RD and release Schlumberger.

## San Juan 30-6 Unit #75A

Unit D, Section 23, T30N, R07W Rio Arriba County, New Mexico Elevation 6290' GL, 6302' KB LAT: 36° 48.1769' Long: 107° 32.7466'

9A. If fill, TIH w/ 3-7/8" bit and CO to PBTD. TOOH.

9. NU stripping head. Open rams on BOP. Strip 178 jts. 2-3/8" 4.7# J-55 tubing w/ expendable check and seating nipple one joint off bottom and land tubing @ 5586'. ND stripping head, BOP, spool, and blooie line. NU wellhead. Pump off expendable check. Place well on production. RD and release rig.

Recommend: Michely.

Approve: Brucal Bouge 6.29.99
Drilling Superintendent

Vendors:

Wireline: Schlumberger 328-5006

Michele Quisel Office: 324-6162 Pager: 326-8196 Home: 564-9097 Steve Campbell Pager: 564-1902 Office: 326-9546 Home: 325-8218 Hans Dube Office: 326-9555 Home: 564-9401 Glen Christiansen Office: 326-9733 Home: 327-5089


## San Juan 30-6 Unit #75A

840' FNL, 790' FWL Unit D Sec. 23, T-30 R-07W Rio Arriba County, New Mexico

KB 6302

GL 6290

LAT: 36 48.1769' LONG: 107 32.7466'

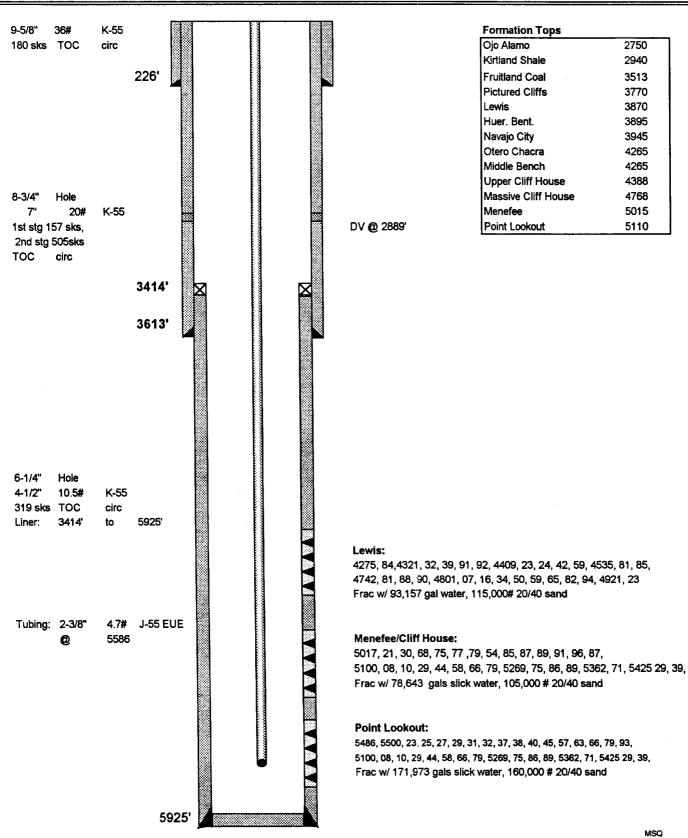

TD=

PBTD=

5925

5808

6/21/99