


Project: Lea County, NM
Site: Angus State 24-35 16 605H
Well: 605H
Wellbore: Lateral
Design: Plan #1
Rig: Cactus 139
Job: M18116

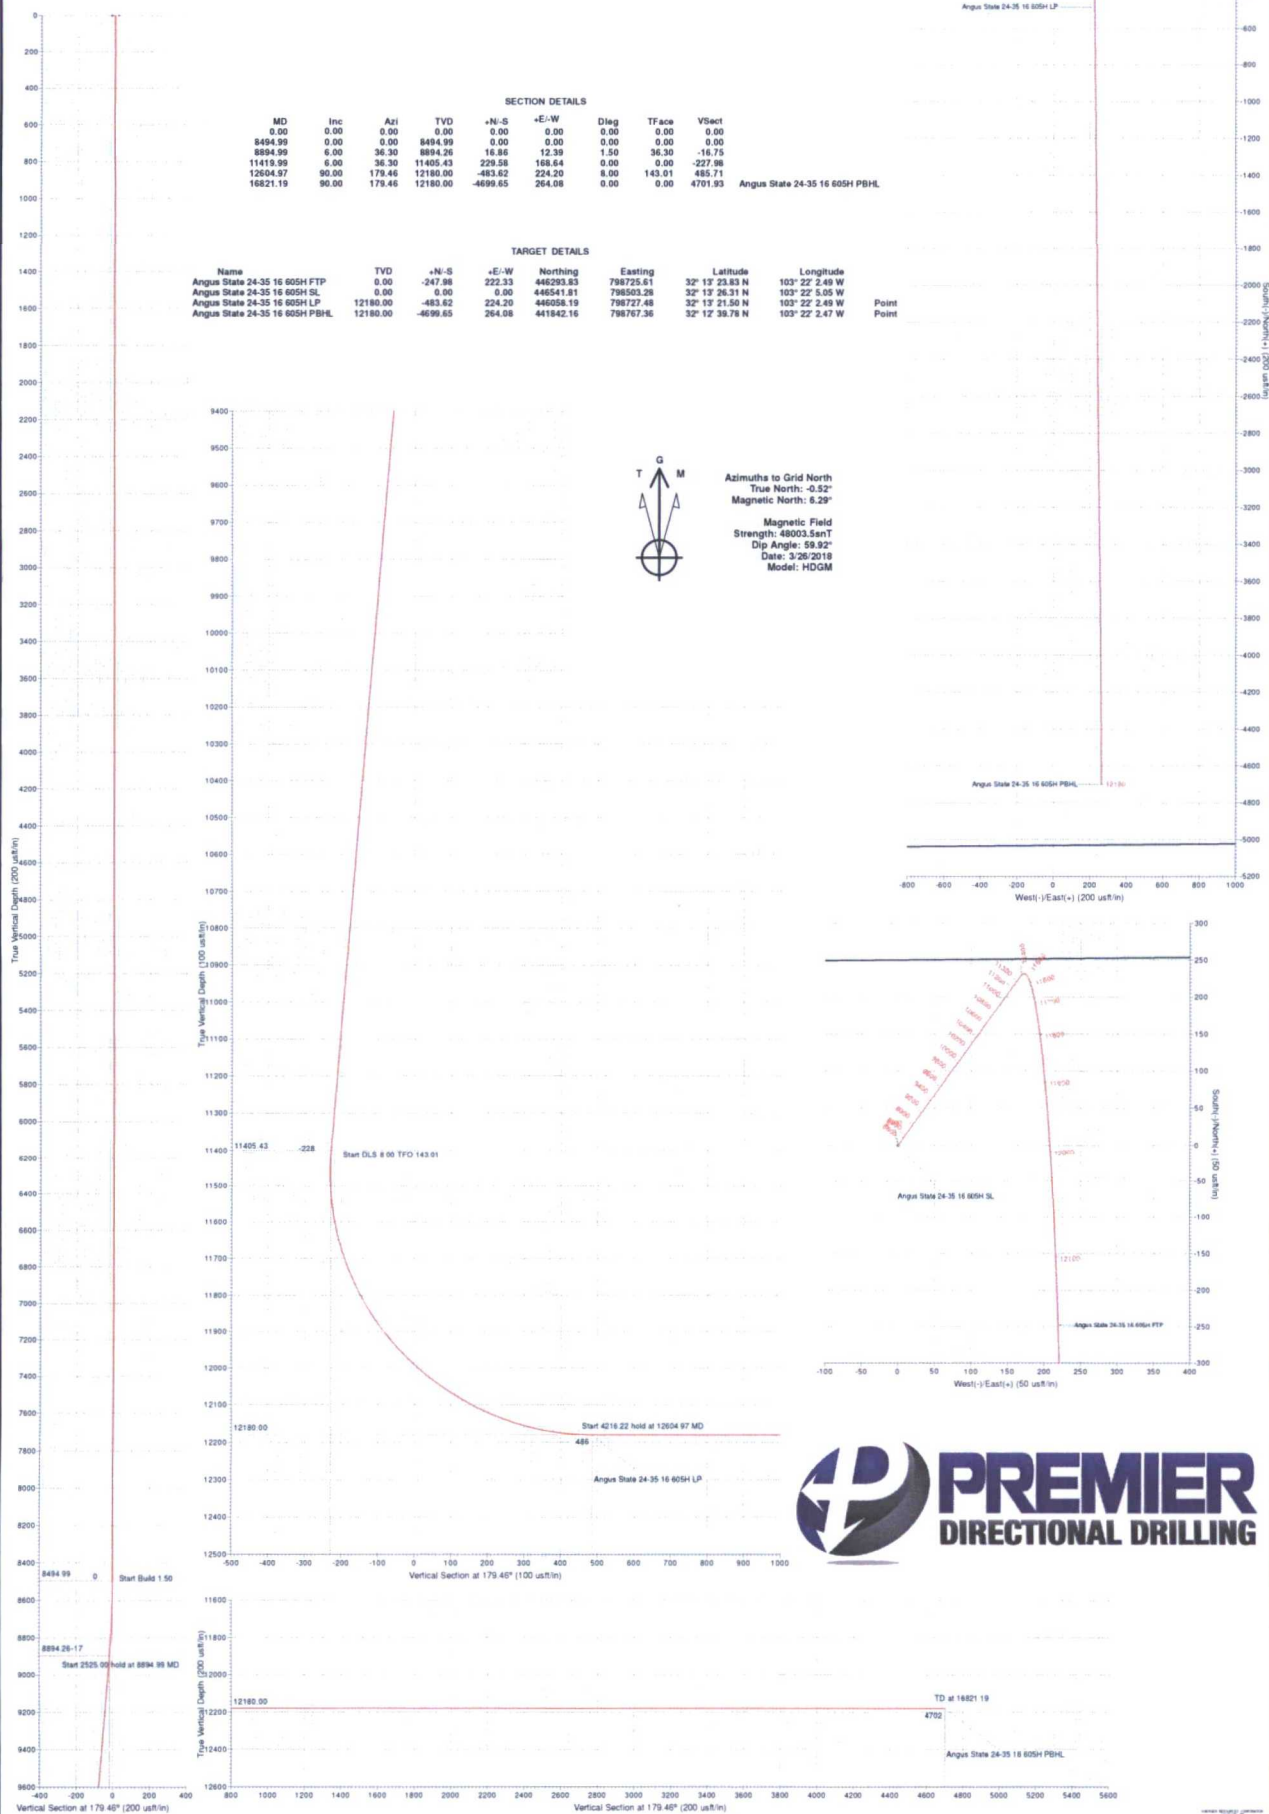

Planning Report

Database:	EDM 5000.14 Multi User	Local Co-ordinate Reference:	Well 605H
Company:	ENERGEN RESOURCES CORPORATION	TVD Reference:	3372+25 @ 3397.00usft (Cactus139)
Project:	Lea County, NM	MD Reference:	3372+25 @ 3397.00usft (Cactus139)
Site:	Angus State 24-35 16 605H	North Reference:	Grid
Well:	605H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Lateral		
Design:	Plan #1		

Project	Lea County, NM		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site	Angus State 24-35 16 605H					
Site Position:		Northing:	446,541.81 usft	Latitude:	32° 13' 26.31 N	
From:	Map	Easting:	798,503.28 usft	Longitude:	103° 22' 5.05 W	
Position Uncertainty:		0.00 usft	Slot Radius:	13.200 in	Grid Convergence:	0.51

Well	605H					
Well Position	+N/-S	0.00 usft	Northing:	446,541.81 usft	Latitude:	32° 13' 26.31 N
	+E/-W	0.00 usft	Easting:	798,503.28 usft	Longitude:	103° 22' 5.05 W
Position Uncertainty		0.00 usft	Wellhead Elevation:		Ground Level:	3,372.00 usft

Wellbore	Lateral				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	HDGM	3/26/2018	6.80	59.92	48,004

Design	Plan #1			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.00	0.00	0.00	179.46

Plan Survey Tool Program	Date	3/5/2018		
Depth From (usft)	Depth To (usft)	Survey (Wellbore)	Tool Name	Remarks
1	0.00	16,821.19 Plan #1 (Lateral)	MWD+HRGM	
			OWSG MWD + HRGM	

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
8,494.99	0.00	0.00	8,494.99	0.00	0.00	0.00	0.00	0.00	0.00	
8,894.99	6.00	36.30	8,894.26	16.86	12.39	1.50	1.50	0.00	36.30	
11,419.99	6.00	36.30	11,405.43	229.58	168.64	0.00	0.00	0.00	0.00	
12,604.97	90.00	179.46	12,180.00	-483.62	224.20	8.00	7.09	12.08	143.01	
16,821.19	90.00	179.46	12,180.00	-4,699.65	264.08	0.00	0.00	0.00	0.00	Angus State 24-35 16

Planning Report

Database:	EDM 5000.14 Multi User	Local Co-ordinate Reference:	Well 605H
Company:	ENERGEN RESOURCES CORPORATION	TVD Reference:	3372+25 @ 3397.00usft (Cactus139)
Project:	Lea County, NM	MD Reference:	3372+25 @ 3397.00usft (Cactus139)
Site:	Angus State 24-35 16 605H	North Reference:	Grid
Well:	605H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Lateral		
Design:	Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,400.00	0.00	0.00	0.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00
2,600.00	0.00	0.00	2,600.00	0.00	0.00	0.00	0.00	0.00	0.00
2,700.00	0.00	0.00	2,700.00	0.00	0.00	0.00	0.00	0.00	0.00
2,800.00	0.00	0.00	2,800.00	0.00	0.00	0.00	0.00	0.00	0.00
2,900.00	0.00	0.00	2,900.00	0.00	0.00	0.00	0.00	0.00	0.00
3,000.00	0.00	0.00	3,000.00	0.00	0.00	0.00	0.00	0.00	0.00
3,100.00	0.00	0.00	3,100.00	0.00	0.00	0.00	0.00	0.00	0.00
3,200.00	0.00	0.00	3,200.00	0.00	0.00	0.00	0.00	0.00	0.00
3,300.00	0.00	0.00	3,300.00	0.00	0.00	0.00	0.00	0.00	0.00
3,400.00	0.00	0.00	3,400.00	0.00	0.00	0.00	0.00	0.00	0.00
3,500.00	0.00	0.00	3,500.00	0.00	0.00	0.00	0.00	0.00	0.00
3,600.00	0.00	0.00	3,600.00	0.00	0.00	0.00	0.00	0.00	0.00
3,700.00	0.00	0.00	3,700.00	0.00	0.00	0.00	0.00	0.00	0.00
3,800.00	0.00	0.00	3,800.00	0.00	0.00	0.00	0.00	0.00	0.00
3,900.00	0.00	0.00	3,900.00	0.00	0.00	0.00	0.00	0.00	0.00
4,000.00	0.00	0.00	4,000.00	0.00	0.00	0.00	0.00	0.00	0.00
4,100.00	0.00	0.00	4,100.00	0.00	0.00	0.00	0.00	0.00	0.00
4,200.00	0.00	0.00	4,200.00	0.00	0.00	0.00	0.00	0.00	0.00
4,300.00	0.00	0.00	4,300.00	0.00	0.00	0.00	0.00	0.00	0.00
4,400.00	0.00	0.00	4,400.00	0.00	0.00	0.00	0.00	0.00	0.00
4,500.00	0.00	0.00	4,500.00	0.00	0.00	0.00	0.00	0.00	0.00
4,600.00	0.00	0.00	4,600.00	0.00	0.00	0.00	0.00	0.00	0.00
4,700.00	0.00	0.00	4,700.00	0.00	0.00	0.00	0.00	0.00	0.00
4,800.00	0.00	0.00	4,800.00	0.00	0.00	0.00	0.00	0.00	0.00
4,900.00	0.00	0.00	4,900.00	0.00	0.00	0.00	0.00	0.00	0.00
5,000.00	0.00	0.00	5,000.00	0.00	0.00	0.00	0.00	0.00	0.00
5,100.00	0.00	0.00	5,100.00	0.00	0.00	0.00	0.00	0.00	0.00
5,200.00	0.00	0.00	5,200.00	0.00	0.00	0.00	0.00	0.00	0.00
5,300.00	0.00	0.00	5,300.00	0.00	0.00	0.00	0.00	0.00	0.00

Planning Report

Database:	EDM 5000.14 Multi User	Local Co-ordinate Reference:	Well 605H
Company:	ENERGEN RESOURCES CORPORATION	TVD Reference:	3372+25 @ 3397.00usft (Cactus139)
Project:	Lea County, NM	MD Reference:	3372+25 @ 3397.00usft (Cactus139)
Site:	Angus State 24-35 16 605H	North Reference:	Grid
Well:	605H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Lateral		
Design:	Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
5,400.00	0.00	0.00	5,400.00	0.00	0.00	0.00	0.00	0.00	0.00
5,500.00	0.00	0.00	5,500.00	0.00	0.00	0.00	0.00	0.00	0.00
5,600.00	0.00	0.00	5,600.00	0.00	0.00	0.00	0.00	0.00	0.00
5,700.00	0.00	0.00	5,700.00	0.00	0.00	0.00	0.00	0.00	0.00
5,800.00	0.00	0.00	5,800.00	0.00	0.00	0.00	0.00	0.00	0.00
5,900.00	0.00	0.00	5,900.00	0.00	0.00	0.00	0.00	0.00	0.00
6,000.00	0.00	0.00	6,000.00	0.00	0.00	0.00	0.00	0.00	0.00
6,100.00	0.00	0.00	6,100.00	0.00	0.00	0.00	0.00	0.00	0.00
6,200.00	0.00	0.00	6,200.00	0.00	0.00	0.00	0.00	0.00	0.00
6,300.00	0.00	0.00	6,300.00	0.00	0.00	0.00	0.00	0.00	0.00
6,400.00	0.00	0.00	6,400.00	0.00	0.00	0.00	0.00	0.00	0.00
6,500.00	0.00	0.00	6,500.00	0.00	0.00	0.00	0.00	0.00	0.00
6,600.00	0.00	0.00	6,600.00	0.00	0.00	0.00	0.00	0.00	0.00
6,700.00	0.00	0.00	6,700.00	0.00	0.00	0.00	0.00	0.00	0.00
6,800.00	0.00	0.00	6,800.00	0.00	0.00	0.00	0.00	0.00	0.00
6,900.00	0.00	0.00	6,900.00	0.00	0.00	0.00	0.00	0.00	0.00
7,000.00	0.00	0.00	7,000.00	0.00	0.00	0.00	0.00	0.00	0.00
7,100.00	0.00	0.00	7,100.00	0.00	0.00	0.00	0.00	0.00	0.00
7,200.00	0.00	0.00	7,200.00	0.00	0.00	0.00	0.00	0.00	0.00
7,300.00	0.00	0.00	7,300.00	0.00	0.00	0.00	0.00	0.00	0.00
7,400.00	0.00	0.00	7,400.00	0.00	0.00	0.00	0.00	0.00	0.00
7,500.00	0.00	0.00	7,500.00	0.00	0.00	0.00	0.00	0.00	0.00
7,600.00	0.00	0.00	7,600.00	0.00	0.00	0.00	0.00	0.00	0.00
7,700.00	0.00	0.00	7,700.00	0.00	0.00	0.00	0.00	0.00	0.00
7,800.00	0.00	0.00	7,800.00	0.00	0.00	0.00	0.00	0.00	0.00
7,900.00	0.00	0.00	7,900.00	0.00	0.00	0.00	0.00	0.00	0.00
8,000.00	0.00	0.00	8,000.00	0.00	0.00	0.00	0.00	0.00	0.00
8,100.00	0.00	0.00	8,100.00	0.00	0.00	0.00	0.00	0.00	0.00
8,200.00	0.00	0.00	8,200.00	0.00	0.00	0.00	0.00	0.00	0.00
8,300.00	0.00	0.00	8,300.00	0.00	0.00	0.00	0.00	0.00	0.00
8,400.00	0.00	0.00	8,400.00	0.00	0.00	0.00	0.00	0.00	0.00
8,494.99	0.00	0.00	8,494.99	0.00	0.00	0.00	0.00	0.00	0.00
8,500.00	0.08	36.30	8,500.00	0.00	0.00	0.00	1.50	1.50	0.00
8,600.00	1.58	36.30	8,599.99	1.16	0.85	-1.16	1.50	1.50	0.00
8,700.00	3.08	36.30	8,699.90	4.43	3.26	-4.40	1.50	1.50	0.00
8,800.00	4.58	36.30	8,799.68	9.81	7.21	-9.74	1.50	1.50	0.00
8,894.99	6.00	36.30	8,894.26	16.86	12.39	-16.75	1.50	1.50	0.00
8,900.00	6.00	36.30	8,899.24	17.29	12.70	-17.17	0.00	0.00	0.00
9,000.00	6.00	36.30	8,998.69	25.71	18.89	-25.53	0.00	0.00	0.00
9,100.00	6.00	36.30	9,098.15	34.13	25.07	-33.90	0.00	0.00	0.00
9,200.00	6.00	36.30	9,197.60	42.56	31.26	-42.26	0.00	0.00	0.00
9,300.00	6.00	36.30	9,297.05	50.98	37.45	-50.63	0.00	0.00	0.00
9,400.00	6.00	36.30	9,396.50	59.41	43.64	-58.99	0.00	0.00	0.00
9,500.00	6.00	36.30	9,495.96	67.83	49.83	-67.36	0.00	0.00	0.00
9,600.00	6.00	36.30	9,595.41	76.26	56.02	-75.72	0.00	0.00	0.00
9,700.00	6.00	36.30	9,694.86	84.68	62.20	-84.09	0.00	0.00	0.00
9,800.00	6.00	36.30	9,794.31	93.10	68.39	-92.46	0.00	0.00	0.00
9,900.00	6.00	36.30	9,893.76	101.53	74.58	-100.82	0.00	0.00	0.00
10,000.00	6.00	36.30	9,993.22	109.95	80.77	-109.19	0.00	0.00	0.00
10,100.00	6.00	36.30	10,092.67	118.38	86.96	-117.55	0.00	0.00	0.00
10,200.00	6.00	36.30	10,192.12	126.80	93.14	-125.92	0.00	0.00	0.00
10,300.00	6.00	36.30	10,291.57	135.23	99.33	-134.28	0.00	0.00	0.00
10,400.00	6.00	36.30	10,391.02	143.65	105.52	-142.65	0.00	0.00	0.00
10,500.00	6.00	36.30	10,490.48	152.07	111.71	-151.01	0.00	0.00	0.00

Planning Report

Database:	EDM 5000.14 Multi User	Local Co-ordinate Reference:	Well 605H
Company:	ENERGEN RESOURCES CORPORATION	TVD Reference:	3372+25 @ 3397.00usft (Cactus139)
Project:	Lea County, NM	MD Reference:	3372+25 @ 3397.00usft (Cactus139)
Site:	Angus State 24-35 16 605H	North Reference:	Grid
Well:	605H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Lateral		
Design:	Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
10,600.00	6.00	36.30	10,589.93	160.50	117.90	-159.38	0.00	0.00	0.00
10,700.00	6.00	36.30	10,689.38	168.92	124.09	-167.75	0.00	0.00	0.00
10,800.00	6.00	36.30	10,788.83	177.35	130.27	-176.11	0.00	0.00	0.00
10,900.00	6.00	36.30	10,888.29	185.77	136.46	-184.48	0.00	0.00	0.00
11,000.00	6.00	36.30	10,987.74	194.20	142.65	-192.84	0.00	0.00	0.00
11,100.00	6.00	36.30	11,087.19	202.62	148.84	-201.21	0.00	0.00	0.00
11,200.00	6.00	36.30	11,186.64	211.04	155.03	-209.57	0.00	0.00	0.00
11,300.00	6.00	36.30	11,286.09	219.47	161.22	-217.94	0.00	0.00	0.00
11,400.00	6.00	36.30	11,385.55	227.89	167.40	-226.30	0.00	0.00	0.00
11,419.99	6.00	36.30	11,405.43	229.58	168.64	-227.98	0.00	0.00	0.00
11,450.00	4.33	55.80	11,435.32	231.48	170.51	-229.86	8.00	-5.57	64.99
11,500.00	3.95	113.43	11,485.21	231.85	173.65	-230.21	8.00	-0.77	115.26
11,550.00	6.66	146.79	11,535.00	228.74	176.81	-227.07	8.00	5.43	66.71
11,600.00	10.25	159.06	11,584.45	222.16	179.99	-220.45	8.00	7.18	24.55
11,650.00	14.06	164.89	11,633.32	212.13	183.17	-210.40	8.00	7.62	11.65
11,700.00	17.96	168.24	11,681.37	198.72	186.32	-196.95	8.00	7.79	6.72
11,750.00	21.89	170.43	11,728.37	181.98	189.44	-180.18	8.00	7.86	4.38
11,800.00	25.84	171.98	11,774.09	161.99	192.51	-160.17	8.00	7.90	3.09
11,850.00	29.80	173.14	11,818.30	138.85	195.52	-137.01	8.00	7.93	2.32
11,900.00	33.77	174.05	11,860.80	112.69	198.45	-110.81	8.00	7.94	1.82
11,950.00	37.75	174.79	11,901.36	83.61	201.28	-81.71	8.00	7.95	1.48
12,000.00	41.73	175.41	11,939.80	51.77	204.00	-49.84	8.00	7.96	1.23
12,050.00	45.71	175.93	11,975.93	17.31	206.60	-15.37	8.00	7.97	1.06
12,100.00	49.70	176.39	12,009.57	-19.58	209.07	21.55	8.00	7.97	0.92
12,150.00	53.69	176.80	12,040.56	-58.74	211.40	60.73	8.00	7.97	0.82
12,200.00	57.67	177.17	12,068.74	-99.97	213.56	101.98	8.00	7.98	0.74
12,250.00	61.66	177.51	12,093.99	-143.07	215.56	145.09	8.00	7.98	0.68
12,300.00	65.65	177.82	12,116.17	-187.83	217.38	189.87	8.00	7.98	0.63
12,350.00	69.64	178.12	12,135.18	-234.04	219.02	236.09	8.00	7.98	0.59
12,400.00	73.64	178.40	12,150.93	-281.46	220.46	283.52	8.00	7.98	0.56
12,450.00	77.63	178.67	12,163.33	-329.87	221.70	331.94	8.00	7.98	0.54
12,500.00	81.62	178.93	12,172.33	-379.03	222.73	381.11	8.00	7.98	0.52
12,550.00	85.61	179.18	12,177.89	-428.70	223.55	430.79	8.00	7.98	0.51
12,604.97	90.00	179.46	12,180.00	-483.62	224.20	485.71	8.00	7.98	0.50
12,700.00	90.00	179.46	12,180.00	-578.64	225.10	580.74	0.00	0.00	0.00
12,800.00	90.00	179.46	12,180.00	-678.64	226.05	680.74	0.00	0.00	0.00
12,900.00	90.00	179.46	12,180.00	-778.63	226.99	780.74	0.00	0.00	0.00
13,000.00	90.00	179.46	12,180.00	-878.63	227.94	880.74	0.00	0.00	0.00
13,100.00	90.00	179.46	12,180.00	-978.62	228.88	980.74	0.00	0.00	0.00
13,200.00	90.00	179.46	12,180.00	-1,078.62	229.83	1,080.74	0.00	0.00	0.00
13,300.00	90.00	179.46	12,180.00	-1,178.62	230.78	1,180.74	0.00	0.00	0.00
13,400.00	90.00	179.46	12,180.00	-1,278.61	231.72	1,280.74	0.00	0.00	0.00
13,500.00	90.00	179.46	12,180.00	-1,378.61	232.67	1,380.74	0.00	0.00	0.00
13,600.00	90.00	179.46	12,180.00	-1,478.60	233.61	1,480.74	0.00	0.00	0.00
13,700.00	90.00	179.46	12,180.00	-1,578.60	234.56	1,580.74	0.00	0.00	0.00
13,800.00	90.00	179.46	12,180.00	-1,678.59	235.51	1,680.74	0.00	0.00	0.00
13,900.00	90.00	179.46	12,180.00	-1,778.59	236.45	1,780.74	0.00	0.00	0.00
14,000.00	90.00	179.46	12,180.00	-1,878.58	237.40	1,880.74	0.00	0.00	0.00
14,100.00	90.00	179.46	12,180.00	-1,978.58	238.34	1,980.74	0.00	0.00	0.00
14,200.00	90.00	179.46	12,180.00	-2,078.58	239.29	2,080.74	0.00	0.00	0.00
14,300.00	90.00	179.46	12,180.00	-2,178.57	240.23	2,180.74	0.00	0.00	0.00
14,400.00	90.00	179.46	12,180.00	-2,278.57	241.18	2,280.74	0.00	0.00	0.00
14,500.00	90.00	179.46	12,180.00	-2,378.56	242.13	2,380.74	0.00	0.00	0.00
14,600.00	90.00	179.46	12,180.00	-2,478.56	243.07	2,480.74	0.00	0.00	0.00

Planning Report

Database:	EDM 5000.14 Multi User	Local Co-ordinate Reference:	Well 605H
Company:	ENERGEN RESOURCES CORPORATION	TVD Reference:	3372+25 @ 3397.00usft (Cactus139)
Project:	Lea County, NM	MD Reference:	3372+25 @ 3397.00usft (Cactus139)
Site:	Angus State 24-35 16 605H	North Reference:	Grid
Well:	605H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Lateral		
Design:	Plan #1		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
14,700.00	90.00	179.46	12,180.00	-2,578.55	244.02	2,580.74	0.00	0.00	0.00
14,800.00	90.00	179.46	12,180.00	-2,678.55	244.96	2,680.74	0.00	0.00	0.00
14,900.00	90.00	179.46	12,180.00	-2,778.54	245.91	2,780.74	0.00	0.00	0.00
15,000.00	90.00	179.46	12,180.00	-2,878.54	246.86	2,880.74	0.00	0.00	0.00
15,100.00	90.00	179.46	12,180.00	-2,978.54	247.80	2,980.74	0.00	0.00	0.00
15,200.00	90.00	179.46	12,180.00	-3,078.53	248.75	3,080.74	0.00	0.00	0.00
15,300.00	90.00	179.46	12,180.00	-3,178.53	249.69	3,180.74	0.00	0.00	0.00
15,400.00	90.00	179.46	12,180.00	-3,278.52	250.64	3,280.74	0.00	0.00	0.00
15,500.00	90.00	179.46	12,180.00	-3,378.52	251.58	3,380.74	0.00	0.00	0.00
15,600.00	90.00	179.46	12,180.00	-3,478.51	252.53	3,480.74	0.00	0.00	0.00
15,700.00	90.00	179.46	12,180.00	-3,578.51	253.48	3,580.74	0.00	0.00	0.00
15,800.00	90.00	179.46	12,180.00	-3,678.50	254.42	3,680.74	0.00	0.00	0.00
15,900.00	90.00	179.46	12,180.00	-3,778.50	255.37	3,780.74	0.00	0.00	0.00
16,000.00	90.00	179.46	12,180.00	-3,878.49	256.31	3,880.74	0.00	0.00	0.00
16,100.00	90.00	179.46	12,180.00	-3,978.49	257.26	3,980.74	0.00	0.00	0.00
16,200.00	90.00	179.46	12,180.00	-4,078.49	258.20	4,080.74	0.00	0.00	0.00
16,300.00	90.00	179.46	12,180.00	-4,178.48	259.15	4,180.74	0.00	0.00	0.00
16,400.00	90.00	179.46	12,180.00	-4,278.48	260.10	4,280.74	0.00	0.00	0.00
16,500.00	90.00	179.46	12,180.00	-4,378.47	261.04	4,380.74	0.00	0.00	0.00
16,600.00	90.00	179.46	12,180.00	-4,478.47	261.99	4,480.74	0.00	0.00	0.00
16,700.00	90.00	179.46	12,180.00	-4,578.46	262.93	4,580.74	0.00	0.00	0.00
16,800.00	90.00	179.46	12,180.00	-4,678.46	263.88	4,680.74	0.00	0.00	0.00
16,821.19	90.00	179.46	12,180.00	-4,699.65	264.08	4,701.93	0.00	0.00	0.00