

Ground Level	3315.90
--------------	---------




PHOENIX
TECHNOLOGY SERVICES



Azimuths to Grid North
True North: -0.51°
Magnetic North: 6.21°

Magnetic Field
Strength: 47904.5nT
Dip Angle: 59.86°
Date: 9/26/2018
Model: MVHD

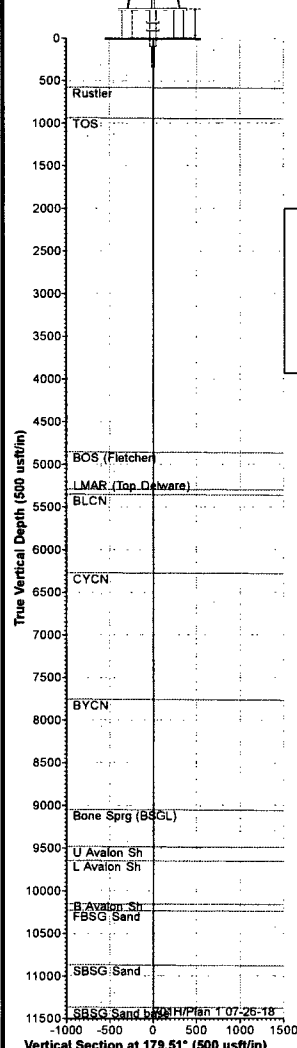

WELL DETAILS								
3315.90								
+N-S	+E-W	Northing	Easting	Latitude	Longitude			
0.00	0.00	436156.90	796201.00	32° 11' 43.77301 N	103° 22' 32.92361 W			

DESIGN TARGET DETAILS								
Name	TVD	+N-S	+E-W	Northing	Easting	Latitude	Longitude	
LTP - Coonskin Fee 701H	0.00	-7541.50	64.50	428611.40	796265.50	32° 10' 29.14375 N	103° 22' 32.95431 W	
FTP - Coonskin Fee 701H	12436.00	-279.90	2.30	435879.00	796203.30	32° 11' 41.00319 N	103° 22' 32.92585 W	
BHL - Coonskin Fee 701H	12473.00	-7671.50	65.60	428487.40	796268.60	32° 10' 27.85729 N	103° 22' 32.95497 W	

SECTION DETAILS											
Sec	MD	Inc	Azi	TVD	+N-S	+E-W	Dleg	TFace	VSec	Target	Annotation
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
2	11883.05	0.00	0.00	11883.05	0.00	0.00	0.00	0.00	0.00		KOP: Begin 10.00°/100' Build
3	12769.06	89.70	179.51	12436.00	-569.95	4.87	10.00	179.51	569.97		LP: Hold 89.70° Inc at 179.51° Azi
4	19861.97	89.70	179.51	12473.00	-767.150	65.80	0.00	0.00	7671.78	BHL - Coonskin Fee 701H	TD at 19861.97

Map System: US State Plane 1927 (Exact solution)
Datum: NAD 1927 (NADCON CONUS)
Ellipsoid: Clarke 1866
Zone Name: New Mexico East 3001

Local Origin: Well 701H, Grid North

Latitude: 22° 11' 42.77201 N

Longitude: 103° 22' 32.92361 W

Grid East: 796201.00

Grid North: 436158.90

Scale Factor: 1.000

Geomagnetic Model: MVHD
Sample Date: 26-Sep-18
Magnetic Declination: 6.72°
p Angle from Horizontal: 59.86°
Magnetic Field Strength: 47904.47907984nT






To convert a Magnetic Direction to a Grid Direction, Add 6.21°
 To convert a Magnetic Direction to a True Direction, Add 6.72° East
 To convert a True Direction to a Grid Direction, Subtract 0.51°

FORMATION TOP DETAILS

NDPath	MDPath	Furster	DipAngle	DipDir
581.00	581.00	Romation	0.30	179.51
940.00	940.00	TOS	0.30	179.51
4859.00	4859.00	BOS (Fletcher)	0.30	179.51
5296.00	5296.00	LMAR (Top Dehaware)	0.30	179.51
5357.00	5357.00	BYCN	0.30	179.51
6276.00	6276.00	CYCN	0.30	179.51
7761.00	7761.00	BYCN	0.30	179.51
9051.00	9051.00	Bone Sprg (BSGL)	0.30	179.51
9483.00	9483.00	A Uvaton Sh	0.30	179.51
9848.00	9848.00	A Uvaton Sh	0.30	179.51
10153.00	10153.00	A Uvaton Sh	0.30	179.51
10232.00	10232.00	FBSS Sand	0.30	179.51
10872.00	10872.00	SRBG Sand	0.30	179.51
1137.00	1137.00	SSGS Sand base	0.30	179.51
11874.00	11874.00	SSGS Sand	0.30	179.51
12281.95	12331.86	WFMP	0.30	179.51

LEGEND

- 602H, OH, Plan 1 07-26-18 V0
----- 601H, OH, Plan 1 07-26-18 V0
----- 21Y, OH / Job# 62323, Surveys (McVay 8) V0
----- Plan 1 07-26-18

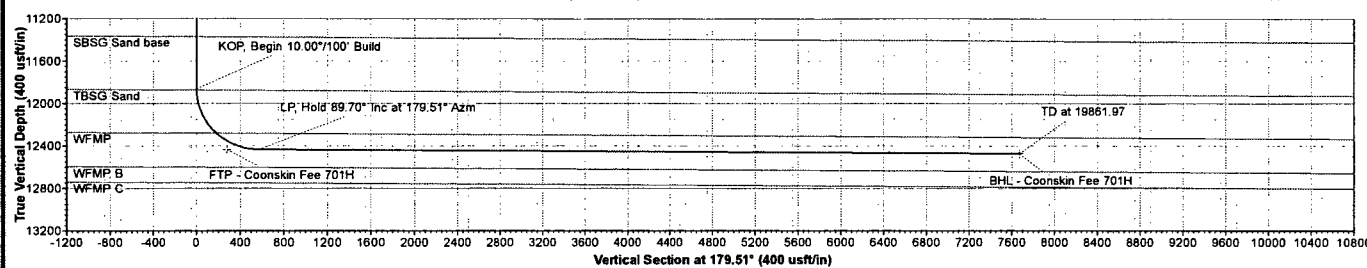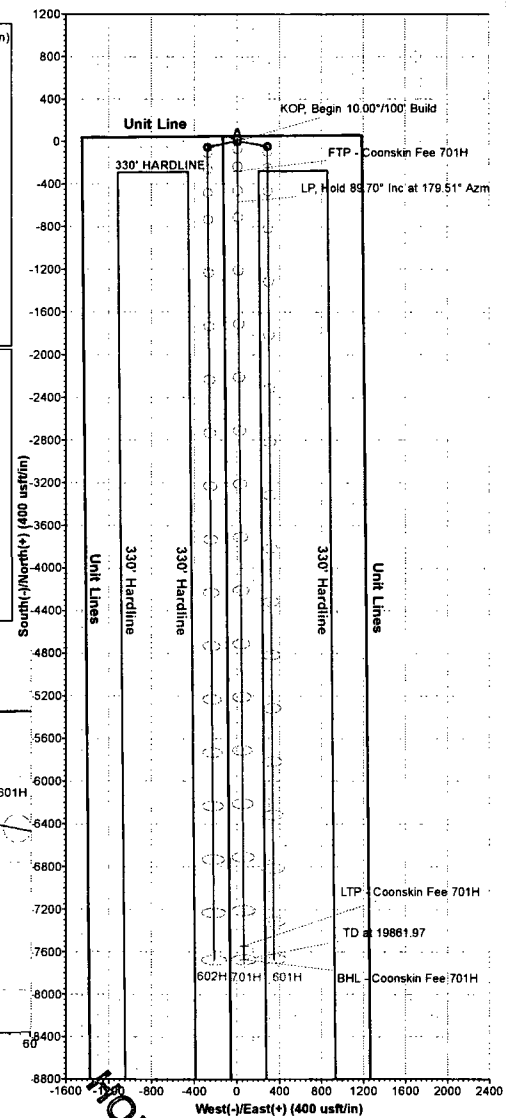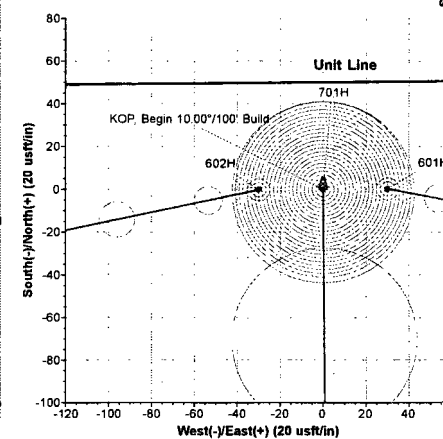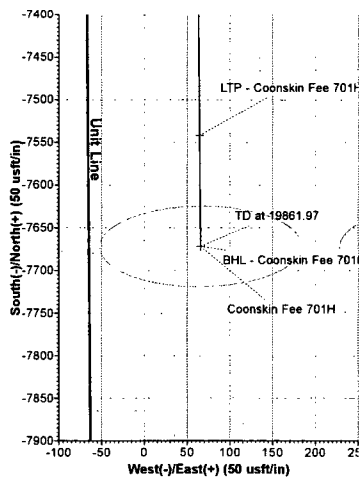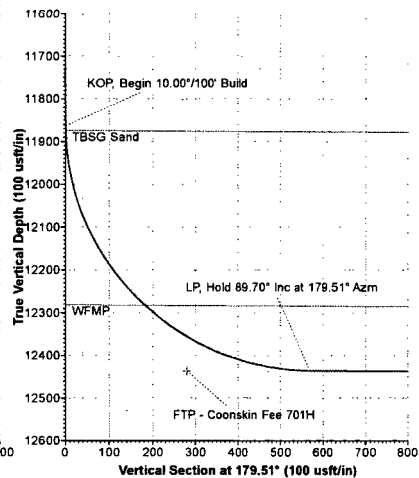

8800
-1600
-800
-400
0
West (-)

MOBES OCD

AUG 07 2018

RECEIVED



PHOENIX
TECHNOLOGY SERVICES

COG Operating LLC

Lea County, NM (NAD27 NME)

Coonskin Fee

701H

OH

Plan: Plan 1 07-26-18

HOBBS COO
AUG 07 2018
RECEIVED

Standard Planning Report

26 July, 2018



Database:	USA Compass	Local Co-ordinate Reference:	Well 701H
Company:	COG Operating LLC	TVD Reference:	RKB @ 3340.90usft (Precision 595)
Project:	Lea County, NM (NAD27 NME)	MD Reference:	RKB @ 3340.90usft (Precision 595)
Site:	Coonskin Fee	North Reference:	Grid
Well:	701H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 1 07-26-18		

Project	Lea County, NM (NAD27 NME)		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site	Coonskin Fee		
Site Position:		Northing:	436,159.30 usft
From:	Map	Easting:	796,231.00 usft
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "
		Latitude:	32° 11' 43.77433 N
		Longitude:	103° 22' 32.57448 W
		Grid Convergence:	0.51 °

Well	701H		
Well Position	+N/-S	-0.40 usft	Northing: 436,158.90 usft
	+E/-W	-30.00 usft	Easting: 796,201.00 usft
Position Uncertainty	0.00 usft	Wellhead Elevation:	Latitude: 32° 11' 43.77301 N
			Longitude: 103° 22' 32.92361 W
			Ground Level: 3,315.90 usft

Wellbore	OH		
Magnetics	Model Name	Sample Date	Declination
			(°)
	MVHD	9/26/2018	6.72
			Dip Angle
			(°)
			59.86
			Field Strength
			(nT)
			47,904.47907984

Design	Plan 1 07-26-18		
Audit Notes:			
Version:	Phase:	PROTOTYPE	Tie On Depth: 0.00
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W
	(usft)	(usft)	(usft)
	0.00	0.00	0.00
			Direction
			(°)
			179.51

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
11,863.05	0.00	0.00	11,863.05	0.00	0.00	0.00	0.00	0.00	0.00	
12,760.07	89.70	179.51	12,436.00	-569.95	4.87	10.00	10.00	20.01	179.51	
19,861.97	89.70	179.51	12,473.00	-7,671.50	65.60	0.00	0.00	0.00	0.00	BHL - Coonskin Fee

Database:	USA Compass	Local Co-ordinate Reference:	Well 701H
Company:	COG Operating LLC	TVD Reference:	RKB @ 3340.90usft (Precision 595)
Project:	Lea County, NM (NAD27 NME)	MD Reference:	RKB @ 3340.90usft (Precision 595)
Site:	Coonskin Fee	North Reference:	Grid
Well:	701H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 1 07-26-18		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
581.00	0.00	0.00	581.00	0.00	0.00	0.00	0.00	0.00	0.00	
Rustler										
940.00	0.00	0.00	940.00	0.00	0.00	0.00	0.00	0.00	0.00	
TOS										
4,859.00	0.00	0.00	4,859.00	0.00	0.00	0.00	0.00	0.00	0.00	
BOS (Fletcher)										
5,296.00	0.00	0.00	5,296.00	0.00	0.00	0.00	0.00	0.00	0.00	
LMAR (Top Delaware)										
5,357.00	0.00	0.00	5,357.00	0.00	0.00	0.00	0.00	0.00	0.00	
BLCN										
6,276.00	0.00	0.00	6,276.00	0.00	0.00	0.00	0.00	0.00	0.00	
CYCN										
7,761.00	0.00	0.00	7,761.00	0.00	0.00	0.00	0.00	0.00	0.00	
BYCN										
9,051.00	0.00	0.00	9,051.00	0.00	0.00	0.00	0.00	0.00	0.00	
Bone Sprg (BSGL)										
9,483.00	0.00	0.00	9,483.00	0.00	0.00	0.00	0.00	0.00	0.00	
U Avalon Sh										
9,648.00	0.00	0.00	9,648.00	0.00	0.00	0.00	0.00	0.00	0.00	
L Avalon Sh										
10,153.00	0.00	0.00	10,153.00	0.00	0.00	0.00	0.00	0.00	0.00	
B Avalon Sh										
10,232.00	0.00	0.00	10,232.00	0.00	0.00	0.00	0.00	0.00	0.00	
FBSG Sand										
10,872.00	0.00	0.00	10,872.00	0.00	0.00	0.00	0.00	0.00	0.00	
SBSG Sand										
11,371.00	0.00	0.00	11,371.00	0.00	0.00	0.00	0.00	0.00	0.00	
SBSG Sand base										
11,863.05	0.00	0.00	11,863.05	0.00	0.00	0.00	0.00	0.00	0.00	
KOP, Begin 10.00°/100' Build										
11,874.00	1.10	179.51	11,874.00	-0.10	0.00	0.10	10.00	10.00	0.00	
TBSG Sand										
11,900.00	3.70	179.51	11,899.97	-1.19	0.01	1.19	10.00	10.00	0.00	
12,000.00	13.70	179.51	11,998.70	-16.29	0.14	16.29	10.00	10.00	0.00	
12,100.00	23.70	179.51	12,093.30	-48.30	0.41	48.30	10.00	10.00	0.00	
12,200.00	33.70	179.51	12,180.91	-96.25	0.82	96.26	10.00	10.00	0.00	
12,300.00	43.70	179.51	12,258.86	-158.69	1.36	158.69	10.00	10.00	0.00	
12,332.86	46.98	179.51	12,281.95	-182.05	1.56	182.06	10.00	10.00	0.00	
WFMP										
12,400.00	53.70	179.51	12,324.78	-233.71	2.00	233.72	10.00	10.00	0.00	
12,500.00	63.70	179.51	12,376.68	-319.04	2.73	319.05	10.00	10.00	0.00	
12,600.00	73.70	179.51	12,412.96	-412.08	3.52	412.10	10.00	10.00	0.00	
12,700.00	83.70	179.51	12,432.54	-510.02	4.36	510.03	10.00	10.00	0.00	
12,760.07	89.70	179.51	12,436.00	-569.95	4.87	569.97	10.00	10.00	0.00	
LP, Hold 89.70° Inc at 179.51° Azm										
12,800.00	89.70	179.51	12,436.21	-609.88	5.22	609.91	0.00	0.00	0.00	
12,900.00	89.70	179.51	12,436.73	-709.88	6.07	709.91	0.00	0.00	0.00	
13,000.00	89.70	179.51	12,437.25	-809.87	6.93	809.90	0.00	0.00	0.00	
13,100.00	89.70	179.51	12,437.77	-909.87	7.78	909.90	0.00	0.00	0.00	
13,200.00	89.70	179.51	12,438.29	-1,009.86	8.64	1,009.90	0.00	0.00	0.00	
13,300.00	89.70	179.51	12,438.81	-1,109.86	9.49	1,109.90	0.00	0.00	0.00	

Database: USA Compass
Company: COG Operating LLC
Project: Lea County, NM (NAD27 NME)
Site: Coonskin Fee
Well: 701H
Wellbore: OH
Design: Plan 1 07-26-18

Local Co-ordinate Reference: Well 701H
TVD Reference: RKB @ 3340.90usft (Precision 595)
MD Reference: RKB @ 3340.90usft (Precision 595)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
13,400.00	89.70	179.51	12,439.33	-1,209.85	10.35	1,209.90	0.00	0.00	0.00
13,500.00	89.70	179.51	12,439.86	-1,309.85	11.20	1,309.90	0.00	0.00	0.00
13,600.00	89.70	179.51	12,440.38	-1,409.84	12.06	1,409.90	0.00	0.00	0.00
13,700.00	89.70	179.51	12,440.90	-1,509.84	12.91	1,509.90	0.00	0.00	0.00
13,800.00	89.70	179.51	12,441.42	-1,609.83	13.77	1,609.89	0.00	0.00	0.00
13,900.00	89.70	179.51	12,441.94	-1,709.83	14.62	1,709.89	0.00	0.00	0.00
14,000.00	89.70	179.51	12,442.46	-1,809.82	15.48	1,809.89	0.00	0.00	0.00
14,100.00	89.70	179.51	12,442.98	-1,909.82	16.33	1,909.89	0.00	0.00	0.00
14,200.00	89.70	179.51	12,443.50	-2,009.81	17.19	2,009.89	0.00	0.00	0.00
14,300.00	89.70	179.51	12,444.02	-2,109.81	18.04	2,109.89	0.00	0.00	0.00
14,400.00	89.70	179.51	12,444.54	-2,209.80	18.90	2,209.89	0.00	0.00	0.00
14,500.00	89.70	179.51	12,445.07	-2,309.80	19.75	2,309.88	0.00	0.00	0.00
14,600.00	89.70	179.51	12,445.59	-2,409.79	20.61	2,409.88	0.00	0.00	0.00
14,700.00	89.70	179.51	12,446.11	-2,509.79	21.46	2,509.88	0.00	0.00	0.00
14,800.00	89.70	179.51	12,446.63	-2,609.78	22.32	2,609.88	0.00	0.00	0.00
14,900.00	89.70	179.51	12,447.15	-2,709.78	23.17	2,709.88	0.00	0.00	0.00
15,000.00	89.70	179.51	12,447.67	-2,809.77	24.03	2,809.88	0.00	0.00	0.00
15,100.00	89.70	179.51	12,448.19	-2,909.77	24.88	2,909.88	0.00	0.00	0.00
15,200.00	89.70	179.51	12,448.71	-3,009.76	25.74	3,009.87	0.00	0.00	0.00
15,300.00	89.70	179.51	12,449.23	-3,109.76	26.59	3,109.87	0.00	0.00	0.00
15,400.00	89.70	179.51	12,449.75	-3,209.75	27.45	3,209.87	0.00	0.00	0.00
15,500.00	89.70	179.51	12,450.27	-3,309.75	28.30	3,309.87	0.00	0.00	0.00
15,600.00	89.70	179.51	12,450.80	-3,409.74	29.16	3,409.87	0.00	0.00	0.00
15,700.00	89.70	179.51	12,451.32	-3,509.74	30.01	3,509.87	0.00	0.00	0.00
15,800.00	89.70	179.51	12,451.84	-3,609.73	30.87	3,609.87	0.00	0.00	0.00
15,900.00	89.70	179.51	12,452.36	-3,709.73	31.72	3,709.87	0.00	0.00	0.00
16,000.00	89.70	179.51	12,452.88	-3,809.72	32.58	3,809.86	0.00	0.00	0.00
16,100.00	89.70	179.51	12,453.40	-3,909.72	33.43	3,909.86	0.00	0.00	0.00
16,200.00	89.70	179.51	12,453.92	-4,009.71	34.29	4,009.86	0.00	0.00	0.00
16,300.00	89.70	179.51	12,454.44	-4,109.71	35.14	4,109.86	0.00	0.00	0.00
16,400.00	89.70	179.51	12,454.96	-4,209.70	36.00	4,209.86	0.00	0.00	0.00
16,500.00	89.70	179.51	12,455.48	-4,309.70	36.85	4,309.86	0.00	0.00	0.00
16,600.00	89.70	179.51	12,456.01	-4,409.69	37.71	4,409.86	0.00	0.00	0.00
16,700.00	89.70	179.51	12,456.53	-4,509.69	38.56	4,509.85	0.00	0.00	0.00
16,800.00	89.70	179.51	12,457.05	-4,609.68	39.42	4,609.85	0.00	0.00	0.00
16,900.00	89.70	179.51	12,457.57	-4,709.68	40.27	4,709.85	0.00	0.00	0.00
17,000.00	89.70	179.51	12,458.09	-4,809.67	41.13	4,809.85	0.00	0.00	0.00
17,100.00	89.70	179.51	12,458.61	-4,909.67	41.98	4,909.85	0.00	0.00	0.00
17,200.00	89.70	179.51	12,459.13	-5,009.66	42.84	5,009.85	0.00	0.00	0.00
17,300.00	89.70	179.51	12,459.65	-5,109.66	43.69	5,109.85	0.00	0.00	0.00
17,400.00	89.70	179.51	12,460.17	-5,209.65	44.55	5,209.84	0.00	0.00	0.00
17,500.00	89.70	179.51	12,460.69	-5,309.65	45.40	5,309.84	0.00	0.00	0.00
17,600.00	89.70	179.51	12,461.22	-5,409.64	46.26	5,409.84	0.00	0.00	0.00
17,700.00	89.70	179.51	12,461.74	-5,509.64	47.11	5,509.84	0.00	0.00	0.00
17,800.00	89.70	179.51	12,462.26	-5,609.63	47.97	5,609.84	0.00	0.00	0.00
17,900.00	89.70	179.51	12,462.78	-5,709.63	48.82	5,709.84	0.00	0.00	0.00
18,000.00	89.70	179.51	12,463.30	-5,809.62	49.68	5,809.84	0.00	0.00	0.00
18,100.00	89.70	179.51	12,463.82	-5,909.62	50.53	5,909.84	0.00	0.00	0.00
18,200.00	89.70	179.51	12,464.34	-6,009.61	51.39	6,009.83	0.00	0.00	0.00
18,300.00	89.70	179.51	12,464.86	-6,109.61	52.24	6,109.83	0.00	0.00	0.00
18,400.00	89.70	179.51	12,465.38	-6,209.60	53.10	6,209.83	0.00	0.00	0.00
18,500.00	89.70	179.51	12,465.90	-6,309.60	53.95	6,309.83	0.00	0.00	0.00
18,600.00	89.70	179.51	12,466.43	-6,409.59	54.81	6,409.83	0.00	0.00	0.00
18,700.00	89.70	179.51	12,466.95	-6,509.59	55.66	6,509.83	0.00	0.00	0.00



Planning Report



Database:	USA Compass	Local Co-ordinate Reference:	Well 701H
Company:	COG Operating LLC	TVD Reference:	RKB @ 3340.90usft (Precision 595)
Project:	Lea County, NM (NAD27 NME)	MD Reference:	RKB @ 3340.90usft (Precision 595)
Site:	Coonskin Fee	North Reference:	Grid
Well:	701H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 1 07-26-18		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
18,800.00	89.70	179.51	12,467.47	-6,609.58	56.52	6,609.83	0.00	0.00	0.00	
18,900.00	89.70	179.51	12,467.99	-6,709.58	57.37	6,709.82	0.00	0.00	0.00	
19,000.00	89.70	179.51	12,468.51	-6,809.57	58.23	6,809.82	0.00	0.00	0.00	
19,100.00	89.70	179.51	12,469.03	-6,909.57	59.08	6,909.82	0.00	0.00	0.00	
19,200.00	89.70	179.51	12,469.55	-7,009.56	59.94	7,009.82	0.00	0.00	0.00	
19,300.00	89.70	179.51	12,470.07	-7,109.56	60.79	7,109.82	0.00	0.00	0.00	
19,400.00	89.70	179.51	12,470.59	-7,209.55	61.65	7,209.82	0.00	0.00	0.00	
19,500.00	89.70	179.51	12,471.11	-7,309.55	62.50	7,309.82	0.00	0.00	0.00	
19,600.00	89.70	179.51	12,471.64	-7,409.54	63.36	7,409.82	0.00	0.00	0.00	
19,700.00	89.70	179.51	12,472.16	-7,509.54	64.22	7,509.81	0.00	0.00	0.00	
19,800.00	89.70	179.51	12,472.68	-7,609.53	65.07	7,609.81	0.00	0.00	0.00	
19,861.97	89.70	179.51	12,473.00	-7,671.50	65.60	7,671.78	0.00	0.00	0.00	
TD at 19861.97										

Design Targets										
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude Longitude		
- hit/miss target										
- Shape										
LTP - Coonskin Fee 7	0.00	0.00	0.00	-7,541.50	64.50	428,617.40	796,265.50	32° 10' 29.14375 N 03° 22' 32.95431 W		
- plan misses target center by 7541.78usft at 0.00usft MD (0.00 TVD, 0.00 N, 0.00 E)										
- Point										
FTP - Coonskin Fee 7	0.00	0.00	12,436.00	-279.90	2.30	435,879.00	796,203.30	32° 11' 41.00319 N 03° 22' 32.92585 W		
- plan misses target center by 70.80usft at 12497.38usft MD (12375.51 TVD, -316.69 N, 2.71 E)										
- Point										
BHL - Coonskin Fee 7	0.00	0.00	12,473.00	-7,671.50	65.60	428,487.40	796,266.60	32° 10' 27.85729 N 03° 22' 32.95497 W		
- plan hits target center										
- Point										

Database:	USA Compass	Local Co-ordinate Reference:	Well 701H
Company:	COG Operating LLC	TVD Reference:	RKB @ 3340.90usft (Precision 595)
Project:	Lea County, NM (NAD27 NME)	MD Reference:	RKB @ 3340.90usft (Precision 595)
Site:	Coonskin Fee	North Reference:	Grid
Well:	701H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan 1 07-26-18		

Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
581.00	581.00	Rustler		0.30	179.51	
940.00	940.00	TOS		0.30	179.51	
4,859.00	4,859.00	BOS (Fletcher)		0.30	179.51	
5,296.00	5,296.00	LMAR (Top Delaware)		0.30	179.51	
5,357.00	5,357.00	BLCN		0.30	179.51	
6,276.00	6,276.00	CYCN		0.30	179.51	
7,761.00	7,761.00	BYCN		0.30	179.51	
9,051.00	9,051.00	Bone Sprg (BSGL)		0.30	179.51	
9,483.00	9,483.00	U Avalon Sh		0.30	179.51	
9,648.00	9,648.00	L Avalon Sh		0.30	179.51	
10,153.00	10,153.00	B Avalon Sh		0.30	179.51	
10,232.00	10,232.00	FBSG Sand		0.30	179.51	
10,872.00	10,872.00	SBSG Sand		0.30	179.51	
11,371.00	11,371.00	SBSG Sand base		0.30	179.51	
11,874.00	11,874.00	TBSG Sand		0.30	179.51	
12,332.86	12,281.95	WFMP		0.30	179.51	

Plan Annotations					
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates			
		+N/-S (usft)	+E/-W (usft)	Comment	
11,863.05	11,863.05	0.00	0.00	KOP, Begin 10.00°/100' Build	
12,760.07	12,436.00	-569.95	4.87	LP, Hold 89.70° Inc at 179.51° Azm	
19,861.97	12,473.00	-7,671.50	65.60	TD at 19861.97	